

# TWO-WIRE ELECTRIC LOCK DOOR PHONE KIT


Provides Entry Security for Your Residence

# DA-1AS/DA-1AG






# **Simplified Two-Wire Door Entry Kit**

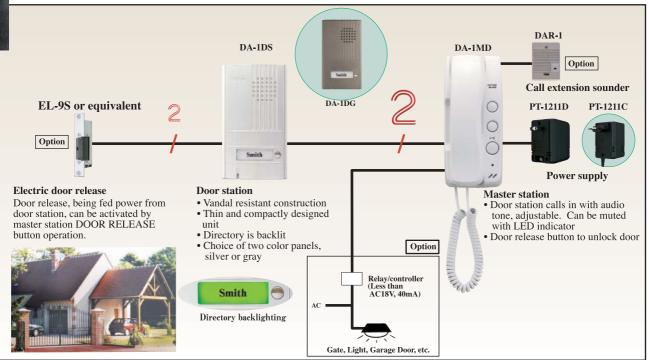

## System features

- Connect Electric Door Release with same two wires from Door station. Requires no extra power supply for door release.
- Existing doorbell or chime wires can be utilized (Disconnect from transformer)
- Master station is equipped with DOOR RELEASE and one FUNCTION button to turn on entrance light, etc.
- Optional call extension sounder

#### Names & Dimensions



Directory with backlight

### Options







## **Specifications**

• Power source: AC 15V, supplied from Power supply

• Calling: Electronic tone(while the button is depressed). w/adj. Vol. or muted

· Communication: Simultaneous with handset.

• Weight: DA-1MD: approx. 370g. DA-1DS: approx. 270g. PT-1211C: 400g.

PT-1211D: 430g.

• Wiring: 2 wires, polarized from door to DA-1MD

• Wiring distance: (1)Door Release (2)Door station (3)Master station (4)Power supply

	Ø 0.6mm	Ø 0.8mm	Ø 1.0mm
(1)-(2)-(3)-(4)	110m	200m	310m
(3)-(4)	55m	100m	155m

- DA-1AS Kit consists of DA-1DS, DA-1MD & PT-1211C or PT-1211D.
- DA-1AG Kit consists of DA-1DG, DA-1MD & PT-1211C or PT-1211D.
- PT-1211C/D power supply is designed for exclusive use of DA-1MD

Distributed by:



http://www.aiphone.com/ Printed in Japan