### **Value Product**

The return of the Comet brings with it the exceptional value and quality required to meet the demands of the single and multi-family housing markets, as well as light commercial applications.

Combining a variety of lever designs, convenient installation and the Arrow benchmark for dependability, the CL Series is perfect in most any space.

#### **Certification:**

The CL Series has been designed to meet the requirements of ANSI, A156.2, Series 4000, Grade 2.



Construction – Tubular chassis

Backset - Universal latch is standard. Adjustable for both 2-3/8" (60mm) or 2-3/4" (70mm).

**Latch** – Brass front. Supplied standard with 1" x 2-1/4" (25mm x 57mm) square corner, 1" x 2-1/4" radius corner and 1-1/8" x 2-1/4" (29mm x 57mm) square corner latch fronts. Available with drive-in latches.

**Strike** – 1-5/8" x 2-1/4" (41mm x 57mm) full lip strike standard. Available with 1-1/8" x 2-3/4" (29mm x 70mm) "T" strike, or 1-1/4" x 4-7/8" (32mm x 124mm) ANSI strike.

Door Thickness – Fits 1-3/8" to 1-3/4" (35mm-44mm) doors standard.

**Exposed Trim** – Levers are zinc based and are plated to match finish requirements.



### **ADA/Americans with Disabilities Act:**

Acceptable Door Hardware: Section 4.13.9

Handles, pulls, latches and other operating devices on accessible doors shall have a shape that is easy to grasp with one hand and does not require grasping, tight pinching or twisting of the wrist to operate. Lever operated mechanisms, push-type mechanisms and "U" shaped handles are acceptable designs.

Look for the universal symbol next to Arrow products that comply with ADA accessibility requirements.

**Mounting** – Leversets are supplied with concealed screws on inside rose.


Cylinder – Standard: Solid brass, 6-pin, pinned 5, 2 brass keys. Options: Arrow A or sectional keyways, Schlage C keyway.

Finishes – US3, US5, US26, US26D, US15.

**Packaging** – Leversets are packed 1 per box, 20 per carton.

Warranty – 5 year mechanical, 5 year finish.

#### **Finishes:**




BN	IHA U.S.	Equiv Arro	ow Equiv	Finish
1 60	5 US3	03		Bright Brass
2 60	6 US4	04		Satin Brass
3 60	9 US5	05A		Satin Brass, Blackened
4 61	4 US10	OBL 10B	Р	Dark Oxide Bronze, Clear Coated
5 62	5 US26	5 26		Bright Chromium Plated
6 62	6 US26	5D 26D		Satin Chromium Plated
7 61	9 US15	5 15		Nickel Plated





# **Value Product**

# **Lever designs**









# **CL Series** cylinders

**Cylinder** – Standard: Solid brass, 6-pin, pinned 5, 2 brass keys. Options: Arrow A or sectional keyways, Schlage C keyway.







## **Value Product**

### **Latches & Strikes:**

Latches







**Dead Latch** 




2-3/8" - 2-3/4" Adjustable Backset



**Spring Latch** 







#505

Drive-In



Dead Latch

#515

Note: Standard latch provided with these three faceplates.

1" x 2-1/4" square corner

1" x 2-1/4" radius corner 1-1/8" x 2-1/4" square corner Note: Standard latch provided with these three faceplates.


1" x 2-1/4" square corner


1" x 2-1/4" radius corner


1-1/8" x 2-1/4" square corner


#### **Accessories:**

Strikes










### **Installation:**

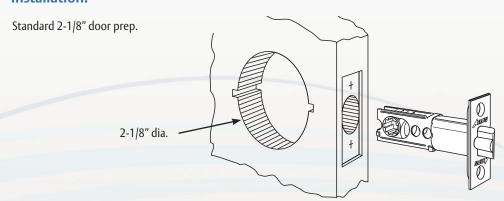



# **Value Product**

ARROW STANDARD	FUNCTION	DESCRIPTION
CL01	Passage	Latchbolt operated by knob/lever either side.
CL02	Privacy	Latchbolt operated by knob/lever either side except when inside turnbutton locks outside. Unlocked by rotating button or by using tool outside.
CL04	Patio	Both knob/levers locked by inside button. Deadlocking latch standard.
CL08	1/2 Dummy Trim	Rigid trim for one side of door only. Used as pull or to match active trim.
CL11	Entrance	Latchbolt operated by knob/lever either side except when outside knob/lever is locked by turn-button inside. When outside knob/lever is locked, latchbolt operated by key outside or turning inside knob/lever. Inside button must be manually released.
CL12	Storeroom	Outside knob/lever always rigid. Latchbolt operated by key in outside knob/lever, or by turning inside knob/lever.
		Indicates knob/lever rigid at all times.

## **Order Example:**

**Example:** To order a CL Series entry function lockset with a Virgo design lever, satin chrome finish, with a full lip strike and adjustable backset, keyed different:

#### Specify:

Standard: CL 11 VC 26D 502 511 KD XXX
Options
Keying (if required)
Strike
Finish
Design



Series

Function