

The background features several overlapping, dark grey, wavy, and flowing shapes that resemble liquid or soft fabric. These shapes are set against a solid black background, creating a sense of depth and movement. The lighting is subtle, highlighting the curves and folds of the forms.

MODERN[®] FORMS

INTRODUCING

MODERN FORMS 2024 LUMINAIRES

Our new collections epitomize the Modern Forms promise: to offer elevated lighting designs with breakthrough technology at its core. Every piece is effortless, uncomplicated and honest in its execution, seductive in its shape and created from upscale, luxury materials.


At Modern Forms, we are committed to making strides towards a greener and more eco-conscious future. In our pursuit of sustainability, we've decided to reduce the size of this supplement to minimize our ecological footprint and contribute to preserving our planet's resources.

There is a QR code next to each product listing to enhance your browsing experience. Scan the code with your smart device for access to the product pages of our website for complete details on the design, features and specifications of each luminaire.


FINISHES AVAILABLE




Aged Brass
AB




Aluminum
AL



Antique Nickel
AN




Black
BK




Black/Aged Brass
BK/AB



Black/Brushed Nickel
BK/BN




Brushed Nickel
BN




Bronze
BZ



Bronze/Gold Leaf
BZ/GL



Polished Nickel
PN



White
WT

INTRODUCING



MULTI-LIGHTS OPTIONS



Modern Forms presents our new collection of multi-light fixtures, which incorporates multiple pendants installed onto one square, round or linear canopy. These pendants are arranged in various configurations on a single canopy to create an artful statement as well as deliver ample lighting to spaces throughout a home or business.




LINEAR CANOPY

14 & 23 LIGHTS




SQUARE CANOPY

13, 25 & 41 LIGHTS



ROUND CANOPY

3, 5, 9, 15 & 21 LIGHTS



CASCADE
P.3

CHAOS
P.5

DOUBLE BUBBLE
P.7

KILT
P.9

MAGIC
P.11

MINX
P.13


PISCES
P.15



LINEAR CANOPY



PD-41*14L

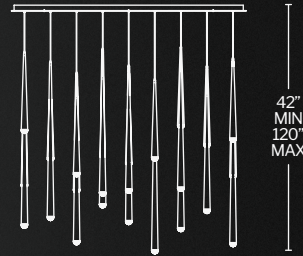

PD-41*23L



SQUARE CANOPY



PD-41*13S



PD-41*25S




PD-41*41S




ROUND CANOPY




PD-41*03R

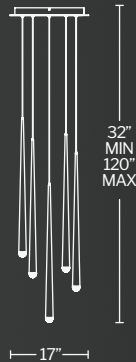


PD-41*05R

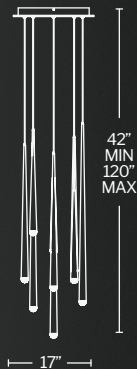

PD-41*09R

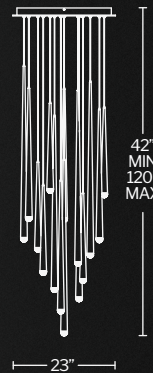

PD-41*15R

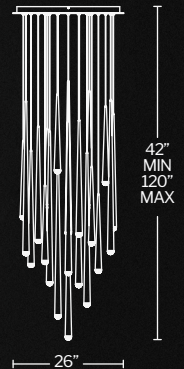

PD-41*21R

CASCADE



Multiples with Cut Crystal Accents:



Replace * with 7.
For example, a 13-lights square would be PD-41713S

Multiples with Etched Flat Accents:



Replace * with 8.
For example, a 13-lights square would be PD-41813S



- Metal pendants with cut crystal or etched glass cap on a square, round or linear canopy
- Thin, powered aircraft cables provide an ultra-clean look
- Canopy conceals a proprietary universal 120V-220V-277V driver


CCT	CRI	Voltage	Dimming	Rated Life
3500K	90	120-277V	ELV	50,000 hours

Model No.	# of lights	Canopy	Wattage	LED Lumens	Delivered Lumens	Finish	Suspension	
							MIN	MAX
PD-41*14L PD-41*23L	14 lights 23 lights	Linear	98W 161W	6,118 10,051	5,254 8,631	AB, BK, PN	42"	120"
PD-41*13S PD-41*25S PD-41*41S	13 lights 25 lights 41 lights	Square	98W 182W 294W	5,681 10,925 17,917	4,878 9,381 15,385	AB, BK, PN	42"	120"
PD-41*03R PD-41*05R PD-41*09R PD-41*15R PD-41*21R	3 lights 5 lights 9 lights 15 lights 21 lights	Round	21W 35W 63W 105W 147W	1,311 2,185 3,933 6,555 9,177	1,126 1,876 3,377 5,629 7,880	AB, BK, PN	32" 32" 42" 42" 42"	120"


Example: PD-41715R-AB



LINEAR CANOPY

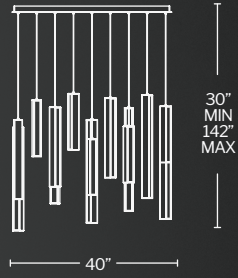


PD-64814L

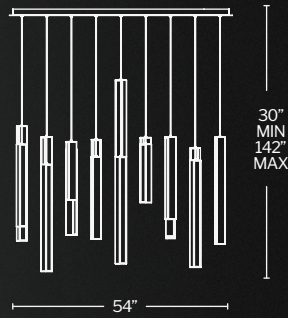


PD-64823L




SQUARE CANOPY

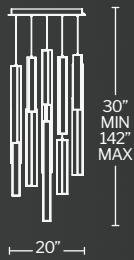

PD-64813S



PD-64825S

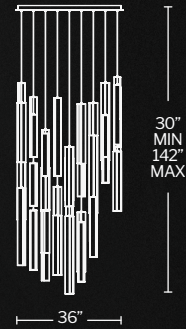

PD-64841S



ROUND CANOPY




PD-64803R




PD-64805R



PD-64809R

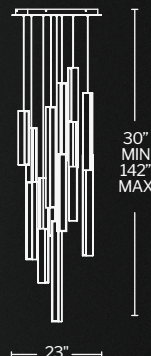

PD-64815R

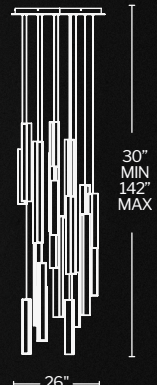

PD-64821R

CHAOS

*See complementary piece on page 31



- Sculptural bars of light on a square, round or linear canopy
- Thin, powered aircraft cables provide an ultra-clean look
- Canopy conceals a proprietary universal 120V-220V-277V driver

CCT	CRI	Voltage	Dimming	Rated Life
3000K	90	120-277V	ELV, TRIAC, 0-10V	50,000 hours


*All Canopies are in BK Finish

Model No.	# of lights	Canopy	Wattage	LED Lumens	Delivered Lumens	Finish	Suspension	
							MIN	MAX
PD-64814L	14 lights	Linear	120W	17,850	11,610	BK/AB	30"	142"
PD-64823L	23 lights		200W	29,621	19,210			
PD-64813S	13 lights	Square	102W	15,595	10,232	BK/AB	30"	142"
PD-64825S	25 lights		207W	31,127	20,308			
PD-64841S	41 lights		326W	51,497	33,673			
PD-64803R	3 lights	Round	27W	1,702	1,114	BK/AB	30"	142"
PD-64805R	5 lights		37W	2,332	1,747			
PD-64809R	9 lights		67W	4,020	2,807			
PD-64815R	15 lights		114W	7,285	3,871			
PD-64821R	21 lights		135W	10,199	4,591			


Example: PD-64809R-BK/AB-BK



LINEAR CANOPY

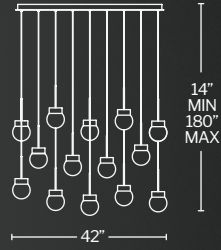

PD-82014L

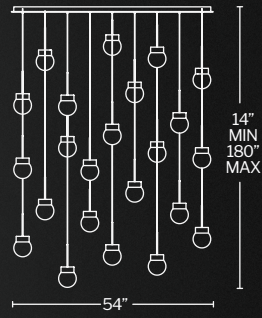


PD-82023L




SQUARE CANOPY



PD-82013S

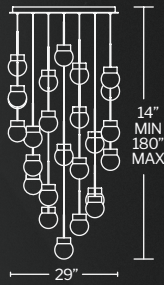


PD-82025S

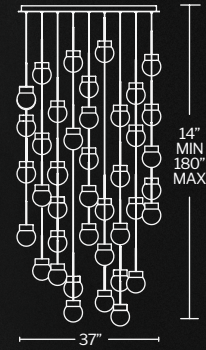

PD-82041S




ROUND CANOPY



PD-82003R




PD-82005R

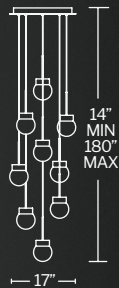

PD-82009R



PD-82015R

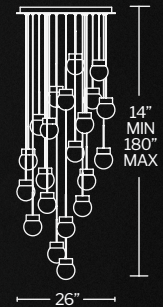

PD-82021R

DOUBLE BUBBLE



- Laser etched crystal orbs on a square, round or linear canopy
- Thin, powered aircraft cables provide an ultra-clean look
- Canopy conceals a proprietary universal 120V-220V-277V driver


CCT	CRI	Voltage	Dimming	Rated Life
3000K	90	120-277V	ELV	50,000 hours

Model No.	# of lights	Canopy	Wattage	LED Lumens	Delivered Lumens	Finish	Suspension	
							MIN	MAX
PD-82014L	14 lights	Linear	41W	4,137	3,556	AB, BK	14"	180"
PD-82023L	23 lights		70W	6,966	5,988			
PD-82013S	13 lights	Square	41W	4,137	3,556	AB, BK	14"	180"
PD-82025S	25 lights		82W	8,274	7,112			
PD-82041S	41 lights		123W	12,411	10,668			
PD-82003R	3 lights	Round	16W	1,411	1,213	AB, BK	14"	180"
PD-82005R	5 lights		23W	2,061	1,772			
PD-82009R	9 lights		35W	3,483	2,994			
PD-82015R	15 lights		41W	4,137	3,556			
PD-82021R	21 lights		70W	6,966	5,988			


Example: PD-82003R-BK



LINEAR CANOPY




PD-44414L

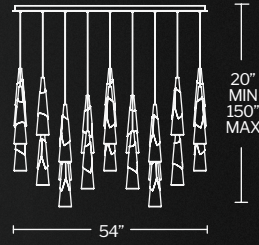

PD-44423L



SQUARE CANOPY



PD-44413S




PD-44425S




PD-44441S



ROUND CANOPY




PD-44403R




PD-44405R



PD-44409R



PD-44415R

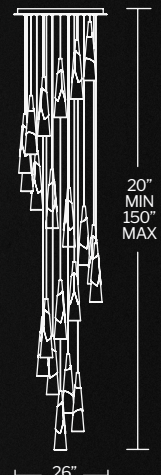

PD-44421R

KILT



*See complementary piece on page 24 and 18



- Hazy acrylic and metal pendants on a square, round or linear canopy
- Canopy conceals a proprietary universal 120V-220V-277V driver
- Artisan crafted hazy cloud acrylic. Each unique piece lends itself to variations in milkiness
- Thin powered aircraft cables provide an ultra-clean look for adjustable suspension height
- Built-in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K


CCT	CRI	Voltage	Dimming	Rated Life
2700K	90	120-277V	ELV	50,000 hours
3000K				
3500K				
4000K				

Model No.	# of lights	Canopy	Wattage	LED Lumens	Delivered Lumens	Finish	Suspension	
							MIN	MAX
PD-44414L	14 lights	Linear	110W	9,968	7,256	AB, BK	20"	150"
PD-44423L	23 lights		179W	16,376	11,792			
PD-44413S	13 lights	Square	105W	9,256	6,952	AB, BK	20"	150"
PD-44425S	25 lights		197W	17,800	13,000			
PD-44409R	9 lights		69W	6,408	4,536			
PD-44415R	15 lights	Round	115W	10,680	7,560	AB, BK	20"	150"
PD-44421R	21 lights		161W	14,952	10,584			


Example: PD-44414L-AB



LINEAR CANOPY

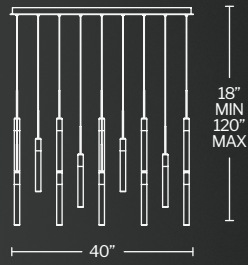

PD-35614L

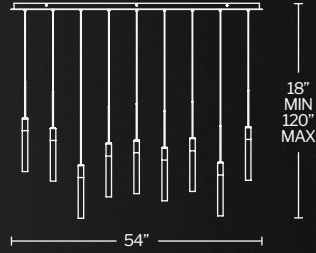

PD-35623L



SQUARE CANOPY



PD-35613S




PD-35625S



PD-35641S




ROUND CANOPY




PD-35603




PD-35605



PD-35609

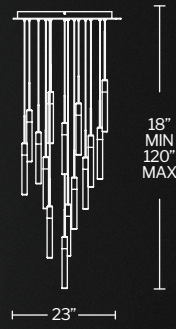

PD-35615

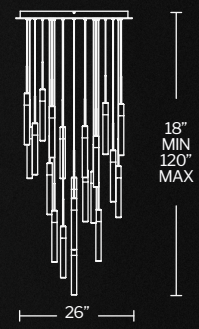

PD-35621

MAGIC



- Piastra glass pendants on a square, round or linear canopy
- Thin, powered aircraft cables provide an ultra-clean look for adjustable suspension height
- Canopy conceals a proprietary universal 120V-220V-277V driver


CCT	CRI	Voltage	Dimming	Rated Life
3000K	90	120-277V	ELV	50,000 hours

Model No.	# of lights	Canopy	Wattage	LED Lumens	Delivered Lumens	Finish	Suspension	
							MIN	MAX
PD-35614L	14 lights	Linear	87W	3,136	2,884	BK, PN	18"	120"
PD-35623L	23 lights		133W	5,152	4,738			
PD-35613S	13 lights	Square	87W	2,912	2,678	BK, PN	18"	120"
PD-35625S	25 lights		142W	5,600	5,150			
PD-35641S	41 lights		224W	9,184	8,446			
PD-35603	3 lights	Round	17W	672	618	BK, PN	18"	120"
PD-35605	5 lights		29W	1,120	1,030			
PD-35609	9 lights		52W	2,016	1,854			
PD-35615	15 lights		87W	3,360	3,090			
PD-35621	21 lights		122W	4,704	4,326			


Example: PD-35621-PN



LINEAR CANOPY




PD-78014L

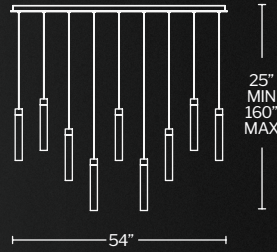

PD-78023L



SQUARE CANOPY



PD-78013S



PD-78025S




PD-78041S




ROUND CANOPY




PD-78003R




PD-78005R



PD-78009R

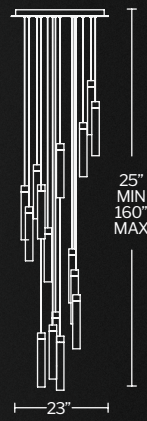

PD-78015R

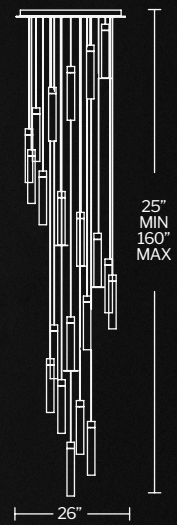

PD-78021R



- Artisanal reclaimed K5 crystal shades and metal pendants on a square, round or linear canopy
- Thin, powered aircraft cables provide an ultra-clean look
- Canopy conceals a proprietary universal 120V-220V-277V driver


CCT	CRI	Voltage	Dimming	Rated Life
3000K	90	120-277V	ELV, TRIAC, 0-10V	55,000 hours

Model No.	# of lights	Canopy	Wattage	LED Lumens	Delivered Lumens	Finish	Suspension	
							MIN	MAX
PD-78014L	14 lights	Linear	48W	4,317	3,892	AB, AN	25"	160"
PD-78023L	23 lights		77W	7,092	6,394			
PD-78013S	13 lights	Square	46W	4,008	3,614	AB, AN	25"	160"
PD-78025S	25 lights		84W	7,708	6,950			
PD-78041S	41 lights		134W	12,641	11,398			
PD-78003R	3 lights	Round	13W	1,075	847	AB, AN	25"	160"
PD-78005R	5 lights		22W	1,790	1,484			
PD-78009R	9 lights		32W	2,775	2,502			
PD-78015R	15 lights		52W	4,625	4,170			
PD-78021R	21 lights		70W	6,475	5,838			


Example: PD-78005R-AB



LINEAR CANOPY



PD-34414L

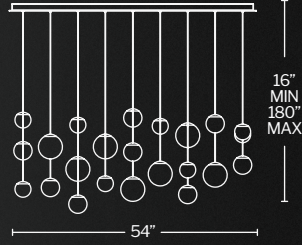

PD-34423L



SQUARE CANOPY



PD-34413S



PD-34425S




PD-34441S




ROUND CANOPY



PD-34403R




PD-34405R



PD-34409R



PD-34415R

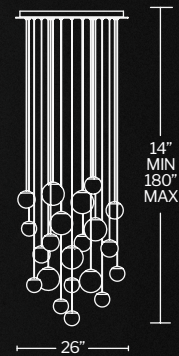

PD-34421R

PISCES



*See complementary piece on page 20



- Natural Spanish Alabaster orbs on a square, round or linear canopy
- Thin, powered aircraft cables provide an ultra-clean look
- Canopy conceals a proprietary universal 120V-220V-277V driver
- Built-in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K

CCT	CRI	Voltage	Dimming	Rated Life
2700K	90	120-277V	ELV, TRIAC	50,000 hours
3000K				
3500K				
4000K				


Model No.	# of lights	Canopy	Wattage	LED Lumens	Delivered Lumens	Finish	Suspension	
							MIN	MAX
PD-34414L	14 lights	Linear	110W	9,703	5,071	AB, BK	14"	180"
PD-34423L	23 lights		179W	16,276	8,506			
PD-34413S	13 lights	Square	105W	8,451	4,416	AB, BK	14"	180"
PD-34425S	25 lights		197W	17,215	8,996			
PD-34441S	41 lights		317W	29,422	15,376			
PD-34403R	3 lights	Round	23W	2,191	1,145	AB, BK	14"	180"
PD-34405R	5 lights		41W	3,130	1,636			
PD-34409R	9 lights		69W	6,573	3,435			
PD-34415R	15 lights		115W	10,955	5,725			
PD-34421R	21 lights		161W	15,337	8,015			

Example: PD-34415R-BK

AZURE



- Premium Spanish Alabaster panels ensconced in luminous metal. Unique veining in each crafted piece
- Slim canopy conceals a proprietary 120/277V driver
- Spin on round canopy with minimal hardware
- Three 12" and one 6" downrods included (additional sold separately)
- Includes hang straight swivel for sloped ceiling installation

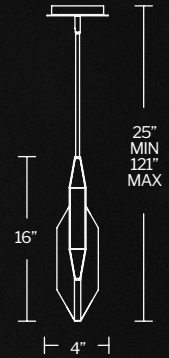


Model No.	Size	CCT	CRI	Voltage	Wattage	LED Lumens	Delivered Lumens	Dimming	Rated Life	Finish	L	W	H	Suspension	
														MIN	MAX
PD-42416	16"	3000K	90	120/277V	20W	1,109	297	ELV, TRIAC	50,000 hours	AB, BK	4"	4"	16"	25"	121"

Example: PD-42416-BK

CLIQUE



- Premium Spanish Alabaster contours accented by gleaming trim. Unique veining in each crafted piece
- Slim canopy conceals a proprietary universal 120V-220V-277V driver
- Spin on canopy with minimal hardware
- Thin, powered aircraft cables provide an ultra-clean look

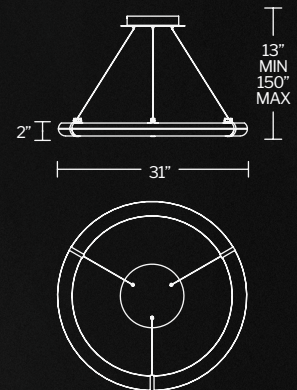



Model No.	Size	CCT	CRI	Voltage	Wattage	LED Lumens	Delivered Lumens	Dimming	Rated Life	Finish	L	W	H	Suspension	
														MIN	MAX
PD-56431	31"	3000K	90	120-277V	43W	4,335	3,251	ELV, TRIAC, 0-10V	50,000 hours	AB	31"	31"	2"	13"	150"

Example: PD-56431-AB

COLISEO



- Carved tiles of top-quality Spanish Alabaster set within luminous metal
- Each crafted fixture combines individual pieces of natural stone that feature unique veining and color variation
- Thin powered aircraft cables provide an ultra-clean look
- Spin-on round canopy with minimal hardware
- Slim canopy conceals a proprietary universal 120V-220V-277V driver

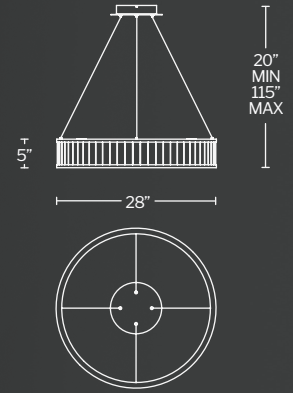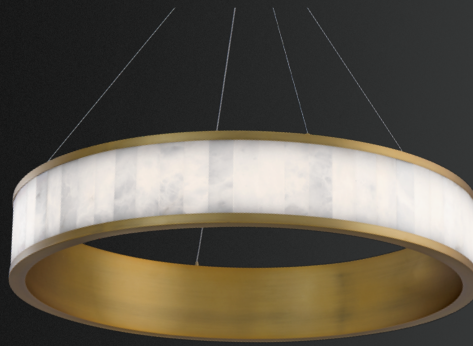


Model No.	Size	CCT	CRI	Voltage	Wattage	LED Lumens	Delivered Lumens	Dimming	Rated Life	Finish	L	W	H	Suspension	
														MIN	MAX
PD-72128	28"	3000K	90	120-277V	42W	4,242	2,851	ELV, TRIAC, 0-10V	50,000 hours	AB, AN	28"	28"	5"	20"	115"

Example: PD-72128-AB

ENTICE



- Natural Spanish Alabaster cylinders and metal collar ornament a silica strand
- Remote or surface mounted driver options available
- Built-in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K

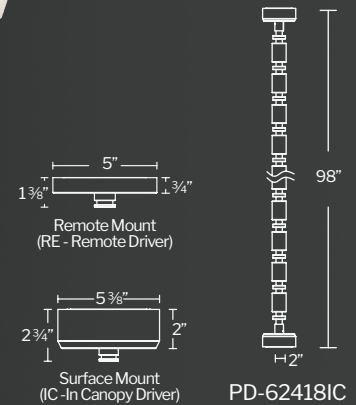

Model No.	Mounting Option	Size	CCT	CRI	Voltage	Wattage	LED Lumens	Delivered Lumens	Dimming	Rated Life	Finish	H (RE)	H (IC)
PD-62418		90"	-27			21W	2,000	600				95"	98"
PD-62424	IC	120"	-30			28W	2,600	800				124"	127"
PD-62436	RE	180"	-35	90	120-277V	40W	4,000	1,200	ELV	50,000 hours	AB	183"	186"
PD-62448		240"	-40			56W	5,000	1,600				242"	245"

Example: PD-62418IC-30-AB


*Mounting Option: Use IC for In-Canopy Driver or RE for Remote Driver.

ILIOS



PATENTED

- Ring centerpiece illuminates through a silica diffuser
- Ambient illumination
- Spin-on round canopy with minimal hardware
- Slim canopy conceals a proprietary universal 120V-220V-277V driver
- Thin, powered aircraft cables provide an ultra-clean look

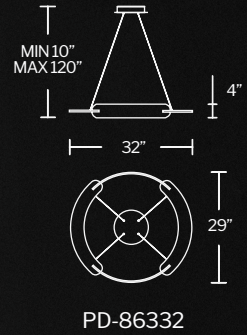


Model No.	Size	CCT	CRI	Voltage	Wattage	LED Lumens	Delivered Lumens	Dimming	Rated Life	Finish	L	W	H	Suspension	
														MIN	MAX
PD-86332	32"	3000K	90	120-277V	46W	3,141	1,616	ELV, TRIAC, 0-10V	54,000 hours	AB, BK	32"	29"	4"	10"	120"
PD-86342	42"				70W	4,718	2,425								

Example: PD-86332-AB

KILT



- Crisp metal skirt drapes over a hazy acrylic cone
- Each unique piece lends itself to variations in milkiness
- Slim canopy conceals a proprietary 120/277V driver
- Spin-on round canopy with minimal hardware
- Thin, powered aircraft cables provide an ultra-clean look
- Built-in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K

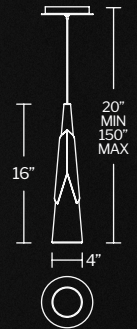

*See complementary piece on page 9 and 24


Model No.	Size	CCT	CRI	Voltage	Wattage	LED Lumens	Delivered Lumens	Dimming	Rated Life	Finish	L	W	H	Suspension	
														MIN	MAX
PD-44416	16"	-27 -30 -35 -40	90	120/277V	8.3W	712	566	ELV	50,000 hours	AB, BK	4"	4"	16"	20"	150"

Example: PD-44416-30-BK

LUZERNE



- Bundles of fluted glass cylinders reflect illumination from an inner plate, creating a mirrored effect
- Slim canopy conceals a proprietary universal 120V-220V-277V driver
- Spin on canopy with minimal hardware
- Thin, powered aircraft cables provide an ultra-clean look

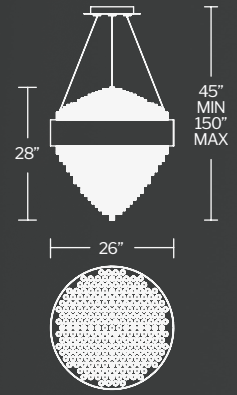


Model No.	Size	CCT	CRI	Voltage	Wattage	LED Lumens	Delivered Lumens	Dimming	Rated Life	Finish	L	W	H	Suspension	
														MIN	MAX
PD-30126	26"	3000K	90	120-277V	60W	5,000	3,000	ELV	50,000 hours	AB, BN	26"	26"	28"	45"	150"

Example: PD-30126-AB

MONTAGE



- Reclaimed K5 crystal columns extend from a gleaming frame
- Slim canopy conceals a proprietary 120/277V driver
- Spin-on round canopy with minimal hardware
- Three 12" and one 6" down rods included (additional sold separately)
- Includes hang straight swivel for sloped ceiling installation

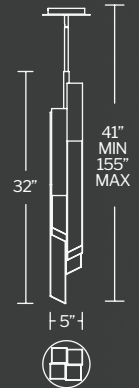


Model No.	Size	CCT	CRI	Voltage	Wattage	LED Lumens	Delivered Lumens	Dimming	Rated Life	Finish	L	W	H	Suspension	
														MIN	MAX
PD-54432	32"	3000K	90	120/277V	29W	1,714	1,645	ELV, TRIAC	50,000 hours	BK	5"	5"	32"	40"	155"

Example: PD-54432-BK

PAREL



- Spanish Alabaster beads on an LED loop draped over gleaming arms. Unique veining in each crafted piece
- Slim canopy conceals a proprietary universal 120V-220V-277V driver
- Three 12" and one 6" down rods included (additional sold separately)
- Includes hang straight swivel for sloped ceiling installation

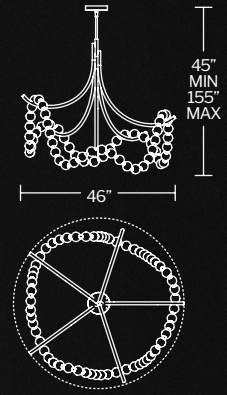

*See complementary piece on page 32




Model No.	Size	CCT	CRI	Voltage	Wattage	LED Lumens	Delivered Lumens	Dimming	Rated Life	Finish	L	W	H	Suspension	
														MIN	MAX
PD-50446	46"	3000K	90	120-277V	42W	4000	1200	ELV	50,000 hours	AB, AN	46"	46"	45"	45"	155"

Example: PD-50446-AB

PISCES



- Natural Spanish Alabaster orb suspended by minimal hardware. Unique veining in each crafted piece
- Slim canopy conceals a proprietary universal 120V-220V-277V driver
- Spin-on round canopy with minimal hardware
- Three 12" and one 6" downrods included (additional sold separately)
- Slope ceiling adaptable. Hang straight swivel
- Built-in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K

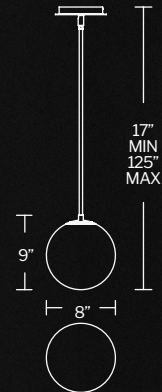

*See complementary piece on page 15




Model No.	Size	CCT	CRI	Voltage	Wattage	LED Lumens	Delivered Lumens	Dimming	Rated Life	Finish	L	W	H	Suspension	
														MIN	MAX
PD-34408	8"	-27 -30 -35 -40	90	120/277V	14.2W	1,184	814	ELV, TRIAC	50,000 hours	AB, BK	8"	8"	9"	17"	125"

Example: PD-34408-30-BK

SABER



- Elegant Spanish Alabaster bound with a wrapped band. Unique veining in each crafted piece
- Slim canopy conceals a proprietary 120/277V driver
- Spin-on round canopy with minimal hardware
- Thin, powered aircraft cables provide an ultra-clean look

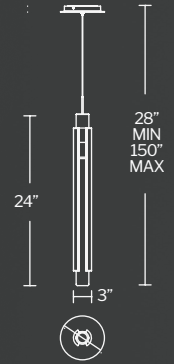


Model No.	Size	CCT	CRI	Voltage	Wattage	LED Lumens	Delivered Lumens	Dimming	Rated Life	Finish	L	W	H	Suspension	
														MIN	MAX
PD-48424	24"	3000K	90	120/277V	28W	1,630	452	ELV	50,000 hours	AB, BK	3"	3"	24"	28"	150"

Example: PD-48424-BK

SERENITY



- Artisanal wispy glass wraps around a glistening ring
- Three 12" and one 6" downrods included (additional sold separately)
- Includes hang straight swivel for sloped ceiling installation
- Spin-on round canopy with minimal hardware
- Slim canopy conceals a proprietary 120V/277V driver

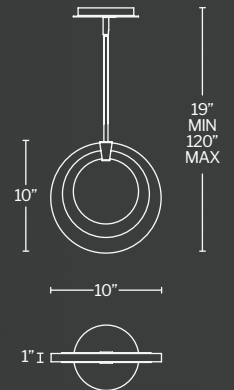

*See complementary piece on page 26


Model No.	Size	CCT	CRI	Voltage	Wattage	LED Lumens	Delivered Lumens	Dimming	Rated Life	Finish	L	W	H	Suspension	
														MIN	MAX
PD-38210	10"	3000K	90	120/277V	15W	680	448	ELV, TRIAC	54,000 hours	AB, BK	10"	1"	10"	19"	120"

Example: PD-38210-BK

SYNOPSIS



- A composite LED and silica diffuser spiral around a wavy axis
- Slim canopy conceals a proprietary universal 120V-220V-277V driver
- Spin on canopy with minimal hardware
- Thin, powered aircraft cables provide an ultra-clean look

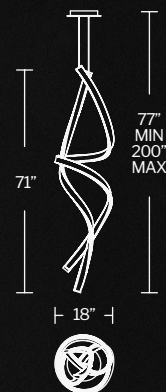



Model No.	Size	CCT	CRI	Voltage	Wattage	LED Lumens	Delivered Lumens	Dimming	Rated Life	Finish	L	W	H	Suspension	
														MIN	MAX
PD-58471	71"	3000K	90	120-277V	92W	6,220	3,172	ELV, TRIAC, 0-10V	50,000 hours	BK	18"	18"	71"	77"	200"

Example: PD-58471-BK

TAPER



- A sleek dome canopy adorned with a luminous gold leaf interior
- Spin on canopy with minimal hardware
- Three 12" and one 6" down rods included (additional sold separately)
- Includes hang straight swivel for sloped ceiling installation
- Slim canopy conceals a proprietary 120V/277V driver

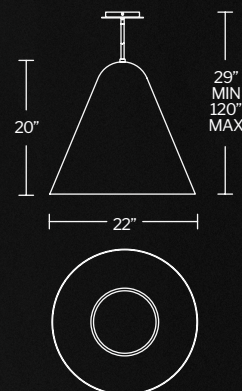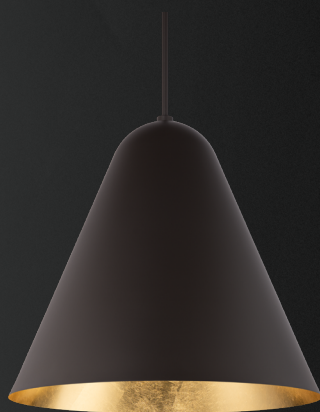


Model No.	Size	CCT	CRI	Voltage	Wattage	LED Lumens	Delivered Lumens	Dimming	Rated Life	Finish	L	W	H	Suspension	
														MIN	MAX
PD-12422	22"	3000K	90	120/277V	28W	4,132	1,653	ELV, TRIAC	50,000 hours	BZ/GL	22"	22"	20"	29"	120"

Example: PD-12422-BZ/GL

VELOCE



- Interlocked, adjustable bands of metal loop in a simple design
- Edge-lit metal bands rotatable up to 25 degrees
- Thin, powered aircraft cables provide an ultra-clean look
- Round canopy with minimal hardware
- Canopy conceals a proprietary universal 120V-220V-277V driver



PD-24826



*See complementary piece on page 34



Model No.	Size	CCT	CRI	Voltage	Wattage	LED Lumens	Delivered Lumens	Dimming	Rated Life	Finish	L	W	H	Suspension	
														MIN	MAX
PD-24826	26"				54W	3,850	3,593				26"	26"	7"	27"	116"
PD-24838	38"	3000K	90	120-277V	79W	5,311	3,647	ELV, 0-10V	50,000 hours	AB, BK, TT	38"	38"	8"	29"	118"
PD-24848	48"				107W	9,235	5,035				48"	48"	12"	38"	172"

Example: PD-24826-AB

WOVEN



- Handcrafted ribbons create a silhouette of metal and light
- Spin on canopy with minimal hardware
- Thin, powered aircraft cables provide an ultra-clean look
- Slim canopy conceals a proprietary universal 120V-220V-277V driver

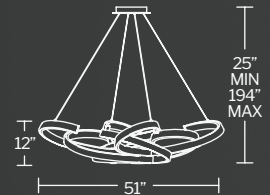


Model No.	Size	CCT	CRI	Voltage	Wattage	LED Lumens	Delivered Lumens	Dimming	Rated Life	Finish	L	W	H	Suspension	
														MIN	MAX
PD-22452	51"	3000K	90	120-277V	104W	9,010	4,595	ELV, TRIAC, 0-10V	50,000 hours	BK	51"	51"	12"	25"	194"

Example: PD-22452-BK

FIRENZE



- Natural Spanish Alabaster with unique veining is bracketed within slender metallic arms
- Slim canopy conceals a proprietary 120/277V driver

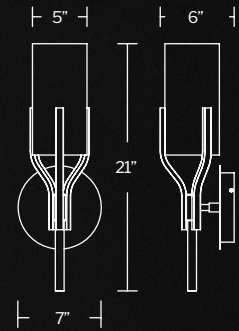


Model No.	Size	CCT	CRI	Voltage	Wattage	LED Lumens	Delivered Lumens	Dimming	Rated Life	Finish	L	W	H
WS-40221	21"	3000K	90	120/277V	12W	1,180	889	ELV, TRIAC	50,000 hours	AB, AN	7"	6"	21"

Example: **WS-40221-AB**

KILT



- Hazy cloud acrylic bound with a gleaming band
- Each unique piece lends itself to variations in milkiness
- Slim canopy conceals a proprietary 120/277V driver
- Built-in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K

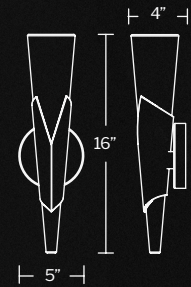

*See complementary piece on page 9 and 18


Model No.	Size	CCT	CRI	Voltage	Wattage	LED Lumens	Delivered Lumens	Dimming	Rated Life	Finish	L	W	H
WS-44416	16"	-27 -30 -35 -40	90	120/277V	8W	712	534	ELV	50,000 hours	AB, BK	5"	4"	16"

Example: **WS-44416-30-BK**

LYRIKAL



- A mitered glass bar balanced by crisp metal
- Can be mounted on wall in all orientations
- Built-in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Slim canopy conceals a proprietary 120V/277V driver

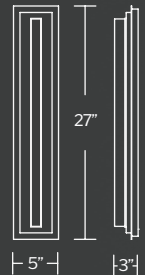


Model No.	Size	CCT	CRI	Voltage	Wattage	LED Lumens	Delivered Lumens	Dimming	Rated Life	Finish	L	W	H
WS-10427	27"	-27	90	120/277V	28W	2,894	1,792	ELV, TRIAC	54,000 hours	BK/AB	5"	3"	27"
		-30											
		-35											
		-40											

Example: **WS-10427-30-BK/AB**

SENSU



- Folded hazy cloudy acrylic within a lustrous frame
- Each unique piece lends itself to variations in milkiness
- Slim canopy conceals a proprietary 120/277V driver

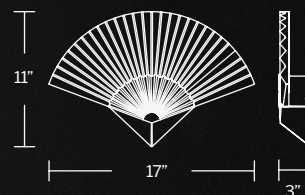


Model No.	Size	CCT	CRI	Voltage	Wattage	LED Lumens	Delivered Lumens	Dimming	Rated Life	Finish	L	W	H
WS-26417	17"	3000K	90	120/277V	13W	565	338	ELV, TRIAC	50,000 hours	AB, AN	17"	3"	11"

Example: WS-26417-AB

SERENITY



- A gleaming ring complements artisanal wispy glass
- Each handcrafted shade is unique and lends itself to slight variations.
- Thin canopy conceals a proprietary 120V/277V driver
- May be mounted on wall vertically or upside down

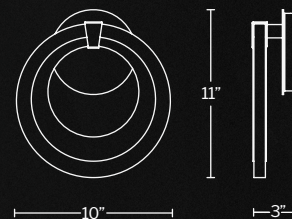


See complementary piece on page 21


Model No.	Size	CCT	CRI	Voltage	Wattage	LED Lumens	Delivered Lumens	Dimming	Rated Life	Finish	L	W	H
WS-38211	11"	3000K	90	120/277V	15W	680	444	ELV, TRIAC	54,000 hours	AB, BK	10"	3"	11"

Example: WS-38211-BK

ASCOT

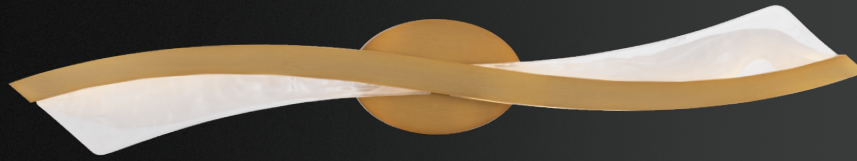

- Curves of artisanal wispy glass accent a sleek frame
- Each handcrafted piece is unique and lends itself to slight variations
- Can be mounted on wall in all orientations
- Slim canopy conceals a proprietary 120/277V driver



WS-46434


Model No.	Size	CCT	CRI	Voltage	Wattage	LED Lumens	Delivered Lumens	Dimming	Rated Life	Finish	L	W	H
WS-46422	22"	3000K	90	120/277V	38W	1,630	746	ELV, TRIAC	50,000 hours	AB	22"	3"	5"
WS-46434	34"				49W	2,100	1,321				34"	3"	5"

Example: WS-46434-AB

JAVELIN



- An arrow of Spanish Alabaster embraced by a metallic band. Unique veining in each crafted piece
- Can be mounted on wall in all orientations
- Slim canopy conceals a proprietary 120V/277V driver

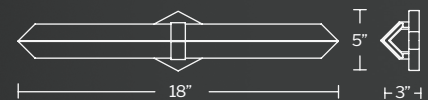

WS-20428


Model No.	Size	CCT	CRI	Voltage	Wattage	LED Lumens	Delivered Lumens	Dimming	Rated Life	Finish	L	W	H
WS-20418	18"	3000K	90	120/277V	15W	1,411	795	ELV, TRIAC	50,000 hours	AB, BN	18"	3"	5"
WS-20428	28"				28W	2,520	1,342				28"	3"	5"

Example: WS-20428-AB

LANZA



- Organic Spanish Alabaster mounted on a rectangular plate. Unique veining in each crafted piece
- Can be mounted on wall in all orientations
- No driver or transformer required
- Conversion plate included for 4" junction box



WS-52427

Model No.	Size	CCT	CRI	Voltage	Wattage	LED Lumens	Delivered Lumens	Dimming	Rated Life	Finish	L	W	H
WS-52427	27"	3000K	90	120V	26W	2,318	1,281	ELV,	54,000	AB, BK	27"	2"	4"
WS-52434	34"				39W	3,743	1,718	TRIAC	hours		34"	2"	4"

Example: WS-52427-AB

POSH



- A sparkling reclaimed K5 crystal diffuser bound by metallic bars
- Inner plate creates a mirrored effect
- Can be mounted on wall in all orientations
- Slim canopy conceals a proprietary 120V/277V driver




WS-14421


Model No.	Size	CCT	CRI	Voltage	Wattage	LED Lumens	Delivered Lumens	Dimming	Rated Life	Finish	L	W	H
WS-14421	21"	3000K	90	120/277V	20W	1,618	631	ELV,	50,000	BN, BK	21"	3"	5"
WS-14428	28"				23W	1,770	685	TRIAC	hours		29"	3"	5"

Example: WS-14421-BK

SWOOP

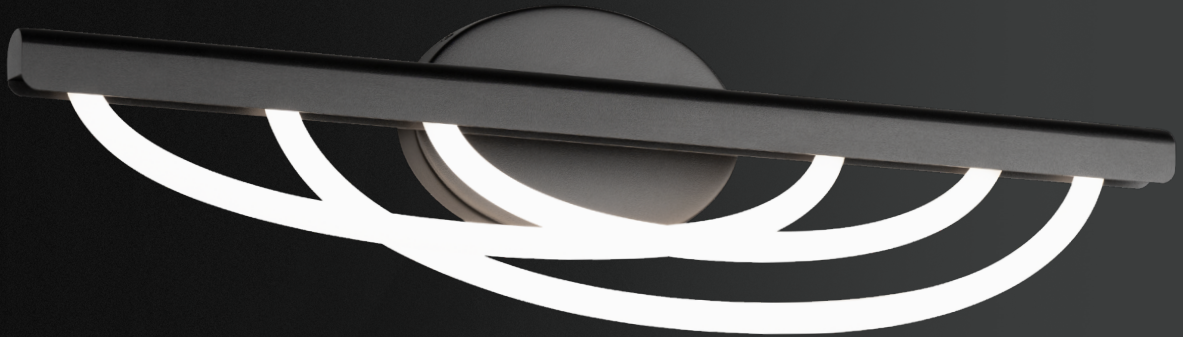

- Swags of fixed silica tubing suspended from a straight bar
- Slim canopy conceals a proprietary 120/277V driver

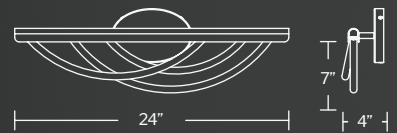


WS-32424


Model No.	Size	CCT	CRI	Voltage	Wattage	LED Lumens	Delivered Lumens	Dimming	Rated Life	Finish	L	W	H
WS-32424	24"				21W	1663	848	ELV, TRIAC	50,000 hours	BK, BN	24"	4"	7"
WS-32434	34"	3000K	90	120/277V	20W	1927	983	ELV, TRIAC	50,000 hours	BK, BN	34"	4"	9"

Example: WS-32424-BK

BRODY

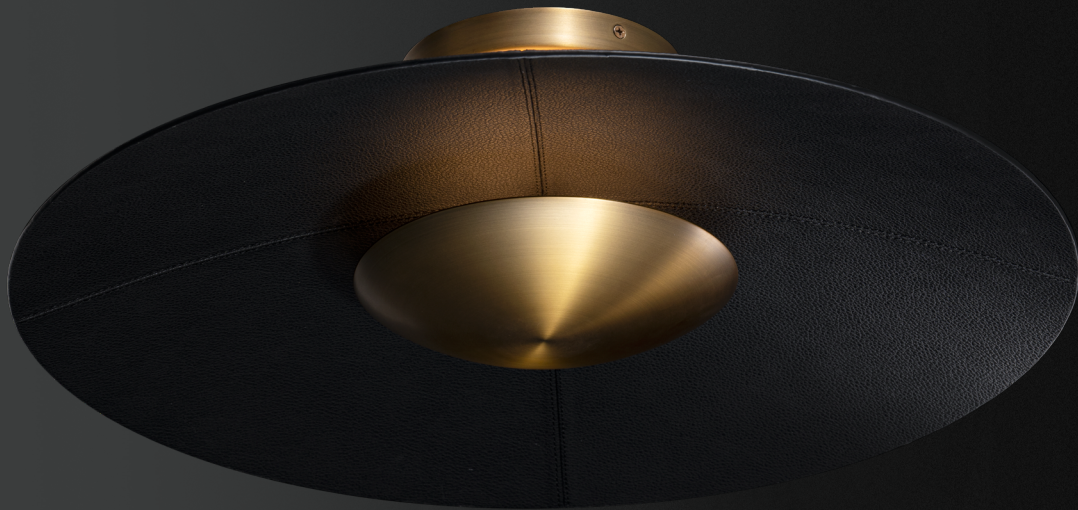

- Up and ambient illumination
- Can be mounted on ceiling or wall in all orientations
- Slim canopy conceals a proprietary 120/277V driver

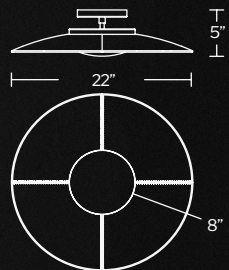

Model No.	Size	CCT	CRI	Voltage	Wattage	LED Lumens	Delivered Lumens	Dimming	Rated Life	Finish	L	W	H
FM-88422	22"	3000K	90	120/277V	27W	2,723	708	ELV, TRIAC	50,000 hours	BK/AB	22"	22"	6"



Example: **FM-88422-BK/AB**

CHAOS



CALIFORNIA
JA8
TITLE 24

- Sculptural light bars on a round ceiling canopy
- Can be mounted on ceiling or wall in all orientations
- Slim canopy conceals a proprietary universal 120V-220V-277V driver

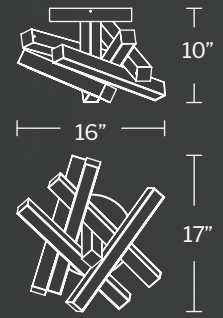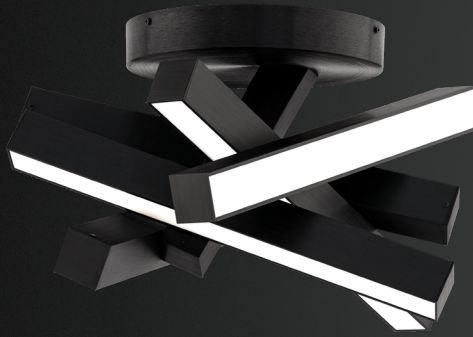

*See complementary piece on page 5



Model No.	Size	CCT	CRI	Voltage	Wattage	LED Lumens	Delivered Lumens	Dimming	Rated Life	Finish	L	W	H
FM-64817	17"	3000K	90	120-277V	41W	3,600	2,240	ELV, TRIAC, 0-10V	50,000 hours	AB, AL, BK	16"	17"	10"

Example: **FM-64817-BK**

LANDED



- Natural Spanish Alabaster shade extending from a flat metal brim. Unique veining in each crafted piece
- Can be mounted on ceiling or wall in all orientations
- Slim canopy conceals a proprietary universal 120V-220V-277V driver

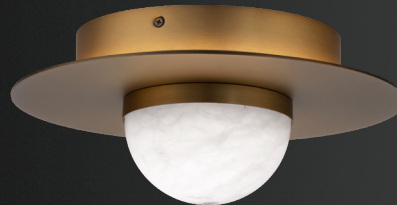


Model No.	Size	CCT	CRI	Voltage	Wattage	LED Lumens	Delivered Lumens	Dimming	Rated Life	Finish	L	W	H
FM-16412	12"	3000K	90	120-277V	37W	2,393	1,322	ELV, 0-10V, TRIAC	54,000 hours	AB, BK	12"	12"	5"

Example: **FM-16412-AB**

PAREL



- Slender arms cradle silica tubes and Spanish Alabaster beads
- Round canopy with minimal hardware
- Slim canopy conceals a proprietary universal 120V-220V-227V"

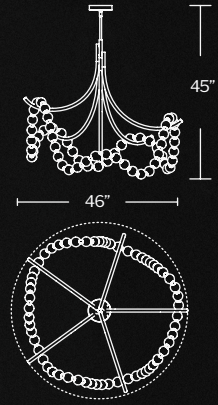

*See complementary piece on page 20





Model No.	Size	CCT	CRI	Voltage	Wattage	LED Lumens	Delivered Lumens	Dimming	Rated Life	Finish	L	W	H
FM-50446	46"	3000K	90	120-277V	42W	4000	1200	ELV	50,000 hours	AB, AN	46"	46"	45"

Example: FM-50446-AN

VELOCE



- Two metal and acrylic rings wrap around each other
- Spin-on round canopy with minimal hardware
- Thin canopy conceals a proprietary 120V/277V driver
- May be mounted on ceiling or wall

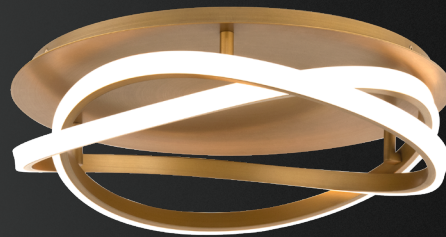

*See complementary piece on page 25




Model No.	Size	CCT	CRI	Voltage	Wattage	LED Lumens	Delivered Lumens	Dimming	Rated Life	Finish	L	W	H
FM-24818	18"	3000K	90	120/277V	35W	2860	1765	ELV, TRIAC	50,000 hours	AB, BK, TT	18"	18"	5"

Example: FM-24818-AB

BOXIE



- Three-dimensional geometric metallic forms
- Ambient and backlit illumination
- Complementary two-tone finish
- Slim canopy conceals a proprietary 120/277V driver

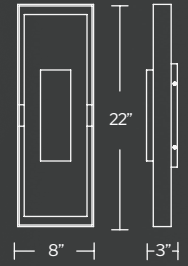

WS-W28422




Model No.	Size	CCT	CRI	Voltage	Wattage	LED Lumens	Delivered Lumens	Dimming	Rated Life	Finish	L	W	H
WS-W28410	10"				14W	547	383				8"	3"	10"
WS-W28422	22"	3000K	90	120/277V	19W	1027	720	ELV, TRIAC	50,000 hours	BK/BN	8"	3"	22"
WS-W28434	34"				27W	1244	972				10"	3"	34"

Example: WS-W28422-BK/BN

DRAPED



- Solid block of cast glass is held by a substantial linear frame
- Downward illumination
- Built-in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- 0-10V dimming option available with additional component # LDS065M010AFE-LO1. Component dimensions: 3.4" x 1.2" x 0.5"
- ACLED driverless technology



WS-W60412




Model No.	Size	CCT	CRI	Voltage	Wattage	LED Lumens	Delivered Lumens	Dimming	Rated Life	Finish	L	W	H
		-27											
WS-W60412	12"	-30	90	120V	16W	1,350	552	ELV, TRIAC	50,000 hours	BK	6"	3"	12"
WS-W60418	18"	-35					511				6"	3"	18"
		-40											

Example: WS-W60412-30-BK

FLAMME



- Handcrafted, bent metalwork ribbon curves upwards. Each unique piece lends itself to variations in curvature
- Up and down illumination
- Can be mounted on wall vertically or upside down
- 0-10V dimming option available with additional component # LDS065M010AFE-L01. Component dimensions: 3.4" x 1.2" x 0.5"
- ACLED driverless technology

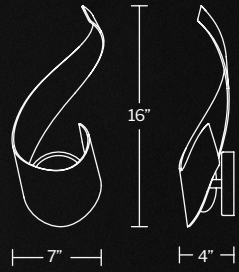


Model No.	Size	CCT	CRI	Voltage	Wattage	LED Lumens	Delivered Lumens	Dimming	Rated Life	Finish	L	W	H
WS-W18416	16"	3000K	90	120V	12W	1,000	273	ELV, TRIAC	54,000 hours	BK	7"	4"	16"

Example: **WS-W18416-BK**

FLUE



- Opaque triangular shade shelters LED light sources
- Downward illumination
- Can be mounted on wall vertically or upside down
- Built-in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- No driver or transformer required




Model No.	Size	CCT	CRI	Voltage	Wattage	LED Lumens	Delivered Lumens	Dimming	Rated Life	Finish	L	W	H
WS-W36406	6"	-27 -30 -35 -40	90	120V	12W	1,000	320	ELV, TRIAC	50,000 hours	BK	6"	4"	6"

Example: **WS-W36406-30-BK**

HELIOGRAPH



- Thick bar of acrylic bisected by an etched metal band
- Up, down, and ambient illumination
- Clear acrylic blocks are softened with an etched facade to diffuse light
- Built-in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Slim canopy conceals a proprietary 120/277V driver



WS-W30418




Model No.	Size	CCT	CRI	Voltage	Wattage	LED Lumens	Delivered Lumens	Dimming	Rated Life	Finish	L	W	H
WS-W30418	18"	-27	90	120/277V	10W	168	130	ELV, TRIAC	50,000 hours	BK	6"	4"	18"
WS-W30424	24"	-30			14W	288	196				6"	4"	24"
WS-W30432	32"	-35			19W	355	276				6"	4"	32"
		-40											

Example: WS-W30418-30-BK

MAGLEV



- Balanced sconce made of metal with an etched glass diffuser
- Up and down illumination
- Built-in color temperature adjustability. Switch from 3000K/3500K/4000K.
- Can be mounted on wall in all orientations
- No driver or transformer required

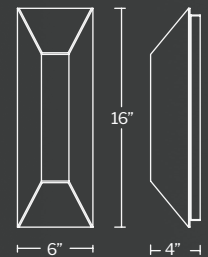

WS-W24116



Model No.	Size	CCT	CRI	Voltage	Wattage	LED Lumens	Delivered Lumens	Dimming	Rated Life	Finish	L	W	H
WS-W24110	10"	-30	90	120V	15W	632	472	ELV, TRIAC	54,000 hours	AL, BK, BZ, WT	4"	6"	10"
WS-W24116	16"	-35			25W	1,000	802				4"	6"	16"
		-40											

Example: WS-W24116-30-BK



Headquarters

Tel: 800.526.2588
Fax: 800.526.2585

44 Harbor Park Dr
Port Washington, NY 11050

South East

1600 Distribution Ct
Lithia Springs, GA 30122

Central

1700 South J Elmer Freeway
Suite 100
Cedar Hill, TX 75104

West

1750 S Archibald Ave
Ontario, CA 91761

Consult our manufacturing facility to take advantage of our custom capabilities in large quantities.
For up to date product specifications and assistance please visit [modernforms.com](https://www.modernforms.com) or call **1-800-526-2588**

© Copyright 2024 Modern Forms

MODERNFORMS.COM

MODERN FORMS®

Modern Forms technology and designs are protected by several patents and patent applications. Modern Forms will not hesitate to enforce its intellectual property rights through injunctive relief and seek further relief through damages if it has reason to believe its patents are being infringed.

Copyright © 2024 Modern Forms. All rights reserved. This catalog is copyrighted and Modern Forms will use all measures available to it under the law against anyone who copies or derives from its copyrighted work.

Modern Forms retains the right to modify the design of its products at any time as part of the company's continuous improvement program. Please refer to our website for the latest product specifications.

[MODERNFORMS.COM](https://www.modernforms.com)