

Introducing the New ABH® 6800Q and LR6000Q Quiet Hospital Latches...

A quiet environment creates a healing environment



6800Q Series
(Shown with option custom engraving)



LR6000Q Series
(Shown with option custom engraving)

- Zero Decibels gained during Push and Pull action
- Less than 5 lbs. to activate latch – Meets ADA Requirements
- All BHMA Finishes Available
- Custom Engraving Available
- Patented Linear Acting Cam for smooth operation
- UL Listed in U.S.A. and Canada
- **Patent# 7,285,374 & Additional Patents Pending**

Independent Testing of Hospital Latch Units when latch is Pushed or Pulled to retract the latch

ABH®	6800Q or LR6000Q	0 Decibels Gained
GJ*	HL6	34.7 Decibels Gained
Trimco*	1562	32.8 Decibels Gained
Sargent*	114/115	31.2 Decibels Gained



Innovation, Quality, Customer Service


Tel (630) 875-9900 • www.abhmfg.com • abhinfo@abhmfg.com

* Brand names are trademarks or registered trademarks of their respective companies.

* The information contained on this sheet is for informational purposes only and may not apply to your situation. Neither the publisher nor author shall be liable for any loss of profit or any commercial damages resulting from use of this Cutsheet. Information provided is subjective and has been compiled through an independent test.


LR6000Q – Ligature-Resistant Cylindrical Latch

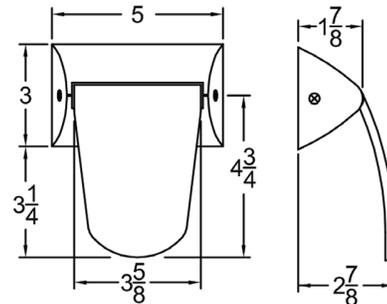- New ligature-resistant design provides a sleek look as well as functionality not commonly found in push/pull trim
- 1-3/4" standard door thickness (specify if different)
- Meets ADA requirements
- Trim is mounted using four thru-bolts for maximum stability
- Non-handed for installation and stocking ease
- Trim can be mounted vertical or horizontal (with handles pointing toward hinge edge of door)
- UL Listed in U.S.A. and Canada for use on door fire rated 90 minutes or less, up to 4'0" x 8'0"
- Custom engraving available
- **Patents Pending**










6800Q Series – Low Profile Cylindrical Latches

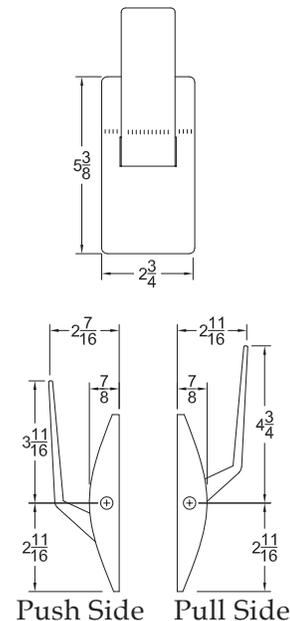- Comes standard with Round Cover (suffix "RC")
- Cylindrical latch application – passage function
- 1-3/4" standard door thickness (specify if different)
- Meets ADA requirements
- Trim is mounted using four thru-bolts for maximum stability
- Handing of unit is field-reversible by easily reversing the cam holder assembly on the backside of the unit
- Linear acting cam which provides for a smoother operating unit
- UL Listed in U.S.A. and Canada for use on door fire rated 90 minutes or less, up to 4'0" x 8'0"
- Custom engraving available
- **Patent #7,258,374 & additional Patent Pending**



Models

							
Push Down Pull Up Left Hand	Push Up Pull Down Left Hand	Push Up Pull Up Left Hand	Push Down Pull Down Left Hand	Push Down Pull Up Right Hand	Push Up Pull Down Right Hand	Push Up Pull Up Right Hand	Push Down Pull Down Right Hand

Architectural Builders Hardware Manufacturing, Inc.
 1222 Ardmore Avenue, Itasca, IL 60143
 Tel: 630-875-9900 • Fax: 630-875-9918 / 800-932-9224
 Web: www.abhmf.com • Email: abhinfo@abhmf.com

