


PBM Series

Momentary Panic Stations

Single gang panic station with momentary push button switch that remains active as long as it's depressed. Choice of contact configurations ensures compatibility with most systems

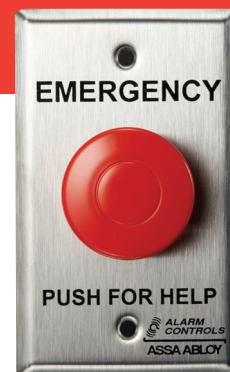

Features

Standard Features

- Single gang stainless steel wall plate, weather resistant to IP65 standards
- 1-1/2" red mushroom button
- Plate screened "EMERGENCY PUSH FOR HELP" to quickly call for assistance
- Momentary action switch

Options

- Plate: multiple plate finishes and widths available, specify when ordering
- Illumination: long life LED in 6V, 12V, 24V, 120V, specify when ordering
- **GR** Guard Ring
- **LUC** Lift up cover

Specifications

Certifications & Listings

- Conforms to IP65

Electrical

- Available in any combination of N/O and/or N/C contact pairs. See table below.
- Contacts rated 10A at 35 VDC or 120 VAC
- Switch connection via screw terminals
- Switch depth behind plate: 2-1/2"

Operating Temperature

- -13F to +158 F (-25 to 70 C)

How To Order

MODEL	CONTACTS	PLATE	ILLUMINATION	GUARD RING
PBM	1	4	L2	GR
PBM Momentary Operator	1 - One N/O pair and one N/C pair	1 - 302 Stainless Steel	L1 - 6VDC	GR Guard Ring
	2 - 2 N/O pairs	2 - White	L2 - 12VDC	LUC Lift Up Cover
	3 - 2 N/C pairs	3 - Ivory	L3 - 24VDC	(blank) NONE
	4 - 1 N/C pair	4 - Red	L4 - 120VAC	
	5 - 1 N/O pair	5 - 1-3/4" Stainless		
		6 - 1-3/4" Red		