

TECHNICAL DATA SHEET

ClearPath™ SERIES - Wireless Transmitters & Receivers



DESCRIPTION

ClearPath series transmitters (TX) and receivers (RX) provide reliable, time-tested, wireless activation for automatic doors. All transmitters share a common printed circuit board (PCB), transmit on user selectable 300 or 390 MHz, come turnkey with signal boosting antennas and 9V battery prewired and installed in one of several surface box options, and communicate with the multi-functional CP-RX receiver (sold separately).

FEATURES


- **Transmitter (TX) options:**
 CP-TX = TX & #1020 surface box
 CP-TX-V = (2) TX & #1015 surface box
 CP-TX-J = TX & #1010 surface box
 CP-TX-R4 = TX & 1025 surface box
 CP-TX-R6 = TX & 1030 surface Box
- Selectable frequencies: 300 MHz, 390 MHz & HDRC (filtered 390 MHz)
- Vestibule option provides 2 transmitters that will independently activate each vestibule door
- Sequencing option allows a single transmitter to activate 2 doors with an adjustable delay between activations
- **Receiver (RX) mode options:**
 CP-RX = Mode 1 & 2: single output RX or RX + selectable time delay of 0,5,10,15 & 20 seconds
 CP-RXM = Mode 3 & 4: two output RX or two sequenced output RX with selectable time delay of 5,10,15 & 20 seconds

QUESTIONS?
Call 317-842-2545
or visit mssedco.com



ClearPath™ SERIES - Wireless Transmitters & Receivers

DIMENSIONS

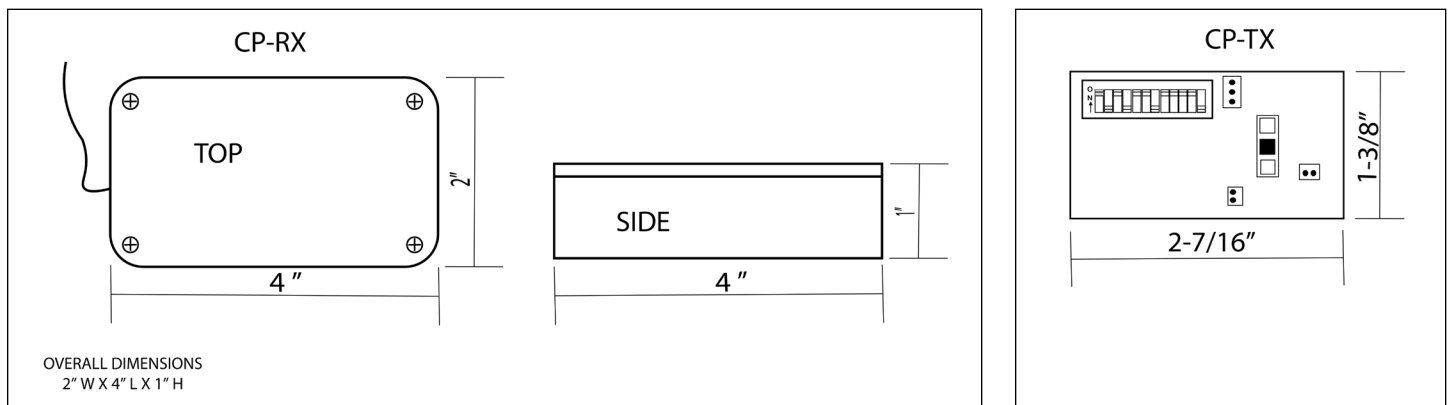

TECHNICAL SPECIFICATIONS

TRANSMITTER		RECEIVER	
OPERATING FREQUENCY	User Selectable - 300MHz, 390MHz, HDRC (filtered 390MHz)	RELAY OUTPUT	NO/CC/COM Rated 3AMP
INPUT POWER	9V Alkaline battery	INPUT POWER	12-24V AC/DC
CERTIFICATION	FCC	TEMPERATURE	-4°F to 140°F (-20°C to 60°C)
SIZE	PCB only - 2.4" x 1.3" x 0.25"; (6cm x 3.3cm x 0.64cm)	WEIGHT/SIZE	Less than 1.0 lbs. (0.5kg); 4" x 2" x 1" (10cm x 5cm x 2.5cm)
		HOUSING	Blue ABS Plastic

PART NUMBER GUIDE

XX - XXX - XX		
Product Series	Type	Options
CP = ClearPath	TX = Single Output Transmitter & #1020 Box STX = Two Output Sequencing Transmitter & #1020 Box RX = Receiver - Modes 1 & 2 RXM = Receiver - Modes 3 & 4	V = Vestibule (2) TX & #1015 Box J = Jamb/Narrow (1) TX & #1010 Box R4 = 4.5" Round (1) TX & #1025 Box R6 = 6" Round (1) TX & #1030 Box

WARRANTY

MS Sedco products are warrantied to be free from manufacturing defects for three years from date of purchase from MS Sedco – terms apply.

QUALIFIED INSTALLERS

When installing this product to an automatic pedestrian door application, MS Sedco recommends installation by technicians who are certified inspectors by the American Association of Automatic Door Manufacturers (AAADM). All installations shall be compliant with applicable nationally recognized performance standards and building codes.



MS Sedco | 5706 W 74th St | Indianapolis, IN 46278
Call 317-842-2545 | Email custsvc@mssedco.com | mssedco.com