




ASSEMBLY INSTRUCTION MODEL#2265-AG



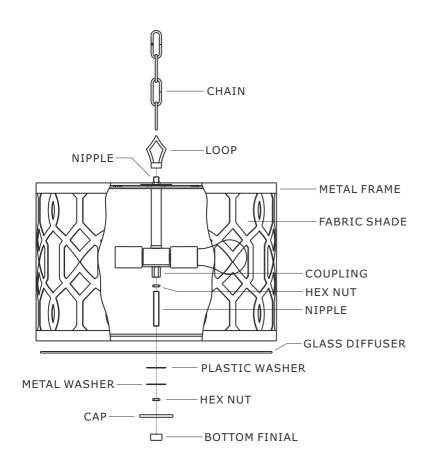


All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.





You will need 3-Medium Base Bulb 60 Watts Recommended 100 Watts Max. USE LED BULBS FOR EXTENDED USE This fixture is Dry rated

How to install

- 1. Slip the loop along wire and thread onto the nipple located on the top of the metal frame.
- 2. Determine the preferred hanging height and adjust the chain to the length required.
- 3. Connect fixture wires to supply wires in outlet box.
- 4. Install the fixture onto the outlet box.
- 5. Install the bulbs(not included) into the socket.
- 6.Thread the nipple onto the coupling and adjust the length of nipple to fit with the glass. Tighten it with hex nut.
- 7.Slide the glass diffuser, the plastic washer and the metal washer over the nipple, then secure with the hex nut.
- 8. Slide the cap over the nipple, then secure with the bottom finial.

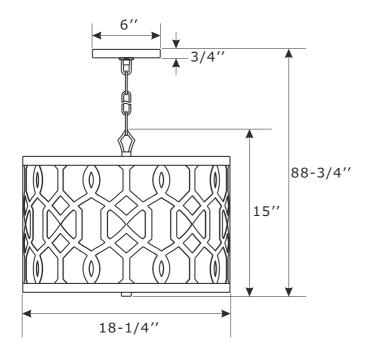

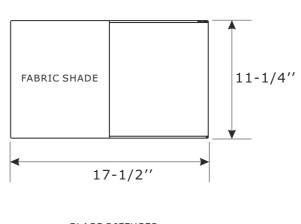







ASSEMBLY INSTRUCTION MODEL#2265-AG

Part Number

Part Numbers

- A. (1)-Mounting hardware
- B. (1)-Canopy W6"xH3/4" #XRF2260AGCAN6IN
- C. (1)-Collar ring
- D. (1)-Collar loop #XRF2260AGLOOP
- E. (1)-Chain -72", 4mm thick #XRF2260AGCHA4.0MM
- F. (1)-Loop
- G. (1)-Metal frame
- H. (1)-Fabric shade W17-1/2"xH11-1/4" #XRF2265SHA17.5IN
- I. (2)-Hex nut
- J. (1)-Nipple
- K. (1)-Glass diffuser #XRF2265DIF17.75IN
- L. (1)-Plastic washer
- M. (1)-Metal washer
- N. (1)-Cap #XRF2263AGCAP
- O. (1)-Bottom finial #XRF2263AGFIN

