





# Delta BreezRecessed Ventilation Recessed fan/Dimmable LED light Specifications

**REC80LED**  
(80 CFM)

## Dimensions

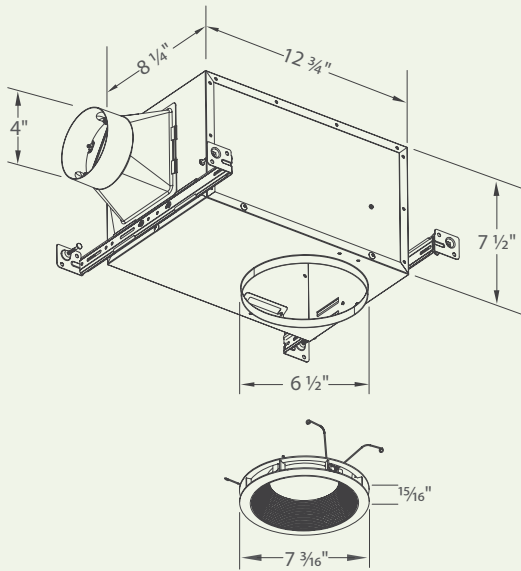

Fan Curve

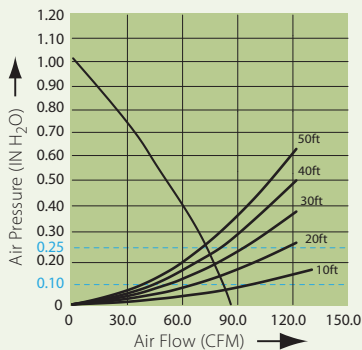

## Description

Delta BreezRecessed REC80LED is the only recessed fan/Dimmable LED light on the market with energy-efficient, brushless DC motor for energy savings and long life. Quiet operation ventilating fan with low profile, rated for continuous running. Fan has been awarded ENERGY STAR®. It is HVI, UL, and cUL certified, and can be used to comply with ASHRAE 62.2 local and whole building continuous and intermittent operation. Meets CA Title 24 requirements.

## DC Motor/Blower

- Power Rating of 120 Volts/60Hz
- DC Brushless motor engineered to run continuously
- Motor equipped with thermal cutoff fuse
- Removable with permanently lubricated plug-in motor
- Built-in soft start function to increase bearings' life
- Automatically powers OFF when impeller is locked abnormally

## Housing

- Galvanized steel body
- Detachable 4" diameter metal duct adapter
- Built-in backdraft damper
- Easy installation with expandable extension bracket

## Grille

- Attractive design using PP material
- Attaches directly to housing with torsion springs

## Light

- LED life is 30,000 hours (compare with 10,000-hour CFL life)
- 13-Watt Dimmable LED main light included (dimmer switch not included)
- Warm, white LED main light output: 850 Lumens; 3000K; 90 CRI for high color accuracy

## Warranty

- 3-year limited warranty

## TYPICAL SPECIFICATION

Ventilation fan shall be Delta Breez model REC80LED; ENERGY STAR qualified with DC brushless motor engineered to run continuously for a minimum 70,000 hours; airflow rating of 80 CFM and loudness rating of 1.5 Sones at 0.1 static pressure as certified by the Home Ventilating Institute (HVI); power consumption of 14.5 Watts with efficiency rating of 6.1 CFM/Watt; fan features motor lock protection. UL and cUL listed for tub/shower enclosure when used with GFCI-protected branch circuit wiring

## Specifications

BreezRecessed REC80LED	4" Duct (Standard)	
Static Pressure (Inches w.g.)	0.1	0.25
Air Flow (CFM)	80	65
Sones	1.5	2.0
Power Consumption (Watts)	14.5	14.5
Energy Efficiency (CFM/Watt)	6.1	5.4
Current (Amps)	0.34 Max	
Power Rating (V/Hz)	120 / 60	
LED Main Light (Watt)	13	