


OPP20-D2

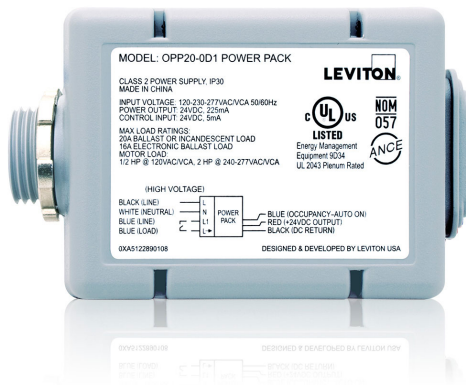

Color :  Gray

UPC Code : 078477634035

Country Of Origin : China

Occupancy Sensor Power Pack, Super Duty, Auto-ON, Manual-ON, and Local Switch inputs

20A Standard Power Pack for Occupancy Sensors, features include Auto ON, Manual ON, Local Switch, Latching Relay; Line Voltage Input: 120/208/220/230/240/277V, 50/60Hz; Low Voltage: Input-24VDC, 2mA, Output-24VDC, 225mA. Housing: 1/2" Threaded nipple w/locknut (fits on or in a 4" sqr box), RoHS Compliant, Title 24 Compliant, ASHRAE 90.1 Compliant, Color: Gray

The Leviton OPP20 Super Duty Power Pack is the first power pack designed to control virtually any lighting or receptacle circuit load to meet today's challenges for solid state lighting control and tougher code requirements for unmatched performance and durability. The Power Pack models are cost-effective with simplified energy management tools for daylight harvesting and energy management.

Do you have a question about an occupancy sensor or vacancy sensor?

Technical Information

Electrical Specifications

Frequency : 50/60Hz

Voltage : 120/230/277 VAC

Mechanical Specifications

Neutral Wire Connection : Required

Relay Type : Latching

Product Features

Color : Gray

Product Line : OPP20

Sensor Type : Power Pack

Standards and Certifications

Title 24 Compliant : Yes

Features and Benefits

- First true industry-exclusive "fail safe" design assures lights ON meeting life safety requirements of NFPA 101
- Robust power pack meets intense plug load control requirements of CA Title 24/ASHRAE 90.1
- Industry exclusive Switched Daylighting Power Pack models for use with Wall Switches, Occupancy Sensors and Photocells
- Robust and reliable mechanical latching relays specifically designed to operate LED's and high inrush electronic ballast loads
- Surpasses industry standards for short circuit protection (NEMA 410 16 Amp ballast overload testing)
- Tested to exceed 1.5 million switching cycles under standard load
- Built in manual ON switching control to meet CA Title 24 standards

- Models support a wide range of applications including switched daylighting, occupancy sensing control, bi-level switching, and metering/mechanical applications
- Overloaded at 16A

SPECIFICATION SUBMITTAL

JOB NAME: 	CATALOG NUMBERS: <table border="1" style="width: 100%;"> <tr> <td style="width: 50%; height: 20px;"></td> <td style="width: 50%; height: 20px;"></td> </tr> <tr> <td style="height: 20px;"></td> <td style="height: 20px;"></td> </tr> </table>				
JOB NUMBER: 					

Leviton Manufacturing Co., Inc

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.

T. Monday-Friday): +1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-461-2002 ·

FAX: +1-800-824-3005 ·

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)

5386- 1797 ·

Visit our Website at: www.leviton.com

© 2026 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:

www.leviton.com/company/about-leviton/locations

© 2026 Leviton Manufacturing Co., Inc.