2022 ELECTRICAL FITTINGS & FASTENERS CATALOG

orbit®
Orbit Industries, Inc.

25 YEARS
EST. 1997

2022 CATALOG

# ELECTRICAL & FITTINGS FASTENERS



ORBIT INDUSTRIES, INC.

Intertek

www.orbitelectric.com

ORBCAT-3

# table of contents



| About Us

| Electrical Fittings

Pg. i | Fitting Introduction

Pg. ii | Material Reference

Pg. iv | Featured Products




Pg. 1 | EMT FITTINGS




Pg. 18 | FLEX AC/MC FITTINGS




Pg. 31 | LIQUID TIGHT FITTINGS



Pg. 40 | NM CABLE FITTINGS




Pg. 44 | CORD GRIP FITTINGS




Pg. 46 | RIGID/IMC FITTINGS




Pg. 72 | COMBINATION FITTINGS

# table of contents




Pg. 77 | CONDUIT BODIES



Pg. 90 | FORM 7 & 8 CONDUIT BODIES



Pg. 97 | HANDY ELLS




Pg. 99 | CAST DEVICE BOXES AND COVERS



Pg. 101 | GROUNDINGS



Pg. 111 | ELBOWS AND NIPPLES



Pg. 119 | STRAPS, CLAMPS AND HANGERS



Pg. 128 | SERVICE ENTRANCE

# table of contents




Pg. 133 | BUSHINGS, LOCKNUTS AND WASHERS



Pg. 145 | BAR HANGERS



Pg. 147 | SAFETY PLATES



Pg. 148 | ACCESSORIES

NEW! | Fastening & Support Solutions

Pg. 154 | Fastener Introduction

Pg. 155 | Material Reference

Pg. 156 | Featured Products



Pg. 165 | CABLE & CONDUIT



Pg. 180 | STRAPS



Pg. 184 | STUD WALL

# table of contents





Pg. 190 | READY-TO-INSTALL ASSEMBLIES




Pg. 197 | THE HABIT



Pg. 206 | BOX & CONDUIT HANGERS



Pg. 208 | RECESSED LIGHT MOUNTING SOLUTIONS



Pg. 210 | ADJUSTABLE RINGS




Pg. 213 | CEILING & ACOUSTICAL




Pg. 217 | BAR HANGERS

# table of contents



Pg. 219 | BEAM & PURLIN



Pg. 228 | DATACOM & LOW VOLTAGE



Pg. 231 | SAFETY PLATES



Pg. 232 | ACCESSORIES

Pg. 236 | Product Index
Pg. 247 | Orbit Product Line Card

# About Orbit Industries, Inc.

Orbit Industries, Inc. is a manufacturer of products catering to the electrical distribution market. Our dedication to servicing distributors and end users through a network of innovative products, distribution centers on both coasts, and experienced stocking agents has allowed us to expand and succeed at an unprecedented rate. With more than 6,000 products in over 12 lines, a 98.7% fill rate and a team whose combined experience in the industry reaches over 400 years, Orbit is motivated to provide the best possible experience for the electrical industry.

# History

Orbit Industries, Inc. was founded in 1997 in Los Angeles by David Nikayin, an electrical contractor who decided to bring his knowledge to the manufacturing side of the industry after seeing that the needs of his team weren't satisfied by current products and manufacturers. In 2016 Orbit opened a second distribution center in Tennessee, allowing the company to ship products in 3 DAYS OR LESS, to any location in the country. In 2018, Orbit relocated its California distribution hub to the City of Bell Gardens, which increased the company's capacity on the West coast by more than a third, ensuring products are in-stock when customers need them. Through David's leadership and his team of industry veterans, we have established Orbit as one of the leading manufacturers of innovative electrical products.




**East coast Distribution Center**
**Morristown, TN**

# Extensive Inventory

With 220,000 Sq. Ft. of distribution center (DC) capacity on the West coast; a 450,000 Sq. Ft. DC on the East coast; and a nationwide network of warehousing facilities, Orbit boasts one of the largest inventories of electrical products in the country. This inventory enables Orbit to deliver all of our quality products within the shortest possible lead time. You can count on our offering of 6,000 SKUS (and counting) to be in-stock and ready to ship when you need them. With a 98.7% fill rate, you can focus more on customers; less on back-orders. Finally, with just ONE order, ONE shipment and ONE invoice, doing business has never been easier.

# Dedicated Customer Service

Our focus on catering to this industry since Orbit's inception has awarded us with a well-earned reputation for excellent customer service. Our Agents and Representatives are located across the nation, armed with the experience and knowledge needed to provide a quality, one-on-one level of service. Our team's emphasis on maintaining these personal relationships is what has allowed Orbit to be the only company of its size to remain so accessible.




**West coast Distribution Center**
**Bell Gardens, CA**

# Innovation

Orbit is dedicated to providing customers with innovative solutions. Our design engineers consistently help bring labor saving products to the market. With feedback from customers, contractors and engineers, as well as through extensive field tests, each product available from Orbit is designed with the end user in mind.

Our highly experienced R & D Team can even take advantage of our state-of-the-art manufacturing facility to turn any product concept into reality in just 90 days. This has resulted in a wide selection of innovative and exclusive products such as the Simple Support Bracket Family, Box and Conduit Hanger Support Plates, and Recessed Light Adapter Plates.















# ELECTRICAL FITTINGS

# INTRODUCTION

Orbit features an extensive variety of Electrical fittings in sizes and shapes to fit any application. Each fitting is constructed to meet our high standards, resulting in a group of products consisting of a quality found nowhere else. Our vast selection includes EMT, Rigid, Liquid Tight, Conduit Bodies, Elbows, Straps, Groundings and more. Most of our UL listed metal fittings for metal cable, conduit and tubing are considered suitable for grounding for use in circuits over and under 250V, and where installed in accordance with the NEC.

## EMT Fittings




## Flex Fittings



## AC/MC Fittings



## Liquid Tight Fittings



## Groundings



## Conduit Bodies



## Straps, Clamps, Hangers



## Conduit Elbows





## And more...

## MATERIALS

**STEEL, DIE CAST ZINC, MALLEABLE IRON, AND PVC.**



Steel



Die Cast Zinc



Malleable Iron



PVC

Orbit's fittings are available in a variety of sizes and high quality materials.

## Steel



Steel Fittings offer a higher tensile strength and higher yield strength than Zinc Die-Cast Fittings. Machined from a solid bar of stock steel, Steel Fittings are coated with zinc plating for corrosion protection. Steel Fittings are suitable for dry and wet locations, and are considered to be “specification grade” fittings.

## Zinc Die Cast



Zinc Die-Cast Fittings are quickly machined in one piece, making them very economical in price and light-weight when transported. Zinc Die-Cast Fittings are often deployed in short conduit runs and non-critical electrical work.

## Non-Metallic



Non-Metallic PVC and Nylon Fittings are used in both wet and dry locations when conduits and fittings are not subject to physical damage. Commonly used in residential applications, Non-Metallic Fittings are ideal when extra flexibility is desired for installation or maintenance.

# Malleable Iron



Malleable Iron Fittings are manufactured from a hot liquid metal poured into a mold, then cooled to produce a casting that is extremely tough. Malleable Iron Fittings are also coated with zinc plating for corrosion protection. Able to withstand hammering, machining, and extreme temperatures without breaking, Malleable Iron Fittings are often required by designers and federal specs for industrial applications.



# Gray Iron

Gray Iron Fittings are manufactured from a hot liquid mold in much the same way as malleable iron. As it cools, Gray Iron forms graphite flakes which produce its gray appearance. While more brittle than malleable iron, Gray Iron Fittings are inherently corrosion-resistant, have a higher dampening capacity, and do not shrink under extreme temperature shifts.

# Bronze



Bronze Fittings are composed of a copper-tin alloy that is both highly conductive and corrosion resistant. Bronze is regarded as the “go-to material” for grounding electrical service panels and equipment, especially for direct-burial (DB).

## Rigid-to-EMT Set Screw Combo Couplings

Pg. 2, 46, 73



Steel Rigid to EMT Set Screw Combo Couplings join un-threaded 1/2” thru 1” Rigid/IMC conduit to un-threaded 1/2” thru 1” EMT conduit. A Phillips or standard-head screwdriver may be used to tighten the fitting's set screws on either end. Suitable for dry locations. Sealing tape may be used to create a concrete tight seal.




## Rigid-to-EMT Compression Combo Couplings

Pg. 5, 50, 75

Steel Rigid to EMT Compression Combo Couplings improve upon more common set-screw type combination fittings. One end of the coupling is threaded for 1/2” thru 1” Rigid/IMC conduit; the other end is un-threaded for 1/2” thru 1” EMT. Unlike set-screw fittings, the SREC Series greatly reduces the risk of seizing screws, or the accidental bending of EMT due to over-torque. Compression type fittings are also wet location or concrete rated.

# Double-Bite Set Screw Combo Couplings

Pg. 12, 22, 72




Tubular Steel Double-Bite Set Screw Combo Couplings feature a saddle-type clamp that rides up and down the screw, and grips flexible conduit better than squeeze-type combo couplings. This double-bite saddle clamp joins all common Flex, MC, and AC-type cable ranges to one end of the fitting. On the opposite end, a set screw joins 1/2" and 3/4" EMT conduit to create a seamless conduit transition. For dry locations only.




# Double-Bite Compression Combo Couplings

Pg. 11, 23, 73

Tubular Steel Double-Bite Compression Combo Couplings also feature a saddle-type clamp, offering all the same advantages of its set screw counterpart above. However, this model features a compression ring in place of a set-screw so there is no risk of seizing screws, dropped screws, or bent EMT raceway. Zinc-plated steel design offers a higher tensile strength than common zinc die cast combo fittings. For dry locations only.

## EMT-to-Liquid Tight Compression Combo Couplings

Pg. 4, 32, 75



Steel EMT-to-Liquid Tight Compression Combo Couplings join EMT raceway to metallic or non-metallic liquid tight conduit. One end of the coupling is Compression Type for 1/2” thru 1” EMT conduit; on the other end is a grounding ferrule locknut for 1/2” thru 1” liquid tight conduit. An internal sealing ring creates a rain-tight and concrete-tight seal between both types of conduit.

## Rigid-to-Liquid Tight Compression Combo Couplings

Pg. 32, 51, 75




Steel Rigid-to-Liquid Tight Compression Couplings join Rigid or IMC raceway to metallic or non-metallic liquid tight conduit. One end of the coupling is threaded for 1/2” thru 2” Rigid conduit; on the other end is a grounding ferrule locknut for 1/2” thru 2” liquid tight conduit. This combo coupling design provides rain-tight and concrete-tight features.

## Double-Bite Connectors

Pg. 20

NEW!



Steel Double-Bite Cable Connectors feature a dual-gripping saddle clamp shaped to fit metal cable jackets, preventing cable distortion and conductor damage. All models include an insulated throat to prevent conductor chaffing during wire pulls. Connector fits 1/2” thru 1” knockouts, and accommodates 3/8” thru 1” flexible metal conduit. For dry locations only.



## Fast-Lock Connectors

Pg. 26, 27

Steel "Fast-Lock" Connectors make it possible to terminate over 100 sizes of MC, AC or Flex-type cable with only four SKUs. Available in standard and wide-throat models, these connectors feature a captive combo head set-screw for tightening the saddle-base cable clamp. To install, simply tilt the throat at an angle, insert it into the 1/2" or 3/4" knockout, and the connector will clip in-place. No locknut required.

## Double-Snap Connectors


Pg. 25



Double-Snap Connectors work to make terminating AC/MC cables to steel boxes and enclosures easy and tool-free. Available for both new and old-work installations, each connector can be assembled to the cable or box without tools, resulting in a much faster installation. Both fittings are also easily removable and re-usable.

# Universal Strut Clamps

Pg. 10, 55, 123

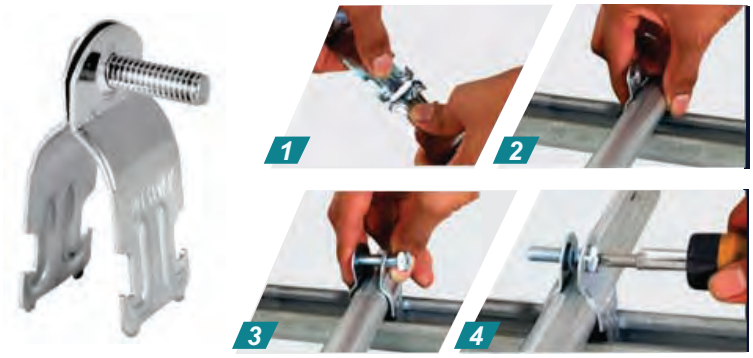


Universal Strut Clamps can be inserted anywhere along slotted channel, and allow for remarkably tight spacing between conduits. 1/2" thru 2" is a single piece design without nut. 2-1/2" thru 4" is a two-piece design with nut and thicker wall.



# Saddle-Type Strut Clamps

Pg. 30, 56, 124

Saddle-Type Strut Clamps can be used to secure EMT, Rigid conduit, and FMC Conduit in 5/16" thru 4" trade sizes. No need to break-apart or reassemble thanks to its single-piece design. Wide saddle and anti-rotation tabs prevent twisting when tightening screw. Universal bolt head stays captive so there are no loose screws to drop.

# Liquid Tight Connectors with Lay-In Lugs

Pg. 35, 36, 39



Malleable Iron Liquid Tight Connectors with Aluminum Lay-in Lugs are ideal when installations require copper or aluminum external bonding jumpers. Available in Straight, 45° and 90° angles, and accepts 3/8” thru 4” flexible liquid tight conduit (metallic and non-metallic). Sealing washer maintains a liquid tight connection when terminating in unthreaded openings.



# 3-Piece Rigid Conduit Couplings

Pg. 48

3-Piece Rigid Conduit Couplings make it possible to join two lengths of threaded Rigid/IMC conduit that are difficult (or impossible) to turn. This malleable iron coupling is composed of an outer hex slip-on ring, an inner threaded ferrule, and hexagonal threaded nipple that form a concrete-tight connection. Also useful for "breaking" long conduit runs, and a required coupling in many federal specifications. Trade sizes 1/2" thru 4".

# Form 7 Conduit Bodies

Pg. 90 - 93



Form 7 Gray Iron Conduit Bodies provide slightly more cubic content than traditional malleable iron conduit bodies, allowing more room for conductor splicing. Form 7 Conduit Bodies are also more compact, and feature a flat-back for more stable installations. Threaded hubs are tapered and include integral bushings for easier wire pulls. Stamped Steel and Gray Iron Covers with integral gaskets are sold separate. Form 7 Covers feature captive wedgenuts that provide superior screwdriver seating and torque compared to traditional screws. Covers are easy to remove later, and interchangeable with Form 7 Conduit Bodies offered by most other brands.

# Form 8 Conduit Bodies

Pg. 93 - 96



Form 8 Gray Iron Conduit Bodies are roughly 14% longer and feature wire-pull openings that are 16% larger than Form 7 Bodies of the same trade size. This greater size accommodates heavier, larger gauge conductors. Form 8 Conduit Bodies also feature a flat-back design and tapered conduit hubs. Stamped Steel and Gray Iron Covers with integral gaskets are sold separate, and include stainless steel screws.

## *STEEL* EMT CONNECTORS SET-SCREW TYPE

### FEATURES

- Electroplated Zinc
- Concrete-Tight when taped

### NOTE

- Sizes 2-1/2” to 4” are also listed for Rigid and IMC conduits

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **OF7701** | 1/2” | 50 | 500 |
| **OF7702** | 3/4” | 25 | 250 |
| **OF7703** | 1” | 10 | 100 |
| **OF7704** | 1-1/4” | 10 | 100 |
| **OF7705** | 1-1/2” | 10 | 50 |
| **OF7706** | 2” | 5 | 50 |
| **OF7707** | 2-1/2” | - | 12 |
| **OF7708** | 3” | - | 12 |
| **OF7709** | 3-1/2” | - | 6 |
| **OF7710** | 4” | - | 6 |



*1/2” to 1”*



*1-1/4” to 2”*



*2-1/2” to 4”*

## *STEEL* INSULATED EMT CONNECTORS SET-SCREW TYPE

### FEATURES

- Electroplated Zinc
- With Insulated Throat
- Concrete-Tight when taped

### NOTE

- Sizes 2-1/2” to 4” are also listed for Rigid and IMC conduits
- Insulated color may vary

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **OF7701-S** | 1/2” | 50 | 500 |
| **OF7702-S** | 3/4” | 25 | 250 |
| **OF7703-S** | 1” | 10 | 100 |
| **OF7704-S** | 1-1/4” | 10 | 100 |
| **OF7705-S** | 1-1/2” | 10 | 50 |
| **OF7706-S** | 2” | 5 | 50 |
| **OF7707-S** | 2-1/2” | - | 12 |
| **OF7708-S** | 3” | - | 12 |
| **OF7709-S** | 3-1/2” | - | 6 |
| **OF7710-S** | 4” | - | 6 |



*1/2” to 1”*



*1-1/4” to 2”*



*2-1/2” to 4”*

## *STEEL* EMT COUPLINGS SET-SCREW TYPE

### FEATURES

- Electroplated Zinc
- Concrete-Tight when taped

### NOTE

- Sizes 2-1/2" to 4" are also listed for Rigid and IMC conduits

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **OF7711** | 1/2" | 50 | 500 |
| **OF7712** | 3/4" | 25 | 250 |
| **OF7713** | 1" | 10 | 100 |
| **OF7714** | 1-1/4" | 10 | 100 |
| **OF7715** | 1-1/2" | 10 | 50 |
| **OF7716** | 2" | 5 | 50 |
| **OF7717** | 2-1/2" | - | 12 |
| **OF7718** | 3" | - | 12 |
| **OF7719** | 3-1/2" | - | 6 |
| **OF7720** | 4" | - | 6 |



*1/2" to 1"*



*1-1/4" to 2"*



*2-1/2" to 4"*

## *STEEL* RIGID TO EMT COMBINATION COUPLINGS SET-SCREW TYPE

### FEATURES

- Electroplated Zinc
- Concrete-Tight when taped

| Cat. No. | Rigid Size | EMT Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| **SRECS-50** | 1/2" | 1/2" | 25 | 250 |
| **SRECS-75** | 3/4" | 3/4" | 10 | 100 |
| **SRECS-100** | 1" | 1" | 10 | 100 |



*SRECS-50*



*SRECS-100*

## *STEEL* EMT CONNECTORS COMPRESSION TYPE & RAIN-TIGHT

### FEATURES

- Electroplated Zinc
- Concrete-Tight

### NOTE

- Sizes 2-1/2" to 4" are also listed for Rigid and IMC Conduits
- Compression Cap color may vary

| Cat. No. Compression | Cat. No. Rain-Tight | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| **OF7601** | **OF7601-W** | 1/2" | 25 | 250 |
| **OF7602** | **OF7602-W** | 3/4" | 25 | 250 |
| **OF7603** | **OF7603-W** | 1" | 10 | 100 |
| **OF7604** | **OF7604-W** | 1-1/4" | 10 | 100 |
| **OF7605** | **OF7605-W** | 1-1/2" | 10 | 50 |
| **OF7606** | **OF7606-W** | 2" | 5 | 50 |
| **OF7607** | **OF7607-W** | 2-1/2" | - | 12 |
| **OF7608** | **OF7608-W** | 3" | - | 12 |
| **OF7609** | **OF7609-W** | 3-1/2" | - | 6 |
| **OF7610** | **OF7610-W** | 4" | - | 6 |



*Compression Type*



*Rain-Tight*

## *STEEL* INSULATED EMT CONNECTORS COMPRESSION TYPE & RAIN-TIGHT

### FEATURES

- Electroplated Zinc
- With Insulated Throat
- Concrete-Tight

### NOTE

- Sizes 2-1/2" to 4" are also listed for Rigid and IMC conduits
- Insulated and Compression Cap color may vary

| Cat. No. Compression | Cat. No. Rain-Tight | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| **OF7601-S** | **OF7601-SW** | 1/2" | 25 | 250 |
| **OF7602-S** | **OF7602-SW** | 3/4" | 25 | 250 |
| **OF7603-S** | **OF7603-SW** | 1" | 10 | 100 |
| **OF7604-S** | **OF7604-SW** | 1-1/4" | 10 | 100 |
| **OF7605-S** | **OF7605-SW** | 1-1/2" | 10 | 50 |
| **OF7606-S** | **OF7606-SW** | 2" | 5 | 50 |
| **OF7607-S** | **OF7607-SW** | 2-1/2" | - | 12 |
| **OF7608-S** | **OF7608-SW** | 3" | - | 12 |
| **OF7609-S** | **OF7609-SW** | 3-1/2" | - | 6 |
| **OF7610-S** | **OF7610-SW** | 4" | - | 6 |



*Compression Type*



*Rain-Tight*

## STEEL EMT COUPLINGS COMPRESSION TYPE & RAIN-TIGHT

### FEATURES

- Electroplated Zinc
- Concrete-Tight

### NOTE

- Sizes 2-1/2" to 4" are also listed for Rigid and IMC conduits
- Compression Cap color may vary

| Cat. No. Compression | Cat. No. Rain-Tight | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| OF7611 | OF7611-W | 1/2" | 25 | 250 |
| OF7612 | OF7612-W | 3/4" | 25 | 250 |
| OF7613 | OF7613-W | 1" | 10 | 100 |
| OF7614 | OF7614-W | 1-1/4" | 10 | 100 |
| OF7615 | OF7615-W | 1-1/2" | 10 | 50 |
| OF7616 | OF7616-W | 2" | 5 | 50 |
| OF7617 | OF7617-W | 2-1/2" | - | 12 |
| OF7618 | OF7618-W | 3" | - | 12 |
| OF7619 | OF7619-W | 3-1/2" | - | 6 |
| OF7620 | OF7620-W | 4" | - | 6 |



*Compression Type*



*Rain-Tight*

## STEEL EMT TO LIQUID TIGHT COMBINATION COUPLINGS COMPRESSION TYPE

### FEATURES

- Electroplated Zinc
- Concrete-Tight
- Rain-Tight

| Cat. No. | EMT Size | LT Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| SELTC-50 | 1/2" | 1/2" | 25 | 250 |
| SELTC-75 | 3/4" | 3/4" | 10 | 100 |
| SELTC-100 | 1" | 1" | 10 | 100 |



*SELTC-75*



*SELTC-100*

## *STEEL* RIGID TO EMT COMBINATION COUPLINGS THREADED/COMPRESSION TYPE

NEW

### FEATURES

- Electroplated Zinc
- Internally threaded for Rigid/IMC conduit
- Compression type for EMT conduit
- Rain-Tight
- Concrete-Tight

| Cat. No. | RIGID Size | EMT Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| **SREC-50** | 1/2” | 1/2” | 25 | 100 |
| **SREC-75** | 3/4” | 3/4” | 25 | 100 |
| **SREC-100** | 1” | 1” | 10 | 40 |



*SREC-50*

## *ZINC DIE CAST* EMT CONNECTORS SET-SCREW TYPE

### FEATURES

- Concrete-Tight when taped
- Combo Head Set-Screw

### NOTE

- Sizes 2-1/2” to 4” are also listed for Rigid and IMC conduits

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **OF701** | 1/2” | 100 | 1000 |
| **OF702** | 3/4” | 50 | 500 |
| **OF703** | 1” | 10 | 100 |
| **OF704** | 1-1/4” | 10 | 100 |
| **OF705** | 1-1/2” | 10 | 50 |
| **OF706** | 2” | 5 | 50 |
| **OF707** | 2-1/2” | - | 12 |
| **OF708** | 3” | - | 12 |
| **OF709** | 3-1/2” | - | 6 |
| **OF710** | 4” | - | 6 |



*1/2” to 1”*



*1-1/4” to 2”*



*2-1/2” to 4”*

## *ZINC DIE CAST*
## INSULATED EMT CONNECTORS
## SET-SCREW TYPE

### FEATURES

- With Insulated Throat
- Concrete-Tight when taped
- Combo Head Set-Screw

### NOTE

- Sizes 2-1/2" to 4" are also listed for Rigid and IMC conduits
- Insulated color may vary

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **OF701-S** | 1/2" | 50 | 500 |
| **OF702-S** | 3/4" | 25 | 250 |
| **OF703-S** | 1" | 10 | 100 |
| **OF704-S** | 1-1/4" | 10 | 100 |
| **OF705-S** | 1-1/2" | 10 | 50 |
| **OF706-S** | 2" | 5 | 50 |
| **OF707-S** | 2-1/2" | - | 12 |
| **OF708-S** | 3" | - | 12 |
| **OF709-S** | 3-1/2" | - | 6 |
| **OF710-S** | 4" | - | 6 |



*1/2" to 1"*



*1-1/4" to 2"*



*2-1/2" to 4"*

## *ZINC DIE CAST*
## EMT COUPLINGS
## SET-SCREW TYPE

### FEATURES

- Concrete-Tight when taped
- Combo Head Set-Screw

### NOTE

- Sizes 2-1/2" to 4" are also listed for Rigid and IMC conduits

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **OF711** | 1/2" | 50 | 500 |
| **OF712** | 3/4" | 25 | 250 |
| **OF713** | 1" | 10 | 100 |
| **OF714** | 1-1/4" | 10 | 100 |
| **OF715** | 1-1/2" | 10 | 50 |
| **OF716** | 2" | 5 | 50 |
| **OF717** | 2-1/2" | - | 12 |
| **OF718** | 3" | - | 12 |
| **OF719** | 3-1/2" | - | 6 |
| **OF720** | 4" | - | 6 |



*1/2" to 1"*



*1-1/4" to 2"*



*2-1/2" to 4"*

## *ZINC DIE CAST* EMT CONNECTORS COMPRESSION TYPE & RAIN-TIGHT

### FEATURES
- Concrete-Tight

### NOTE
- Sizes 2-1/2" to 4" are also listed for Rigid and IMC conduits
- Compression Cap color may vary

| Cat. No. Compression | Cat. No. Rain-Tight | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| **OF601** | **OF601-W** | 1/2" | 50 | 500 |
| **OF602** | **OF602-W** | 3/4" | 25 | 250 |
| **OF603** | **OF603-W** | 1" | 10 | 100 |
| **OF604** | **OF604-W** | 1-1/4" | 10 | 100 |
| **OF605** | **OF605-W** | 1-1/2" | 10 | 50 |
| **OF606** | **OF606-W** | 2" | 5 | 50 |
| **OF607** | **OF607-W** | 2-1/2" | - | 12 |
| **OF608** | **OF608-W** | 3" | - | 12 |
| **OF609** | **OF609-W** | 3-1/2" | - | 6 |
| **OF610** | **OF610-W** | 4" | - | 6 |



*Compression Type*



*Rain-Tight*

## *ZINC DIE CAST* INSULATED EMT CONNECTORS COMPRESSION TYPE & RAIN-TIGHT

### FEATURES
- With Insulated Throat
- Concrete-Tight

### NOTE
- Sizes 2-1/2" to 4" are also listed for Rigid and IMC conduits
- Insulated and Compression Cap color may vary

| Cat. No. Compression | Cat. No. Rain-Tight | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| **OF601-S** | **OF601-SW** | 1/2" | 50 | 500 |
| **OF602-S** | **OF602-SW** | 3/4" | 25 | 250 |
| **OF603-S** | **OF603-SW** | 1" | 10 | 100 |
| **OF604-S** | **OF604-SW** | 1-1/4" | 10 | 100 |
| **OF605-S** | **OF605-SW** | 1-1/2" | 10 | 50 |
| **OF606-S** | **OF606-SW** | 2" | 5 | 50 |
| **OF607-S** | **OF607-SW** | 2-1/2" | - | 12 |
| **OF608-S** | **OF608-SW** | 3" | - | 12 |
| **OF609-S** | **OF609-SW** | 3-1/2" | - | 6 |
| **OF610-S** | **OF610-SW** | 4" | - | 6 |



*Compression Type*



*Rain-Tight*

## ZINC DIE CAST
## EMT COUPLINGS
## COMPRESSION TYPE & RAIN-TIGHT

### FEATURES
- Concrete-Tight

### NOTE
- Sizes 2-1/2” to 4” are also listed for Rigid and IMC conduits
- Compression Cap color may vary

| Cat. No. Compression | Cat. No. Rain-Tight | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| OF611 | OF611-W | 1/2” | 50 | 500 |
| OF612 | OF612-W | 3/4” | 25 | 250 |
| OF613 | OF613-W | 1” | 10 | 100 |
| OF614 | OF614-W | 1-1/4” | 10 | 100 |
| OF615 | OF615-W | 1-1/2” | 10 | 50 |
| OF616 | OF616-W | 2” | 5 | 50 |
| OF617 | OF617-W | 2-1/2” | - | 12 |
| OF618 | OF618-W | 3” | - | 12 |
| OF619 | OF619-W | 3-1/2” | - | 6 |
| OF620 | OF620-W | 4” | - | 6 |



*Compression Type*



*Rain-Tight*

## STAMPED STEEL
## 1-HOLE EMT STRAPS

### FEATURES
- Electroplated Zinc

### NOTE
- Sizes 2-1/2” to 4” are also listed for Rigid and IMC conduits

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| SE1-50 | 1/2” | 100 | 1000 |
| SE1-75 | 3/4” | 100 | 1000 |
| SE1-100 | 1” | 100 | 500 |
| SE1-125 | 1-1/4” | 100 | 500 |
| SE1-150 | 1-1/2” | 50 | 500 |
| SE1-200 | 2” | 50 | 500 |
| SU1-250 | 2-1/2” | 25 | 100 |
| SU1-300 | 3” | 25 | 100 |
| SU1-350 | 3-1/2” | 25 | 100 |
| SU1-400 | 4” | 25 | 100 |



*SE1-50 to SE1-200*



*SU1-250 to SU1-400*

## STAMPED STEEL
## 2-HOLE EMT STRAPS

### FEATURES
- Electroplated Zinc

### NOTE
- Sizes 2-1/2” to 4” are also listed for Rigid and IMC conduits

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **SE2-50** | 1/2” | 100 | 1000 |
| **SE2-75** | 3/4” | 100 | 1000 |
| **SE2-100** | 1” | 100 | 500 |
| **SE2-125** | 1-1/4” | 100 | 500 |
| **SE2-150** | 1-1/2” | 50 | 500 |
| **SE2-200** | 2” | 50 | 500 |
| **SU2-250** | 2-1/2” | 25 | 100 |
| **SU2-300** | 3” | 25 | 100 |
| **SU2-350** | 3-1/2” | 25 | 100 |
| **SU2-400** | 4” | 25 | 100 |



*SE2-50 to SE2-200*



*SU2-250 to SU2-400*

## STAMPED STEEL
## NAIL STRAPS

### FEATURES
- Electroplated Zinc

### NOTE
- Varies according to sizes

| Cat. No. | EMT Size | FLEX/RIGID Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| **NS-50** | 1/2” | 3/8” | 100 | 1000 |
| **NS-50/75** | 3/4” | 1/2” | 100 | 1000 |
| **NS-100** | 1” | 3/4” | 100 | 1000 |



## *STAMPED STEEL* UNIVERSAL STRUT CLAMPS

### FEATURES

- Electroplated Zinc
- Listed for EMT, IMC and Rigid
- 1/2" to 2 ": Break-apart design without Nut
- 2-1/2" to 4": Two-pieces design with Nut

| Cat. No. | EMT/RIGID Size | Std. Pkg. |
|---|---|---|
| **ST-50** | 1/2” | 100 |
| **ST-75** | 3/4” | 100 |
| **ST-100** | 1” | 100 |
| **ST-125** | 1-1/4” | 100 |
| **ST-150** | 1-1/2” | 50 |
| **ST-200** | 2” | 50 |
| **ST-250** | 2-1/2” | 50 |
| **ST-300** | 3” | 25 |
| **ST-350** | 3-1/2” | 25 |
| **ST-400** | 4” | 25 |



## *STAMPED STEEL* SADDLE TYPE STRUT CLAMPS

### FEATURES

- Electroplated Zinc
- Tri-Combo Hex Screw Head
- Wide Saddle design

| Cat. No. | EMT/RIGID Conduit Size | Cable O.D. Range | Std. Pkg. |
|---|---|---|---|
| **STS-50** | 5/16” - 1/2” | 0.260" - 0.890" | 100 |
| **STS-75** | 3/4” | 0.670" - 1.090" | 100 |
| **STS-100** | 1” | 0.890" - 1.450" | 100 |
| **STS-125** | 1-1/4” | 1.150" - 1.700" | 50 |
| **STS-150** | 1-1/2” | 1.350" - 2.000" | 50 |
| **STS-200** | 2” | 1.875" - 2.570" | 50 |
| **STS-250** | 2-1/2” | 2.500" - 3.060" | 25 |
| **STS-300** | 3” | 3.000" - 3.600" | 25 |
| **STS-350** | 3-1/2” | 3.600" - 4.100" | 25 |
| **STS-400** | 4” | 4.100" - 4.700" | 25 |



## *STEEL* CONDUIT HANGERS *WITH BOLTS*

### FEATURES

- Electroplated Zinc

| Cat. No. | Trade Size | EMT Size | Rigid Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|---|
| **PH-50B** | #0B | 1/2” | 1/2” & 3/8” | 50 | 500 |
| **PH-75B** | #1B | 3/4” | 3/4” | 50 | 500 |
| **PH-100B** | #2B | 1” | 1” | 25 | 250 |
| **PH-105B** | #2-1/2B | 1-1/4” | - | 25 | 250 |
| **PH-125B** | #3B | 1-1/2” | 1-1/4” | 50 | 250 |
| **PH-150B** | #4B | - | 1-1/2” | 50 | 250 |
| **PH-200B** | #5B | 2” | 2” | 20 | 100 |
| **PH-250B** | #6B | 2-1/2” | 2-1/2” | 10 | 50 |
| **PH-300B** | #7B | 3” | 3” | 10 | 50 |
| **PH-350B** | #8B | 3-1/2” | 3-1/2” | 10 | 50 |
| **PH-400B** | #9B | 4” | 4” | 5 | 25 |



## *STEEL* EMT TO FLEX COUPLINGS COMPRESSION/DOUBLE-BITE SADDLE CLAMP TYPE

NEW

### FEATURES

- Electroplated Zinc
- Dual-gripping Saddle Clamp
- For AC, MCI, MCI-A, HCF, RWFMC
- Compression type for EMT conduit
- Combo Head Set-Screw
- Suitable for dry location only

| Cat. No. | Flex/Cable Range | EMT Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| **SEFCD-50** | Steel AC: 12/4 (0.550") - 6/3 (0.920")<br>AL AC: 12/4 (0.550") - 6/3 (0.920")<br>Steel MCI: 10/4 (0.640") - 8/3 (0.920")<br>AL MCI: 10/4 (0.640") - 8/3 (0.920")<br>AL MCI-A: 12/4 (0.520") - 8/4 (0.770")<br>Steel HCF AC: 12/4 (0.550") - 6/3 (0.920")<br>AL HCF AC: 12/4 (0.550") - 6/3 (0.920")<br>HCF MCI-A: 12/4 (0.520") - 8/4 (0.770")<br>Steel/AL FMC/RWFMC/XRWFMC: 1/2" | 1/2” | 25 | 100 |
| **SEFCD-75** | Steel AC: 6/4 (0.930") - 4/3 (1.075")<br>AL AC: 8/3(0.680") - 4/3 (1.075")<br>Steel MCI: 8/3 (0.730") - 4/3 (1.075")<br>AL MCI: 6/4 (0.930") - 4/3 (1.075")<br>AL MCI-A: 8/4 (0.770") - 6/4 (1.110")<br>Steel HCF AC: 6/4 (0.930") - 4/3 (1.075")<br>AL HCF AC: 8/3 (0.680") - 4/3 (1.075")<br>HCF MCI-A: 8/4 (0.770") - 6/4 (1.110")<br>Steel/AL FMC/RWFMC/XRWFMC: 3/4" | 3/4” | 25 | 100 |



## *STEEL* EMT TO FLEX COUPLINGS SET-SCREW/DOUBLE-BITE SADDLE CLAMP TYPE

NEW

### FEATURES

- Electroplated Zinc
- Dual-gripping Saddle Clamp
- For AC, MCI, MCI-A, HCF, RWFMC
- Set-Screw type for EMT conduit
- Combo Head Set-Screw
- Suitable for dry location only

| Cat. No. | Flex/Cable Range | EMT Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| **SEFSD-38** | Steel AC: 14/2 (0.450") - 10/2 (0.660")<br>AL AC: 14/2(0.450") - 10/2 (0.660")<br>Steel MCI: 14/2 (0.450") - 10/2 (0.660")<br>AL MCI: 14/2 (0.450") - 10/2 (0.660")<br>AL MCI-A: 14/2 (0.400") - 10/3 (0.590")<br>Steel HCF AC: 14/2 (0.450") - 10/2 (0.660")<br>AL HCF AC: 14/2 (0.450") - 10/2 (0.660")<br>HCF MCI-A: 14/2 (0.400") - 10/3 (0.590")<br>Steel/AL FMC/RWFMC/XRWFMC: 3/8" | 1/2” | 25 | 100 |
| **SEFSD-50** | Steel AC: 12/4 (0.550") - 6/3 (0.920")<br>AL AC: 12/4 (0.550") - 6/3 (0.920")<br>Steel MCI: 10/4 (0.640") - 8/3 (0.920")<br>AL MCI: 10/4 (0.640") - 8/3 (0.920")<br>AL MCI-A: 12/4 (0.520") - 8/4 (0.770")<br>Steel HCF AC: 12/4 (0.550") - 6/3 (0.920")<br>AL HCF AC: 12/4 (0.550") - 6/3 (0.920")<br>HCF MCI-A: 12/4 (0.520") - 8/4 (0.770")<br>Steel/AL FMC/RWFMC/XRWFMC: 1/2" | 1/2” | 25 | 100 |
| **SEFSD-75** | Steel AC: 6/4 (0.930") - 4/3 (1.075")<br>AL AC: 8/3(0.680") - 4/3 (1.075")<br>Steel MCI: 8/3 (0.730") - 4/3 (1.075")<br>AL MCI: 6/4 (0.930") - 4/3 (1.075")<br>AL MCI-A: 8/4 (0.770") - 6/4 (1.110")<br>Steel HCF AC: 6/4 (0.930") - 4/3 (1.075")<br>AL HCF AC: 8/3 (0.680") - 4/3 (1.075")<br>HCF MCI-A: 8/4 (0.770") - 6/4 (1.110")<br>Steel/AL FMC/RWFMC/XRWFMC: 3/4" | 3/4” | 25 | 100 |



## *ZINC DIE CAST* EMT TO FLEX COUPLINGS SET-SCREW/SQUEEZE TYPE

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **OF530** | 1/2” to 3/8” | 50 | 500 |
| **OF531** | 1/2” to 1/2” | 25 | 250 |
| **OF532** | 3/4” to 3/4” | 25 | 100 |
| **OF533** | 1” to 1” | 10 | 40 |



## ZINC DIE CAST
### EMT TO FLEX COUPLINGS SET-SCREW/CLAMP TYPE



| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| OF520 | 1/2" to 3/8" | 50 | 500 |
| OF521 | 1/2" to 1/2" | 25 | 250 |
| OF522 | 3/4" to 3/4" | 25 | 250 |
| OF523 | 1" to 1" | 10 | 40 |

## ZINC DIE CAST
### EMT TO FLEX COUPLINGS COMPRESSION/SCREW-IN TYPE



| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| OF1611 | 1/2" | 50 | 500 |
| OF1612 | 3/4" | 25 | 250 |
| OF1613 | 1" | 10 | 100 |

## ZINC DIE CAST
### EMT OFFSET CONNECTORS SET-SCREW TYPE



**FEATURES**
- Concrete-Tight when taped
- Combo Head Set-Screw

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| OCS-50 | 1/2" | 100 | 1000 |
| OCS-75 | 3/4" | 50 | 500 |

## ZINC DIE CAST
### EMT OFFSET CONNECTORS COMPRESSION TYPE



**FEATURES**
- Concrete-Tight

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| OCC-50 | 1/2" | 100 | 1000 |
| OCC-75 | 3/4" | 50 | 500 |

## ZINC DIE CAST
### EMT 90° ANGLE CONNECTOR COMPRESSION TYPE



**FEATURES**
- Concrete-Tight

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| CC90-50 | 1/2" | 25 | 100 |

## *ZINC DIE CAST*
## EMT "FASTLOCK" CONNECTORS (NO LOCKNUT)

### FEATURES
- Combo Head Set-Screw
- Suitable for dry location only



| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| OF1701 | 1/2" | 50 | 500 |
| OF1702 | 3/4" | 50 | 500 |

## *ZINC DIE CAST*
## EMT INSIDE CORNER SET-SCREW TYPE

### FEATURES
- Combo Head Set-Screw



| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| ECS-50 | 1/2" | 100 | 1000 |
| ECS-75 | 3/4" | 50 | 500 |

## *ZINC DIE CAST* EMT TO EMT PULL ELBOWS SET-SCREW TYPE *WITH GASKET*

### FEATURES
- Aluminum Cover



SET-SCREW EMT

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| SSPE-G50 | 1/2" | 10 | 100 |
| SSPE-G75 | 3/4" | 5 | 50 |
| SSPE-G100 | 1" | - | 25 |
| SSPE-G125 | 1-1/4" | - | 20 |

## *ZINC DIE CAST* EMT TO EMT PULL ELBOWS SET-SCREW TYPE *WITHOUT GASKET*

### FEATURES
- Aluminum Cover



SET-SCREW EMT

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| SSPE-50 | 1/2" | 10 | 100 |
| SSPE-75 | 3/4" | 5 | 50 |
| SSPE-100 | 1" | - | 25 |
| SSPE-125 | 1-1/4" | - | 20 |

## *ZINC DIE CAST* EMT TO BOX PULL ELBOWS SET-SCREW TYPE *WITH GASKET*

### FEATURES

- Aluminum Cover

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **SSPEB-G50** | 1/2” | 10 | 100 |
| **SSPEB-G75** | 3/4” | 5 | 50 |
| **SSPEB-G100** | 1” | - | 25 |
| **SSPEB-G125** | 1-1/4” | - | 20 |



SET-SCREW EMT

## *ZINC DIE CAST* EMT TO BOX PULL ELBOWS SET-SCREW TYPE *WITHOUT GASKET*

### FEATURES

- Aluminum Cover

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **SSPEB-50** | 1/2” | 10 | 100 |
| **SSPEB-75** | 3/4” | 5 | 50 |
| **SSPEB-100** | 1” | - | 25 |
| **SSPEB-125** | 1-1/4” | - | 20 |



SET-SCREW EMT

## *PLASTIC* EMT BUSHINGS

### FEATURES

- Protects wires from damage by sharp edges of EMT
- Size 2-1/2” to 4” can be also used for Rigid, IMC and PVC conduit

### NOTE

- Color may vary

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **TPB-50** | 1/2” | 100 | 1000 |
| **TPB-75** | 3/4” | 100 | 1000 |
| **TPB-100** | 1” | 50 | 500 |
| **TPB-125** | 1-1/4” | 25 | 250 |
| **TPB-150** | 1-1/2” | 25 | 250 |
| **TPB-200** | 2” | 10 | 100 |
| **TPB-250** | 2-1/2” | 10 | 100 |
| **TPB-300** | 3” | - | 20 |
| **TPB-350** | 3-1/2” | - | 20 |
| **TPB-400** | 4” | - | 10 |



For More Information See pg. 77-96

## Form 7 Gray Iron Conduit Bodies


LB7


LL7


LR7


C7


T7


SCG7


GICG7

## Form 8 Gray Iron Conduit Bodies


LB8


LL8


LR8


C8


T8


SCG8


GICG8

## Malleable Iron Conduit Bodies


MLB


MLL


MLR


MC


MT

For More Information See pg. 77-96

# Aluminum Conduit Bodies


LB-A



LL-A


LR-A


C-A


T-A


SLB


LBM


LB


LL


LR


C


T


SSLB


SSLR


SSLL


SSC


SST


CG


STEEL
SC


AC


G

## *ZINC DIE CAST*
## FLEX CONNECTORS
## SCREW-IN TYPE

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **OF671** | 3/8” | 100 | 1000 |
| **OF672** | 1/2” | 100 | 1000 |
| **OF673** | 3/4” | 100 | 500 |
| **OF674** | 1” | 25 | 250 |
| **OF675** | 1-1/4” | 10 | 100 |
| **OF681** | 1-1/2” | 5 | 50 |
| **OF682** | 2” | 3 | 30 |



## *ZINC DIE CAST*
## INSULATED FLEX CONNECTORS
## SCREW-IN TYPE

### FEATURES
- With Insulated Throat

### NOTE
- Insulated color may vary

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **OF671-S** | 3/8” | 100 | 1000 |
| **OF672-S** | 1/2” | 100 | 1000 |
| **OF673-S** | 3/4” | 100 | 500 |
| **OF674-S** | 1” | 25 | 250 |
| **OF675-S** | 1-1/4” | 10 | 100 |
| **OF681-S** | 1-1/2” | 5 | 50 |
| **OF682-S** | 2” | 3 | 30 |



## *ZINC DIE CAST*
## FLEX COUPLINGS
## SCREW-IN TYPE

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **OF676** | 1/2” | 100 | 1000 |
| **OF677** | 3/4” | 100 | 500 |
| **OF678** | 1” | 25 | 250 |
| **OF679** | 1-1/4” | 10 | 100 |
| **OF685** | 1-1/2” | 5 | 50 |
| **OF686** | 2” | 3 | 30 |



## *STEEL* FLEX BUSHINGS

### FEATURES
- Electroplated Zinc
- Used to insulate cut Flex when the conduit is used for data cables without a junction box

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **FB-50** | 1/2” | 100 | 1000 |
| **FB-75** | 3/4” | 100 | 500 |
| **FB-100** | 1” | 25 | 250 |





*Shown Installed*

## ZINC DIE CAST
## FLEX CONNECTORS
## SQUEEZE TYPE

### NOTE
- Sizes 3/8" & 1/2" are also for AC (BX)

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **OF730** | 3/8" | 50 | 500 |
| **OF731** | 1/2" | 25 | 250 |
| **OF732** | 3/4" | 25 | 250 |
| **OF733** | 1" | 10 | 100 |
| **OF734** | 1-1/4" | 10 | 100 |
| **OF735** | 1-1/2" | 5 | 50 |
| **OF736** | 2" | 4 | 40 |
| **OF737** | 2-1/2" | 2 | 6 |
| **OF738** | 3" | 1 | 2 |
| **OF739** | 3-1/2" | 1 | 2 |
| **OF740** | 4" | 1 | 2 |



*3/8" to 2"*



*2-1/2" to 4"*

## ZINC DIE CAST
## INSULATED FLEX CONNECTORS
## SQUEEZE TYPE

### FEATURES
- With Insulated Throat

### NOTE
- Sizes 3/8" & 1/2" are also for AC(BX)
- Insulated color may vary

| Cat. No. Compression | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **OF730-S** | 3/8" | 50 | 500 |
| **OF731-S** | 1/2" | 25 | 250 |
| **OF732-S** | 3/4" | 25 | 250 |
| **OF733-S** | 1" | 10 | 100 |
| **OF734-S** | 1-1/4" | 10 | 100 |
| **OF735-S** | 1-1/2" | 5 | 50 |
| **OF736-S** | 2" | 4 | 40 |
| **OF737-S** | 2-1/2" | 2 | 6 |
| **OF738-S** | 3" | 1 | 2 |
| **OF739-S** | 3-1/2" | 1 | 2 |
| **OF740-S** | 4" | 1 | 2 |



*3/8" to 2"*



*2-1/2" to 4"*

## STEEL
## INSULATED FLEX CONNECTORS DOUBLE-BITE SADDLE CLAMP TYPE

NEW

### FEATURES

- Electroplated Zinc
- Combo Head Set-Screw
- Suitable for dry location only
- Dual-gripping Saddle Clamp
- For AC, MCI, MCI-A, HCF, FMC

### NOTE

Insulated color may vary

| Cat. No. | Flex/Cable Range | KO Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| **SFID-38** | Steel AC: 14/2 (0.450") - 10/2 (0.660")<br>AL AC: 14/2(0.450") - 10/2 (0.660")<br>Steel MCI: 14/2 (0.450") - 10/2 (0.660")<br>AL MCI: 14/2 (0.450") - 10/2 (0.660")<br>AL MCI-A: 14/2 (0.400") - 10/3 (0.590")<br>Steel HCF AC: 14/2 (0.450") - 10/2 (0.660")<br>AL HCF AC: 14/2 (0.450") - 10/2 (0.660")<br>HCF MCI-A: 14/2 (0.400") - 10/3 (0.590")<br>Steel/AL FMC/RWFMC/XRWFMC: 3/8" | 1/2” | 25 | 100 |
| **SFID-50** | Steel AC: 12/4 (0.550") - 6/3 (0.920")<br>AL AC: 12/4 (0.550") - 6/3 (0.920")<br>Steel MCI: 10/4 (0.640") - 8/3 (0.920")<br>AL MCI: 10/4 (0.640") - 8/3 (0.920")<br>AL MCI-A: 12/4 (0.520") - 8/4 (0.770")<br>Steel HCF AC: 12/4 (0.550") - 6/3 (0.920")<br>AL HCF AC: 12/4 (0.550") - 6/3 (0.920")<br>HCF MCI-A: 12/4 (0.520") - 8/4 (0.770")<br>Steel/AL FMC/RWFMC/XRWFMC: 1/2" | 1/2” | 25 | 100 |
| **SFID-75** | Steel AC: 6/4 (0.930") - 4/3 (1.075")<br>AL AC: 8/3(0.680") - 4/3 (1.075")<br>Steel MCI: 8/3 (0.730") - 4/3 (1.075")<br>AL MCI: 6/4 (0.930") - 4/3 (1.075")<br>AL MCI-A: 8/4 (0.770") - 6/4 (1.110")<br>Steel HCF AC: 6/4 (0.930") - 4/3 (1.075")<br>AL HCF AC: 8/3 (0.680") - 4/3 (1.075")<br>HCF MCI-A: 8/4 (0.770") - 6/4 (1.110")<br>Steel/AL FMC/RWFMC/XRWFMC: 3/4" | 3/4” | 25 | 100 |
| **SFID-100** | Steel AC: 6/4 (0.930") - 1/3 (1.375")<br>AL AC: 6/4(0.930") - 1/3 (1.375")<br>Steel MCI: 6/4 (0.960") - 3/4 (1.375")<br>AL MCI: 6/4 (0.960") - 3/4 (1.375")<br>AL MCI-A: 0.880" - 1.110"<br>Steel HCF AC: 6/4 (0.930") - 1/3 (1.375")<br>AL HCF AC: 6/4 (0.930") - 1/3 (1.375")<br>HCF MCI-A: 0.880" - 1.110"<br>Steel/AL FMC/RWFMC/XRWFMC: 1" | 1” | 10 | 40 |



## ZINC DIE CAST
## FLEX CONNECTOR CLAMP TYPE



### FEATURES
- Combo Head Set-Screw

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| OF657 | 1/2” | 25 | 50 |

## ZINC DIE CAST
## FLEX CONNECTORS SET-SCREW TYPE



### FEATURES
- Steel Screw
- For steel Flex only

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| OF654 | 1/2” | 100 | 500 |
| OF655 | 3/4” | 75 | 375 |

## ZINC DIE CAST
## 90° ANGLE FLEX CONNECTORS SCREW-IN TYPE



### FEATURES
- Sliding Cover for easy wire pulls

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| OF9674 | 1” | 10 | 100 |

*while supplies last*

## ZINC DIE CAST
## 90° ANGLE AC (BX) MC/FLEX CONNECTORS SQUEEZE TYPE

### FEATURES
- Suitable for dry location only
- For AC, MCI-A, FMC/RWFMC

| Cat. No. | Flex/Cable Range | KO Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| OF643 | Steel AC: 14/2 (0.453") - 8/2 (0.647")<br>AL AC: 14/2 (0.453") - 10/4 (0.622")<br>Steel MCI-A: 14/2 (0.453") - 8/2 (0.669")<br>AL MCI-A: 14/2 (0.453") - 10/4 (0.646")<br>Steel/AL FMC/RWFMC: 3/8" | 1/2” | 25 | 250 |
| OF644 | Steel AC: 10/4 (0.648") - 8/3 (0.826")<br>AL AC: 10/4 (0.622") - 6/4 (0.905")<br>Steel MCI-A: 10/4 (0.622") - 6/3 (0.866")<br>AL MCI-A: 10/4 (0.646") - 6/4 (0.937")<br>Steel/AL FMC/RWFMC: 1/2" | 1/2” | 25 | 250 |
| OF645 | Steel AC: 6/4 (0.945") - 3/4 (1.185")<br>AL AC: 6/4 (0.925") - 2/4 (1.133")<br>Steel MCI-A: 8/4 (0.827") - 3/4 (1.185")<br>AL MCI-A: 8/4 (0.827") - 3/4 (1.185")<br>Steel/AL FMC/RWFMC: 3/4" | 3/4” | 25 | 250 |



## *ZINC DIE CAST*
## 90° ANGLE FLEX CONNECTORS
## SQUEEZE TYPE

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| OF6463 | 1” | 5 | 25 |
| OF6464 | 1-1/4” | - | 5 |
| OF6465 | 1-1/2” | - | 5 |
| OF6466 | 2” | - | 5 |
| OF6467 | 2-1/2” | - | 5 |
| OF6468 | 3” | - | 5 |
| OF6469 | 3-1/2” | - | 1 |
| OF6470 | 4” | - | 1 |



*1” to 2”*



*2-1/2” to 4”*

## *STEEL* EMT TO FLEX COUPLINGS
## SET-SCREW/DOUBLE-BITE
## SADDLE CLAMP TYPE

NEW

### FEATURES

- Electroplated Zinc
- Dual-gripping Saddle Clamp
- For AC, MCI, MCI-A, HCF, RWFMC
- Set-Screw type for EMT conduit
- Combo Head Set-Screw
- Suitable for dry location only

| Cat. No. | Flex/Cable Range | EMT Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| SEFSD-38 | Steel AC: 14/2 (0.450") - 10/2 (0.660")<br>AL AC: 14/2(0.450") - 10/2 (0.660")<br>Steel MCI: 14/2 (0.450") - 10/2 (0.660")<br>AL MCI: 14/2 (0.450") - 10/2 (0.660")<br>AL MCI-A: 14/2 (0.400") - 10/3 (0.590")<br>Steel HCF AC: 14/2 (0.450") - 10/2 (0.660")<br>AL HCF AC: 14/2 (0.450") - 10/2 (0.660")<br>HCF MCI-A: 14/2 (0.400") - 10/3 (0.590")<br>Steel/AL FMC/RWFMC/XRWFMC: 3/8" | 1/2” | 25 | 100 |
| SEFSD-50 | Steel AC: 12/4 (0.550") - 6/3 (0.920")<br>AL AC: 12/4 (0.550") - 6/3 (0.920")<br>Steel MCI: 10/4 (0.640") - 8/3 (0.920")<br>AL MCI: 10/4 (0.640") - 8/3 (0.920")<br>AL MCI-A: 12/4 (0.520") - 8/4 (0.770")<br>Steel HCF AC: 12/4 (0.550") - 6/3 (0.920")<br>AL HCF AC: 12/4 (0.550") - 6/3 (0.920")<br>HCF MCI-A: 12/4 (0.520") - 8/4 (0.770")<br>Steel/AL FMC/RWFMC/XRWFMC: 1/2" | 1/2” | 25 | 100 |
| SEFSD-75 | Steel AC: 6/4 (0.930") - 4/3 (1.075")<br>AL AC: 8/3(0.680") - 4/3 (1.075")<br>Steel MCI: 8/3 (0.730") - 4/3 (1.075")<br>AL MCI: 6/4 (0.930") - 4/3 (1.075")<br>AL MCI-A: 8/4 (0.770") - 6/4 (1.110")<br>Steel HCF AC: 6/4 (0.930") - 4/3 (1.075")<br>AL HCF AC: 8/3 (0.680") - 4/3 (1.075")<br>HCF MCI-A: 8/4 (0.770") - 6/4 (1.110")<br>Steel/AL FMC/RWFMC/XRWFMC: 3/4" | 3/4” | 25 | 100 |



## *STEEL* EMT TO FLEX COUPLINGS COMPRESSION/DOUBLE-BITE SADDLE CLAMP TYPE

NEW

### FEATURES

- Electroplated Zinc
- Dual-gripping Saddle Clamp
- For AC, MCI, MCI-A, HCF, RWFMC
- Compression type for EMT conduit
- Combo Head Set-Screw
- Suitable for dry location only

| Cat. No. | Flex/Cable Range | EMT Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| SEFCD-50 | Steel AC: 12/4 (0.550") - 6/3 (0.920")<br>AL AC: 12/4 (0.550") - 6/3 (0.920")<br>Steel MCI: 10/4 (0.640") - 8/3 (0.920")<br>AL MCI: 10/4 (0.640") - 8/3 (0.920")<br>AL MCI-A: 12/4 (0.520") - 8/4 (0.770")<br>Steel HCF AC: 12/4 (0.550") - 6/3 (0.920")<br>AL HCF AC: 12/4 (0.550") - 6/3 (0.920")<br>HCF MCI-A: 12/4 (0.520") - 8/4 (0.770")<br>Steel/AL FMC/RWFMC/XRWFMC: 1/2" | 1/2” | 25 | 100 |
| SEFCD-75 | Steel AC: 6/4 (0.930") - 4/3 (1.075")<br>AL AC: 8/3(0.680") - 4/3 (1.075")<br>Steel MCI: 8/3 (0.730") - 4/3 (1.075")<br>AL MCI: 6/4 (0.930") - 4/3 (1.075")<br>AL MCI-A: 8/4 (0.770") - 6/4 (1.110")<br>Steel HCF AC: 6/4 (0.930") - 4/3 (1.075")<br>AL HCF AC: 8/3 (0.680") - 4/3 (1.075")<br>HCF MCI-A: 8/4 (0.770") - 6/4 (1.110")<br>Steel/AL FMC/RWFMC/XRWFMC: 3/4" | 3/4” | 25 | 100 |



## *ZINC DIE CAST* EMT TO FLEX COUPLINGS SET-SCREW/SQUEEZE TYPE

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| OF530 | 1/2” to 3/8” | 50 | 500 |
| OF531 | 1/2” to 1/2” | 25 | 250 |
| OF532 | 3/4” to 3/4” | 25 | 100 |
| OF533 | 1” to 1” | 10 | 40 |



## *ZINC DIE CAST* EMT TO FLEX COUPLINGS SET-SCREW/CLAMP TYPE

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| OF520 | 1/2” to 3/8” | 50 | 500 |
| OF521 | 1/2” to 1/2” | 25 | 250 |
| OF522 | 3/4” to 3/4” | 25 | 250 |
| OF523 | 1” to 1” | 10 | 40 |



## ZINC DIE CAST
### EMT TO FLEX COUPLINGS
### COMPRESSION/SCREW-IN TYPE

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| OF1611 | 1/2” | 50 | 500 |
| OF1612 | 3/4” | 25 | 250 |
| OF1613 | 1” | 10 | 100 |



## ZINC DIE CAST
### RIGID TO FLEX COUPLINGS
### CLAMP TYPE

**FEATURES**
- For steel Flex Only

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| OF697 | 1/2” | 25 | 250 |



## ZINC DIE CAST
### RIGID TO FLEX COUPLINGS
### SET-SCREW TYPE

**FEATURES**
- For steel Flex Only

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| OF694 | 1/2” | 25 | 250 |
| OF695 | 3/4” | 25 | 250 |



## *ZINC DIE CAST* INSULATED DOUBLE-SNAP CABLE CONNECTORS

### FEATURES

- 105°C rated Throat Insulator
- For AC, MCI, MCI-A, HCF, RWFMC
- Fast and Tool-free installation
- Dry location
- Removable and reusable

| Cat. No. | FLEX/Cable Range | Trade Size | KO Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|---|
| **DSC-38** | DOUBLE-SNAP CABLE CONNECTOR WITH INSULATOR<br>Steel/AL AC: 14/2 (0.40") - 10/3 (0.618")<br>Steel MCI: 0.395" - 0.638"<br>AL MCI: 0.40" - 0.618"<br>Steel/AL MCI-A: 14/2 (0.395") - 10/3 (0.638")<br>Steel/AL HCF MCI-A: 14/2 (0.395") - 10/3 (0.638")<br>AL RWFMC: 3/8" | 3/8” | 1/2” | 50 | 500 |



## *ZINC DIE CAST* INSULATED CUT-IN DOUBLE-SNAP CABLE CONNECTORS

### FEATURES

- 105°C rated Throat Insulator
- For FMC, AC, MCI, MCI-A, HCF
- Fast and Tool-free installation
- Dry location
- Removable and reusable

| Cat. No. | Flex/Cable Range | Trade Size | KO Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|---|
| **DSC-38C** | CUT-IN DOUBLE-SNAP CABLE CONNECTOR WITH INSULATOR, FOR OLD WORK<br>Steel/AL AC: 14/2 (0.40") - 10/3 (0.618")<br>Steel/AL MCI: 14/2 (0.395") - 10/3 (0.638")<br>Steel/AL MCI-A: 14/2 (0.395") - 10/3 (0.638")<br>Steel/AL HCF MCI-A: 14/2 (0.395") - 10/3 (0.638")<br>Steel/AL FMC: 3/8" | 3/8” | 1/2” | 50 | 500 |



## *STEEL* "FASTLOCK" CONNECTORS

### FEATURES

- Electroplated Zinc
- Saddle-Base Connector
- Combo Head Set-Screw
- For AC, MCI, HCF AC, MCI-A, HCF MCI-A, FMC/RWFMC

### NOTE

- Insulated color may vary

| Cat. No. | Flex/Cable Range | KO Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| FLC-50 | Steel AC: 14/2 (0.475") - 10/3 (0.565")<br>AL AC: 14/2 (0.464") - 10/3 (0.610")<br>Steel MCI: 14/2 (0.455") - 10/3 (0.565")<br>AL MCI: 14/2 (0.455") - 10/3 (0.600")<br>Steel HCF AC: 14/2 (0.475") - 10/3 (0.565")<br>AL HCF AC: 14/2 (0.464") - 10/3 (0.610")<br>AL MCI-A: 14/2 (0.385") - 10/3 (0.510")<br>HCF MCI-A: 14/2 (0.385") - 10/3 (0.510")<br>Steel/AL FMC/RWFMC: 3/8" | 1/2" | 50 | 500 |



## *STEEL* "FASTLOCK" WIDE-THROAT CONNECTORS

### FEATURES

- Electroplated Zinc
- Saddle-Base Connector
- Combo Head Set-Screw
- For AC, MCI, HCF AC, MCI-A, HCF MCI-A, FMC/RWFMC

### NOTE

- Insulated color may vary

| Cat. No. | Flex/Cable Range | KO Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| FLC-50L | Steel AC: 10/4 (0.605") - 6/3 (0.853")<br>AL AC: 10/3 (0.610") - 6/3 (0.823")<br>Steel MCI: 10/3 (0.580") - 8/3 (0.690")<br>AL MCI: 10/3 (0.520") - 8/3 (0.690")<br>Steel HCF AC: 10/4 (0.605") - 6/3 (0.853")<br>AL HCF AC: 10/3 (0.610") - 6/3 ( 0.823")<br>AL MCI-A: 8/3 (0.675")<br>HCF MCI-A: 8/3 (0.675")<br>Steel/AL FMC/RWFMC: 1/2" | 1/2" | 50 | 500 |
| FLC-75L | Steel AC: 10/3 (0.545") - 6/3 (0.850")<br>AL AC: 10/3 (0.600") - 6/3 (0.835")<br>Steel MCI: 10/3 (0.550") - 6/3 (0.850")<br>AL MCI: 10/3 (0.580") - 6/3 (0.850")<br>Steel HCF AC: 10/3 (0.545") - 6/3 (0.850")<br>AL HCF AC: 10/3 (0.600") - 6/3 ( 0.835")<br>AL MCI-A: 8/3 (0.675") - 6/3 ( 0.785")<br>HCF MCI-A: 8/3 (0.675") - 6/3 ( 0.785")<br>Steel/AL FMC/RWFMC: 1/2" | 3/4" | 25 | 250 |



## *STEEL* "FASTLOCK" DUPLEX CONNECTORS

### FEATURES

- Electroplated Zinc
- Combo Head Set-Screw
- For AC, MCI, HCF AC, MCI-A, HCF MCI-A, FMC/RWFMC

### NOTE

- Insulated color may vary

| Cat. No. | Flex/Cable Range | KO Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| FLD-50 | Steel AC: 14/2 (0.475") - 10/3 (0.565")<br>AL AC: 14/2 (0.464") - 12/4 (0.600")<br>Steel MCI: 14/2 (0.455") - 12/4 (0.545")<br>AL MCI: 14/2 (0.455") - 12/4 (0.550")<br>Steel HCF AC: 14/2 (0.475") - 10/3 (0.565")<br>AL HCF AC: 14/2 (0.464") - 12/4 (0.600")<br>AL MCI-A: 14/2 (0.385") - 10/3 (0.520")<br>HCF MCI-A: 14/2 (0.385") - 10/3 (0.520")<br>Steel/AL FMC/RWFMC: 3/8" | 1/2" | 25 | 250 |



## *ZINC DIE CAST* METAL CLAD (MC) CONNECTORS SADDLE-TYPE

### FEATURES

- Combo Head Set-Screw
- With Insulated Throat
- Suitable for Dry Location only
- For AC, MCI-A, NM Cable, FMC/RWFMC

### NOTE

- Insulated color may vary

| Cat. No. | Flex/Cable Range | KO Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| OF6231 | Steel AC: 14/2 (0.457") - 12/4 (0.539")<br>AL AC: 14/2 (0.464") - 10/4 (0.622")<br>Steel MCI-A: 14/2 (0.453") - 10/4 (0.614")<br>AL MCI-A: 14/2 (0.433") - 10/3 (0.630")<br>Steel/AL FMC/RWFMC: 3/8"<br>NM Cable: 12/3,14/2 &8/2 with ground<br>12/2 without ground | 1/2" | 100 | 500 |
| OF6232 | Steel Interlocking: 0.661 - 0.711 Dia.<br>AL Interlocking: 0.775 - 0.825 Dia.<br>Steel/AL AC: 0.650 - 0.810 Dia.<br>Steel FMC: 1/2" | 3/4" | 50 | 250 |



## ZINC DIE CAST
### METAL CLAD (MC) & AC (BX) CONNECTORS SET-SCREW TYPE

**FEATURES**

- For AC, MCI-A, FMC/RWFMC

| Cat. No. | Flex/Cable Range | KO Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| **OF653** | Steel AC: 14/2 (0.453") - 10/4 (0.622")<br>AL AC: 14/2 (0.464") - 14/4 (0.535")<br>Steel MCI-A: 14/2 (0.453") - 10/2 (0.581")<br>AL MCI-A: 14/2 (0.437") - 10/2 (0.535")<br>Steel/AL FMC/RWFMC: 3/8" | 1/2” | 100 | 500 |



## ZINC DIE CAST
### METAL CLAD (MC) & AC (BX) CONNECTORS

**FEATURES**

- For AC, MCI-A, NM Cable, FMC/RWFMC

| Cat. No. | Flex/Cable Range | KO Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| **OF6620** | Steel AC: 14/2 (0.457") - 12/4 (0.539")<br>AL AC: 14/2 (0.464") - 14/4 (0.534")<br>Steel MCI-A: 14/2 (0.453") - 10/2 (0.531")<br>AL MCI-A: 14/2 (0.433") - 10/2 (0.539")<br>Steel/AL FMC/RWFMC: 3/8"<br>NM Cable: 12/3,14/2 with ground<br>12/2 without ground | 1/2” | 100 | 500 |



## ZINC DIE CAST
### METAL CLAD (MC) CONNECTORS CLAMP TYPE

**FEATURES**

- With Insulated Throat
- Suitable for dry location only

**NOTE**

- Insulated color may vary

| Cat. No. | Cable Range | KO Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| ***MC-CL-100** | 0.83" - 1.04" | 1” | 10 | 100 |
| ***MC-CL-150** | 1.36" - 1.60" | 1-1/2 ” | 10 | 100 |
| ***MC-CL-250** | 1.99" - 2.34" | 2-1/2” | - | 10 |
| ***MC-CL-300** | 2.30" - 2.68" | 3” | - | 5 |
| ***MC-CL-350** | 2.85" - 3.42" | 3-1/2” | - | 5 |

*While Supplies Last



*ZINC DIE CAST*

## COMBINATION AC (BX) & NON-METALLIC (NM) CONNECTOR

### FEATURES

- Suitable for dry location only
- For AC, NM Cable, FMC/RWFMC, Cord

| Cat. No. | Flex/Cable Range | KO Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| **OF623** | Steel/AL AC: 14/2<br>Steel/AL FMC/RWFMC: 3/8"<br>NM Cable: 14/2<br>Cord: 0.340" - 0.380" Dia Cord<br>14/3 SJO, 16/3 SJO, 16/2 SO | 1/2” | 25 | 250 |



*ZINC DIE CAST*

## DUPLEX AC (BX) FLEX/MC CONNECTORS

### FEATURES

- Suitable for dry location only
- For AC, MCI-A, NM Cable, FMC/RWFMC

| Cat. No. | Flex/Cable Range | KO Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| **MC-DX-50** | Steel AC: 14/2 (0.457") - 12/4 (0.539")<br>AL AC: 14/2 (0.464") - 10/4 (0.622")<br>Steel MCI-A: 14/2 (0.453") - 10/4 (0.614")<br>AL MCI-A: 14/2 (0.433") - 10/3 (0.630")<br>Steel/AL FMC/RWFMC: 3/8"<br>NM Cable: 12/3,14/2 with ground<br>12/2 without ground | 1/2” | 25 | 250 |



*STAMPED STEEL*

## 1-HOLE MC(BX) CABLE STRAPS

### FEATURES

- Electroplated Zinc
- Corrosion-resistant

| Cat. No. | Description | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **S1-38** | 12-2, 12-3, 10-2, 10-3<br>MC (BX) 1-Hole Strap | 100 | 1000 |



## *STAMPED STEEL* SADDLE TYPE STRUT CLAMPS

### FEATURES

- Electroplated Zinc
- Tri-Combo Hex Screw Head
- Wide Saddle design

| Cat. No. | EMT/Rigid/FMC Conduit Size | Cable O.D. Range | Std. Pkg. |
|---|---|---|---|
| **STS-50** | 5/16” - 1/2” | 0.260" - 0.890" | 100 |
| **STS-75** | 3/4” | 0.670" - 1.090" | 100 |
| **STS-100** | 1” | 0.890" - 1.450" | 100 |
| **STS-125** | 1-1/4” | 1.150" - 1.700" | 50 |
| **STS-150** | 1-1/2” | 1.350" - 2.000" | 50 |
| **STS-200** | 2” | 1.875" - 2.570" | 50 |
| **STS-250** | 2-1/2” | 2.500" - 3.060" | 25 |
| **STS-300** | 3” | 3.000" - 3.600" | 25 |
| **STS-350** | 3-1/2” | 3.600" - 4.100" | 25 |
| **STS-400** | 4” | 4.100" - 4.700" | 25 |



## *STAMPED STEEL* NAIL STRAPS

### FEATURES

- Electroplated Zinc

### NOTE

- Varies according to sizes

| Cat. No. | EMT Size | FLEX/RIGID Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| **NS-50** | 1/2” | 3/8” | 100 | 1000 |
| **NS-50/75** | 3/4” | 1/2” | 100 | 1000 |
| **NS-100** | 1” | 3/4” | 100 | 1000 |



## ANTI-SHORT BUSHINGS THERMOPLASTIC

### FEATURES

- High-Temperature Plastic
- Fits BX (AC) and Flex conduits

| Cat. No. | For Use With | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| **ASB-516** | 14/2, 14/3, 12/2 | 5/16” | 35 | 3500 |
| **ASB-38** | 14/4, 12/3, 6/1, 4/1 | 3/8” | 35 | 2100 |
| **ASB-716** | 12/4, 10/2, 10/3, 2/1 | 7/16” | 35 | 700 |
| **ASB-50** | 10/4, 8/2, 8/3, 1/1 | 1/2” | 20 | 400 |
| **ASB-75** | 8/4, 6/2, 4/2, 4/3, 6/4 | 3/4” | 16 | 320 |



## *STEEL* LIQUID TIGHT SEALING RINGS

### FEATURES

- Neoprene Rubber Gasket
- Steel Retainer
- Form liquid tight seal between connector and box

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **LTSR-50** | 1/2” | 250 | 2500 |
| **LTSR-75** | 3/4” | 200 | 2000 |
| **LTSR-100** | 1” | 150 | 1500 |
| **LTSR-125** | 1-1/4” | 100 | 1000 |
| **LTSR-150** | 1-1/2” | 50 | 500 |
| **LTSR-200** | 2” | 50 | 500 |
| **LTSR-250** | 2-1/2” | - | 100 |
| **LTSR-300** | 3” | - | 100 |
| **LTSR-350** | 3-1/2” | - | 50 |
| **LTSR-400** | 4” | - | 50 |



## *NON-METALLIC (PVC)* STRAIGHT LIQUID TIGHT CONNECTORS

SOLAR

### FEATURES

- PVC Type-B
- Corrosion-resistant
- Zinc Locknut

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **NMLT-38** | 3/8” | 25 | 100 |
| **NMLT-50** | 1/2” | 25 | 250 |
| **NMLT-75** | 3/4” | 15 | 150 |
| **NMLT-100** | 1” | 8 | 80 |
| **NMLT-125** | 1-1/4” | 5 | 50 |
| **NMLT-150** | 1-1/2” | 4 | 40 |
| **NMLT-200** | 2” | 1 | 36 |



## *NON-METALLIC (PVC)* 90º ANGLE LIQUID TIGHT CONNECTORS

SOLAR

### FEATURES

- PVC Type-B
- Corrosion-resistant
- Zinc Locknut

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **NMLT90-38** | 3/8” | 10 | 100 |
| **NMLT90-50** | 1/2” | 15 | 150 |
| **NMLT90-75** | 3/4” | 10 | 100 |
| **NMLT90-100** | 1” | 5 | 50 |
| **NMLT90-125** | 1-1/4” | 4 | 40 |
| **NMLT90-150** | 1-1/2” | 2 | 20 |
| **NMLT90-200** | 2” | 1 | 10 |



## *STEEL* EMT TO LIQUID TIGHT COMBINATION COUPLINGS COMPRESSION TYPE

### FEATURES

- Electroplated Zinc
- Rain-Tight
- Concrete-Tight

| Cat. No. | EMT Size | LT Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| **SELTC-50** | 1/2” | 1/2” | 25 | 250 |
| **SELTC-75** | 3/4” | 3/4” | 10 | 100 |
| **SELTC-100** | 1” | 1” | 10 | 100 |



*SELTC-75*



*SELTC-100*

## *STEEL* RIGID TO LIQUID TIGHT COMBINATION COUPLINGS THREADED/COMPRESSION TYPE

NEW

### FEATURES

- Electroplated Zinc
- Rain-Tight
- Internally threaded for Rigid/IMC conduit
- Concrete-Tight

| Cat. No. | RIGID Size | LT Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| **SRLTC-50** | 1/2” | 1/2” | 25 | 100 |
| **SRLTC-75** | 3/4” | 3/4” | 10 | 40 |
| **SRLTC-100** | 1” | 1” | 10 | 40 |
| **SRLTC-125** | 1-1/4” | 1-1/4” | 5 | 20 |
| **SRLTC-150** | 1-1/2” | 1-1/2” | - | 15 |
| **SRLTC-200** | 2” | 2” | - | 10 |



## *ZINC DIE CAST* STRAIGHT LIQUID TIGHT CONNECTORS

**NOTE**

- Insulated color may vary

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **LT-38** | 3/8” | 25 | 250 |
| **LT-50** | 1/2” | 25 | 250 |
| **LT-75** | 3/4” | 15 | 150 |
| **LT-100** | 1” | 8 | 80 |
| **LT-125** | 1-1/4” | 5 | 50 |
| **LT-150** | 1-1/2” | 4 | 40 |
| **LT-200** | 2” | 1 | 10 |
| **LT-250** | 2-1/2” | 1 | 10 |
| **LT-300** | 3” | 1 | 10 |
| **LT-350** | 3-1/2” | 1 | 6 |
| **LT-400** | 4” | 1 | 6 |



## *ZINC DIE CAST* INSULATED STRAIGHT LIQUID TIGHT CONNECTORS

**FEATURES**

- With Insulated Throat

**NOTE**

- Insulated color may vary

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **LTI-38** | 3/8” | 25 | 250 |
| **LTI-50** | 1/2” | 25 | 250 |
| **LTI-75** | 3/4” | 15 | 150 |
| **LTI-100** | 1” | 8 | 80 |
| **LTI-125** | 1-1/4” | 5 | 50 |
| **LTI-150** | 1-1/2” | 4 | 40 |
| **LTI-200** | 2” | 1 | 36 |
| **LTI-250** | 2-1/2” | 1 | 10 |
| **LTI-300** | 3” | 1 | 10 |
| **LTI-350** | 3-1/2” | 1 | 6 |
| **LTI-400** | 4” | 1 | 6 |



## *MALLEABLE IRON* STRAIGHT LIQUID TIGHT CONNECTORS

### FEATURES

- Electroplated Zinc

### NOTE

- Insulated color may vary

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **MLT-38** | 3/8” | 25 | 250 |
| **MLT-50** | 1/2” | 25 | 250 |
| **MLT-75** | 3/4” | 15 | 150 |
| **MLT-100** | 1” | 8 | 80 |
| **MLT-125** | 1-1/4” | 5 | 50 |
| **MLT-150** | 1-1/2” | 4 | 40 |
| **MLT-200** | 2” | 1 | 20 |
| **MLT-250** | 2-1/2” | - | 1 |
| **MLT-300** | 3” | - | 1 |
| **MLT-350** | 3-1/2” | - | 1 |
| **MLT-400** | 4” | - | 1 |



## *MALLEABLE IRON* INSULATED STRAIGHT LIQUID TIGHT CONNECTORS

### FEATURES

- Electroplated Zinc
- With Insulated Throat

### NOTE

- Insulated color may vary

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **MLTI-38** | 3/8” | 25 | 250 |
| **MLTI-50** | 1/2” | 25 | 250 |
| **MLTI-75** | 3/4” | 15 | 150 |
| **MLTI-100** | 1” | 8 | 80 |
| **MLTI-125** | 1-1/4” | 5 | 50 |
| **MLTI-150** | 1-1/2” | 4 | 40 |
| **MLTI-200** | 2” | 1 | 20 |
| **MLTI-250** | 2-1/2” | - | 1 |
| **MLTI-300** | 3” | - | 1 |
| **MLTI-350** | 3-1/2” | - | 1 |
| **MLTI-400** | 4” | - | 1 |



## *MALLEABLE IRON* INSULATED STRAIGHT LIQUID TIGHT CONNECTORS WITH ALUMINUM LAY-IN LUG

### FEATURES

- Electroplated Zinc
- 105°C rated Insulated Throat
- Sealing Washer included
- Aluminum lay-in Lug provides easy installation of a ground wire

### NOTE

- Insulated color may vary

| Cat. No. | Trade Size | Lug Range | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| **MLTILL-38** | 3/8” | #14 - #4 | 25 | 250 |
| **MLTILL-50** | 1/2” | #14 - #4 | 25 | 250 |
| **MLTILL-75** | 3/4” | #14 - #4 | 10 | 100 |
| **MLTILL-100** | 1” | #14 - #4 | 5 | 50 |
| **MLTILL-125** | 1-1/4” | #14 - #4 | 5 | 50 |
| **MLTILL-150** | 1-1/2” | #14 - #4 | 4 | 40 |
| **MLTILL-200** | 2” | #14 - #4 | 2 | 20 |
| **MLTILL-250** | 2-1/2” | #14 - #1/0 | 1 | 10 |
| **MLTILL-300** | 3” | #14 - #1/0 | 1 | 10 |
| **MLTILL-350** | 3-1/2” | #6 - #250MCM | - | 1 |
| **MLTILL-400** | 4” | #6 - #250MCM | - | 1 |



*MLTILL-75*



*MLTILL-125*

## *MALLEABLE IRON* 45º ANGLE LIQUID TIGHT CONNECTORS

### FEATURES

- Electroplated Zinc

### NOTE

- Insulated color may vary

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **MLT45-38** | 3/8” | 25 | 150 |
| **MLT45-50** | 1/2” | 25 | 150 |
| **MLT45-75** | 3/4” | 10 | 100 |
| **MLT45-100** | 1” | 5 | 50 |
| **MLT45-125** | 1-1/4” | 5 | 40 |
| **MLT45-150** | 1-1/2” | 4 | 20 |
| **MLT45-200** | 2” | 1 | 15 |
| **MLT45-250** | 2-1/2” | - | 1 |
| **MLT45-300** | 3” | - | 1 |
| **MLT45-350** | 3-1/2” | - | 1 |
| **MLT45-400** | 4” | - | 1 |



## *MALLEABLE IRON* INSULATED 45º ANGLE LIQUID TIGHT CONNECTORS

### FEATURES

- Electroplated Zinc
- With Insulated Throat

### NOTE

- Insulated color may vary

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **MLTI45-38** | 3/8” | 25 | 150 |
| **MLTI45-50** | 1/2” | 25 | 150 |
| **MLTI45-75** | 3/4” | 10 | 100 |
| **MLTI45-100** | 1” | 5 | 50 |
| **MLTI45-125** | 1-1/4” | 5 | 40 |
| **MLTI45-150** | 1-1/2” | 4 | 20 |
| **MLTI45-200** | 2” | 1 | 15 |
| **MLTI45-250** | 2-1/2” | - | 1 |
| **MLTI45-300** | 3” | - | 1 |
| **MLTI45-350** | 3-1/2” | - | 1 |
| **MLTI45-400** | 4” | - | 1 |



## *MALLEABLE IRON* INSULATED 45º ANGLE LIQUID TIGHT CONNECTORS WITH ALUMINUM LAY-IN LUG

### FEATURES

- Electroplated Zinc
- 105°C rated insulated throat
- Sealing Washer included
- Aluminum lay-in Lug provides easy installation of a ground wire

### NOTE

- Insulated color may vary

| Cat. No. | Trade Size | Lug Range | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| **MLTI45LL-38** | 3/8” | #14 - #4 | 10 | 100 |
| **MLTI45LL-50** | 1/2” | #14 - #4 | 10 | 100 |
| **MLTI45LL-75** | 3/4” | #14 - #4 | 10 | 100 |
| **MLTI45LL-100** | 1” | #14 - #4 | 5 | 50 |
| **MLTI45LL-125** | 1-1/4” | #14 - #4 | - | 5 |
| **MLTI45LL-150** | 1-1/2” | #14 - #4 | - | 5 |
| **MLTI45LL-200** | 2” | #14 - #4 | - | 5 |
| **MLTI45LL-250** | 2-1/2” | #14 - #1/0 | - | 1 |
| **MLTI45LL-300** | 3” | #14 - #1/0 | - | 1 |
| **MLTI45LL-350** | 3-1/2” | #6 - #250MCM | - | 1 |
| **MLTI45LL-400** | 4” | #6 - #250MCM | - | 1 |



*MLTI45LL-75*



*MLTI45LL-125*

## *ZINC DIE CAST* 90º ANGLE LIQUID TIGHT CONNECTORS

### NOTE

- Insulated color may vary

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **LT90-38** | 3/8” | 15 | 150 |
| **LT90-50** | 1/2” | 15 | 150 |
| **LT90-75** | 3/4” | 10 | 100 |
| **LT90-100** | 1” | 5 | 50 |
| **LT90-125** | 1-1/4” | 4 | 40 |
| **LT90-150** | 1-1/2” | 2 | 20 |
| **LT90-200** | 2” | 1 | 10 |
| **LT90-250** | 2-1/2” | 1 | 10 |
| **LT90-300** | 3” | 1 | 4 |
| **LT90-400** | 4” | 1 | 3 |



## *ZINC DIE CAST* INSULATED 90º ANGLE LIQUID TIGHT CONNECTORS

### FEATURES

- With Insulated Throat

### NOTE

- Insulated color may vary

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **LTI90-38** | 3/8” | 15 | 150 |
| **LTI90-50** | 1/2” | 15 | 150 |
| **LTI90-75** | 3/4” | 10 | 100 |
| **LTI90-100** | 1” | 5 | 50 |
| **LTI90-125** | 1-1/4” | 4 | 40 |
| **LTI90-150** | 1-1/2” | 2 | 20 |
| **LTI90-200** | 2” | 1 | 10 |
| **LTI90-250** | 2-1/2” | 1 | 10 |
| **LTI90-300** | 3” | 1 | 4 |
| **LTI90-350** | 3-1/2” | 1 | 3 |
| **LTI90-400** | 4” | 1 | 3 |



## *MALLEABLE IRON* 90º ANGLE LIQUID TIGHT CONNECTORS

### FEATURES

- Electroplated Zinc

### NOTE

- Insulated color may vary

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **MLT90-38** | 3/8” | 25 | 150 |
| **MLT90-50** | 1/2” | 25 | 150 |
| **MLT90-75** | 3/4” | 10 | 100 |
| **MLT90-100** | 1” | 5 | 50 |
| **MLT90-125** | 1-1/4” | 5 | 40 |
| **MLT90-150** | 1-1/2” | 4 | 20 |
| **MLT90-200** | 2” | 1 | 15 |
| **MLT90-250** | 2-1/2” | - | 1 |
| **MLT90-300** | 3” | - | 1 |
| **MLT90-350** | 3-1/2” | - | 1 |
| **MLT90-400** | 4” | - | 1 |



## *MALLEABLE IRON* INSULATED 90º ANGLE LIQUID TIGHT CONNECTORS

### FEATURES

- Electroplated Zinc
- With Insulated Throat

### NOTE

- Insulated color may vary

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **MLTI90-38** | 3/8” | 25 | 150 |
| **MLTI90-50** | 1/2” | 25 | 150 |
| **MLTI90-75** | 3/4” | 10 | 100 |
| **MLTI90-100** | 1” | 5 | 50 |
| **MLTI90-125** | 1-1/4” | 5 | 40 |
| **MLTI90-150** | 1-1/2” | 4 | 20 |
| **MLTI90-200** | 2” | 1 | 15 |
| **MLTI90-250** | 2-1/2” | - | 1 |
| **MLTI90-300** | 3” | - | 1 |
| **MLTI90-350** | 3-1/2” | - | 1 |
| **MLTI90-400** | 4” | - | 1 |



## *MALLEABLE IRON*

## INSULATED 90º ANGLE LIQUID TIGHT CONNECTORS WITH ALUMINUM LAY-IN LUG

### FEATURES

- Electroplated Zinc
- 105°C rated insulated throat
- Sealing Washer included
- Aluminum lay-in Lug provides easy installation of a ground wire

### NOTE

- Insulated color may vary

| Cat. No. | Trade Size | Lug Range | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| **MLTI90LL-38** | 3/8” | #14 - #4 | 10 | 100 |
| **MLTI90LL-50** | 1/2” | #14 - #4 | 10 | 100 |
| **MLTI90LL-75** | 3/4” | #14 - #4 | 10 | 100 |
| **MLTI90LL-100** | 1” | #14 - #4 | 5 | 50 |
| **MLTI90LL-125** | 1-1/4” | #14 - #4 | - | 5 |
| **MLTI90LL-150** | 1-1/2” | #14 - #4 | - | 5 |
| **MLTI90LL-200** | 2” | #14 - #4 | - | 5 |
| **MLTI90LL-250** | 2-1/2” | #14 - #1/0 | - | 1 |
| **MLTI90LL-300** | 3” | #14 - #1/0 | - | 1 |
| **MLTI90LL-350** | 3-1/2” | #6 - #250MCM | - | 1 |
| **MLTI90LL-400** | 4” | #6 - #250MCM | - | 1 |



*MLTI90LL-75*



*MLTI90LL-125*

## *PVC NON-METALLIC (NM)* CABLE CONNECTORS

### FEATURES

- Heavy-duty PVC

| Cat. No. | For Use With | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| *NM-50 | One or Two 14/2, 14/3, 12/2<br>One 12/3, 10/2, 10/3<br>One or Two 0.300"<br>or 0.600" cords | 1/2" | 50 | 500 |
| *NM-75 | One 8/3, 6/2, 6/3<br>Two 14/3, 12/2, 12/3, 10/2<br>Single or Multiple flexible cord<br>in wire range 0.500" to 0.850" | 3/4" | 50 | 500 |

*While Supplies Last



## *NON-METALLIC* CABLE CONNECTORS PUSH-IN TYPE

### FEATURES

- Flame-retardant Polypropylene
- Special gripping arrangement for easy cable insertion

| Cat. No. | For Use With | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| NMP-50 | One 10, 12, 14 AWG<br>two-conductor cables with<br>or without ground wire | 1/2" | 100 | 300 |



## *PLASTIC* NON-METALLIC CABLE QUICK-LOCK CONNECTORS

### FEATURES

- Easy and fast installation
- Simply remove with screwdriver if necessary

| Cat. No. | NM Cable Range | Trade Size | KO Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|---|
| PQLC-38 | 14/2 - 10/3 | 3/8" | 1/2" | 100 | 1000 |
| PQLC-75 | 14/3 - 6/3 | 3/4" | 3/4" | 50 | 500 |



*PQLC-38*



*PQLC-75*

## *PLASTIC* UNIVERSAL METAL STUD GROMMETS

### FEATURES


- High strength, non-conductive Polypropylene
- Universal design fits into a standard 1" trade size hole and all factory-punched stud holes
- Lightweight material eases installation

| Cat. No. | Description | Std. Pkg. |
|---|---|---|
| **PUSG** | Universal Snap-in Type Bushings for metal stud, fit all factory punched metal stud holes | 100 |




### INSTALLATION INSTRUCTION:

**Step1:** Separate the two halves
**Step2:** Snap the bushing end and the washer end together through the hole
**Step3:** Install cable through the grommet



### COMMON HOLE SHAPES IN METAL STUDS:

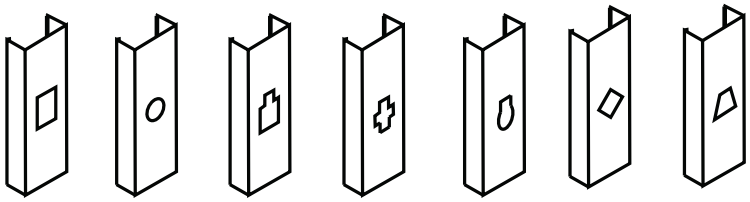

## *ZINC DIE CAST*
## COMBINATION AC (BX) & NON-METALLIC (NM) CONNECTORS

### FEATURES

- Suitable for dry location only
- For AC, NM Cable, FMC/RWFMC, Cord

| Cat. No. | FLEX/Cable Range | KO Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| **OF623** | Steel/AL AC: 14/2<br>Steel/AL FMC/RWFMC: 3/8"<br>NM Cable: 14/2<br>Cord: 0.340" - 0.380" Dia Cord<br>14/3 SJO, 16/3 SJO, 16/2 SO | 1/2” | 25 | 250 |



## *ZINC DIE CAST* NON-METALLIC CABLE CONNECTORS

**NOTE**

- Sizes 1" to 2" are also suitable for service entrance

| Cat. No. | For Use With | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| **RX-50** | (1) 14/2 to 10/2 NM, (2) 14/2 or (2) 12/2 NM, 0.340" to 0.380" Dia. Flex Cord (Dry Location) 14/3, 16/2, and 16/3 SJO | 1/2" | 100 | 1000 |
| **RX-75** | (2) 14-2 NM, AWG, 0.340" to 0.515" Dia. Flex Cord (Dry Location) 14/3, 14/2 SJO | 3/4" | 25 | 250 |
| ***For Service Entrace*** | | | | |
| **RX-100** | (4) 14/2, (1) 8/3, 8/2, 6/2, 6/3, 4/2, 4/3 NM (1) 2 SE Cable | 1" | 10 | 100 |
| **RX-125** | 4/3 or 2/3 NM | 1-1/4" | 5 | 50 |
| **RX-150** | 3-2/0 or 3-4/0 NM | 1-1/2" | 5 | 50 |
| **RX-200** | 3-2/0 or 3-4/0 NM | 2" | 5 | 50 |





## *ZINC DIE CAST* WATERTIGHT SERVICE ENTRANCE CABLE CONNECTORS

**FEATURES**

- Watertight

| Cat. No. | Trade Size | Wire Size | Grommet Opening | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|---|
| **WECC-100-8** | 1" | #8 | 0.40" - 0.68" | 10 | 100 |
| **WECC-100-6** | 1" | #6 | 0.44" - 0.70" | 10 | 100 |
| **WECC-100-4** | 1" | #4 | 0.52" - 0.84" | 10 | 100 |
| **WECC-125-3** | 1-1/4" | #3 | 0.56" - 0.92" | 10 | 50 |
| **WECC-125-2** | 1-1/4" | #2 | 0.60" - 1.00" | 10 | 50 |
| **WECC-125-1** | 1-1/4" | #1 | 0.65" - 1.09" | 10 | 50 |
| **WECC-150-10** | 1-1/2" | #1/0 | 0.72" - 1.24" | 5 | 50 |
| **WECC-150-20** | 1-1/2" | #2/0 | 0.86" - 1.34" | 5 | 50 |
| **WECC-150-30** | 1-1/2" | #3/0 | 0.87" - 1.37" | 5 | 50 |
| **WECC-200-10** | 2" | #1/0 | 0.72" - 1.24" | 5 | 25 |
| **WECC-200-20** | 2" | #2/0 | 0.86" - 1.34" | 5 | 25 |
| **WECC-200-30** | 2" | #3/0 | 0.87" - 1.34" | 5 | 25 |
| **WECC-200-40** | 2" | #4/0 | 0.90" - 1.50" | 5 | 25 |
| **WECC-200-40N** | 2" | #4/0 | 1.11" - 1.73" | 5 | 25 |



## STAMPED STEEL
### 1-HOLE RG6U CABLE STRAPS

**FEATURES**

- Electroplated Zinc

| Cat. No. | Description | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **S1-25** | RG6U (Coaxial Cable) 1-Hole Strap | 100 | 1000 |



## STAMPED STEEL
### 1-HOLE SERVICE ENTRANCE STRAPS

**FEATURES**

- Electroplated Zinc
- Corrosion-resistant

| Cat. No. | Description | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **SES1-50** | Three #8, #6, #4 | 100 | 500 |
| **SES1-75** | Three #3, #2 | 100 | 500 |
| **SES1-100** | Three #1, #1/0, #2/0 | 50 | 250 |
| **SES1-200** | Three #3/0, #4/0 | 25 | 250 |



## STAMPED STEEL
### 2-HOLE SERVICE ENTRANCE STRAPS

**FEATURES**

- Electroplated Zinc
- Corrosion-resistant

| Cat. No. | Description | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **SES2-50** | Three #8, #6, #4 | 20 | 100 |
| **SES2-75** | Three #3, #2 | 20 | 100 |
| **SES2-100** | Three #1, #1/0, #2/0 | 20 | 100 |
| **SES2-200** | Three #3/0, #4/0 | 20 | 100 |



## PRE-GALVANIZED STEEL
### STUD MOUNTING CABLE SUPPORT

**FEATURES**

- Wood or Metal Stud
- Easy to lock
- Space saving packaging

| Cat. No. | Description | Non-Metallic | MC/AC/BX | Std. Pkg. |
|---|---|---|---|---|
| **CS-CJ6** | Stud Mounting Cable Support with Locking Tab | Max. 6 | Max. 4 | 100 |





## *ZINC DIE CAST* STRAIN RELIEF CORD-GRIP CONNECTORS

### FEATURES

- Watertight

| Cat. No. | Trade Size | Cord Range | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| CG-50-190/260 | 1/2” | 0.190” - 0.260” | 25 | 100 |
| CG-50-260/375 | 1/2” | 0.260” - 0.375” | 25 | 100 |
| CG-50-375/500 | 1/2” | 0.375” - 0.500” | 25 | 100 |
| CG-75-375/500 | 3/4” | 0.375” - 0.500” | 10 | 50 |
| CG-75-500/625 | 3/4” | 0.500” - 0.625” | 10 | 50 |
| CG-75-625/750 | 3/4” | 0.625” - 0.750” | 10 | 50 |
| CG-100-375/500 | 1” | 0.375” - 0.500” | 10 | 50 |
| CG-100-500/625 | 1” | 0.500” - 0.625” | 10 | 50 |
| CG-100-625/750 | 1” | 0.625” - 0.750” | 10 | 50 |
| CG-100-750/880 | 1” | 0.750” - 0.880” | 10 | 50 |
| CG-100-880/985 | 1” | 0.880” - 0.985” | 10 | 50 |



## *STEEL* STRAIN RELIEF CORD-GRIP CONNECTORS

### FEATURES

- Zinc Electroplated
- Watertight
- Connect S,SO,ST,SJ,SJO, SJT Cord to metal box or enclosure
- Color-coded bushings identify different cord ranges

| Cat. No. | Trade Size | Color | Cord Range | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|---|
| SCG-50-125/250 | 1/2" | Red | 0.125" - 0.250" | 25 | 100 |
| SCG-50-250/350 | 1/2" | White | 0.250" - 0.350" | 20 | 100 |
| SCG-50-350/450 | 1/2" | Blue | 0.350" - 0.450" | 20 | 100 |
| SCG-50-450/560 | 1/2" | Green | 0.450" - 0.560" | 20 | 100 |
| SCG-50-560/650 | 1/2" | Beige | 0.560" - 0.650" | 20 | 100 |
| SCG-75-125/250 | 3/4" | Red | 0.125" - 0.250" | 10 | 50 |
| SCG-75-250/350 | 3/4" | White | 0.250" - 0.350" | 10 | 50 |
| SCG-75-350/450 | 3/4" | Blue | 0.350" - 0.450" | 10 | 50 |
| SCG-75-450/560 | 3/4" | Green | 0.450" - 0.560" | 10 | 50 |
| SCG-75-560/650 | 3/4" | Beige | 0.560" - 0.650" | 10 | 50 |
| SCG-75-650/750 | 3/4" | Yellow | 0.650" - 0.750" | 10 | 50 |
| SCG-75-750/850 | 3/4" | Purple | 0.750" - 0.850" | 10 | 50 |
| SCG-100-450/560 | 1" | Green | 0.450" - 0.560" | 5 | 25 |
| SCG-100-560/650 | 1" | Beige | 0.560" - 0.650" | 5 | 25 |
| SCG-100-650/750 | 1" | Yellow | 0.650" - 0.750" | 5 | 25 |
| SCG-100-750/850 | 1" | Purple | 0.750" - 0.850" | 5 | 25 |
| SCG-100-850/950 | 1" | Gray | 0.850" - 0.950" | 5 | 25 |
| SCG-100-950/1050 | 1" | Black | 0.950" - 1.050" | 5 | 25 |



## *NYLON* STRAIN RELIEF CORD-GRIP CONNECTORS

SOLAR

### FEATURES

- Watertight

### NOTE

- Lock Nut not included

| Cat. No. | Trade Size | Cord Range | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| **NGC-38-197/394** | 3/8” | 0.197” - 0.394” | 25 | 100 |
| **NGC-50-384/551** | 1/2” | 0.394” - 0.551” | 25 | 100 |
| **NGC-75-551/709** | 3/4” | 0.551” - 0.709” | 10 | 50 |
| **NGC100-709/984** | 1” | 0.709” - 0.984” | 10 | 50 |



## *ZINC DIE CAST* WATERTIGHT SERVICE ENTRANCE CABLE CONNECTORS

### FEATURES

- Watertight

| Cat. No. | Trade Size | Wire Size | Grommet Opening | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|---|
| **WECC-100-8** | 1" | #8 | 0.40" - 0.68" | 10 | 100 |
| **WECC-100-6** | 1" | #6 | 0.44" - 0.70" | 10 | 100 |
| **WECC-100-4** | 1" | #4 | 0.52" - 0.84" | 10 | 100 |
| **WECC-125-3** | 1-1/4" | #3 | 0.56" - 0.92" | 10 | 50 |
| **WECC-125-2** | 1-1/4" | #2 | 0.60" - 1.00" | 10 | 50 |
| **WECC-125-1** | 1-1/4" | #1 | 0.65" - 1.09" | 10 | 50 |
| **WECC-150-10** | 1-1/2" | #1/0 | 0.72" - 1.24" | 5 | 50 |
| **WECC-150-20** | 1-1/2" | #2/0 | 0.86" - 1.34" | 5 | 50 |
| **WECC-150-30** | 1-1/2" | #3/0 | 0.87" - 1.37" | 5 | 50 |
| **WECC-200-10** | 2" | #1/0 | 0.72" - 1.24" | 5 | 25 |
| **WECC-200-20** | 2" | #2/0 | 0.86" - 1.34" | 5 | 25 |
| **WECC-200-30** | 2" | #3/0 | 0.87" - 1.34" | 5 | 25 |
| **WECC-200-40** | 2" | #4/0 | 0.90" - 1.50" | 5 | 25 |
| **WECC-200-40N** | 2" | #4/0 | 1.11" - 1.73" | 5 | 25 |



## *STEEL* RIGID CONNECTORS SET-SCREW TYPE

### FEATURES

- Electroplated Zinc
- For use in dry location

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| RS-50 | 1/2” | 25 | 250 |
| RS-75 | 3/4” | 25 | 250 |
| RS-100 | 1” | 10 | 100 |
| RS-125 | 1-1/4” | 1 | 25 |
| RS-150 | 1-1/2” | 1 | 25 |
| RS-200 | 2” | 1 | 10 |



## *STEEL* RIGID COUPLINGS SET-SCREW TYPE

### FEATURES

- Electroplated Zinc
- For use in dry location

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| RSC-50 | 1/2” | 25 | 250 |
| RSC-75 | 3/4” | 25 | 250 |
| RSC-100 | 1” | 10 | 100 |
| RSC-125 | 1-1/4” | 1 | 25 |
| RSC-150 | 1-1/2” | 1 | 25 |
| RSC-200 | 2” | 1 | 10 |



## *STEEL* RIGID TO EMT COMBINATION COUPLINGS SET-SCREW TYPE

### FEATURES

- Electroplated Zinc
- Concrete-Tight when taped

| Cat. No. | Rigid Size | EMT Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| SRECS-50 | 1/2” | 1/2” | 25 | 250 |
| SRECS-75 | 3/4” | 3/4” | 10 | 100 |
| SRECS-100 | 1” | 1” | 10 | 100 |



## *STEEL* THREADLESS RIGID CONNECTORS COMPRESSION TYPE

### FEATURES

- Electroplated Zinc
- Concrete-Tight

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| RT-50 | 1/2” | 25 | 250 |
| RT-75 | 3/4” | 25 | 250 |
| RT-100 | 1” | 10 | 100 |
| RT-125 | 1-1/4” | 1 | 25 |
| RT-150 | 1-1/2” | 1 | 25 |
| RT-200 | 2” | 1 | 10 |



## *MALLEABLE IRON* THREADLESS RIGID CONNECTORS COMPRESSION TYPE

### FEATURES

- Electroplated Zinc
- Concrete-Tight

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| MRT-50 | 1/2” | 25 | 100 |
| MRT-75 | 3/4” | 25 | 100 |
| MRT-100 | 1” | 5 | 25 |
| MRT-125 | 1-1/4” | - | 25 |
| MRT-150 | 1-1/2” | - | 25 |
| MRT-200 | 2” | - | 10 |
| MRT-250 | 2-1/2” | - | 10 |
| MRT-300 | 3” | - | 10 |
| MRT-350 | 3-1/2” | - | 6 |
| MRT-400 | 4” | - | 6 |



## *STEEL* THREADLESS RIGID COUPLINGS COMPRESSION TYPE

### FEATURES

- Electroplated Zinc
- Concrete-Tight

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| RTC-50 | 1/2” | 25 | 250 |
| RTC-75 | 3/4” | 25 | 250 |
| RTC-100 | 1” | 10 | 100 |
| RTC-125 | 1-1/4” | 1 | 25 |
| RTC-150 | 1-1/2” | 1 | 25 |
| RTC-200 | 2” | 1 | 10 |



## *MALLEABLE IRON* THREADLESS RIGID COUPLINGS COMPRESSION TYPE

### FEATURES

- Electroplated Zinc
- Concrete-Tight

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **MRTC-50** | 1/2” | 10 | 100 |
| **MRTC-75** | 3/4” | 10 | 100 |
| **MRTC-100** | 1” | 5 | 50 |
| **MRTC-125** | 1-1/4” | 5 | 50 |
| **MRTC-150** | 1-1/2” | - | 12 |
| **MRTC-200** | 2” | - | 5 |
| **MRTC-250** | 2-1/2” | - | 5 |
| **MRTC-300** | 3” | - | 3 |
| **MRTC-350** | 3-1/2” | - | 2 |
| **MRTC-400** | 4” | - | 2 |



*MRTC-75*



*MRTC-125*

## *MALLEABLE IRON* THREE-PIECE RIGID CONDUIT COUPLINGS

### FEATURES

- Electroplated Zinc

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **MR3C-50** | 1/2” | 10 | 100 |
| **MR3C-75** | 3/4” | 10 | 100 |
| **MR3C-100** | 1” | 5 | 50 |
| **MR3C-125** | 1-1/4” | 5 | 50 |
| **MR3C-150** | 1-1/2” | 3 | 30 |
| **MR3C-200** | 2” | - | 5 |
| **MR3C-250** | 2-1/2” | - | 5 |
| **MR3C-300** | 3” | - | 5 |
| **MR3C-350** | 3-1/2” | - | 4 |
| **MR3C-400** | 4” | - | 4 |



*MR3C-75*



*MR3C-125*



*MR3C-150*
*exploded view*

## *MALLEABLE IRON*
## SPLIT RIGID COUPLINGS

### FEATURES

- Electroplated Zinc
- High density Foam Gasket
- Easy and fast installation

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **MSRC-200** | 2” | 5 | 25 |
| **MSRC-250** | 2-1/2” | 2 | 10 |
| **MSRC-300** | 3” | 2 | 10 |
| **MSRC-350** | 3-1/2” | 1 | 5 |
| **MSRC-400** | 4” | 1 | 5 |




## *CAST STEEL*
## RIGID THREADED COUPLINGS

### FEATURES

- Electroplated Zinc

| Cat. No. | Trade Size | DIMENSIONS D | DIMENSIONS L | Std. Pkg. |
|---|---|---|---|---|
| **RC-50** | 1/2” | 1.012” | 1.626” | 100 |
| **RC-75** | 3/4” | 1.252” | 1.642” | 50 |
| **RC-100** | 1” | 1.524” | 1.969” | 30 |
| **RC-125** | 1-1/4” | 1.87” | 2.031” | 20 |
| **RC-150** | 1-1/2” | 2.154” | 2.063” | 20 |
| **RC-200** | 2” | 2.65” | 2.126” | 20 |
| **RC-250** | 2-1/2” | 3.252” | 3.189” | 24 |
| **RC-300** | 3” | 3.87” | 3.307” | 16 |
| **RC-350** | 3-1/2” | 4.5” | 3.406” | 12 |
| **RC-400** | 4” | 4.874” | 3.516” | 10 |
| **RC-500** | 5” | 6.0” | 3.953” | 1 |
| **RC-600** | 6” | 7.2” | 4.252” | 1 |





## *ZINC DIE CAST*
## RIGID TO FLEX COUPLINGS
## CLAMP TYPE

### FEATURES
- For steel Flex only

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| OF697 | 1/2” | 25 | 250 |



## *ZINC DIE CAST*
## RIGID TO FLEX COUPLINGS
## SET-SCREW TYPE

### FEATURES
- For steel Flex only

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| OF694 | 1/2” | 25 | 250 |
| OF695 | 3/4” | 25 | 250 |



## *STEEL* RIGID TO EMT
## COMBINATION COUPLINGS
## THREADED/COMPRESSION TYPE

NEW

### FEATURES
- Electroplated Zinc
- Internally threaded for Rigid/IMC conduit
- Compression type for EMT conduit
- Rain-Tight
- Concrete-Tight

| Cat. No. | Rigid Size | EMT Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| SREC-50 | 1/2” | 1/2” | 25 | 100 |
| SREC-75 | 3/4” | 3/4” | 25 | 100 |
| SREC-100 | 1” | 1” | 10 | 40 |



## *STEEL* RIGID TO LIQUID TIGHT COMBINATION COUPLINGS THREADED/COMPRESSION TYPE

NEW

### FEATURES

- Electroplated Zinc
- Rain-Tight
- Internally threaded for Rigid/IMC conduit
- Concrete-Tight

| Cat. No. | Rigid Size | LT Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| **SRLTC-50** | 1/2” | 1/2” | 25 | 100 |
| **SRLTC-75** | 3/4” | 3/4” | 10 | 40 |
| **SRLTC-100** | 1” | 1” | 10 | 40 |
| **SRLTC-125** | 1-1/4” | 1-1/4” | 5 | 20 |
| **SRLTC-150** | 1-1/2” | 1-1/2” | - | 15 |
| **SRLTC-200** | 2” | 2” | - | 10 |



## *ZINC DIE CAST* WATERTIGHT HUBS

SOLAR

### FEATURES

- 105ºC rated Throat Insulator

### NOTE

- Insulated color may vary

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **WH-50** | 1/2” | 25 | 125 |
| **WH-75** | 3/4” | 25 | 125 |
| **WH-100** | 1” | 25 | 125 |
| **WH-125** | 1-1/4” | 10 | 50 |
| **WH-150** | 1-1/2” | 10 | 50 |
| **WH-200** | 2” | 10 | 50 |
| **WH-250** | 2-1/2” | 5 | 25 |
| **WH-300** | 3” | 2 | 10 |
| **WH-350** | 3-1/2” | 2 | 10 |
| **WH-400** | 4” | 2 | 10 |



## *ZINC DIE CAST* GROUNDED WATERTIGHT HUBS

SOLAR

### FEATURES

- 105ºC rated Throat Insulator
- Grounding Post & Screw

### NOTE

- Insulated color may vary

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **WHG-50** | 1/2” | 25 | 125 |
| **WHG-75** | 3/4” | 25 | 125 |
| **WHG-100** | 1” | 25 | 125 |
| **WHG-125** | 1-1/4” | 10 | 50 |
| **WHG-150** | 1-1/2” | 10 | 50 |
| **WHG-200** | 2” | 10 | 50 |
| **WHG-250** | 2-1/2” | 5 | 25 |
| **WHG-300** | 3” | 2 | 10 |
| **WHG-350** | 3-1/2” | 2 | 10 |
| **WHG-400** | 4” | 2 | 10 |



## *MALLEABLE IRON* GROUNDED WATERTIGHT HUBS

### FEATURES

- 105ºC rated Throat Insulator
- Grounding Screw
- Electroplated Zinc

### NOTE

- Insulated color may vary

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **MWHG-50** | 1/2” | 25 | 250 |
| **MWHG-75** | 3/4” | 25 | 100 |
| **MWHG-100** | 1” | 10 | 100 |
| **MWHG-125** | 1-1/4” | 5 | 50 |
| **MWHG-150** | 1-1/2” | 2 | 20 |
| **MWHG-200** | 2” | 2 | 20 |
| **MWHG-250** | 2-1/2” | - | 10 |
| **MWHG-300** | 3” | - | 5 |
| **MWHG-350** | 3-1/2” | - | 5 |
| **MWHG-400** | 4” | - | 5 |



*MWHG-50*



*MWHG-150*

## *MALLEABLE IRON* 90º ANGLE THREADED SHORT ELBOWS

### FEATURES

- Electroplated Zinc

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **MSE90-50** | 1/2” | 50 | 200 |
| **MSE90-75** | 3/4” | 25 | 100 |
| **MSE90-100** | 1” | 25 | 100 |



## *ZINC DIE CAST* RIGID TO BOX PULL ELBOWS *WITH GASKET*

### FEATURES

- Aluminum Cover

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **PEB-50** | 1/2” | 10 | 100 |
| **PEB-75** | 3/4” | 5 | 50 |
| **PEB-100** | 1” | - | 25 |
| **PEB-125** | 1-1/4” | - | 20 |



RIGID

## *ZINC DIE CAST* RIGID TO RIGID PULL ELBOWS *WITH GASKET*

### FEATURES

- Aluminum Cover

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **PE-50** | 1/2” | 10 | 100 |
| **PE-75** | 3/4” | 5 | 50 |
| **PE-100** | 1” | - | 25 |
| **PE-125** | 1-1/4” | - | 20 |



RIGID

## MALLEABLE IRON CONDUIT CLAMPS EDGE TYPE

### FEATURES

- Electroplated Zinc

| Cat. No. | Trade Size | Std. Pkg. |
|---|---|---|
| **MCCE-50** | 1/2” | 50 |
| **MCCE-75** | 3/4” | 50 |
| **MCCE-100** | 1” | 25 |
| **MCCE-125** | 1-1/4” | 25 |
| **MCCE-150** | 1-1/2” | 25 |
| **MCCE-200** | 2” | 25 |
| **MCCE-250** | 2-1/2” | 10 |
| **MCCE-300** | 3” | 10 |



*MCCE-50*



*MCCE-100*

## MALLEABLE IRON CONDUIT CLAMPS RIGHT ANGLE TYPE

### FEATURES

- Electroplated Zinc

| Cat. No. | Trade Size | Std. Pkg. |
|---|---|---|
| **MCCR-50** | 1/2” | 50 |
| **MCCR-75** | 3/4” | 50 |
| **MCCR-100** | 1” | 50 |
| **MCCR-125** | 1-1/4” | 50 |
| **MCCR-150** | 1-1/2” | 50 |
| **MCCR-200** | 2” | 50 |
| **MCCR-250** | 2-1/2” | 25 |
| **MCCR-300** | 3” | 25 |
| **MCCR-350** | 3-1/2” | 25 |
| **MCCR-400** | 4” | 25 |



*MCCR-50*



*MCCR-100*

## *MALLEABLE IRON* CONDUIT CLAMPS PARALLEL TYPE

### FEATURES

- Electroplated Zinc

| Cat. No. | Trade Size | Std. Pkg. |
|---|---|---|
| **MCCP-50** | 1/2” | 50 |
| **MCCP-75** | 3/4” | 50 |
| **MCCP-100** | 1” | 50 |
| **MCCP-125** | 1-1/4” | 25 |
| **MCCP-150** | 1-1/2” | 25 |
| **MCCP-200** | 2” | 25 |
| **MCCP-250** | 2-1/2” | 10 |
| **MCCP-300** | 3” | 10 |
| **MCCP-350** | 3-1/2” | 10 |
| **MCCP-400** | 4” | 10 |



*MCCP-50*



*MCCP-100*

## *STAMPED STEEL* UNIVERSAL STRUT CLAMPS

### FEATURES

- Electroplated Zinc
- Listed for EMT, IMC and Rigid
- 1/2" to 2 ": Break-apart design without Nut
- 2-1/2" to 4": Two-pieces design with Nut

| Cat. No. | EMT/Rigid Size | Std. Pkg. |
|---|---|---|
| **ST-50** | 1/2” | 100 |
| **ST-75** | 3/4” | 100 |
| **ST-100** | 1” | 100 |
| **ST-125** | 1-1/4” | 100 |
| **ST-150** | 1-1/2” | 50 |
| **ST-200** | 2” | 50 |
| **ST-250** | 2-1/2” | 50 |
| **ST-300** | 3” | 25 |
| **ST-350** | 3-1/2” | 25 |
| **ST-400** | 4” | 25 |



## *STAMPED STEEL* SADDLE TYPE STRUT CLAMPS

### FEATURES

- Electroplated Zinc
- Tri-Combo Hex Screw Head
- Wide Saddle design

| Cat. No. | EMT/Rigid/FMC Conduit Size | Cable O.D. Range | Std. Pkg. |
|---|---|---|---|
| **STS-50** | 5/16” - 1/2” | 0.260" - 0.890" | 100 |
| **STS-75** | 3/4” | 0.670" - 1.090" | 100 |
| **STS-100** | 1” | 0.890" - 1.450" | 100 |
| **STS-125** | 1-1/4” | 1.150" - 1.700" | 50 |
| **STS-150** | 1-1/2” | 1.350" - 2.000" | 50 |
| **STS-200** | 2” | 1.875" - 2.570" | 50 |
| **STS-250** | 2-1/2” | 2.500" - 3.060" | 25 |
| **STS-300** | 3” | 3.000" - 3.600" | 25 |
| **STS-350** | 3-1/2” | 3.600" - 4.100" | 25 |
| **STS-400** | 4” | 4.100" - 4.700" | 25 |



## *STAMPED STEEL* CONDUIT HANGERS *WITH BOLTS*

### FEATURES

- Electroplated Zinc

| Cat. No. | Trade Size | EMT Size | Rigid Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|---|
| **PH-50B** | #0B | 1/2” | 1/2” & 3/8” | 50 | 500 |
| **PH-75B** | #1B | 3/4” | 3/4” | 50 | 500 |
| **PH-100B** | #2B | 1” | 1” | 25 | 250 |
| **PH-105B** | #2-1/2B | 1-1/4” | - | 25 | 250 |
| **PH-125B** | #3B | 1-1/2” | 1-1/4” | 50 | 250 |
| **PH-150B** | #4B | - | 1-1/2” | 50 | 250 |
| **PH-200B** | #5B | 2” | 2” | 20 | 100 |
| **PH-250B** | #6B | 2-1/2” | 2-1/2” | 10 | 50 |
| **PH-300B** | #7B | 3” | 3” | 10 | 50 |
| **PH-350B** | #8B | 3-1/2” | 3-1/2” | 10 | 50 |
| **PH-400B** | #9B | 4” | 4” | 5 | 25 |



## STAMPED STEEL
### 1-HOLE RIGID STRAPS

**FEATURES**
- Electroplated Zinc

**NOTE**
- Sizes 2-1/2” to 4” are also listed for EMT and IMC conduits

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| SR1-50 | 1/2” | 100 | 1000 |
| SR1-75 | 3/4” | 100 | 1000 |
| SR1-100 | 1” | 100 | 500 |
| SR1-125 | 1-1/4” | 100 | 500 |
| SR1-150 | 1-1/2” | 50 | 500 |
| SR1-200 | 2” | 50 | 500 |
| SU1-250 | 2-1/2” | 25 | 100 |
| SU1-300 | 3” | 25 | 100 |
| SU1-350 | 3-1/2” | 25 | 100 |
| SU1-400 | 4” | 25 | 100 |





## STAMPED STEEL
### 2-HOLE RIGID STRAPS

**FEATURES**
- Electroplated Zinc

**NOTE**
- Sizes 2-1/2” to 4” are also listed for EMT and IMC conduits

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| SR2-50 | 1/2” | 100 | 1000 |
| SR2-75 | 3/4” | 100 | 1000 |
| SR2-100 | 1” | 100 | 500 |
| SR2-125 | 1-1/4” | 100 | 500 |
| SR2-150 | 1-1/2” | 50 | 500 |
| SR2-200 | 2” | 50 | 500 |
| SU2-250 | 2-1/2” | 25 | 100 |
| SU2-300 | 3” | 25 | 100 |
| SU2-350 | 3-1/2” | 25 | 100 |
| SU2-400 | 4” | 25 | 100 |





## MALLEABLE IRON
## 1-HOLE RIGID STRAPS

### FEATURES
- Electroplated Zinc

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| SRM1-50 | 1/2” | 100 | 1000 |
| SRM1-75 | 3/4” | 50 | 500 |
| SRM1-100 | 1” | 25 | 250 |
| SRM1-125 | 1-1/4” | 20 | 200 |
| SRM1-150 | 1-1/2” | 10 | 100 |
| SRM1-200 | 2” | 10 | 50 |
| SRM1-250 | 2-1/2” | - | 25 |
| SRM1-300 | 3” | - | 25 |
| SRM1-350 | 3-1/2” | - | 10 |
| SRM1-400 | 4” | - | 10 |



## MALLEABLE IRON
## CLAMP BACK SPACERS

### FEATURES
- Electroplated Zinc

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| CBS-50 | 1/2” | 25 | 250 |
| CBS-75 | 3/4” | 25 | 250 |
| CBS-100 | 1” | 25 | 250 |
| CBS-125 | 1-1/4” | 10 | 100 |
| CBS-150 | 1-1/2” | 10 | 100 |
| CBS-200 | 2” | 5 | 50 |
| CBS-250 | 2-1/2” | - | 25 |
| CBS-300 | 3” | - | 10 |
| CBS-350 | 3-1/2” | - | 10 |
| CBS-400 | 4” | - | 10 |



## *MACHINED STEEL*
## REDUCING BUSHINGS

### FEATURES

- Electroplated Zinc
- Meets Federal Spec. A-A-50553

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **RB-50/38** | 1/2" to 3/8" | 100 | 500 |
| **RB-75/50** | 3/4" to 1/2" | 100 | 500 |
| **RB-100/50** | 1" to 1/2" | 50 | 250 |
| **RB-100/75** | 1" to 3/4" | 50 | 250 |
| **RB-125/50** | 1-1/4" to 1/2" | 20 | 100 |
| **RB-125/75** | 1-1/4" to 3/4" | 20 | 100 |
| **RB-125/100** | 1-1/4" to 1" | 20 | 100 |
| **RB-150/50** | 1-1/2" to 1/2" | 10 | 50 |
| **RB-150/75** | 1-1/2" to 3/4" | 10 | 50 |
| **RB-150/100** | 1-1/2" to 1" | 10 | 50 |
| **RB-150/125** | 1-1/2" to 1-1/4" | 10 | 50 |
| **RB-200/50** | 2" to 1/2" | 10 | 50 |
| **RB-200/75** | 2" to 3/4" | 10 | 50 |
| **RB-200/100** | 2" to 1" | 10 | 50 |
| **RB-200/125** | 2" to 1-1/4" | 10 | 50 |
| **RB-200/150** | 2" to 1-1/2" | 10 | 50 |



## *MALLEABLE IRON*
## REDUCING BUSHINGS

### FEATURES

- Electroplated Zinc

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **RB-250/200** | 2-1/2" to 2" | 10 | 50 |
| **RB-300/200** | 3" to 2" | 10 | 50 |
| **RB-300/250** | 3" to 2-1/2" | 10 | 50 |
| **RB-350/250** | 3-1/2" to 2-1/2" | 5 | 20 |
| **MRB-350/300** | 3-1/2" to 3" | 5 | 20 |
| **MRB-400/350** | 4" to 3-1/2" | 5 | 20 |



## *STEEL* RIGID MALE ENLARGERS

### FEATURES

- Electroplated Zinc

| Cat. No. | Male Size | Female Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| **SME-50/75** | 1/2” | 3/4” | 25 | 250 |
| **SME-75/100** | 3/4” | 1” | 10 | 100 |
| **SME-100/125** | 1” | 1-1/4” | 10 | 100 |



*SME-50/75*



*SME-100/125*

## *PVC PLASTIC* INSULATING BUSHINGS

### FEATURES

- 105ºC Rated
- Meets Federal Spec. A-A-50553

### NOTE

- Color may vary

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **PB-50** | 1/2” | 100 | 1000 |
| **PB-75** | 3/4” | 100 | 1000 |
| **PB-100** | 1” | 50 | 500 |
| **PB-125** | 1-1/4” | 25 | 250 |
| **PB-150** | 1-1/2” | 25 | 250 |
| **PB-200** | 2” | 10 | 100 |
| **PB-250** | 2-1/2” | 10 | 100 |
| **PB-300** | 3” | - | 20 |
| **PB-350** | 3-1/2” | - | 20 |
| **PB-400** | 4” | - | 10 |
| **PB-500** | 5” | - | 10 |
| **PB-600** | 6” | - | 10 |



## *ZINC DIE CAST* CONDUIT BUSHINGS

### FEATURES

- Full Machine-Cut Internal Threads
- Meets Federal Spec. A-A-50553

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **CB-50** | 1/2” | 100 | 1000 |
| **CB-75** | 3/4” | 50 | 500 |
| **CB-100** | 1” | 50 | 500 |
| **CB-125** | 1-1/4” | 25 | 250 |
| **CB-150** | 1-1/2” | 25 | 250 |
| **CB-200** | 2” | 15 | 90 |
| **CB-250** | 2-1/2” | 2 | 10 |
| **CB-300** | 3” | 2 | 10 |
| **CB-350** | 3-1/2” | - | 5 |
| **CB-400** | 4” | - | 5 |



## *ZINC DIE CAST* CONDUIT BUSHINGS INSULATED

### FEATURES

- Full Machine-Cut Internal Threads
- Insulated Throat
- Meets Federal Spec. A-A-50553

### NOTE

- Insulated color may vary

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **CBI-50** | 1/2” | 100 | 1000 |
| **CBI-75** | 3/4” | 50 | 500 |
| **CBI-100** | 1” | 50 | 500 |
| **CBI-125** | 1-1/4” | 25 | 250 |
| **CBI-150** | 1-1/2” | 25 | 250 |
| **CBI-200** | 2” | 15 | 90 |
| **CBI-250** | 2-1/2” | 2 | 10 |
| **CBI-300** | 3” | 2 | 10 |
| **CBI-350** | 3-1/2” | - | 5 |
| **CBI-400** | 4” | - | 5 |



## *MALLEABLE IRON* INSULATED CONDUIT BUSHINGS

### FEATURES

- Electroplated Zinc
- 105°C rated insulated throat

### NOTE

- Insulated color may vary

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **MCBI-50** | 1/2” | 100 | 1000 |
| **MCBI-75** | 3/4” | 50 | 500 |
| **MCBI-100** | 1” | 50 | 500 |
| **MCBI-125** | 1-1/4” | 25 | 250 |
| **MCBI-150** | 1-1/2” | 25 | 100 |
| **MCBI-200** | 2” | 10 | 100 |
| **MCBI-250** | 2-1/2” | - | 50 |
| **MCBI-300** | 3” | - | 25 |
| **MCBI-350** | 3-1/2” | - | 25 |
| **MCBI-400** | 4” | - | 10 |
| **MCBI-500** | 5” | - | 10 |
| **MCBI-600** | 6” | - | 10 |



*MCBI-75*



*MCBI-125*

## *ZINC DIE CAST* GROUND BUSHINGS INSULATED WITH UNIVERSAL LAY-IN LUG

### FEATURES

- 105ºC rated Throat Insulator

| Cat. No. | Trade Size | Lug Range | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| **GBLL-50** | 1/2” | #14 - #4 | 50 | 500 |
| **GBLL-75** | 3/4” | #14 - #4 | 40 | 400 |
| **GBLL-100** | 1” | #14 - #4 | 15 | 150 |
| **GBLL-125** | 1-1/4” | #14 - #4 | 15 | 150 |
| **GBLL-125-10** | 1-1/4" | #14 - #1/0 | 20 | 200 |
| **GBLL-150** | 1-1/2” | #14 - #4 | 10 | 100 |
| **GBLL-150-10** | 1-1/2" | #14 - #1/0 | 10 | 100 |
| **GBLL-200** | 2” | #14 - #4 | 5 | 50 |
| **GBLL-200-10** | 2" | #14 - #1/0 | 10 | 100 |
| **GBLL-250** | 2-1/2” | #6 - #250MCM | 5 | 50 |
| **GBLL-250-10** | 2-1/2" | #14 - #1/0 | - | 50 |
| **GBLL-300** | 3” | #6 - #250MCM | 5 | 50 |
| **GBLL-300-10** | 3" | #14 - #1/0 | - | 50 |
| **GBLL-350** | 3-1/2” | #6 - #250MCM | 4 | 40 |
| **GBLL-350-10** | 3-1/2" | #14 - #1/0 | - | 10 |
| **GBLL-400** | 4” | #6 - #250MCM | 4 | 40 |
| **GBLL-400-10** | 4" | #14 - #1/0 | - | 10 |



## *MALLEABLE IRON* GROUND BUSHINGS INSULATED WITH UNIVERSAL LAY-IN LUG

### FEATURES

- Electroplated Zinc
- Full Machine-Cut Internal Threads
- Meets Federal Spec. A-A-50553

| Cat. No. | Trade Size | Lug Range | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| **MGBLL-50** | 1/2” | #14 - #4 | 50 | 200 |
| **MGBLL-75** | 3/4” | #14 - #4 | 25 | 100 |
| **MGBLL-100** | 1” | #14 - #4 | 25 | 100 |
| **MGBLL-125** | 1-1/4” | #14 - #4 | 10 | 50 |
| **MGBLL-125-10** | 1-1/4" | #14 - #1/0 | 20 | 200 |
| **MGBLL-150** | 1-1/2” | #14 - #4 | 10 | 50 |
| **MGBLL-150-10** | 1-1/2" | #14 - #1/0 | 10 | 100 |
| **MGBLL-200** | 2” | #14 - #4 | 10 | 50 |
| **MGBLL-200-10** | 2" | #14 - #1/0 | 10 | 100 |
| **MGBLL-250** | 2-1/2” | #6 - #250MCM | 5 | 25 |
| **MGBLL-250-10** | 2-1/2" | #14 - #1/0 | - | 50 |
| **MGBLL-300** | 3” | #6 - #250MCM | 5 | 25 |
| **MGBLL-300-10** | 3" | #14 - #1/0 | - | 25 |
| **MGBLL-350** | 3-1/2” | #6 - #250MCM | - | 5 |
| **MGBLL-350-10** | 3-1/2" | #14 - #1/0 | - | 10 |
| **MGBLL-400** | 4” | #6 - #250MCM | - | 5 |
| **MGBLL-400-10** | 4" | #14 - #1/0 | - | 10 |
| **MGBLL-500** | 5” | #6 - #250MCM | - | 5 |
| **MGBLL-500-30** | 5" | #6 - #3/0 | - | 5 |
| **MGBLL-600** | 6” | #6 - #250MCM | - | 5 |
| **MGBLL-600-30** | 6" | #6 - #3/0 | - | 5 |



## GALVANIZED STAMPED STEEL
### REDUCING WASHERS

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| RW-75/50 | 3/4" to 1/2" | 250 | 1000 |
| RW-100/50 | 1" to 1/2" | 250 | 1000 |
| RW-100/75 | 1" to 3/4" | 250 | 1000 |
| RW-125/50 | 1-1/4" to 1/2" | 100 | 400 |
| RW-125/75 | 1-1/4" to 3/4" | 100 | 400 |
| RW-125/100 | 1-1/4" to 1" | 100 | 400 |
| RW-150/50 | 1-1/2" to 1/2" | - | 100 |
| RW-150/75 | 1-1/2" to 3/4" | - | 100 |
| RW-150/100 | 1-1/2" to 1" | - | 100 |
| RW-150/125 | 1-1/2" to 1-1/4" | - | 100 |
| RW-200/50 | 2" to 1/2" | - | 50 |
| RW-200/75 | 2" to 3/4" | - | 50 |
| RW-200/100 | 2" to 1" | - | 50 |
| RW-200/125 | 2" to 1-1/4" | - | 50 |
| RW-200/150 | 2" to 1-1/2" | - | 50 |
| RW-250/50 | 2-1/2" to 1/2" | 25 | 100 |
| RW-250/75 | 2-1/2" to 3/4 | 25 | 100 |
| RW-250/100 | 2-1/2" to 1" | 25 | 100 |
| RW-250/125 | 2-1/2" to 1-1/4" | 25 | 100 |
| RW-250/150 | 2-1/2" to 1-1/2" | 25 | 100 |
| RW-250/200 | 2-1/2" to 2" | 25 | 100 |
| RW-300/50 | 3" to 1/2" | - | 25 |
| RW-300/75 | 3" to 3/4" | - | 25 |
| RW-300/100 | 3" to 1" | - | 25 |
| RW-300/125 | 3" to 1-1/4" | - | 25 |
| RW-300/150 | 3" to 1-1/2" | - | 25 |
| RW-300/200 | 3" to 2" | - | 25 |
| RW-300/250 | 3" to 2-1/2" | - | 25 |
| RW-350/50 | 3-1/2" to 1/2" | - | 10 |
| RW-350/75 | 3-1/2" to 3/4" | - | 10 |
| RW-350/100 | 3-1/2" to 1" | - | 10 |
| RW-350/125 | 3-1/2" to 1-1/4" | - | 10 |
| RW-350/150 | 3-1/2" to 1-1/2" | - | 10 |
| RW-350/200 | 3-1/2" to 2" | - | 10 |
| RW-350/250 | 3-1/2" to 2-1/2" | - | 10 |
| RW-350/300 | 3-1/2" to 3" | - | 10 |
| RW-400/50 | 4" to 1/2" | - | 10 |
| RW-400/75 | 4" to 3/4" | - | 10 |
| RW-400/100 | 4" to 1" | - | 10 |
| RW-400/125 | 4" to 1-1/4" | - | 10 |
| RW-400/150 | 4" to 1-1/2" | - | 10 |
| RW-400/200 | 4" to 2" | - | 10 |
| RW-400/250 | 4" to 2-1/2" | - | 10 |
| RW-400/300 | 4" to 3" | - | 10 |
| RW-400/350 | 4" to 3-1/2" | - | 10 |



## *ZINC DIE CAST* CONDUIT LOCKNUTS

### FEATURES

- Full-Cut Internal Threads
- Meets Federal Spec. A-A-50553

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **LN-50** | 1/2” | 100 | 1000 |
| **LN-75** | 3/4” | 100 | 1000 |
| **LN-100** | 1” | 100 | 1000 |
| **LN-125** | 1-1/4” | 50 | 500 |
| **LN-150** | 1-1/2” | 50 | 500 |
| **LN-200** | 2” | 25 | 250 |
| **LN-250** | 2-1/2” | 10 | 100 |
| **LN-300** | 3” | 5 | 50 |
| **LN-350** | 3-1/2” | 5 | 50 |
| **LN-400** | 4” | - | 25 |



## *STEEL* CONDUIT LOCKNUTS

### FEATURES

- Electroplated Zinc
- Full-Cut Internal Threads
- Meets Federal Spec. A-A-50553

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **SLN-50** | 1/2” | 100 | 1000 |
| **SLN-75** | 3/4” | 100 | 1000 |
| **SLN-100** | 1” | 100 | 1000 |
| **SLN-125** | 1-1/4” | 50 | 500 |
| **SLN-150** | 1-1/2” | 50 | 500 |
| **SLN-200** | 2” | 25 | 250 |
| **SLN-250** | 2-1/2” | 10 | 100 |
| **SLN-300** | 3” | 5 | 50 |
| **SLN-350** | 3-1/2” | 5 | 50 |
| **SLN-400** | 4” | - | 25 |
| **SLN-500** | 5” | - | 10 |
| **SLN-600** | 6” | - | 10 |



## *STEEL* SEALING LOCKNUTS

### FEATURES

- Electroplated Zinc
- Bonded with Molten Sealing Material
- Meets Federal Spec. A-A-50553

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| SSLN-50 | 1/2” | 100 | 1000 |
| SSLN-75 | 3/4” | 100 | 1000 |
| SSLN-100 | 1” | 100 | 1000 |
| SSLN-125 | 1-1/4” | 50 | 500 |
| SSLN-150 | 1-1/2” | 50 | 500 |
| SSLN-200 | 2” | 25 | 250 |
| SSLN-250 | 2-1/2” | 10 | 100 |
| SSLN-300 | 3” | 5 | 50 |
| SSLN-350 | 3-1/2” | 5 | 50 |
| SSLN-400 | 4” | - | 25 |
| SSLN-500 | 5” | - | 10 |
| SSLN-600 | 6” | - | 10 |



## *STEEL* GROUNDING (BONDING) RIGID LOCKNUTS

### FEATURES

- Electroplated Zinc

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| GL-50 | 1/2” | 50 | 200 |
| GL-75 | 3/4” | 25 | 100 |
| GL-100 | 1” | 25 | 100 |
| GL-125 | 1-1/4” | 10 | 50 |
| GL-150 | 1-1/2” | 10 | 50 |
| GL-200 | 2” | 10 | 50 |
| GL-250 | 2-1/2” | 5 | 25 |
| GL-300 | 3” | 5 | 25 |
| GL-350 | 3-1/2” | - | 5 |
| GL-400 | 4” | - | 5 |
| GL-500 | 5” | - | 5 |
| GL-600 | 6” | - | 5 |



## *STEEL* LIQUID TIGHT SEALING RINGS

### FEATURES

- Neoprene Rubber Gasket
- Steel Retainer
- Form liquid tight seal between connector and box

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| LTSR-50 | 1/2” | 250 | 2500 |
| LTSR-75 | 3/4” | 200 | 2000 |
| LTSR-100 | 1” | 150 | 1500 |
| LTSR-125 | 1-1/4” | 100 | 1000 |
| LTSR-150 | 1-1/2” | 50 | 500 |
| LTSR-200 | 2” | 50 | 500 |
| LTSR-250 | 2-1/2” | - | 100 |
| LTSR-300 | 3” | - | 100 |
| LTSR-350 | 3-1/2” | - | 50 |
| LTSR-400 | 4” | - | 50 |



## *ZINC DIE CAST*
## 3/4” OFFSET NIPPLES

### FEATURES

- Meets Federal Spec. A-A-50553

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| ON-50 | 1/2” | 25 | 250 |
| ON-75 | 3/4” | 20 | 200 |
| ON-100 | 1” | 10 | 100 |
| ON-125 | 1-1/4” | 5 | 50 |
| ON-150 | 1-1/2” | 5 | 50 |
| ON-200 | 2” | 3 | 30 |



## *ZINC DIE CAST*
## 1” LONG CONDUIT CHASE NIPPLES

### FEATURES

- Meets Federal Spec. A-A-50553

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| CN-50L | 1/2” | 100 | 1000 |
| CN-75L | 3/4” | 50 | 500 |
| CN-100L | 1” | 25 | 250 |



## ZINC DIE CAST
## CONDUIT CHASE NIPPLES

### FEATURES
- Meets Federal Spec. A-A-50553

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **CN-50** | 1/2” | 100 | 1000 |
| **CN-75** | 3/4” | 100 | 1000 |
| **CN-100** | 1” | 50 | 500 |
| **CN-125** | 1-1/4” | 25 | 250 |
| **CN-150** | 1-1/2” | 25 | 250 |
| **CN-200** | 2” | 15 | 90 |



## ZINC DIE CAST
## INSULATED CONDUIT CHASE NIPPLES

### FEATURES
- With Insulated Throat
- Meets Federal Spec. A-A-50553

### NOTE
- Insulated color may vary

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **CNI-50** | 1/2” | 100 | 1000 |
| **CNI-75** | 3/4” | 100 | 1000 |
| **CNI-100** | 1” | 50 | 500 |
| **CNI-125** | 1-1/4” | 25 | 250 |
| **CNI-150** | 1-1/2” | 25 | 250 |
| **CNI-200** | 2” | 15 | 90 |
| **CNI-250** | 2-1/2” | 2 | 10 |
| **CNI-300** | 3” | 2 | 10 |
| **CNI-350** | 3-1/2” | - | 5 |
| **CNI-400** | 4” | - | 5 |



## MALLEABLE IRON
## RIGID FLOOR FLANGES

### FEATURES
- Electroplated Zinc

| Cat. No. | Trade Size | Std. Pkg. |
|---|---|---|
| FR-50 | 1/2” | 50 |
| FR-75 | 3/4” | 50 |
| FR-100 | 1” | 50 |
| FR-125 | 1-1/4” | 25 |
| FR-150 | 1-1/2” | 25 |
| FR-200 | 2” | 25 |



## MALLEABLE IRON
## CONCRETE SLAB INSERTS STRAIGHT

### FEATURES
- Electroplated Zinc

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| MCSI-50 | 1/2” | 10 | 100 |
| MCSI-75 | 3/4” | 10 | 100 |
| MCSI-100 | 1” | 10 | 50 |



## MALLEABLE IRON
## CONCRETE SLAB INSERTS 90º ANGLE

### FEATURES
- Electroplated Zinc

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| MCSI90-50 | 1/2” | 10 | 100 |
| MCSI90-75 | 3/4” | 10 | 100 |
| MCSI90-100 | 1” | 10 | 50 |



## *STEEL* CONDUIT LOCKING CONNECTORS

PATENT PENDING

ORBIT INDUSTRIES EXCLUSIVE

### FEATURES

- Holes for branch line restraints
- Locknut included

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| CLCSL-50 | 1/2” | 10 | 100 |
| CLCSL-75 | 3/4” | 10 | 100 |



## *DIE CAST ALUMINUM* METER HUBS

### FEATURES

- Electroplated Zinc
- Rain-Tight

| Cat. No. | Trade Size | Std. Pkg. |
|---|---|---|
| AMH-100 | 1” | 10 |
| AMH-125 | 1-1/4” | 10 |
| AMH-150 | 1-1/2” | 10 |
| AMH-200 | 2” | 10 |
| AMH-250 | 2-1/2” | 10 |



## *STEEL* ROOF COUPLING PLATES

NEW

PATENT PENDING

ORBIT INDUSTRIES EXCLUSIVE


### FEATURES

- Allows for easy transition of different conduit types
- Suitable in any type of new or old work roof construction
- Allows conduit to run below the roof-line, reducing time spent de-rating conductors
- Different conduit stubs can be prefabbed to plate
- Maintains roof integrity by reducing support penetrations
- Can be used for through floor conduit penetrations

| Cat. No. | Trade Size | Base Plate Size | Base Plate Thickness | Std. Pkg. |
|---|---|---|---|---|
| RCP-50 | 1/2” | 6” x 6” | 0.064” | 20 |
| RCP-75 | 3/4” | 6” x 6” | 0.064” | 20 |
| RCP-100 | 1” | 6” x 6” | 0.064” | 20 |
| RCP-125 | 1-1/4” | 6” x 6” | 0.064” | 10 |
| RCP-150 | 1-1/2” | 8” x 8” | 0.074” | 10 |
| RCP-200 | 2” | 8” x 8” | 0.074” | 10 |



*RCP-75*



*RCP-125*

## *STEEL* EMT TO FLEX COUPLINGS SET-SCREW/DOUBLE-BITE SADDLE CLAMP TYPE

NEW

### FEATURES

- Electroplated Zinc
- Set-Screw type for EMT conduit
- Dual-gripping Saddle Clamp
- Combo Head Set-Screw
- For AC, MCI, MCI-A, HCF, RWFMC
- Suitable for dry location only

| Cat. No. | Flex/Cable Range | EMT Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| **SEFSD-38** | Steel AC: 14/2 (0.450") - 10/2 (0.660")<br>AL AC: 14/2(0.450") - 10/2 (0.660")<br>Steel MCI: 14/2 (0.450") - 10/2 (0.660")<br>AL MCI: 14/2 (0.450") - 10/2 (0.660")<br>AL MCI-A: 14/2 (0.400") - 10/3 (0.590")<br>Steel HCF AC: 14/2 (0.450") - 10/2 (0.660")<br>AL HCF AC: 14/2 (0.450") - 10/2 (0.660")<br>HCF MCI-A: 14/2 (0.400") - 10/3 (0.590")<br>Steel/AL FMC/RWFMC/XRWFMC: 3/8" | 1/2” | 25 | 100 |
| **SEFSD-50** | Steel AC: 12/4 (0.550") - 6/3 (0.920")<br>AL AC: 12/4 (0.550") - 6/3 (0.920")<br>Steel MCI: 10/4 (0.640") - 8/3 (0.920")<br>AL MCI: 10/4 (0.640") - 8/3 (0.920")<br>AL MCI-A: 12/4 (0.520") - 8/4 (0.770")<br>Steel HCF AC: 12/4 (0.550") - 6/3 (0.920")<br>AL HCF AC: 12/4 (0.550") - 6/3 (0.920")<br>HCF MCI-A: 12/4 (0.520") - 8/4 (0.770")<br>Steel/AL FMC/RWFMC/XRWFMC: 1/2" | 1/2” | 25 | 100 |
| **SEFSD-75** | Steel AC: 6/4 (0.930") - 4/3 (1.075")<br>AL AC: 8/3(0.680") - 4/3 (1.075")<br>Steel MCI: 8/3 (0.730") - 4/3 (1.075")<br>AL MCI: 6/4 (0.930") - 4/3 (1.075")<br>AL MCI-A: 8/4 (0.770") - 6/4 (1.110")<br>Steel HCF AC: 6/4 (0.930") - 4/3 (1.075")<br>AL HCF AC: 8/3 (0.680") - 4/3 (1.075")<br>HCF MCI-A: 8/4 (0.770") - 6/4 (1.110")<br>Steel/AL FMC/RWFMC/XRWFMC: 3/4" | 3/4” | 25 | 100 |



## *STEEL* EMT TO FLEX COUPLINGS COMPRESSION/DOUBLE-BITE SADDLE CLAMP TYPE

NEW

### FEATURES

- Electroplated Zinc
- Compression type for EMT conduit
- Dual-gripping Saddle Clamp
- Combo Head Set-Screw
- For AC, MCI, MCI-A, HCF, RWFMC
- Suitable for dry location only

| Cat. No. | Flex/Cable Range | EMT Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| **SEFCD-50** | Steel AC: 12/4 (0.550") - 6/3 (0.920")<br>AL AC: 12/4 (0.550") - 6/3 (0.920")<br>Steel MCI: 10/4 (0.640") - 8/3 (0.920")<br>AL MCI: 10/4 (0.640") - 8/3 (0.920")<br>AL MCI-A: 12/4 (0.520") - 8/4 (0.770")<br>Steel HCF AC: 12/4 (0.550") - 6/3 (0.920")<br>AL HCF AC: 12/4 (0.550") - 6/3 (0.920")<br>HCF MCI-A: 12/4 (0.520") - 8/4 (0.770")<br>Steel/AL FMC/RWFMC/XRWFMC: 1/2" | 1/2” | 25 | 100 |
| **SEFCD-75** | Steel AC: 6/4 (0.930") - 4/3 (1.075")<br>AL AC: 8/3(0.680") - 4/3 (1.075")<br>Steel MCI: 8/3 (0.730") - 4/3 (1.075")<br>AL MCI: 6/4 (0.930") - 4/3 (1.075")<br>AL MCI-A: 8/4 (0.770") - 6/4 (1.110")<br>Steel HCF AC: 6/4 (0.930") - 4/3 (1.075")<br>AL HCF AC: 8/3 (0.680") - 4/3 (1.075")<br>HCF MCI-A: 8/4 (0.770") - 6/4 (1.110")<br>Steel/AL FMC/RWFMC/XRWFMC: 3/4" | 3/4” | 25 | 100 |



## *STEEL* RIGID TO EMT COMBINATION COUPLINGS SET-SCREW TYPE

### FEATURES

- Electroplated Zinc
- Concrete-Tight when taped

| Cat. No. | Rigid Size | EMT Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| **SRECS-50** | 1/2” | 1/2” | 25 | 250 |
| **SRECS-75** | 3/4” | 3/4” | 10 | 100 |
| **SRECS-100** | 1” | 1” | 10 | 100 |



*SRECS-50*



*SRECS-100*

## ZINC DIE CAST
### EMT TO FLEX COUPLINGS
### SET-SCREW/SQUEEZE TYPE

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| OF530 | 1/2" to 3/8" | 50 | 500 |
| OF531 | 1/2" to 1/2" | 25 | 250 |
| OF532 | 3/4" to 3/4" | 25 | 100 |
| OF533 | 1" to 1" | 10 | 40 |



## ZINC DIE CAST
### EMT TO FLEX COUPLINGS
### SET-SCREW/CLAMP TYPE

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| OF520 | 1/2" to 3/8" | 50 | 500 |
| OF521 | 1/2" to 1/2" | 25 | 250 |
| OF522 | 3/4" to 3/4" | 25 | 250 |
| OF523 | 1" to 1" | 10 | 40 |



## ZINC DIE CAST
### EMT TO FLEX COUPLINGS
### COMPRESSION/SCREW-IN TYPE

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| OF1611 | 1/2" | 50 | 500 |
| OF1612 | 3/4" | 25 | 250 |
| OF1613 | 1" | 10 | 100 |



## *STEEL* EMT TO LIQUID TIGHT COMBINATION COUPLINGS COMPRESSION TYPE

### FEATURES

- Electroplated Zinc
- Concrete-Tight
- Rain-Tight

| Cat. No. | EMT Size | LT Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| **SELTC-50** | 1/2” | 1/2” | 25 | 250 |
| **SELTC-75** | 3/4” | 3/4” | 10 | 100 |
| **SELTC-100** | 1” | 1” | 10 | 100 |



*SELTC-75*



*SELTC-100*

## *STEEL* RIGID TO EMT COMBINATION COUPLINGS THREADED/COMPRESSION TYPE

NEW

### FEATURES

- Electroplated Zinc
- Internally threaded for Rigid/IMC conduit
- Compression type for EMT conduit
- Rain-Tight
- Concrete-Tight

| Cat. No. | Rigid Size | EMT Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| **SREC-50** | 1/2” | 1/2” | 25 | 100 |
| **SREC-75** | 3/4” | 3/4” | 25 | 100 |
| **SREC-100** | 1” | 1” | 10 | 40 |



## *STEEL* RIGID TO LIQUID TIGHT COMBINATION COUPLINGS THREADED/COMPRESSION TYPE

NEW

### FEATURES

- Electroplated Zinc
- Internally threaded for Rigid/IMC conduit
- Rain-Tight
- Concrete-Tight

| Cat. No. | Rigid Size | LT Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| **SRLTC-50** | 1/2” | 1/2” | 25 | 100 |
| **SRLTC-75** | 3/4” | 3/4” | 10 | 40 |
| **SRLTC-100** | 1” | 1” | 10 | 40 |
| **SRLTC-125** | 1-1/4” | 1-1/4” | 5 | 20 |
| **SRLTC-150** | 1-1/2” | 1-1/2” | - | 15 |
| **SRLTC-200** | 2” | 2” | - | 10 |



## ZINC DIE CAST
### RIGID TO FLEX COUPLINGS CLAMP TYPE

**FEATURES**
- For steel Flex only

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| OF697 | 1/2” | 25 | 250 |



## ZINC DIE CAST
### RIGID TO FLEX COUPLINGS SET-SCREW TYPE

**FEATURES**
- For steel Flex only

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| OF694 | 1/2” | 25 | 250 |
| OF695 | 3/4” | 25 | 250 |




## *DIE CAST COPPER-FREE ALUMINUM*
## THREADED CONDUIT BODIES
## *"LB" SERIES*

### FEATURES


- With Die Cast Cover and Neoprene Gasket
- Gray color

| Cat. No. | Trade Size | DIMENSIONS - LB SERIES | | | | | Std. Pkg. |
|---|---|---|---|---|---|---|---|
| | | A | B | C | D | E | |
| LB-50A | 1/2" | 1-5/16" | 3-7/8" | 2-3/32" | 4-5/16" | 1-1/16" | 10 |
| LB-75A | 3/4" | 1-9/16" | 4-11/16" | 2-3/8" | 5-3/32" | 1-5/16" | 10 |
| LB-100A | 1" | 1-13/16" | 5-3/8" | 2-3/4" | 5-29/32" | 1-9/16" | 5 |
| LB-125A | 1-1/4" | 2-1/2" | 7-5/16" | 3-1/2" | 7-13/16" | 1-31/32" | 2 |
| LB-150A | 1-1/2" | 2-1/2" | 7-5/16" | 3-1/2" | 7-13/16" | 2-3/16" | 2 |
| LB-200A | 2" | 3-3/16" | 9-1/2" | 4-1/2" | 10-1/16" | 2-11/16" | 1 |
| LB-250A | 2-1/2" | 4-1/2" | 12-1/16" | 5-5/16" | 12-13/16" | 3-5/16" | 1 |
| LB-300A | 3" | 4-1/2" | 12-1/16" | 5-29/32" | 12-13/16" | 3-15/16" | 1 |
| LB-350A | 3-1/2" | 5-9/16" | 15-1/16" | 7-5/16" | 15-5/8" | 4-17/32" | 1 |
| LB-400A | 4" | 5-9/16" | 15-7/16" | 7-5/16" | 15-5/8" | 4-31/32" | 1 |





LB





## *DIE CAST COPPER-FREE ALUMINUM*
## THREADED CONDUIT BODIES
## *"LL" SERIES*

### FEATURES


- With Die Cast Cover and Neoprene Gasket
- Gray color

| Cat. No. | Trade Size | DIMENSIONS - LL SERIES | | | | | Std. Pkg. |
|---|---|---|---|---|---|---|---|
| | | A | B | C | D | E | |
| LL-50A | 1/2" | 1-5/16" | 3-7/8" | 2-1/32" | 4-5/16" | 1-3/8" | 10 |
| LL-75A | 3/4" | 1-9/16" | 4-11/16" | 2-5/16" | 5-3/32" | 1-5/8" | 10 |
| LL-100A | 1" | 1-13/16" | 5-3/8" | 2-11/16" | 5-29/32" | 1-7/8" | 5 |
| LL-125A | 1-1/4" | 2-1/2" | 7-5/16" | 3-1/2" | 7-13/16" | 2-1/2" | 2 |
| LL-150A | 1-1/2" | 2-1/2" | 7-5/16" | 3-1/2" | 7-13/16" | 2-1/2" | 2 |
| LL-200A | 2" | 3-3/16" | 9-1/2" | 4-9/32" | 10-1/16" | 3-3/8" | 1 |
| LL-250A | 2-1/2" | 4-1/2" | 12-1/16" | 5-7/8" | 12-13/16" | 4" | 1 |
| LL-300A | 3" | 4-1/2" | 12-1/16" | 5-7/8" | 12-13/16" | 4-1/2" | 1 |
| LL-400A | 4" | 5-9/16" | 15-1/16" | 7-21/32" | 15-5/8" | 5-5/8" | 1 |





LL




## DIE CAST COPPER-FREE ALUMINUM
## THREADED CONDUIT BODIES
## "LR" SERIES


### FEATURES

- With Die Cast Cover and Neoprene Gasket
- Gray color

| Cat. No. | Trade Size | DIMENSIONS - LR SERIES | | | | | Std. Pkg. |
|---|---|---|---|---|---|---|---|
| | | A | B | C | D | E | |
| LR-50A | 1/2" | 1-5/16" | 3-7/8" | 2-1/32" | 4-5/16" | 1-3/8" | 10 |
| LR-75A | 3/4" | 1-9/16" | 4-11/16" | 2-5/16" | 5-3/32" | 1-5/8" | 10 |
| LR-100A | 1" | 1-13/16" | 5-3/8" | 2-11/16" | 5-29/32" | 1-7/8" | 5 |
| LR-125A | 1-1/4" | 2-1/2" | 7-5/16" | 3-1/2" | 7-13/16" | 2-1/2" | 2 |
| LR-150A | 1-1/2" | 2-1/2" | 7-5/16" | 3-1/2" | 7-13/16" | 2-1/2" | 2 |
| LR-200A | 2" | 3-3/16" | 9-1/2" | 4-9/32" | 10-1/16" | 3-3/8" | 1 |
| LR-250A | 2-1/2" | 4-1/2" | 12-1/16" | 5-7/8" | 12-13/16" | 4" | 1 |
| LR-300A | 3" | 4-1/2" | 12-1/16" | 5-7/8" | 12-13/16" | 4-1/2" | 1 |
| LR-400A | 4" | 5-9/16" | 15-1/16" | 7-21/32" | 15-5/8" | 5-5/8" | 1 |







## DIE CAST COPPER-FREE ALUMINUM
## THREADED CONDUIT BODIES
## "C" SERIES


### FEATURES

- With Die Cast Cover and Neoprene Gasket
- Gray color

| Cat. No. | Trade Size | DIMENSIONS - C SERIES | | | | | Std. Pkg. |
|---|---|---|---|---|---|---|---|
| | | A | B | C | D | E | |
| C-50A | 1/2" | 1-5/16" | 3-7/8" | 1-3/8" | 4-11/16" | 1-1/16" | 10 |
| C-75A | 3/4" | 1-9/16" | 4-11/16" | 1-5/8" | 5-1/2" | 1-5/16" | 10 |
| C-100A | 1" | 1-13/16" | 5-3/8" | 1-7/8" | 6-7/16" | 1-9/16" | 5 |
| C-125A | 1-1/4" | 2-1/2" | 7-5/16" | 2-1/2" | 8-3/8" | 1-31/32" | 2 |
| C-150A | 1-1/2" | 2-1/2" | 7-5/16" | 2-1/2" | 8-3/8" | 2-3/16" | 2 |
| C-200A | 2" | 3-3/16" | 9-1/2" | 3-3/8" | 10-9/16" | 2-11/16" | 1 |
| C-250A | 2-1/2" | 4-1/2" | 12-1/16" | 4" | 13-1/2" | 3-5/16" | 1 |
| C-300A | 3" | 4-1/2" | 12-1/16" | 4-1/2" | 13-1/2" | 3-15/16" | 1 |
| C-400A | 4" | 5-9/16" | 15-1/16" | 5-5/8" | 16-5/16" | 4-31/32" | 1 |






## DIE CAST COPPER-FREE ALUMINUM
## THREADED CONDUIT BODIES
## "T" SERIES


### FEATURES

- With Die Cast Cover and Neoprene Gasket
- Gray color

| Cat. No. | Trade Size | DIMENSIONS - T SERIES | | | | | Std. Pkg. |
|---|---|---|---|---|---|---|---|
| | | A | B | C | D | E | |
| T-50A | 1/2" | 1-5/16" | 3-7/8" | 1-3/8" | 4-11/16" | 2-1/32" | 10 |
| T-75A | 3/4" | 1-9/16" | 4-11/16" | 1-5/8" | 5-1/2" | 2-5/16" | 10 |
| T-100A | 1" | 1-13/16" | 5-3/8" | 1-7/8" | 6-7/16" | 2-11/16" | 5 |
| T-125A | 1-1/4" | 2-1/2" | 7-5/16" | 2-1/2" | 8-3/8" | 3-1/2" | 2 |
| T-150A | 1-1/2" | 2-1/2" | 7-5/16" | 2-1/2" | 8-3/8" | 3-1/2" | 2 |
| T-200A | 2" | 3-3/16" | 9-1/2" | 3-3/8" | 10-9/16" | 4-9/32" | 1 |
| T-250A | 2-1/2" | 4-1/2" | 12-1/16" | 4" | 13-1/2" | 5-7/8" | 1 |
| T-300A | 3" | 4-1/2" | 12-1/16" | 4-1/2" | 13-1/2" | 5-7/8" | 1 |
| T-400A | 4" | 5-9/16" | 15-1/16" | 5-5/8" | 16-5/16" | 7-21/32" | 1 |







## DIE CAST COPPER-FREE ALUMINUM
## THREADED SERVICE ENTRANCE CONDUIT BODIES
## "SLB" SERIES


### FEATURES

- With Die Cast Cover and Neoprene Gasket
- Gray color

| Cat. No. | Trade Size | DIMENSIONS - SLB SERIES | | | Std. Pkg. |
|---|---|---|---|---|---|
| | | A | B | C | |
| SLB-50 | 1/2" | 1-5/8" | 1-3/8" | 3-9/32" | 20 |
| SLB-75 | 3/4" | 1-27/32" | 1-9/16" | 3-19/32" | 20 |
| SLB-100 | 1" | 2-1/8" | 1-31/32" | 4-5/16" | 10 |
| SLB-125 | 1-1/4" | 2-19/32" | 2-7/16" | 5-9/16" | 10 |
| SLB-150 | 1-1/2" | 2-19/32" | 2-5/8" | 6-1/4" | 6 |
| SLB-200 | 2" | 3-1/8" | 3-1/8" | 6-3/4" | 3 |









## DIE CAST COPPER-FREE ALUMINUM
## THREADED CONDUIT BODIES
## "LB" SERIES
## WITHOUT COVERS


### FEATURES
- Gray color

| Cat. No. | Trade Size | DIMENSIONS - LB SERIES | | | | | Std. Pkg. |
|---|---|---|---|---|---|---|---|
| | | A | B | C | D | E | |
| LB-50 | 1/2" | 1-5/16" | 3-7/8" | 2-3/32" | 4-5/16" | 1-1/16" | 10 |
| LB-75 | 3/4" | 1-9/16" | 4-11/16" | 2-3/8" | 5-3/32" | 1-5/16" | 10 |
| LB-100 | 1" | 1-13/16" | 5-3/8" | 2-3/4" | 5-29/32" | 1-9/16" | 5 |
| LB-125 | 1-1/4" | 2-1/2" | 7-5/16" | 3-1/2" | 7-13/16" | 1-31/32" | 2 |
| LB-150 | 1-1/2" | 2-1/2" | 7-5/16" | 3-1/2" | 7-13/16" | 2-3/16" | 2 |
| LB-200 | 2" | 3-3/16" | 9-1/2" | 4-1/2" | 10-1/16" | 2-11/16" | 1 |
| LB-250 | 2-1/2" | 4-1/2" | 12-1/16" | 5-5/16" | 12-13/16" | 3-5/16" | 1 |
| LB-300 | 3" | 4-1/2" | 12-1/16" | 5-29/32" | 12-13/16" | 3-15/16" | 1 |
| LB-350 | 3-1/2" | 5-9/16" | 15-1/16" | 7-5/16" | 15-5/8" | 4-17/32" | 1 |
| LB-400 | 4" | 5-9/16" | 15-7/16" | 7-5/16" | 15-5/8" | 4-31/32" | 1 |





LB





## DIE CAST COPPER-FREE ALUMINUM
## THREADED CONDUIT BODIES
## "LL" SERIES
## WITHOUT COVERS


### FEATURES
- Gray color

| Cat. No. | Trade Size | DIMENSIONS - LL SERIES | | | | | Std. Pkg. |
|---|---|---|---|---|---|---|---|
| | | A | B | C | D | E | |
| LL-50 | 1/2" | 1-5/16" | 3-7/8" | 2-1/32" | 4-5/16" | 1-3/8" | 10 |
| LL-75 | 3/4" | 1-9/16" | 4-11/16" | 2-5/16" | 5-3/32" | 1-5/8" | 10 |
| LL-100 | 1" | 1-13/16" | 5-3/8" | 2-11/16" | 5-29/32" | 1-7/8" | 5 |
| LL-125 | 1-1/4" | 2-1/2" | 7-5/16" | 3-1/2" | 7-13/16" | 2-1/2" | 2 |
| LL-150 | 1-1/2" | 2-1/2" | 7-5/16" | 3-1/2" | 7-13/16" | 2-1/2" | 2 |
| LL-200 | 2" | 3-3/16" | 9-1/2" | 4-9/32" | 10-1/16" | 3-3/8" | 1 |
| LL-250 | 2-1/2" | 4-1/2" | 12-1/16" | 5-7/8" | 12-13/16" | 4" | 1 |
| LL-300 | 3" | 4-1/2" | 12-1/16" | 5-7/8" | 12-13/16" | 4-1/2" | 1 |
| LL-400 | 4" | 5-9/16" | 15-7/16" | 7-21/32" | 15-5/8" | 5-5/8" | 1 |





LL





## *DIE CAST COPPER-FREE ALUMINUM*
## THREADED CONDUIT BODIES
## *"LR" SERIES*
## *WITHOUT COVERS*

### FEATURES
- Gray color

| Cat. No. | Trade Size | DIMENSIONS - LR SERIES | | | | | Std. Pkg. |
|---|---|---|---|---|---|---|---|
| | | A | B | C | D | E | |
| LR-50 | 1/2" | 1-5/16" | 3-7/8" | 2-1/32" | 4-5/16" | 1-3/8" | 10 |
| LR-75 | 3/4" | 1-9/16" | 4-11/16" | 2-5/16" | 5-3/32" | 1-5/8" | 10 |
| LR-100 | 1" | 1-13/16" | 5-3/8" | 2-11/16" | 5-29/32" | 1-7/8" | 5 |
| LR-125 | 1-1/4" | 2-1/2" | 7-5/16" | 3-1/2" | 7-13/16" | 2-1/2" | 2 |
| LR-150 | 1-1/2" | 2-1/2" | 7-5/16" | 3-1/2" | 7-13/16" | 2-1/2" | 2 |
| LR-200 | 2" | 3-3/16" | 9-1/2" | 4-9/32" | 10-1/16" | 3-3/8" | 1 |
| LR-250 | 2-1/2" | 4-1/2" | 12-1/16" | 5-7/8" | 12-13/16" | 4" | 1 |
| LR-300 | 3" | 4-1/2" | 12-1/16" | 5-7/8" | 12-13/16" | 4-1/2" | 1 |
| LR-400 | 4" | 5-9/16" | 15-1/16" | 7-21/32" | 15-5/8" | 5-5/8" | 1 |











## *DIE CAST COPPER-FREE ALUMINUM*
## THREADED CONDUIT BODIES
## *"C" SERIES*
## *WITHOUT COVERS*

### FEATURES
- Gray color

| Cat. No. | Trade Size | DIMENSIONS - C SERIES | | | | | Std. Pkg. |
|---|---|---|---|---|---|---|---|
| | | A | B | C | D | E | |
| C-50 | 1/2" | 1-5/16" | 3-7/8" | 1-3/8" | 4-11/16" | 1-1/16" | 10 |
| C-75 | 3/4" | 1-9/16" | 4-11/16" | 1-5/8" | 5-1/2" | 1-5/16" | 10 |
| C-100 | 1" | 1-13/16" | 5-3/8" | 1-7/8" | 6-7/16" | 1-9/16" | 5 |
| C-125 | 1-1/4" | 2-1/2" | 7-5/16" | 2-1/2" | 8-3/8" | 1-31/32" | 2 |
| C-150 | 1-1/2" | 2-1/2" | 7-5/16" | 2-1/2" | 8-3/8" | 2-3/16" | 2 |
| C-200 | 2" | 3-3/16" | 9-1/2" | 3-3/8" | 10-9/16" | 2-11/16" | 1 |
| C-250 | 2-1/2" | 4-1/2" | 12-1/16" | 4" | 13-1/2" | 3-5/16" | 1 |
| C-300 | 3" | 4-1/2" | 12-1/16" | 4-1/2" | 13-1/2" | 3-15/16" | 1 |
| C-400 | 4" | 5-9/16" | 15-1/16" | 5-5/8" | 16-5/16" | 4-31/32" | 1 |










## DIE CAST COPPER-FREE ALUMINUM
## THREADED CONDUIT BODIES
## "T" SERIES
## WITHOUT COVERS

### FEATURES
- Gray color

| Cat. No. | Trade Size | DIMENSIONS - T SERIES | | | | | Std. Pkg. |
|---|---|---|---|---|---|---|---|
| | | A | B | C | D | E | |
| T-50 | 1/2" | 1-5/16" | 3-7/8" | 1-3/8" | 4-11/16" | 2-1/32" | 10 |
| T-75 | 3/4" | 1-9/16" | 4-11/16" | 1-5/8" | 5-1/2" | 2-5/16" | 10 |
| T-100 | 1" | 1-13/16" | 5-3/8" | 1-7/8" | 6-7/16" | 2-11/16" | 5 |
| T-125 | 1-1/4" | 2-1/2" | 7-5/16" | 2-1/2" | 8-3/8" | 3-1/2" | 2 |
| T-150 | 1-1/2" | 2-1/2" | 7-5/16" | 2-1/2" | 8-3/8" | 3-1/2" | 2 |
| T-200 | 2" | 3-3/16" | 9-1/2" | 3-3/8" | 10-9/16" | 4-9/32" | 1 |
| T-250 | 2-1/2" | 4-1/2" | 12-1/16" | 4" | 13-1/2" | 5-7/8" | 1 |
| T-300 | 3" | 4-1/2" | 12-1/16" | 4-1/2" | 13-1/2" | 5-7/8" | 1 |
| T-400 | 4" | 5-9/16" | 15-1/16" | 5-5/8" | 16-5/16" | 7-21/32" | 1 |










## DIE CAST COPPER-FREE ALUMINUM
## COVERS & NEOPRENE GASKETS

### FEATURES
- Gray color

| Cat. No. | Trade Size | DIMENSION | | | Std. Pkg. |
|---|---|---|---|---|---|
| | | L | W | H | |
| CG-50 | 1/2" | 3-7/8" | 1-5/16" | 1/4" | 100 |
| CG-75 | 3/4" | 4-11/16" | 1-9/16" | 1/4" | 50 |
| CG-100 | 1" | 5-3/8" | 1-3/4" | 1/4" | 50 |
| CG-125/150 | 1-1/4" - 1-1/2" | 7-5/16" | 2-1/2" | 1/4" | 25 |
| CG-200 | 2" | 9-1/2" | 3-1/8" | 5/16" | 10 |
| CG-250/300 | 2-1/2" - 3" | 12-1/16" | 4-7/16" | 3/8" | 10 |
| CG-350/400 | 3-1/2" - 4" | 15-1/16" | 5-9/16" | 3/8" | 5 |






## *NEOPRENE* GASKETS

### FEATURES

- For use with Cast Aluminum & Malleable Iron Conduit Bodies
- Available in Black color

| Cat. No. | Trade Size | DIMENSION L | DIMENSION W | DIMENSION H | Std. Pkg. |
|---|---|---|---|---|---|
| G-50 | 1/2” | 3-11/16” | 1-3/8” | 1/16” | 100 |
| G-75 | 3/4” | 4-1/4” | 1-1/2” | 1/16” | 100 |
| G-100 | 1” | 5” | 1-3/4” | 1/16” | 50 |
| G-125/150 | 1-1/4” - 1-1/2” | 6” | 2-7/16” | 1/16” | 50 |
| G-200 | 2” | 7” | 3” | 1/16” | 50 |
| G-250/300 | 2-1/2” - 3” | 9” | 4-1/4” | 1/16” | 25 |
| G-350/400 | 3-1/2” - 4” | 11” | 5-1/4” | 1/16” | 25 |





*G*


## *MALLEABLE IRON* THREADED CONDUIT BODIES *“LB” SERIES*

### FEATURES


- Electroplated Zinc

| Cat. No. | Trade Size | DIMENSIONS - LB SERIES A | B | C | D | E | Std. Pkg. |
|---|---|---|---|---|---|---|---|
| MLB-50 | 1/2” | 1-3/8” | 4” | 2-3/16” | 4-5/8” | 1-15/32” | 10 |
| MLB-75 | 3/4” | 1-5/8” | 4-21/32” | 2-3/8” | 5-3/8” | 1-21/32” | 10 |
| MLB-100 | 1” | 1-13/16” | 5-3/8” | 2-7/8” | 6-1/4” | 2” | 5 |
| MLB-125 | 1-1/4” | 2-1/2” | 7-7/32” | 3-1/2” | 8-1/8” | 2-5/8” | 2 |
| MLB-150 | 1-1/2” | 2-1/2” | 7-7/32” | 3-11/16” | 8-3/32” | 2-13/16” | 2 |
| MLB-200 | 2” | 3-1/8” | 9-1/2” | 4-1/2” | 10-1/2” | 3-1/2” | 1 |
| MLB-250 | 2-1/2” | 4-3/8” | 12-1/4” | 5-13/32” | 13-3/4” | 4” | 1 |
| MLB-300 | 3” | 4-3/8” | 12-1/4” | 6-3/16” | 13-13/16” | 4-5/8” | 1 |
| MLB-350 | 3-1/2” | 5-1/2” | 15” | 7-3/16” | 16-5/8” | 5-7/16” | 1 |
| MLB-400 | 4” | 5-1/2” | 15” | 7-11/32” | 16-23/32” | 5-3/4” | 1 |





*MLB*




## MALLEABLE IRON THREADED CONDUIT BODIES "LL" SERIES

### FEATURES


- Electroplated Zinc

| Cat. No. | Trade Size | DIMENSIONS - LL SERIES A | B | C | D | E | Std. Pkg. |
|---|---|---|---|---|---|---|---|
| MLL-50 | 1/2" | 1-3/8" | 4" | 2-1/16" | 4-11/16" | 1-7/16" | 10 |
| MLL-75 | 3/4" | 1-5/8" | 4-11/16" | 2-1/4" | 5-13/32" | 1-21/32" | 10 |
| MLL-100 | 1" | 1-13/16" | 5-3/8" | 2-21/32" | 6-1/4" | 2" | 5 |
| MLL-125 | 1-1/4" | 2-1/2" | 7-7/32" | 3-7/16" | 8-1/8" | 2-19/32" | 2 |
| MLL-150 | 1-1/2" | 2-1/2" | 7-7/32" | 3-7/16" | 8-1/8" | 2-13/16" | 2 |
| MLL-200 | 2" | 3-1/8" | 9-1/2" | 4-3/16" | 10-1/2" | 3-17/32" | 1 |
| MLL-250 | 2-1/2" | 4-3/8" | 12-1/4" | 5-27/32" | 13-3/4" | 4" | 1 |
| MLL-300 | 3" | 4-3/8" | 12-1/4" | 5-29/32" | 13-13/16" | 4-21/32" | 1 |
| MLL-350 | 3-1/2" | 5-1/2" | 15" | 7-1/8" | 16-5/8" | 5-7/16" | 1 |
| MLL-400 | 4" | 5-1/2" | 15" | 7-3/16" | 16-5/8" | 5-3/4" | 1 |





MLL





## MALLEABLE IRON THREADED CONDUIT BODIES "LR" SERIES

### FEATURES


- Electroplated Zinc

| Cat. No. | Trade Size | DIMENSIONS - LR SERIES A | B | C | D | E | Std. Pkg. |
|---|---|---|---|---|---|---|---|
| MLR-50 | 1/2" | 1-3/8" | 4" | 2-1/16" | 4-11/16" | 1-7/16" | 10 |
| MLR-75 | 3/4" | 1-9/16" | 4-11/16" | 2-1/4" | 5-13/32" | 1-21/32" | 10 |
| MLR-100 | 1" | 1-13/16" | 5-3/8" | 2-11/16" | 6-9/32" | 2" | 5 |
| MLR-125 | 1-1/4" | 2-1/2" | 7-7/32" | 3-3/8" | 8-1/8" | 2-19/32" | 2 |
| MLR-150 | 1-1/2" | 2-1/2" | 7-7/32" | 3-7/16" | 8-1/8" | 2-13/16" | 2 |
| MLR-200 | 2" | 3-5/32" | 9-1/2" | 4-1/8" | 10-1/2" | 3-1/2" | 1 |
| MLR-250 | 2-1/2" | 4-7/16" | 12-1/4" | 5-27/32" | 13-3/4" | 4" | 1 |
| MLR-300 | 3" | 4-7/16" | 12-1/4" | 5-29/32" | 13-13/16" | 4-21/32" | 1 |
| MLR-350 | 3-1/2" | 5-1/2" | 15" | 7-1/8" | 16-5/8" | 5-7/16" | 1 |
| MLR-400 | 4" | 5-1/2" | 15" | 7-3/16" | 16-5/8" | 5-3/4" | 1 |





MLR




## MALLEABLE IRON
## THREADED CONDUIT BODIES
## "C" SERIES


### FEATURES

- Electroplated Zinc

| Cat. No. | Trade Size | DIMENSIONS - C SERIES A | B | C | D | Std. Pkg. |
|---|---|---|---|---|---|---|
| MC-50 | 1/2" | 1-3/8" | 4" | 1-1/2" | 5-7/16" | 10 |
| MC-75 | 3/4" | 1-9/16" | 4-11/16" | 1-21/32" | 6-5/32" | 10 |
| MC-100 | 1" | 1-13/16" | 5-13/32" | 2" | 7-5/32" | 5 |
| MC-125 | 1-1/4" | 2-1/2" | 7-7/32" | 2-19/32" | 9-1/16" | 2 |
| MC-150 | 1-1/2" | 2-1/2" | 7-7/32" | 2-13/16" | 9-1/16" | 2 |
| MC-200 | 2" | 3-5/32" | 9-1/2" | 3-1/2" | 11-1/2" | 1 |
| MC-250 | 2-1/2" | 4-7/16" | 12-1/4" | 4" | 15-5/16" | 1 |
| MC-300 | 3" | 4-7/16" | 12-1/4" | 4-5/8" | 15-13/32" | 1 |
| MC-350 | 3-1/2" | 5-1/2" | 15" | 5-7/16" | 18-5/16" | 1 |
| MC-400 | 4" | 5-1/2" | 15" | 5-3/4" | 18-5/16" | 1 |







## MALLEABLE IRON
## THREADED CONDUIT BODIES
## "T" SERIES


### FEATURES

- Electroplated Zinc

| Cat. No. | Trade Size | DIMENSIONS - T SERIES A | B | C | D | E | Std. Pkg. |
|---|---|---|---|---|---|---|---|
| MT-50 | 1/2" | 1-3/8" | 4" | 2-1/16" | 5-13/32" | 1-7/16" | 10 |
| MT-75 | 3/4" | 1-5/8" | 4-21/32" | 2-9/32" | 6-5/32" | 1-21/32" | 10 |
| MT-100 | 1" | 1-13/16" | 5-3/8" | 2-21/32" | 7-5/32" | 2" | 5 |
| MT-125 | 1-1/4" | 2-1/2" | 7-7/32" | 3-13/32" | 9" | 2-11/16" | 2 |
| MT-150 | 1-1/2" | 2-1/2" | 7-7/32" | 3-7/16" | 9-1/16" | 2-13/16" | 2 |
| MT-200 | 2" | 3-5/32" | 9-1/2" | 4-1/8" | 11-1/2" | 3-1/2" | 1 |
| MT-250 | 2-1/2" | 4-7/16" | 12-1/4" | 5-27/32" | 15-9/32" | 4" | 1 |
| MT-300 | 3" | 4-7/16" | 12-1/4" | 5-29/32" | 15-13/32" | 4-21/32" | 1 |
| MT-350 | 3-1/2" | 5-1/2" | 15" | 7-1/8" | 18-9/32" | 5-7/16" | 1 |
| MT-400 | 4" | 5-1/2" | 15" | 7-3/16" | 18-9/32" | 5-3/4" | 1 |





## *STEEL* RAISED DOME COVERS

### FEATURES


- Stamped Steel
- Stainless Steel Screws
- Gasket not included

### NOTE


- Gaskets on page 83

| Cat. No. | Trade Size | DIMENSIONS L | W | H | Std. Pkg. |
|---|---|---|---|---|---|
| **SC-50** | 1/2” | 4” | 1-3/8” | 1/4” | 100 |
| **SC-75** | 3/4” | 4-11/16” | 1-9/16” | 5/16” | 50 |
| **SC-100** | 1” | 5-3/8” | 1-13/16” | 3/8” | 50 |
| **SC-125/150** | 1-1/4” - 1-1/2” | 7-1/4” | 2-1/2” | 13/32” | 25 |
| **SC-200** | 2” | 9-1/2” | 3-1/8” | 1/2” | 10 |
| **SC-250/300** | 2-1/2” - 3” | 12-1/4” | 4-7/16” | 3/4” | 10 |
| **SC-350/400** | 3-1/2” - 4” | 15” | 5-1/2” | 3/4” | 5 |





SC
AC




## *ALUMINUM* CONDUIT COVERS

### FEATURES

- Stamped Aluminum

| Cat. No. | Trade Size | DIMENSIONS L | W | H | Std. Pkg. |
|---|---|---|---|---|---|
| **AC-50** | 1/2” | 3-15/16” | 1-3/8” | 1/4” | 100 |
| **AC-75** | 3/4” | 4-11/16” | 1-1/2” | 5/16” | 50 |
| **AC-100** | 1” | 5-3/8” | 1-3/4” | 3/8” | 50 |
| **AC-125/150** | 1-1/4” - 1-1/2” | 7-1/4” | 2-1/2” | 7/16” | 25 |
| **AC-200** | 2” | 9-1/2” | 3-1/8” | 1/2” | 10 |
| **AC-250/300** | 2-1/2” - 3” | 12-1/4” | 4-7/16” | 3/4” | 10 |
| **AC-350/400** | 3-1/2” - 4” | 15” | 5-1/2” | 3/4” | 5 |




## COPPER-FREE ALUMINUM ALLOY
## EMT CONDUIT BODIES
## SET-SCREW TYPE
## "LB" SERIES

### FEATURES

- Plated Steel Set-Screws

| Cat. No. | Trade Size | DIMENSIONS - LB SERIES | | | | | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|---|---|---|---|
| | | A | B | C | D | E | | |
| SSLB-50 | 1/2" | 1-5/16" | 3-15/16" | 2-1/16" | 4-3/8" | 1-1/16" | 10 | 100 |
| SSLB-75 | 3/4" | 1-17/32" | 4-5/8" | 2-11/32" | 5-1/8" | 1-5/16" | 10 | 50 |
| SSLB-100 | 1" | 1-25/32" | 5-11/32" | 2-7/8" | 6" | 1-9/16" | 5 | 25 |
| SSLB-125 | 1-1/4" | 2-1/2" | 7-1/4" | 3-6/16" | 7-11/16" | 2" | 2 | 10 |
| SSLB-150 | 1-1/2" | 2-1/2" | 7-1/4" | 3-9/16" | 7-11/16" | 2-1/4" | 2 | 10 |
| SSLB-200 | 2" | 3-1/8" | 9-1/2" | 4-11/32" | 10" | 2-11/16" | 1 | 5 |
| SSLB-250 | 2-1/2" | 4-7/16" | 12-1/8" | 5-3/16" | 12-23/32" | 3-3/8" | - | 1 |
| SSLB-300 | 3" | 4-7/16" | 12-1/8" | 5-3/4" | 12-23/32" | 4" | - | 1 |
| SSLB-350 | 3-1/2" | 5-15/32" | 15-1/16" | 7-1/16" | 15-9/16" | 5" | - | 1 |
| SSLB-400 | 4" | 5-15/32" | 15-1/16" | 7-1/16" | 15-9/16" | 5" | - | 1 |



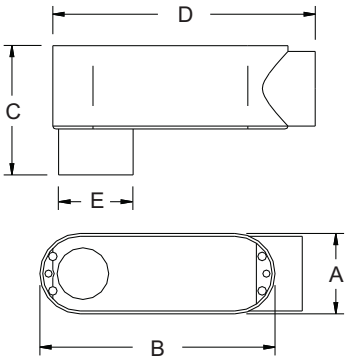



## COPPER-FREE ALUMINUM ALLOY
## EMT CONDUIT BODIES
## SET-SCREW TYPE
## "LR" SERIES

### FEATURES

- Plated Steel Set-Screws

| Cat. No. | Trade Size | DIMENSIONS - LR SERIES | | | | | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|---|---|---|---|
| | | A | B | C | D | E | | |
| SSLR-50 | 1/2" | 1-5/16" | 3-15/16" | 2" | 4-3/8" | 1-5/16" | 10 | 100 |
| SSLR-75 | 3/4" | 1-17/32" | 4-5/8" | 2-1/4" | 5-1/8" | 1-19/32" | 10 | 50 |
| SSLR-100 | 1" | 1-25/32" | 5-11/32" | 2-23/32" | 6" | 1-29/32" | 5 | 25 |
| SSLR-125 | 1-1/4" | 2-1/2" | 7-1/4" | 3-13/32" | 7-11/16" | 2-1/2" | 2 | 10 |
| SSLR-150 | 1-1/2" | 2-1/2" | 7-1/4" | 3-13/32" | 7-11/16" | 2-11/16" | 2 | 10 |
| SSLR-200 | 2" | 3-1/8" | 9-1/2" | 4-3/16" | 10" | 3-3/8" | 1 | 5 |



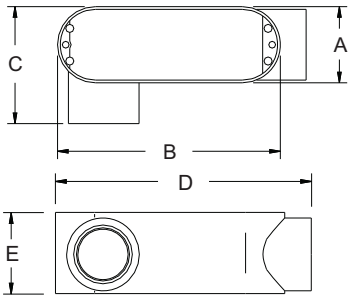


## COPPER-FREE ALUMINUM ALLOY
## EMT CONDUIT BODIES
## SET-SCREW TYPE
## "LL" SERIES

### FEATURES
- Plated Steel Set-Screws

| Cat. No. | Trade Size | DIMENSIONS - LL SERIES | | | | | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|---|---|---|---|
| | | A | B | C | D | E | | |
| SSLL-50 | 1/2" | 1-5/16" | 3-15/16" | 2" | 4-3/8" | 1-5/16" | 10 | 100 |
| SSLL-75 | 3/4" | 1-17/32" | 4-5/8" | 2-1/4" | 5-1/8" | 1-19/32" | 10 | 50 |
| SSLL-100 | 1" | 1-25/32" | 5-11/32" | 2-23/32" | 6" | 1-29/32" | 5 | 25 |
| SSLL-125 | 1-1/4" | 2-1/2" | 7-1/4" | 3-13/32" | 7-11/16" | 2-1/2" | 2 | 10 |
| SSLL-150 | 1-1/2" | 2-1/2" | 7-1/4" | 3-13/32" | 7-11/16" | 2-11/16" | 2 | 10 |
| SSLL-200 | 2" | 3-1/8" | 9-1/2" | 4-3/16" | 10" | 3-3/8" | 1 | 5 |



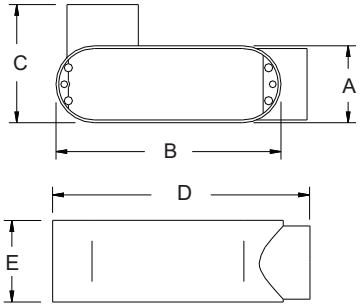



## COPPER-FREE ALUMINUM ALLOY
## EMT CONDUIT BODIES
## SET-SCREW TYPE
## "C" SERIES

### FEATURES
- Plated Steel Set-Screws

| Cat. No. | Trade Size | DIMENSIONS - C SERIES | | | | | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|---|---|---|---|
| | | A | B | C | D | E | | |
| SSC-50 | 1/2" | 1-5/16" | 3-15/16" | 1-5/16" | 4-3/4" | 1-3/32" | 10 | 100 |
| SSC-75 | 3/4" | 1-17/32" | 4-5/8" | 1-19/32" | 5-5/8" | 1-5/16" | 10 | 50 |
| SSC-100 | 1" | 1-25/32" | 5-11/32" | 1-29/32" | 6-21/32" | 1-1/2" | 5 | 25 |
| SSC-125 | 1-1/4" | 2-1/2" | 7-1/4" | 2-1/2" | 8-3/32" | 2" | 2 | 10 |
| SSC-150 | 1-1/2" | 2-1/2" | 7-1/4" | 2-11/16" | 8-3/32" | 2-1/4" | 2 | 10 |
| SSC-200 | 2" | 3-1/8" | 9-1/2" | 3-3/8" | 10-17/32" | 2-3/4" | 1 | 5 |



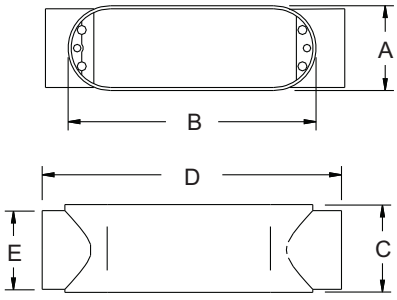


## COPPER-FREE ALUMINUM ALLOY
## EMT CONDUIT BODIES
## SET-SCREW TYPE
## "T" SERIES

### FEATURES
- Plated Steel Set-Screws

| Cat. No. | Trade Size | DIMENSIONS - LL SERIES A | B | C | D | E | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|---|---|---|---|
| SST-50 | 1/2" | 1-5/16" | 3-15/16" | 1-5/16" | 4-3/4" | 2" | 10 | 100 |
| SST-75 | 3/4" | 1-17/32" | 4-5/8" | 1-19/32" | 5-5/8" | 2-1/4" | 10 | 50 |
| SST-100 | 1" | 1-25/32" | 5-11/32" | 1-29/32" | 6-21/32" | 2-23/32" | 5 | 25 |
| SST-125 | 1-1/4" | 2-1/2" | 7-1/4" | 2-7/16" | 8-3/32" | 3-13/32" | 2 | 10 |
| SST-150 | 1-1/2" | 2-1/2" | 7-1/4" | 2-11/16" | 8-3/32" | 3-13/32" | 2 | 10 |
| SST-200 | 2" | 3-1/8" | 9-1/2" | 3-3/8" | 10-17/32" | 4-3/16" | 1 | 5 |



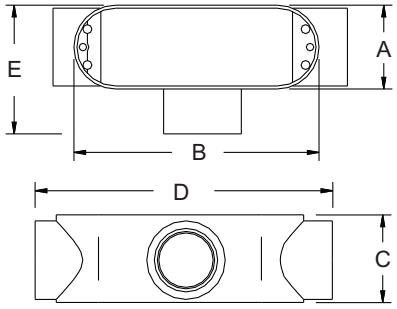



## MOGUL THREADED
## COPPER-FREE ALUMINUM ALLOY
## EXTRA-LARGE RIGID CONDUIT BODIES
## "LB" SERIES

### FEATURES
- Die Cast Aluminum Cover
- Fiber Gasket

| Cat. No. | Trade Size | DIMENSIONS - LB SERIES A | B | C1 | C2 | D | E | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|---|---|---|---|---|
| LBM-150 | 1-1/2" | 3" | 13-7/16" | 5" | 4" | 14-1/4" | 2-3/4" | - | 1 |
| LBM-200 | 2" | 3" | 13-7/16" | 5" | 4" | 14-1/4" | 2-3/4" | - | 1 |
| LBM-250 | 2-1/2" | 4-17/27" | 21-9/10" | 8-2/3" | 5-3/25" | 22-3/4" | 4-1/4" | - | 1 |
| LBM-300 | 3" | 4-17/27" | 21-9/10" | 8-2/3" | 5-3/25" | 22-3/4" | 4-1/4" | - | 1 |
| LBM-350 | 3-1/2" | 5-17/27" | 28-1/2" | 10" | 6-1/10" | 29-1/8" | 5-1/8" | - | 1 |
| LBM-400 | 4" | 5-17/27" | 28-1/2" | 10" | 6-1/10" | 29-1/8" | 5-1/8" | - | 1 |



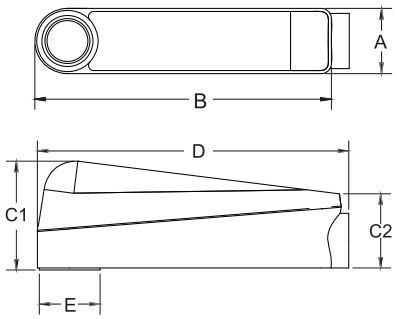


## SAND CAST CLASS 30 GRAY IRON ALLOY
## THREADED CONDUIT BODIES
## "LB" SERIES
## FORM 7

### FEATURES

- Electroplated Zinc
- Flat back design for maximum internal wiring volume
- Interchangeable with other Form 7 conduit bodies
- Suitable for wet location when used with Gasket and Cover
- Use with easy Clip-on Covers

| Cat. No. | Trade Size | DIMENSIONS - LB SERIES | | | | | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|---|---|---|---|
| | | A | B | C | D | E | | |
| LB7-50 | 1/2" | 1-7/20" | 3-2/3" | 2-1/5" | 4-1/2" | 1-4/17" | 10 | 50 |
| LB7-75 | 3/4" | 1-13/20" | 4-7/24" | 2-1/2" | 5-1/5" | 1-1/2" | 5 | 25 |
| LB7-100 | 1" | 1-4/5" | 5-1/23" | 2-17/20" | 6-1/6" | 1-19/24" | 5 | 25 |
| LB7-125 | 1-1/4" | 2-1/5" | 5-4/7" | 3-6/25" | 6-1/2" | 2-3/14" | 1 | 10 |
| LB7-150 | 1-1/2" | 2-9/20" | 6-1/18" | 3-13/25" | 7-1/11" | 2-11/24" | 1 | 10 |
| LB7-200 | 2" | 3" | 7-1/13" | 4-1/7" | 8-1/9" | 3" | 1 | 5 |
| LB7-250 | 2-1/2" | 4-1/4" | 9-1/18" | 5-6/25" | 10-5/7" | 3-9/20" | - | 1 |
| LB7-300 | 3" | 4-1/4" | 9-1/18" | 6" | 10-5/7" | 4-1/4" | - | 1 |
| LB7-350 | 3-1/2" | 5-3/10" | 11" | 6-11/19" | 12-4/5" | 4-3/4" | - | 1 |
| LB7-400 | 4" | 5-3/10" | 11" | 7-1/10" | 12-4/5" | 5-4/15" | - | 1 |







## SAND CAST CLASS 30 GRAY IRON ALLOY
## THREADED CONDUIT BODIES
## "LR" SERIES
## FORM 7

### FEATURES

- Electroplated Zinc
- Flat back design for maximum internal wiring volume
- Interchangeable with other Form 7 conduit bodies
- Suitable for wet location when used with Gasket and Cover
- Use with easy Clip-on Covers

| Cat. No. | Trade Size | DIMENSIONS - LR SERIES | | | | | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|---|---|---|---|
| | | A | B | C | D | E | | |
| LR7-50 | 1/2" | 1-6/13" | 3-2/3" | 1-9/20" | 4-1/2" | 1-2/5" | 10 | 50 |
| LR7-75 | 3/4" | 1-17/26" | 4-7/24" | 2-1/2" | 5-1/5" | 1-13/20" | 5 | 25 |
| LR7-100 | 1" | 1-18/23" | 5-1/25" | 2-4/5" | 6-1/6" | 1-4/5" | 5 | 25 |
| LR7-125 | 1-1/4" | 2-3/14" | 5-4/7" | 3-1/7" | 6-1/2" | 2-1/5" | 1 | 10 |
| LR7-150 | 1-1/2" | 2-9/20" | 6-1/18" | 3-2/5" | 7-1/11" | 2-9/20" | 1 | 10 |
| LR7-200 | 2" | 3" | 7-1/13" | 4" | 8-1/9" | 3" | 1 | 5 |
| LR7-250 | 2-1/2" | 4-1/4" | 9-1/18" | 5-17/20" | 10-5/7" | 4-1/4" | - | 1 |
| LR7-300 | 3" | 4-1/4" | 9-1/18" | 5-17/20" | 10-5/7" | 4-1/4" | - | 1 |
| LR7-400 | 4" | 5-3/10" | 11" | 7" | 12-4/5" | 5-3/10" | - | 1 |






## SAND CAST CLASS 30 GRAY IRON ALLOY
## THREADED CONDUIT BODIES
## "LL" SERIES
## FORM 7

### FEATURES

- Electroplated Zinc
- Flat back design for maximum internal wiring volume
- Interchangeable with other Form 7 conduit bodies
- Suitable for wet location when used with Gasket and Cover
- Use with easy Clip-on Covers

| Cat. No. | Trade Size | DIMENSIONS - LL SERIES | | | | | Std. Master Pkg. | Ctn. |
|---|---|---|---|---|---|---|---|---|
| | | A | B | C | D | E | | |
| LL7-50 | 1/2" | 1-6/13" | 3-2/3" | 1-9/20" | 4-1/2" | 1-2/5" | 10 | 50 |
| LL7-75 | 3/4" | 1-17/26" | 4-7/24" | 2-1/2" | 5-1/5" | 1-13/20" | 5 | 25 |
| LL7-100 | 1" | 1-18/23" | 5-1/25" | 2-4/5" | 6-1/6" | 1-4/5" | 5 | 25 |
| LL7-125 | 1-1/4" | 2-3/14" | 5-4/7" | 3-1/7" | 6-1/2" | 2-1/5" | 1 | 10 |
| LL7-150 | 1-1/2" | 2-9/20" | 6-1/18" | 3-2/5" | 7-1/11" | 2-9/20" | 1 | 10 |
| LL7-200 | 2" | 3" | 7-1/13" | 4" | 8-1/9" | 3" | 1 | 5 |
| LL7-250 | 2-1/2" | 4-1/4" | 9-1/18" | 5-17/20" | 10-5/7" | 4-1/4" | - | 1 |
| LL7-300 | 3" | 4-1/4" | 9-1/18" | 5-17/20" | 10-5/7" | 4-1/4" | - | 1 |
| LL7-400 | 4" | 5-3/10" | 11" | 7" | 12-4/5" | 5-3/10" | - | 1 |







## SAND CAST CLASS 30 GRAY IRON ALLOY
## THREADED CONDUIT BODIES
## "C" SERIES
## FORM 7

### FEATURES

- Electroplated Zinc
- Flat back design for maximum internal wiring volume
- Interchangeable with other Form 7 conduit bodies
- Suitable for wet location when used with Gasket and Cover
- Use with easy Clip-on Covers

| Cat. No. | Trade Size | DIMENSIONS - C SERIES | | | | | Std. Master Pkg. | Ctn. |
|---|---|---|---|---|---|---|---|---|
| | | A | B | C | D | E | | |
| C7-50 | 1/2" | 1-7/20" | 3-2/3" | 1-2/5" | 5-3/10" | 1-1/5" | 10 | 50 |
| C7-75 | 3/4" | 1-13/20" | 4-7/24" | 1-13/20" | 6-4/25" | 1-1/2" | 5 | 25 |
| C7-100 | 1" | 1-4/5" | 5-1/25" | 1-4/5" | 7-3/10" | 1-18/23" | 5 | 25 |
| C7-125 | 1-1/4" | 2-1/5" | 5-4/7" | 2-1/5" | 7-3/7" | 2-3/14" | 1 | 10 |
| C7-150 | 1-1/2" | 2-9/20" | 6-1/18" | 2-9/20" | 8-4/25" | 2-9/20" | 1 | 10 |
| C7-200 | 2" | 3" | 7-1/13" | 3" | 9-3/23" | 3" | 1 | 5 |
| C7-250 | 2-1/2" | 4-1/4" | 9-1/18" | 4-1/4" | 12-9/25" | 3-9/20" | - | 1 |
| C7-300 | 3" | 4-1/4" | 9-1/18" | 4-1/4" | 12-9/25" | 4-1/4" | - | 1 |






## SAND CAST CLASS 30 GRAY IRON ALLOY
## THREADED CONDUIT BODIES
### "T" SERIES
### FORM 7

### FEATURES

- Electroplated Zinc
- Flat back design for maximum internal wiring volume
- Interchangeable with other Form 7 conduit bodies
- Suitable for wet location when used with Gasket and Cover
- Use with easy Clip-on Covers

| Cat. No. | Trade Size | DIMENSIONS - T SERIES A | B | C | D | E | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|---|---|---|---|
| T7-50 | 1/2" | 1-3/5" | 3-2/3" | 1-3/4" | 5-3/10" | 2-12/25" | 5 | 50 |
| T7-75 | 3/4" | 1-9/11" | 4-7/24" | 2" | 6-4/25" | 2-18/25" | 5 | 25 |
| T7-100 | 1" | 2" | 5-1/25" | 2-7/25" | 7-3/10" | 3" | 2 | 20 |
| T7-125 | 1-1/4" | 2-3/14" | 5-4/7" | 2-3/10" | 7-3/7" | 3-1/7" | 1 | 10 |
| T7-150 | 1-1/2" | 2-9/20" | 6-1/18" | 2-3/5" | 8-4/25" | 3-2/5" | 1 | 10 |
| T7-200 | 2" | 3" | 7-1/13" | 3-1/7" | 9-3/23" | 4" | 1 | 5 |
| T7-250 | 2-1/2" | 4-1/4" | 9-1/18" | 3-16/25" | 12-9/25" | 5-17/20" | - | 1 |
| T7-300 | 3" | 4-1/4" | 9-1/18" | 4-9/20" | 12-9/25" | 5-17/20" | - | 1 |
| T7-400 | 4" | 5-3/10" | 11" | 4-23/25" | 14-1/2" | 7" | - | 1 |



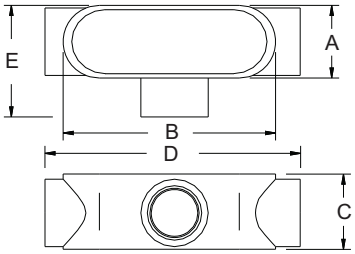



## STAMPED STEEL
## WEDGENUT COVERS
## WITH INTEGRAL GASKETS
### FORM 7

### FEATURES

- Electroplated Zinc
- Usable with all other Form 7 conduit bodies
- Integral Sealing Gaskets
- Easy installation and removal

| Cat. No. | Trade Size | L | W | H | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|---|---|
| SCG7-50 | 1/2" | 3-2/3" | 1-9/26" | 2/7" | 50 | 250 |
| SCG7-75 | 3/4" | 4-7/24" | 1-5/9" | 2/7" | 50 | 250 |
| SCG7-100 | 1" | 5-1/25" | 1-18/23" | 2/7" | 25 | 200 |
| SCG7-125 | 1-1/4" | 5-4/7" | 2-5/27" | 2/7" | 20 | 100 |
| SCG7-150 | 1-1/2" | 6-1/18" | 2-9/20" | 2/7" | 20 | 100 |
| SCG7-200 | 2" | 7-1/13" | 3" | 2/7" | 10 | 50 |
| SCG7-250/300 | 2-1/2" - 3" | 9-1/18" | 4-1/4" | 1/2" | - | 10 |
| SCG7-350/400 | 3-1/2" - 4" | 11" | 5-3/10" | 1/2" | - | 10 |






## *GRAY IRON*
## WEDGENUT COVERS WITH INTEGRAL GASKETS
## *FORM 7*

### FEATURES

- Electroplated Zinc
- Usable with all other Form 7 conduit bodies
- Integral Sealing Gaskets
- Easy installation and removal

| Cat. No. | Trade Size | L | W | H | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|---|---|
| **GICG7-50** | 1/2” | 3-2/3" | 1-9/26" | 5/9" | 25 | 125 |
| **GICG7-75** | 3/4” | 4-7/24" | 1-5/9" | 5/9" | 25 | 125 |
| **GICG7-100** | 1” | 5-1/25" | 1-18/23" | 9/14" | 10 | 100 |
| **GICG7-125** | 1-1/4” | 5-4/7" | 2-5/27" | 2/3" | 10 | 50 |
| **GICG7-150** | 1-1/2” | 6-1/18" | 2-1/3" | 2/3" | 10 | 50 |
| **GICG7-200** | 2” | 7-1/13" | 3" | 3/4" | - | 10 |
| **GICG7-250/300** | 2-1/2” - 3” | 9-1/18" | 4-1/4" | 3/4" | - | 10 |
| **GICG7-350/400** | 3-1/2” - 4” | 11" | 5-1/3" | 5/6" | - | 10 |







## *SAND CAST CLASS 30 GRAY IRON ALLOY*
## THREADED CONDUIT BODIES
## *“LB” SERIES*
## *FORM 8*

### FEATURES

- Electroplated Zinc
- Flat back design for maximum internal wiring volume
- Interchangeable with other Form 8 conduit bodies
- Suitable for wet location when used with Gasket and Cover

| Cat. No. | Trade Size | DIMENSIONS - LB SERIES A | B | C | D | E | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|---|---|---|---|
| **LB8-50** | 1/2” | 1-6/13" | 4-8/29" | 2-3/11" | 5-1/8" | 1-1/4" | 10 | 50 |
| **LB8-75** | 3/4” | 1-13/20" | 4-9/10" | 2-15/28" | 5-4/5" | 1-1/2" | 5 | 25 |
| **LB8-100** | 1” | 1-17/20" | 5-5/8" | 2-9/10" | 6-3/5" | 1-3/4" | 5 | 25 |
| **LB8-125** | 1-1/4” | 2-6/25" | 6-2/3" | 3-1/4" | 7-3/4" | 2-1/5" | 1 | 10 |
| **LB8-150** | 1-1/2” | 2-22/27" | 7-15/16" | 3-2/3" | 9-1/6" | 2-9/20" | 1 | 10 |
| **LB8-200** | 2” | 3-9/11" | 9-4/5" | 4-2/3" | 11-2/25" | 2-9/10" | 1 | 5 |
| **LB8-250** | 2-1/2” | 5-1/17" | 12-1/3" | 6-3/20" | 14-3/10" | 3-9/26" | - | 1 |
| **LB8-300** | 3” | 5-1/17" | 12-1/3" | 6-5/27" | 14-3/10" | 4-1/10" | - | 1 |
| **LB8-350** | 3-1/2” | 6-3/10" | 15-1/10" | 7-1/5" | 16-9/10" | 4-3/5" | - | 1 |
| **LB8-400** | 4” | 6-3/10" | 15-1/10" | 7-1/4" | 16-13/15" | 5-1/4" | - | 1 |






## SAND CAST CLASS 30 GRAY IRON ALLOY
## THREADED CONDUIT BODIES
## "LR" SERIES
## FORM 8

### FEATURES

- Electroplated Zinc
- Flat back design for maximum internal wiring volume
- Interchangeable with other Form 8 conduit bodies
- Suitable for wet location when used with Gasket and Cover

| Cat. No. | Trade Size | DIMENSIONS - LR SERIES A | B | C | D | E | Std. Master Pkg. | Ctn. |
|---|---|---|---|---|---|---|---|---|
| LR8-50 | 1/2" | 1-6/13" | 4-8/29" | 2-6/25" | 5-1/8" | 1-9/20" | 10 | 50 |
| LR8-75 | 3/4" | 1-13/20" | 4-9/10" | 2-9/20" | 5-4/5" | 1-7/10" | 5 | 25 |
| LR8-100 | 1" | 1-17/20" | 5-5/8" | 2-19/25" | 6-3/5" | 2" | 5 | 25 |
| LR8-125 | 1-1/4" | 2-6/25" | 6-2/3" | 3-1/6" | 7-3/4" | 2-3/10" | 1 | 10 |
| LR8-150 | 1-1/2" | 2-22/27" | 7-15/16" | 3-4/5" | 9-1/16" | 2-2/3" | 1 | 10 |
| LR8-200 | 2" | 3-9/11" | 9-4/5" | 4-13/14" | 11-1/13" | 3-13/23" | 1 | 5 |
| LR8-250 | 2-1/2" | 5-1/17" | 12-1/3" | 6-17/26" | 14-3/10" | 4-11/20" | - | 1 |
| LR8-300 | 3" | 5-1/17" | 12-1/3" | 6-17/26" | 14-3/10" | 4-11/20" | - | 1 |







## SAND CAST CLASS 30 GRAY IRON ALLOY
## THREADED CONDUIT BODIES
## "LL" SERIES
## FORM 8

### FEATURES

- Electroplated Zinc
- Flat back design for maximum internal wiring volume
- Interchangeable with other Form 8 conduit bodies
- Suitable for wet location when used with Gasket and Cover

| Cat. No. | Trade Size | DIMENSIONS - LL SERIES A | B | C | D | E | Std. Master Pkg. | Ctn. |
|---|---|---|---|---|---|---|---|---|
| LL8-50 | 1/2" | 1-6/13" | 4-8/29" | 2-6/25" | 5-1/8" | 1-9/20" | 10 | 50 |
| LL8-75 | 3/4" | 1-13/20" | 4-9/10" | 2-9/20" | 5-4/5" | 1-7/10" | 5 | 25 |
| LL8-100 | 1" | 1-17/20" | 5-5/8" | 2-19/25" | 6-3/5" | 2" | 5 | 25 |
| LL8-125 | 1-1/4" | 2-6/25" | 6-2/3" | 3-1/6" | 7-3/4" | 2-3/10" | 1 | 10 |
| LL8-150 | 1-1/2" | 2-22/27" | 7-15/16" | 3-4/5" | 9-1/16" | 2-2/3" | 1 | 10 |
| LL8-200 | 2" | 3-9/11" | 9-4/5" | 4-13/14" | 11-1/13" | 3-13/23" | 1 | 5 |
| LL8-250 | 2-1/2" | 5-1/17" | 12-1/3" | 6-17/26" | 14-3/10" | 4-11/20" | - | 1 |
| LL8-300 | 3" | 5-1/17" | 12-1/3" | 6-17/26" | 14-3/10" | 4-11/20" | - | 1 |






## SAND CAST CLASS 30 GRAY IRON ALLOY
## THREADED CONDUIT BODIES
## "C" SERIES
## FORM 8

### FEATURES

- Electroplated Zinc
- Flat back design for maximum internal wiring volume
- Interchangeable with other Form 8 conduit bodies
- Suitable for wet location when used with Gasket and Cover

| Cat. No. | Trade Size | DIMENSIONS - C SERIES A | B | C | D | E | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|---|---|---|---|
| C8-50 | 1/2" | 1-6/13" | 4-8/29" | 1-9/20" | 6" | 1-1/4" | 10 | 50 |
| C8-75 | 3/4" | 1-13/20" | 4-9/10" | 1-7/10" | 6-2/3" | 1-1/2" | 5 | 25 |
| C8-100 | 1" | 1-17/20" | 5-5/8" | 2" | 7-11/20" | 1-3/4" | 5 | 25 |
| C8-125 | 1-1/4" | 2-6/25" | 6-2/3" | 2-3/10" | 8-4/5" | 2-1/5" | 1 | 10 |
| C8-150 | 1-1/2" | 2-22/27" | 7-15/16" | 2-2/3" | 10-1/5" | 2-3/7" | 1 | 10 |
| C8-200 | 2" | 3-9/11" | 9-4/5" | 3-13/23" | 12-7/19" | 2-9/10" | 1 | 5 |
| C8-250 | 2-1/2" | 5-1/17" | 12-1/3" | 4-11/20" | 16-8/35" | 3-9/26" | - | 1 |
| C8-300 | 3" | 5-1/17" | 12-1/3" | 4-11/20" | 16-8/35" | 4-1/11" | - | 1 |



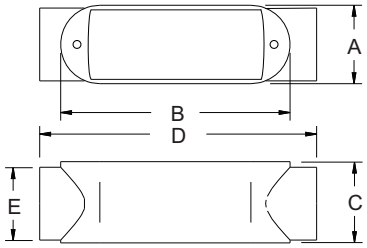



## SAND CAST CLASS 30 GRAY IRON ALLOY
## THREADED CONDUIT BODIES
## "T" SERIES
## FORM 8

### FEATURES

- Electroplated Zinc
- Flat back design for maximum internal wiring volume
- Interchangeable with other Form 8 conduit bodies
- Suitable for wet location when used with Gasket and Cover

| Cat. No. | Trade Size | DIMENSIONS - T SERIES A | B | C | D | E | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|---|---|---|---|
| T8-50 | 1/2" | 1-9/20" | 4-8/29" | 1-3/4" | 6" | 2-1/4" | 5 | 25 |
| T8-75 | 3/4" | 1-13/20" | 4-9/10" | 2" | 6-2/3" | 2-9/20" | 5 | 25 |
| T8-100 | 1" | 1-17/20" | 5-5/8" | 2-3/11" | 7-11/20" | 2-3/4" | 2 | 20 |
| T8-125 | 1-1/4" | 2-6/25" | 6-2/3" | 2-3/10" | 8-4/5" | 3-1/6" | 1 | 10 |
| T8-150 | 1-1/2" | 2-22/27" | 7-15/16" | 2-2/3" | 10-1/5" | 3-4/5" | 1 | 10 |
| T8-200 | 2" | 3-9/11" | 9-4/5" | 3-14/25" | 12-7/20" | 4-13/14" | 1 | 5 |
| T8-250 | 2-1/2" | 5-1/17" | 12-1/3" | 4-11/20" | 16-1/5" | 6-17/26" | - | 1 |
| T8-300 | 3" | 5-1/17" | 12-1/3" | 4-11/20" | 16-1/5" | 6-17/26" | - | 1 |



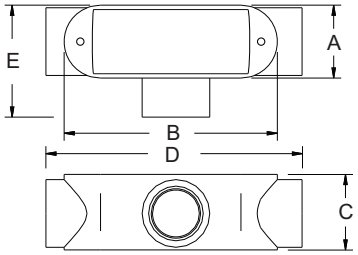


## *STAMPED STEEL* COVERS WITH INTEGRAL GASKETS *FORM 8*

### FEATURES

- Stainless Steel Screws
- Electroplated Zinc
- Integral Sealing Gaskets
- Usable with all other Form 8 conduit bodies

| Cat. No. | Trade Size | L | W | H | Std. Pkg. |
|---|---|---|---|---|---|
| SCG8-50 | 1/2” | 4-8/29" | 1-9/20" | 1/4" | 50 |
| SCG8-75 | 3/4” | 4-15/17" | 1-3/5" | 1/4" | 50 |
| SCG8-100 | 1” | 5-5/8" | 1-17/20" | 1/4" | 25 |
| SCG8-125 | 1-1/4” | 6-3/5" | 2-1/5" | 1/4" | 20 |
| SCG8-150 | 1-1/2” | 7-10/11" | 2-3/4" | 1/3" | 20 |
| SCG8-200 | 2” | 9-3/4" | 3-3/4" | 2/5" | 10 |
| SCG8-250/300 | 2-1/2” - 3” | 12-1/4" | 5-1/23" | 13/22" | 5 |
| SCG8-350/400 | 3-1/2” - 4” | 15" | 6-8/29" | 17/24" | 5 |







## *GRAY IRON* COVERS WITH INTEGRAL GASKETS *FORM 8*

### FEATURES

- Stainless Steel Screws
- Electroplated Zinc
- Integral Sealing Gaskets
- Usable with all other Form 8 conduit bodies

| Cat. No. | Trade Size | L | W | H | Std. Pkg. |
|---|---|---|---|---|---|
| GICG8-50 | 1/2” | 4-8/29" | 1-9/20" | 2/5" | 50 |
| GICG8-75 | 3/4” | 4-15/17" | 1-13/20" | 2/5" | 50 |
| GICG8-100 | 1” | 5-5/8" | 1-17/20" | 2/5" | 25 |
| GICG8-125 | 1-1/4” | 6-9/13" | 2-1/5" | 9/16" | 20 |
| GICG8-150 | 1-1/2” | 7-15/16" | 2-22/27" | 9/10" | 20 |
| GICG8-200 | 2” | 9-7/9" | 3-9/11" | 1-1/8" | 10 |
| GICG8-250/300 | 2-1/2” - 3” | 12-7/20" | 5-1/18" | 1-1/2" | 5 |
| GICG8-350/400 | 3-1/2” - 4” | 15" | 6-3/10" | 1-1/2" | 5 |





## *ZINC DIE CAST* RIGID TO BOX PULL ELBOWS *WITH GASKET*

### FEATURES

- Aluminum Cover

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **PEB-50** | 1/2” | 10 | 100 |
| **PEB-75** | 3/4” | 5 | 50 |
| **PEB-100** | 1” | - | 25 |
| **PEB-125** | 1-1/4” | - | 20 |



RIGID

## *ZINC DIE CAST* RIGID TO RIGID PULL ELBOWS *WITH GASKET*

### FEATURES

- Aluminum Cover

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **PE-50** | 1/2” | 10 | 100 |
| **PE-75** | 3/4” | 5 | 50 |
| **PE-100** | 1” | - | 25 |
| **PE-125** | 1-1/4” | - | 20 |



RIGID

## *ZINC DIE CAST* EMT TO BOX PULL ELBOWS SET-SCREW TYPE *WITH GASKET*

### FEATURES

- Aluminum Cover

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **SSPEB-G50** | 1/2” | 10 | 100 |
| **SSPEB-G75** | 3/4” | 5 | 50 |
| **SSPEB-G100** | 1” | - | 25 |
| **SSPEB-G125** | 1-1/4” | - | 20 |



SET-SCREW EMT

## *ZINC DIE CAST* EMT TO BOX PULL ELBOWS SET-SCREW TYPE *WITHOUT GASKET*

### FEATURES

- Aluminum Cover

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| SSPEB-50 | 1/2” | 10 | 100 |
| SSPEB-75 | 3/4” | 5 | 50 |
| SSPEB-100 | 1” | - | 25 |
| SSPEB-125 | 1-1/4” | - | 20 |



SET-SCREW EMT

## *ZINC DIE CAST* EMT TO EMT PULL ELBOWS SET-SCREW TYPE *WITH GASKET*

### FEATURES

- Aluminum Cover

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| SSPE-G50 | 1/2” | 10 | 100 |
| SSPE-G75 | 3/4” | 5 | 50 |
| SSPE-G100 | 1” | - | 25 |
| SSPE-G125 | 1-1/4” | - | 20 |



SET-SCREW EMT

## *ZINC DIE CAST* EMT TO EMT PULL ELBOWS SET-SCREW TYPE *WITHOUT GASKET*

### FEATURES

- Aluminum Cover

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| SSPE-50 | 1/2” | 10 | 100 |
| SSPE-75 | 3/4” | 5 | 50 |
| SSPE-100 | 1” | - | 25 |
| SSPE-125 | 1-1/4” | - | 20 |



SET-SCREW EMT

## MALLEABLE IRON
## 1-GANG CAST DEVICE BOXES DEAD END 2" DEEP

NEW

### FEATURES
- Electroplated Zinc
- Dead-end configurations
- For both outdoor and indoor use

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| 1MFS-50 | 1/2" | 1 | 5 |
| 1MFS-75 | 3/4" | 1 | 5 |
| 1MFS-100 | 1" | 1 | 5 |



## MALLEABLE IRON
## 1-GANG DEEP CAST DEVICE BOXES DEAD END 2-7/10" DEEP

NEW

### FEATURES
- Electroplated Zinc
- Dead-end configurations
- For both outdoor and indoor use

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| 1MFD-50 | 1/2" | 1 | 5 |
| 1MFD-75 | 3/4" | 1 | 5 |
| 1MFD-100 | 1" | 1 | 5 |



## MALLEABLE IRON
## 1-GANG CAST DEVICE BOXES FEED THROUGH 2" DEEP

NEW

### FEATURES
- Electroplated Zinc
- Feed-through configurations
- For both outdoor and indoor use

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| 1MFSC-50 | 1/2" | 1 | 5 |
| 1MFSC-75 | 3/4" | 1 | 5 |
| 1MFSC-100 | 1" | 1 | 5 |



## MALLEABLE IRON
## 1-GANG DEEP CAST DEVICE BOXES FEED THROUGH 2-7/10" DEEP

NEW

### FEATURES
- Electroplated Zinc
- Feed-through configurations
- For both outdoor and indoor use

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| 1MFDC-50 | 1/2" | 1 | 5 |
| 1MFDC-75 | 3/4" | 1 | 5 |
| 1MFDC-100 | 1" | 1 | 5 |



## MALLEABLE IRON
### 1-GANG CAST DEVICE BOX COVERS

NEW

**FEATURES**

- Electroplated Zinc
- For use with FS & FD cast device box

| Cat. No. | Description | Std. Pkg. |
|---|---|---|
| 1MFC-B | | 20 |
| 1MFC-D | Duplex | 20 |
| 1MFC-TS | Guarded Toggle Switch | 20 |



## STEEL
### 1-GANG CAST DEVICE BOX COVERS

NEW

**FEATURES**

- Electroplated Zinc
- For use with FS & FD cast device box

| Cat. No. | Description | Std. Pkg. |
|---|---|---|
| 1SFC-B | | 25 |
| 1SFC-D | Duplex | 25 |
| 1SFC-TS | Unguarded Toggle Switch | 25 |
| 1SFC-G | GFI | 25 |



## NEOPRENE
### 1-GANG CAST DEVICE BOX COVERS

NEW

**FEATURES**

- For use with FS & FD cast device box

| Cat. No. | Description | Std. Pkg. |
|---|---|---|
| FG-1 | Neoprene Gasket | 50 |



## *STEEL* GROUNDING (BONDING) RIGID LOCKNUTS

### FEATURES

- Electroplated Zinc

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **GL-50** | 1/2” | 50 | 200 |
| **GL-75** | 3/4” | 25 | 100 |
| **GL-100** | 1” | 25 | 100 |
| **GL-125** | 1-1/4” | 10 | 50 |
| **GL-150** | 1-1/2” | 10 | 50 |
| **GL-200** | 2” | 10 | 50 |
| **GL-250** | 2-1/2” | 5 | 25 |
| **GL-300** | 3” | 5 | 25 |
| **GL-350** | 3-1/2” | - | 5 |
| **GL-400** | 4” | - | 5 |
| **GL-500** | 5” | - | 5 |
| **GL-600** | 6” | - | 5 |



## *ZINC DIE CAST* GROUND BUSHINGS INSULATED WITH UNIVERSAL LAY-IN LUG

SOLAR

### FEATURES

- 105ºC rated Throat Insulator

| Cat. No. | Trade Size | Lug Range | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| **GBLL-50** | 1/2” | #14 - #4 | 50 | 500 |
| **GBLL-75** | 3/4” | #14 - #4 | 40 | 400 |
| **GBLL-100** | 1” | #14 - #4 | 15 | 150 |
| **GBLL-125** | 1-1/4” | #14 - #4 | 15 | 150 |
| **GBLL-125-10** | 1-1/4" | #14 - #1/0 | 20 | 200 |
| **GBLL-150** | 1-1/2” | #14 - #4 | 10 | 100 |
| **GBLL-150-10** | 1-1/2" | #14 - #1/0 | 10 | 100 |
| **GBLL-200** | 2” | #14 - #4 | 5 | 50 |
| **GBLL-200-10** | 2" | #14 - #1/0 | 10 | 100 |
| **GBLL-250** | 2-1/2” | #6 - #250MCM | 5 | 50 |
| **GBLL-250-10** | 2-1/2" | #14 - #1/0 | - | 50 |
| **GBLL-300** | 3” | #6 - #250MCM | 5 | 50 |
| **GBLL-300-10** | 3" | #14 - #1/0 | - | 50 |
| **GBLL-350** | 3-1/2” | #6 - #250MCM | 4 | 40 |
| **GBLL-350-10** | 3-1/2" | #14 - #1/0 | - | 10 |
| **GBLL-400** | 4” | #6 - #250MCM | 4 | 40 |
| **GBLL-400-10** | 4" | #14 - #1/0 | - | 10 |





## *MALLEABLE IRON* GROUND BUSHINGS INSULATED WITH UNIVERSAL LAY-IN LUG

### FEATURES

- Electroplated Zinc
- Full Machine-Cut Internal Threads
- Meets Federal Spec. A-A-50553

| Cat. No. | Trade Size | Lug Range | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| **MGBLL-50** | 1/2” | #14 - #4 | 50 | 200 |
| **MGBLL-75** | 3/4” | #14 - #4 | 25 | 100 |
| **MGBLL-100** | 1” | #14 - #4 | 25 | 100 |
| **MGBLL-125** | 1-1/4” | #14 - #4 | 10 | 50 |
| **MGBLL-125-10** | 1-1/4" | #14 - #1/0 | 20 | 200 |
| **MGBLL-150** | 1-1/2” | #14 - #4 | 10 | 50 |
| **MGBLL-150-10** | 1-1/2" | #14 - #1/0 | 10 | 100 |
| **MGBLL-200** | 2” | #14 - #4 | 10 | 50 |
| **MGBLL-200-10** | 2" | #14 - #1/0 | 10 | 100 |
| **MGBLL-250** | 2-1/2” | #6 - #250MCM | 5 | 25 |
| **MGBLL-250-10** | 2-1/2" | #14 - #1/0 | - | 50 |
| **MGBLL-300** | 3” | #6 - #250MCM | 5 | 25 |
| **MGBLL-300-10** | 3" | #14 - #1/0 | - | 25 |
| **MGBLL-350** | 3-1/2” | #6 - #250MCM | - | 5 |
| **MGBLL-350-10** | 3-1/2" | #14 - #1/0 | - | 10 |
| **MGBLL-400** | 4” | #6 - #250MCM | - | 5 |
| **MGBLL-400-10** | 4" | #14 - #1/0 | - | 10 |
| **MGBLL-500** | 5” | #6 - #250MCM | - | 5 |
| **MGBLL-500-30** | 5" | #6 - #3/0 | - | 5 |
| **MGBLL-600** | 6” | #6 - #250MCM | - | 5 |
| **MGBLL-600-30** | 6" | #6 - #3/0 | - | 5 |



## *COPPER* DIRECT BURIAL MECHANICAL LUGS

### FEATURES

- Stainless Steel Screw

| Cat. No. | Wire Range | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **MLDB-14/10** | #14 - #10 | 50 | 400 |
| **MLDB-14/6** | #14 - #6 | 50 | 400 |
| **MLDB-14/4** | #14 - #4 | 25 | 200 |
| **MLDB-6/100** | #6 - #1/0 | 10 | 80 |



## *COPPER* DIRECT BURIAL LAY-IN LUGS

### FEATURES

- Stainless Steel Screws

| Cat. No. | Wire Range | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **LLDB-14/4** | #14 - #4 | 25 | 250 |
| **COPPER TIN PLATED DIRECT BURIAL LAY-IN LUG** | | | |
| **LLTDB-14/4** | #14 - #4 | 25 | 250 |
| **COPPER TIN PLATED DIRECT BURIAL LAY-IN LUG FOR SOLAR INSTALLATIONS** | | | |
| **LLTDB-SP-14/4** | #14 - #4 | 25 | 250 |





## *ALUMINUM* TERMINAL LUGS SINGLE BARREL ONE HOLE MOUNT

### FEATURES

- Electro Tinned
- Single barrel
- Dual rated for copper and aluminum conductors

| Cat. No. | Wire Range | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **FTL-14/4** | #14 - #4 | 50 | 400 |
| **FTL-14/2** | #14 - #2 | 50 | 400 |
| **FTL-14/100** | #14 - #1/0 | 25 | 200 |
| **FTL-14/200** | #14 - #2/0 | 25 | 200 |
| **FTL-6/250** | #6 - #250MCM | 10 | 100 |
| **FTL-6/300** | #6 - #300MCM | 10 | 100 |
| **FTL-6/350** | #6 - #350MCM | 10 | 100 |
| **FTL-4/500** | #4 - #500MCM | 6 | 60 |
| **FTL-2/600** | #2 - #600MCM | 6 | 60 |
| **FTL-300/800** | #300MCM - #800MCM | 4 | 40 |
| **FTL-500/1000** | #500MCM - #1000MCM | 4 | 40 |



## *ALUMINUM* TERMINAL LUGS DOUBLE BARREL ONE HOLE MOUNT

### FEATURES

- Electro Tinned
- Double barrel
- Dual rated for copper and aluminum conductors

| Cat. No. | Wire Range | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **FT2L-14/100** | #14 - #1/0 | 10 | 100 |
| **FT2L-14/200** | #14 - #2/0 | 10 | 100 |
| **FT2L-6/250** | #6 - #250MCM | 10 | 100 |
| **FT2L-6/350** | #6 - #350MCM | 4 | 40 |
| **FT2L-2/600** | #2 - #600MCM | 4 | 40 |
| **FT2L-300/800** | #300MCM - #800MCM | 2 | 20 |
| **FT2L-500/1000** | #500MCM - #1000MCM | 2 | 20 |



## INTERSYSTEM GROUNDING AND BONDING BRIDGES

### FEATURES

- Available in Zinc or Bronze
- Compatible with copper or aluminum wire

| Cat. No. | CU/AL Wire Range | Material | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| **IGBB-5** | #6 - #2 AWG Grounding Conductor for Central Hole<br>#14 - #4 AWG Bonding Conductor for Side Hole | Zinc | 10 | 50 |
| **IGBB-5B** | #6 - #2 AWG Grounding Conductor for Central Hole<br>#14 - #4 AWG Bonding Conductor for Side Hole | Bronze | 10 | 50 |



*IGBB-5*



*IGBB-5B*

## *ZINC DIE CAST* BARE GROUND CLAMPS

### FEATURES

- Steel Screws

| Cat. No. | Ground Wire Range | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| GCBZ-50/100 | #10 - #2 | 1/2” to 1” | 25 | 200 |



## *BRONZE* BARE GROUND CLAMPS

### FEATURES

- Steel Screws

| Cat. No. | Ground Wire Range | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| GCB-50/100 | #10 - #2 | 1/2” to 1” | 25 | 200 |
| GCB-125/200 | #10 - #2 | 1-1/4” to 2” | 10 | 80 |
| GCB-250/400 | #10 - #2 | 2-1/2” to 4” | - | 15 |
| GCB-450/600 | #10 - #2 | 4-1/2” to 6” | - | 5 |



## *BRONZE* BARE GROUND CLAMPS

### FEATURES

- Brass Screws

| Cat. No. | Ground Wire Range | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| GCBR-50/100 | #10 - #2 | 1/2” to 1” | 25 | 200 |



## *BRONZE* ARMORED GROUND CLAMPS

### FEATURES

- Steel Screws
- For use with #8, #6, #4 AWG bare wire or AC (BX) armored cable

| Cat. No. | Ground Wire Range | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| **GCA-50/100** | #8 - #4 | 1/2" to 1" | 25 | 150 |
| **GCA-125/200** | #8 - #4 | 1-1/4" to 2" | 10 | 80 |
| **GCA-250/400** | #8 - #4 | 2-1/2" to 4" | - | 15 |
| **GCA-450/600** | #8 - #4 | 4-1/2" to 6" | - | 5 |



## *BRONZE* DIRECT BURIAL* BARE GROUND CLAMPS

### FEATURES

- Bronze Screws

| Cat. No. | Ground Wire Range | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| **GCBB-50/100** | #10 - #2 | 1/2" to 1" | 25 | 200 |
| **GCBB-125/200** | #10 - #2 | 1-1/4" to 2" | 10 | 80 |

*UL Listed for direct burial in earth or concrete.



## *BRONZE* DIRECT BURIAL* ARMORED GROUND CLAMPS

### FEATURES

- Bronze Screws
- For use with #8, #6, #4 AWG bare wire or AC (BX) armored cable

| Cat. No. | Ground Wire Range | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| **GCAB-50/100** | #8 - #4 | 1/2" to 1" | 25 | 200 |

*UL Listed for direct burial in earth or concrete.



## *BRONZE* GROUND CLAMPS *WITH ADAPTER*

### FEATURES

- Steel Screws

| Cat. No. | Ground Wire Range | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| **GCAH-50/100** | #8 - #4/0 | 1/2” to 1” | 10 | 80 |
| **GCAH-125/200** | #8 - #4/0 | 1-1/4” to 2” | 5 | 40 |



## *HEAVY DUTY BRONZE* DIRECT BURIAL FOR REBAR GROUND CLAMPS

### FEATURES

- Bronze Screws

| Cat. No. | Ground Wire Range | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| **GCR-50/100** | #8 - #2 | 1/2”, 3/4 to 1” | 25 | 200 |

*UL Listed for direct burial in earth or concrete.



## *BRONZE* LAY-IN GROUND CLAMPS

### FEATURES

- Steel Screws

| Cat. No. | Ground Wire Range | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| **GCRL-38/100** | #10 - #2 | 3/8” to 1” Rebar<br>1/2” to 1” | 25 | 100 |



## *BRONZE* DIRECT BURIAL LAY-IN CLAMPS

### FEATURES

- Stainless Steel Screws

| Cat. No. | Ground Wire Range | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| **GCRLDB-38/100** | #10 - #2 | 3/8" to 1" Rebar<br>1/2" to 1" | 25 | 100 |



## *BRONZE* CONDUIT CLAMPS FOR RIGID CONDUIT *WITH ADAPTER*

### FEATURES

- Steel Screws

| Cat. No. | Water Pipe Size | Hub Size | Ground Wire Range | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|---|
| **GCH-50/100-50** | 1/2" to 1" | 1/2" | #10 - #2/0 | 10 | 50 |
| **GCH-50/100-75** | 1/2" to 1" | 3/4" | #10 - #2/0 | 10 | 50 |
| **GCH-50/100-100** | 1/2" to 1" | 1" | #10 - #3/0 | 10 | 50 |



## *BRONZE* GROUND CLAMPS FOR RIGID CONDUIT *WITH FLEXIBLE COPPER STRAP*

### FEATURES

- Steel Screws

| Cat. No. | Water Pipe Size | Hub Size | Ground Wire Range | Std. Pkg. |
|---|---|---|---|---|
| **AGS-50** | 1/2" to 1" | 1/2" | #10 - #4 | 50 |
| **AGS-75** | 1/2" to 1" | 3/4" | #10 - #4 | 50 |
| **AGS-100** | 1/2" to 1" | 1" | #10 - #4 | 50 |



## *BRONZE* CONDUIT HUBS 360° SWING TYPE

### FEATURES

- Steel Screws

| Cat. No. | Pipe Size | Ground Wire Range | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| H-50 | 1/2” | #10 - #2/0 | 25 | 200 |
| H-75 | 3/4” | #10 - #2/0 | 25 | 200 |
| H-100 | 1” | #10 - #3/0 | 20 | 160 |



## *BRONZE* DIRECT BURIAL GROUND ROD CLAMPS

### FEATURES

- Bronze Screw

| Cat. No. | Ground Rod Size | Ground Wire Range | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| GRC-50 | 1/2” | #10 - #2 | 35 | 280 |
| GRC-58 | 5/8” | #10 - #2 | 30 | 240 |
| GRC-75 | 3/4” | #10 - #2 | 20 | 160 |

*UL Listed for direct burial in earth or concrete.



## *BRASS* SPLIT BOLT COPPER TO COPPER CONNECTORS

### FEATURES

- Copper Plated

| Cat. No. | Ground Wire Range | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| SBCC-8 | #8 STR - #12 STR | 25 | 200 |
| SBCC-6 | #6 SOL - #10 SOL | 25 | 200 |
| SBCC-4 | #4 SOL - #8 SOL | 25 | 200 |
| SBCC-2 | #2 STR - #6 SOL | 10 | 80 |
| SBCC-2S | #2 SOL - #6 SOL | 10 | 80 |
| SBCC-10 | #1/0 STR - #4 SOL | 10 | 80 |
| SBCC-20 | #2/0 STR - #2 SOL | 5 | 40 |
| SBCC-30 | #3/0 STR - #2 SOL | 5 | 40 |
| SBCC-250 | #250MCM - #1/0 SOL | 5 | 40 |
| SBCC-350 | #350MCM - #4/0 SOL | 1 | 8 |
| SBCC-500 | #500MCM - #250MCM | 1 | 8 |
| SBCC-750 | #750MCM - #350MCM | 1 | 8 |




## GALVANIZED STEEL
## 22.5º ANGLE
## EMT CONDUIT ELBOWS

### FEATURES

- Meets UL 797 and ANSI C80.3

| Cat. No. | Trade Size | DIMENSIONS | | | Std. Pkg. |
|---|---|---|---|---|---|
| | | Min. UL Radius (A) | Offset (B) | Straight Length (C) | |
| EEL22-50 | 1/2” | 4” | 1-5/16” | 2-5/8” | 50 |
| EEL22-75 | 3/4” | 4-1/2” | 1-7/16” | 2-3/4” | 50 |
| EEL22-100 | 1” | 5-3/4” | 1-9/16” | 2-7/8” | 25 |
| EEL22-125 | 1-1/4” | 7-1/4” | 1-3/4” | 3-1/16” | 20 |
| EEL22-150 | 1-1/2” | 8-1/4” | 2” | 3-1/2” | 15 |
| EEL22-200 | 2” | 9-1/2” | 2-5/16” | 4-1/8” | 10 |
| EEL22-250 | 2-1/2” | 10-1/2” | 2-3/4” | 5-1/16” | BULK |
| EEL22-300 | 3” | 13” | 3-1/4” | 5-15/16” | BULK |
| EEL22-350 | 3-1/2” | 15” | 3-11/16” | 6-11/16” | BULK |
| EEL22-400 | 4” | 16” | 3-15/16” | 7” | BULK |







## GALVANIZED STEEL
## 45º ANGLE
## EMT CONDUIT ELBOWS

### FEATURES

- Meets UL 797 and ANSI C80.3

| Cat. No. | Trade Size | DIMENSIONS | | | Std. Pkg. |
|---|---|---|---|---|---|
| | | Min. UL Radius (A) | Offset (B) | Straight Length (C) | |
| EEL45-50 | 1/2” | 4” | 3-1/16” | 2-11/16” | 50 |
| EEL45-75 | 3/4” | 4-1/2” | 3-1/4” | 2-3/4” | 50 |
| EEL45-100 | 1” | 5-3/4” | 3-13/16” | 3” | 25 |
| EEL45-125 | 1-1/4” | 7-1/4” | 4-7/16” | 3-1/4” | 20 |
| EEL45-150 | 1-1/2” | 8-1/4” | 4-15/16” | 3-1/2” | 15 |
| EEL45-200 | 2” | 9-1/2” | 5-13/16” | 4-5/16” | 10 |
| EEL45-250 | 2-1/2” | 10-1/2” | 6-11/16” | 5-1/8” | BULK |
| EEL45-300 | 3” | 13” | 8-1/8” | 6-1/8” | BULK |
| EEL45-350 | 3-1/2” | 15” | 9-3/16” | 6-3/4” | BULK |
| EEL45-400 | 4” | 16” | 9-3/4” | 7-1/16” | BULK |






## GALVANIZED STEEL
## 90º ANGLE
## EMT CONDUIT ELBOWS

### FEATURES

- Meets UL 797 and ANSI C80.3

| Cat. No. | Trade Size | DIMENSIONS | | | Std. Pkg. |
|---|---|---|---|---|---|
| | | Min. UL Radius (A) | Offset (B) | Straight Length (C) | |
| EEL90-50 | 1/2” | 4” | 6-7/8” | 2-7/8” | 50 |
| EEL90-75 | 3/4” | 4-1/2” | 7-7/16” | 2-15/16” | 50 |
| EEL90-100 | 1” | 5-3/4” | 8-3/4” | 3” | 25 |
| EEL90-125 | 1-1/4” | 7-1/4” | 10-9/16” | 3-5/16” | 20 |
| EEL90-150 | 1-1/2” | 8-1/4” | 11-15/16” | 3-5/8” | 15 |
| EEL90-200 | 2” | 9-1/2” | 13-3/4” | 4-1/4” | 10 |
| EEL90-250 | 2-1/2” | 10-1/2” | 15-3/4” | 5-1/4” | BULK |
| EEL90-300 | 3” | 13” | 19-1/8” | 6-1/8” | BULK |
| EEL90-350 | 3-1/2” | 15” | 21-3/4” | 6-3/4” | BULK |
| EEL90-400 | 4” | 16” | 23-1/8” | 7-1/8” | BULK |







## GALVANIZED STEEL
## 22.5º ANGLE
## RIGID CONDUIT ELBOWS

### FEATURES

- Meets UL 6 and ANSI C80.1
- NPT Thread

| Cat. No. | Trade Size | DIMENSIONS | | | Std. Pkg. |
|---|---|---|---|---|---|
| | | Min. UL Radius (A) | Offset (B) | Straight Length (C) | |
| REL22-50 | 1/2” | 4” | 1-5/16” | 2-5/8” | 50 |
| REL22-75 | 3/4” | 4-1/2” | 1-7/16” | 2-3/4” | 50 |
| REL22-100 | 1” | 5-3/4” | 1-9/16” | 2-7/8” | 25 |
| REL22-125 | 1-1/4” | 7-1/4” | 1-3/4” | 3-1/16” | 20 |
| REL22-150 | 1-1/2” | 8-1/4” | 2” | 3-1/2” | 15 |
| REL22-200 | 2” | 9-1/2” | 2-5/16” | 4-1/8” | 10 |
| REL22-250 | 2-1/2” | 10-1/2” | 2-3/4” | 5-1/16” | BULK |
| REL22-300 | 3” | 13” | 3-1/4” | 5-15/16” | BULK |
| REL22-350 | 3-1/2” | 15” | 3-11/16” | 6-11/16” | BULK |
| REL22-400 | 4” | 16” | 3-15/16” | 7” | BULK |



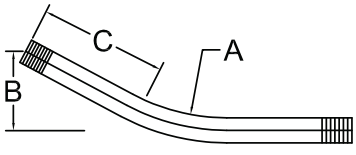


## GALVANIZED STEEL
## 45º ANGLE
## RIGID CONDUIT ELBOWS

### FEATURES

- Meets UL 6 and ANSI C80.1
- NPT Thread

| Cat. No. | Trade Size | DIMENSIONS | | | Std. Pkg. |
|---|---|---|---|---|---|
| | | Min. UL Radius (A) | Offset (B) | Straight Length (C) | |
| REL45-50 | 1/2” | 4” | 3-1/16” | 2-11/16” | 50 |
| REL45-75 | 3/4” | 4-1/2” | 3-1/4” | 2-3/4” | 50 |
| REL45-100 | 1” | 5-3/4” | 3-13/16” | 3” | 25 |
| REL45-125 | 1-1/4” | 7-1/4” | 4-7/16” | 3-1/4” | 20 |
| REL45-150 | 1-1/2” | 8-1/4” | 4-15/16” | 3-1/2” | 15 |
| REL45-200 | 2” | 9-1/2” | 5-13/16” | 4-5/16” | 10 |
| REL45-250 | 2-1/2” | 10-1/2” | 6-11/16” | 5-1/8” | BULK |
| REL45-300 | 3” | 13” | 8-1/8” | 6-1/8” | BULK |
| REL45-350 | 3-1/2” | 15” | 9-3/16” | 6-3/4” | BULK |
| REL45-400 | 4” | 16” | 9-3/4” | 7-1/16” | BULK |







## GALVANIZED STEEL
## 90º ANGLE
## RIGID CONDUIT ELBOWS

### FEATURES

- Meets UL 6 and ANSI C80.1
- NPT Thread

| Cat. No. | Trade Size | DIMENSIONS | | | Std. Pkg. |
|---|---|---|---|---|---|
| | | Min. UL Radius (A) | Offset (B) | Straight Length (C) | |
| REL90-50 | 1/2” | 4” | 6-7/8” | 2-7/8” | 50 |
| REL90-75 | 3/4” | 4-1/2” | 7-7/16” | 2-15/16” | 50 |
| REL90-100 | 1” | 5-3/4” | 8-3/4” | 3” | 25 |
| REL90-125 | 1-1/4” | 7-1/4” | 10-9/16” | 3-5/16” | 20 |
| REL90-150 | 1-1/2” | 8-1/4” | 11-15/16” | 3-5/8” | 15 |
| REL90-200 | 2” | 9-1/2” | 13-3/4” | 4-1/4” | 10 |
| REL90-250 | 2-1/2” | 10-1/2” | 15-3/4” | 5-1/4” | BULK |
| REL90-300 | 3” | 13” | 19-1/8” | 6-1/8” | BULK |
| REL90-350 | 3-1/2” | 15” | 21-3/4” | 6-3/4” | BULK |
| REL90-400 | 4” | 16” | 23-1/8” | 7-1/8” | BULK |





## GALVANIZED STEEL
## RIGID CONDUIT NIPPLES

### FEATURES
- Meets UL 6 and ANSI C80.1
- NPT Thread



| Cat. No. | Trade Size | Length | Std. Pkg. |
|---|---|---|---|
| RN-50-C | 1/2” | 1-1/8” | 25 |
| RN-50-150 | 1/2” | 1-1/2” | 25 |
| RN-50-200 | 1/2” | 2” | 25 |
| RN-50-250 | 1/2” | 2-1/2” | 25 |
| RN-50-300 | 1/2” | 3” | 25 |
| RN-50-350 | 1/2” | 3-1/2” | 25 |
| RN-50-400 | 1/2” | 4” | 25 |
| RN-50-500 | 1/2” | 5” | 25 |
| RN-50-600 | 1/2” | 6” | 25 |
| RN-50-800 | 1/2” | 8” | 25 |
| RN-50-1000 | 1/2” | 10” | 25 |
| RN-50-1200 | 1/2” | 12” | 25 |
| RN-75-C | 3/4” | 1-3/8” | 25 |
| RN-75-150 | 3/4” | 1-1/2” | 25 |
| RN-75-200 | 3/4” | 2” | 25 |
| RN-75-250 | 3/4” | 2-1/2” | 25 |
| RN-75-300 | 3/4” | 3” | 25 |
| RN-75-350 | 3/4” | 3-1/2” | 25 |
| RN-75-400 | 3/4” | 4” | 25 |
| RN-75-500 | 3/4” | 5” | 25 |
| RN-75-600 | 3/4” | 6” | 25 |
| RN-75-800 | 3/4” | 8” | 25 |
| RN-75-1000 | 3/4” | 10” | 25 |
| RN-75-1200 | 3/4” | 12” | 25 |
| RN-100-C | 1” | 1-1/2” | 25 |
| RN-100-200 | 1” | 2” | 25 |
| RN-100-250 | 1” | 2-1/2” | 25 |
| RN-100-300 | 1” | 3” | 25 |
| RN-100-350 | 1” | 3-1/2” | 25 |
| RN-100-400 | 1” | 4” | 25 |
| RN-100-500 | 1” | 5” | 25 |
| RN-100-600 | 1” | 6” | 25 |
| RN-100-800 | 1” | 8” | 25 |
| RN-100-1000 | 1” | 10” | 25 |
| RN-100-1200 | 1” | 12” | 25 |
| RN-125-C | 1-1/4” | 1-5/8” | 25 |
| RN-125-200 | 1-1/4” | 2” | 25 |
| RN-125-250 | 1-1/4” | 2-1/2” | 25 |
| RN-125-300 | 1-1/4” | 3” | 25 |
| RN-125-350 | 1-1/4” | 3-1/2” | 25 |
| RN-125-400 | 1-1/4” | 4” | 25 |
| RN-125-500 | 1-1/4” | 5” | 25 |
| RN-125-600 | 1-1/4” | 6” | 25 |
| RN-125-800 | 1-1/4” | 8” | 25 |

## GALVANIZED STEEL
## RIGID CONDUIT NIPPLES



### FEATURES
- Meets UL 6 and ANSI C80.1
- NPT Thread

| Cat. No. | Trade Size | Length | Std. Pkg. |
|---|---|---|---|
| RN-125-1000 | 1-1/4” | 10” | 25 |
| RN-125-1200 | 1-1/4” | 12” | 25 |
| RN-150-C | 1-1/2” | 1-3/4” | 25 |
| RN-150-200 | 1-1/2” | 2” | 25 |
| RN-150-250 | 1-1/2” | 2-1/2” | 25 |
| RN-150-300 | 1-1/2” | 3” | 25 |
| RN-150-350 | 1-1/2” | 3-1/2” | 25 |
| RN-150-400 | 1-1/2” | 4” | 25 |
| RN-150-500 | 1-1/2” | 5” | 25 |
| RN-150-600 | 1-1/2” | 6” | 25 |
| RN-150-800 | 1-1/2” | 8” | 25 |
| RN-150-1000 | 1-1/2” | 10” | 25 |
| RN-150-1200 | 1-1/2” | 12” | 25 |
| RN-200-C | 2” | 2” | 25 |
| RN-200-250 | 2” | 2-1/2” | 25 |
| RN-200-300 | 2” | 3” | 25 |
| RN-200-350 | 2” | 3-1/2” | 25 |
| RN-200-400 | 2” | 4” | 25 |
| RN-200-500 | 2” | 5” | 25 |
| RN-200-600 | 2” | 6” | 25 |
| RN-200-800 | 2” | 8” | 25 |
| RN-200-1000 | 2” | 10” | 25 |
| RN-200-1200 | 2” | 12” | 25 |
| RN-250-C | 2-1/2” | 2-1/2” | 30 |
| RN-250-300 | 2-1/2” | 3” | 25 |
| RN-250-350 | 2-1/2” | 3-1/2” | 15 |
| RN-250-400 | 2-1/2” | 4” | 15 |
| RN-250-500 | 2-1/2” | 5” | 15 |
| RN-250-600 | 2-1/2” | 6” | 10 |
| RN-250-800 | 2-1/2” | 8” | 5 |
| RN-250-1000 | 2-1/2” | 10” | 5 |
| RN-250-1200 | 2-1/2” | 12” | 5 |
| RN-300-C | 3” | 2-5/8” | 9 |
| RN-300-300 | 3” | 3” | 9 |
| RN-300-350 | 3” | 3-1/2” | 9 |
| RN-300-400 | 3” | 4” | 9 |
| RN-300-500 | 3” | 5” | 9 |
| RN-300-600 | 3” | 6” | 9 |
| RN-300-800 | 3” | 8” | 9 |
| RN-300-1000 | 3” | 10” | 9 |
| RN-300-1200 | 3” | 12” | 9 |
| RN-350-C | 3-1/2” | 2-3/4” | 9 |
| RN-350-400 | 3-1/2” | 4” | 9 |
| RN-350-500 | 3-1/2” | 5” | 9 |

## GALVANIZED STEEL
## RIGID CONDUIT NIPPLES



### FEATURES
- Meets UL 6 and ANSI C80.1
- NPT Thread

| Cat. No. | Trade Size | Length | Std. Pkg. |
|---|---|---|---|
| RN-350-600 | 3-1/2” | 6” | 9 |
| RN-350-800 | 3-1/2” | 8” | 9 |
| RN-350-1000 | 3-1/2” | 10” | 9 |
| RN-350-1200 | 3-1/2” | 12” | 9 |
| RN-400-C | 4” | 2-7/8” | 9 |
| RN-400-400 | 4” | 4” | 9 |
| RN-400-500 | 4” | 5” | 9 |
| RN-400-600 | 4” | 6” | 9 |
| RN-400-800 | 4” | 8” | 4 |
| RN-400-1000 | 4” | 10” | 4 |
| RN-400-1200 | 4” | 12” | 4 |
| RN-500-C | 5” | 3” | 4 |
| RN-500-500 | 5” | 5” | 4 |
| RN-500-600 | 5” | 6” | 4 |
| RN-500-800 | 5” | 8” | 4 |
| RN-500-1000 | 5” | 10” | 4 |
| RN-500-1200 | 5” | 12” | 4 |
| RN-600-C | 6” | 3-1/8” | 4 |
| RN-600-500 | 6” | 5” | 4 |
| RN-600-600 | 6” | 6” | 4 |
| RN-600-800 | 6” | 8” | 4 |
| RN-600-1000 | 6” | 10” | 4 |
| RN-600-1200 | 6” | 12” | 4 |



## ZINC DIE CAST
### 3/4" OFFSET NIPPLES

**FEATURES**

- Meets Federal Spec. A-A-50553

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **ON-50** | 1/2" | 25 | 250 |
| **ON-75** | 3/4" | 20 | 200 |
| **ON-100** | 1" | 10 | 100 |
| **ON-125** | 1-1/4" | 5 | 50 |
| **ON-150** | 1-1/2" | 5 | 50 |
| **ON-200** | 2" | 3 | 30 |



## ZINC DIE CAST
### 1" LONG CONDUIT CHASE NIPPLES

**FEATURES**

- Meets Federal Spec. A-A-50553

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **CN-50L** | 1/2" | 100 | 1000 |
| **CN-75L** | 3/4" | 50 | 500 |
| **CN-100L** | 1" | 25 | 250 |



## ZINC DIE CAST
### CONDUIT CHASE NIPPLES

**FEATURES**

- Meets Federal Spec. A-A-50553

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **CN-50** | 1/2" | 100 | 1000 |
| **CN-75** | 3/4" | 100 | 1000 |
| **CN-100** | 1" | 50 | 500 |
| **CN-125** | 1-1/4" | 25 | 250 |
| **CN-150** | 1-1/2" | 25 | 250 |
| **CN-200** | 2" | 15 | 90 |



## ZINC DIE CAST
## INSULATED CONDUIT CHASE NIPPLES

### FEATURES
- With Insulated Throat
- Meets Federal Spec. A-A-50553

### NOTE
- Insulated color may vary

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| CNI-50 | 1/2” | 100 | 1000 |
| CNI-75 | 3/4” | 100 | 1000 |
| CNI-100 | 1” | 50 | 500 |
| CNI-125 | 1-1/4” | 25 | 250 |
| CNI-150 | 1-1/2” | 25 | 250 |
| CNI-200 | 2” | 15 | 90 |
| CNI-250 | 2-1/2” | 2 | 10 |
| CNI-300 | 3” | 2 | 10 |
| CNI-350 | 3-1/2” | - | 5 |
| CNI-400 | 4” | - | 5 |



## ZINC DIE CAST
## BOX TO BOX CONNECTORS

### FEATURES
- Meets Federal Spec. A-A-50553

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| OF781 | 1/2” | 100 | 500 |



## ZINC DIE CAST
## INSULATED BOX TO BOX CONNECTORS

### FEATURES
- With Insulated Throat
- Meets Federal Spec. A-A-50553

### NOTE
- Insulated color may vary

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| OF781-S | 1/2” | 100 | 500 |



## *STAMPED STEEL*
## 1-HOLE EMT STRAPS

### FEATURES
- Electroplated Zinc

### NOTE
- Sizes 2-1/2” to 4” are also listed for Rigid and IMC conduits

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **SE1-50** | 1/2” | 100 | 1000 |
| **SE1-75** | 3/4” | 100 | 1000 |
| **SE1-100** | 1” | 100 | 500 |
| **SE1-125** | 1-1/4” | 100 | 500 |
| **SE1-150** | 1-1/2” | 50 | 500 |
| **SE1-200** | 2” | 50 | 500 |
| **SU1-250** | 2-1/2” | 25 | 100 |
| **SU1-300** | 3” | 25 | 100 |
| **SU1-350** | 3-1/2” | 25 | 100 |
| **SU1-400** | 4” | 25 | 100 |



*SE1-50 to SE1-200*



*SU1-250 to SU1-400*

## *STAMPED STEEL*
## 2-HOLE EMT STRAPS

### FEATURES
- Electroplated Zinc

### NOTE
- Sizes 2-1/2” to 4” are also listed for Rigid and IMC conduits

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **SE2-50** | 1/2” | 100 | 1000 |
| **SE2-75** | 3/4” | 100 | 1000 |
| **SE2-100** | 1” | 100 | 500 |
| **SE2-125** | 1-1/4” | 100 | 500 |
| **SE2-150** | 1-1/2” | 50 | 500 |
| **SE2-200** | 2” | 50 | 500 |
| **SU2-250** | 2-1/2” | 25 | 100 |
| **SU2-300** | 3” | 25 | 100 |
| **SU2-350** | 3-1/2” | 25 | 100 |
| **SU2-400** | 4” | 25 | 100 |





## STAMPED STEEL
## 1-HOLE RIGID STRAPS

### FEATURES
- Electroplated Zinc

### NOTE
- Sizes 2-1/2” to 4” are also listed for EMT and IMC conduits

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **SR1-50** | 1/2” | 100 | 1000 |
| **SR1-75** | 3/4” | 100 | 1000 |
| **SR1-100** | 1” | 100 | 500 |
| **SR1-125** | 1-1/4” | 100 | 500 |
| **SR1-150** | 1-1/2” | 50 | 500 |
| **SR1-200** | 2” | 50 | 500 |
| **SU1-250** | 2-1/2” | 25 | 100 |
| **SU1-300** | 3” | 25 | 100 |
| **SU1-350** | 3-1/2” | 25 | 100 |
| **SU1-400** | 4” | 25 | 100 |





## STAMPED STEEL
## 2-HOLE RIGID STRAPS

### FEATURES
- Electroplated Zinc

### NOTE
- Sizes 2-1/2” to 4” are also listed for EMT and IMC conduits

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **SR2-50** | 1/2” | 100 | 1000 |
| **SR2-75** | 3/4” | 100 | 1000 |
| **SR2-100** | 1” | 100 | 500 |
| **SR2-125** | 1-1/4” | 100 | 500 |
| **SR2-150** | 1-1/2” | 50 | 500 |
| **SR2-200** | 2” | 50 | 500 |
| **SU2-250** | 2-1/2” | 25 | 100 |
| **SU2-300** | 3” | 25 | 100 |
| **SU2-350** | 3-1/2” | 25 | 100 |
| **SU2-400** | 4” | 25 | 100 |





## STAMPED STEEL
## 1-HOLE RG6U CABLE STRAPS

### FEATURES
- Electroplated Zinc

| Cat. No. | Description | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **S1-25** | RG6U (Coaxial Cable) 1-Hole Strap | 100 | 1000 |



## STAMPED STEEL
## 1-HOLE MC(BX) CABLE STRAPS

### FEATURES
- Electroplated Zinc
- Corrosion-resistant

| Cat. No. | Description | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **S1-38** | 12-2, 12-3, 10-2, 10-3 MC (BX) 1-Hole Strap | 100 | 1000 |



## STAMPED STEEL
## 1-HOLE SERVICE ENTRANCE STRAPS

### FEATURES
- Electroplated Zinc
- Corrosion-resistant

| Cat. No. | Description | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **SES1-50** | Three #8, #6, #4 | 100 | 500 |
| **SES1-75** | Three #3, #2 | 100 | 500 |
| **SES1-100** | Three #1, #1/0, #2/0 | 50 | 250 |
| **SES1-200** | Three #3/0, #4/0 | 25 | 250 |



## STAMPED STEEL
## 2-HOLE SERVICE ENTRANCE STRAPS

### FEATURES
- Electroplated Zinc
- Corrosion-resistant

| Cat. No. | Description | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **SES2-50** | Three #8, #6, #4 | 20 | 100 |
| **SES2-75** | Three #3, #2 | 20 | 100 |
| **SES2-100** | Three #1, #1/0, #2/0 | 20 | 100 |
| **SES2-200** | Three #3/0, #4/0 | 20 | 100 |



## MALLEABLE IRON
## 1-HOLE RIGID STRAPS

### FEATURES
- Electroplated Zinc

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| SRM1-50 | 1/2” | 100 | 1000 |
| SRM1-75 | 3/4” | 50 | 500 |
| SRM1-100 | 1” | 25 | 250 |
| SRM1-125 | 1-1/4” | 20 | 200 |
| SRM1-150 | 1-1/2” | 10 | 100 |
| SRM1-200 | 2” | 10 | 50 |
| SRM1-250 | 2-1/2” | - | 25 |
| SRM1-300 | 3” | - | 25 |
| SRM1-350 | 3-1/2” | - | 10 |
| SRM1-400 | 4” | - | 10 |



## MALLEABLE IRON
## CLAMP BACK SPACERS

### FEATURES
- Electroplated Zinc

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| CBS-50 | 1/2” | 25 | 250 |
| CBS-75 | 3/4” | 25 | 250 |
| CBS-100 | 1” | 25 | 250 |
| CBS-125 | 1-1/4” | 10 | 100 |
| CBS-150 | 1-1/2” | 10 | 100 |
| CBS-200 | 2” | 5 | 50 |
| CBS-250 | 2-1/2” | - | 25 |
| CBS-300 | 3” | - | 10 |
| CBS-350 | 3-1/2” | - | 10 |
| CBS-400 | 4” | - | 10 |



## *STAMPED STEEL*
## NAIL STRAPS

### FEATURES
- Electroplated Zinc

### NOTE
- Varies according to sizes

| Cat. No. | EMT Size | Flex/Rigid Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| **NS-50** | 1/2” | 3/8” | 100 | 1000 |
| **NS-50/75** | 3/4” | 1/2” | 100 | 1000 |
| **NS-100** | 1” | 3/4” | 100 | 1000 |



## *PRE-GALVANIZED STEEL*
## STUD MOUNTING CABLE SUPPORTS

### FEATURES
- Wood or Metal stud
- Easy to lock
- Space-saving packaging

| Cat. No. | Description | Non-Metallic | MC/AC/BX | Std. Pkg. |
|---|---|---|---|---|
| **CS-CJ6** | Stud Mounting Cable Support with locking tab | Max. 6 | Max. 4 | 100 |





## *STAMPED STEEL* UNIVERSAL STRUT CLAMPS

### FEATURES
- Electroplated Zinc
- Listed for EMT, IMC and Rigid
- 1/2" to 2 ": Break-apart design without Nut
- 2-1/2" to 4": Two-piece design with Nut

| Cat. No. | EMT/Rigid Size | Std. Pkg. |
|---|---|---|
| **ST-50** | 1/2” | 100 |
| **ST-75** | 3/4” | 100 |
| **ST-100** | 1” | 100 |
| **ST-125** | 1-1/4” | 100 |
| **ST-150** | 1-1/2” | 50 |
| **ST-200** | 2” | 50 |
| **ST-250** | 2-1/2” | 50 |
| **ST-300** | 3” | 25 |
| **ST-350** | 3-1/2” | 25 |
| **ST-400** | 4” | 25 |



## STAMPED STEEL SADDLE TYPE STRUT CLAMPS

### FEATURES

- Electroplated Zinc
- Tri-Combo Hex Screw Head
- Wide Saddle design

| Cat. No. | EMT/Rigid/FMC Conduit Size | Cable O.D. Range | Std. Pkg. |
|---|---|---|---|
| STS-50 | 5/16” - 1/2” | 0.260" - 0.890" | 100 |
| STS-75 | 3/4” | 0.670" - 1.090" | 100 |
| STS-100 | 1” | 0.890" - 1.450" | 100 |
| STS-125 | 1-1/4” | 1.150" - 1.700" | 50 |
| STS-150 | 1-1/2” | 1.350" - 2.000" | 50 |
| STS-200 | 2” | 1.875" - 2.570" | 50 |
| STS-250 | 2-1/2” | 2.500" - 3.060" | 25 |
| STS-300 | 3” | 3.000" - 3.600" | 25 |
| STS-350 | 3-1/2” | 3.600" - 4.100" | 25 |
| STS-400 | 4” | 4.100" - 4.700" | 25 |



## STAMPED STEEL CONDUIT HANGERS WITH BOLTS

### FEATURES

- Electroplated Zinc

| Cat. No. | Trade Size | EMT Size | Rigid Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|---|
| PH-50B | #0B | 1/2” | 1/2” & 3/8” | 50 | 500 |
| PH-75B | #1B | 3/4” | 3/4” | 50 | 500 |
| PH-100B | #2B | 1” | 1” | 25 | 250 |
| PH-105B | #2-1/2B | 1-1/4” | - | 25 | 250 |
| PH-125B | #3B | 1-1/2” | 1-1/4” | 50 | 250 |
| PH-150B | #4B | - | 1-1/2” | 50 | 250 |
| PH-200B | #5B | 2” | 2” | 20 | 100 |
| PH-250B | #6B | 2-1/2” | 2-1/2” | 10 | 50 |
| PH-300B | #7B | 3” | 3” | 10 | 50 |
| PH-350B | #8B | 3-1/2” | 3-1/2” | 10 | 50 |
| PH-400B | #9B | 4” | 4” | 5 | 25 |



## *STEEL* BEAM CLAMPS

### FEATURES

- Electroplated Zinc
- 2 Threaded Holes
- Single Screw

| Cat. No. | Description | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **BC-25** | 1/4”-20 Tap, 3/4” Jaw, 100 lb. Load | 50 | 250 |
| **BC-38** | 3/8”-16 Tap, 7/8” Jaw, 200 lb. Load | 25 | 100 |



## *MALLEABLE IRON* BEAM CLAMPS

### FEATURES

- Electroplated Zinc
- 2 Threaded Holes
- Single Screw

| Cat. No. | Description | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **BCM-25** | 1/4”-20 Tap, 3/4” Jaw, 125 lb. Load | 50 | 250 |
| **BCM-38** | 3/8”-16 Tap, 7/8” Jaw, 300 lb. Load | 25 | 100 |
| **BCM-50** | 1/2”-13 Tap, 1” Jaw, 600 lb. Load | 10 | 50 |



## *MALLEABLE IRON* CONDUIT CLAMPS EDGE TYPE

### FEATURES

- Electroplated Zinc

| Cat. No. | Trade Size | Std. Pkg. |
|---|---|---|
| **MCCE-50** | 1/2” | 50 |
| **MCCE-75** | 3/4” | 50 |
| **MCCE-100** | 1” | 25 |
| **MCCE-125** | 1-1/4” | 25 |
| **MCCE-150** | 1-1/2” | 25 |
| **MCCE-200** | 2” | 25 |
| **MCCE-250** | 2-1/2” | 10 |
| **MCCE-300** | 3” | 10 |



*MCCE-50*



*MCCE-100*

## MALLEABLE IRON
## CONDUIT CLAMPS
## RIGHT ANGLE TYPE

### FEATURES
- Electroplated Zinc

| Cat. No. | Trade Size | Std. Pkg. |
|---|---|---|
| **MCCR-50** | 1/2” | 50 |
| **MCCR-75** | 3/4” | 50 |
| **MCCR-100** | 1” | 50 |
| **MCCR-125** | 1-1/4” | 50 |
| **MCCR-150** | 1-1/2” | 50 |
| **MCCR-200** | 2” | 50 |
| **MCCR-250** | 2-1/2” | 25 |
| **MCCR-300** | 3” | 25 |
| **MCCR-350** | 3-1/2” | 25 |
| **MCCR-400** | 4” | 25 |



*MCCR-50*



*MCCR-100*

## MALLEABLE IRON
## CONDUIT CLAMPS
## PARALLEL TYPE

### FEATURES
- Electroplated Zinc

| Cat. No. | Trade Size | Std. Pkg. |
|---|---|---|
| **MCCP-50** | 1/2” | 50 |
| **MCCP-75** | 3/4” | 50 |
| **MCCP-100** | 1” | 50 |
| **MCCP-125** | 1-1/4” | 25 |
| **MCCP-150** | 1-1/2” | 25 |
| **MCCP-200** | 2” | 25 |
| **MCCP-250** | 2-1/2” | 10 |
| **MCCP-300** | 3” | 10 |
| **MCCP-350** | 3-1/2” | 10 |
| **MCCP-400** | 4” | 10 |



*MCCP-50*



*MCCP-100*

## *STEEL* U-BOLTS WITH HEX NUTS

### FEATURES

- Electroplated Zinc

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **SUB-50** | 1/2” | 25 | 250 |
| **SUB-75** | 3/4” | 25 | 250 |
| **SUB-100** | 1” | 25 | 250 |
| **SUB-125** | 1-1/4” | 20 | 200 |
| **SUB-150** | 1-1/2” | 20 | 200 |
| **SUB-200** | 2” | 20 | 200 |
| **SUB-250** | 2-1/2” | - | 10 |
| **SUB-300** | 3” | - | 10 |
| **SUB-350** | 3-1/2” | - | 10 |
| **SUB-400** | 4” | - | 10 |



*SUB-75*



*SUB-125*

## *STEEL* FIXTURE HANGERS

| Cat. No. | For Use With | Mount Position | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| **FH-E** | 2, 3, or 4 Light Fixtures | End Mount | 100 | 500 |
| **FH-S** | 2, 3, or 4 Light Fixtures | Side Mount | 100 | 500 |



*FH-S*



*FH-E*

## *STEEL* HANGER SCREWS WITH SINGLE HOLE

### FEATURES

- Wood Screw Thread

| Cat. No. | Description | Dimension | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| **H-SCREW** | Flat Hanger Screw | 1/4” x 3” | 100 | 500 |



## COPPER-FREE ALUMINUM
### SERVICE ENTRANCE CAPS
### CLAMP TYPE

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| EC-50 | 1/2” | 15 | 90 |
| EC-75 | 3/4” | 10 | 60 |
| EC-100 | 1” | 7 | 42 |
| EC-125 | 1-1/4” | 5 | 30 |
| EC-150 | 1-1/2” | 4 | 24 |
| EC-200 | 2” | 4 | 8 |
| EC-250 | 2-1/2” | 1 | 3 |
| EC-300 | 3” | 1 | 3 |
| EC-300L (Large Body) | 3” | 1 | 3 |
| EC-350 | 3-1/2” | 1 | 2 |
| EC-400 | 4” | 1 | 2 |



## HEAVY-DUTY PVC
### SERVICE ENTRANCE HEADS

**FEATURES**
- Snap-on Covers

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| *ECP-50 | 1/2” | 5 | 10 |
| *ECP-75 | 3/4” | 2 | 10 |
| *ECP-100 | 1” | 2 | 10 |
| *ECP-125 | 1-1/4” | - | 5 |
| *ECP-150 | 1-1/2” | 2 | 10 |

*While Supplies Last



## HEAVY-DUTY PVC
### SERVICE ENTRANCE CABLE CAPS

**FEATURES**
- Snap-on Covers

| Cat. No. | Description | Std. Pkg. |
|---|---|---|
| ECCP-50 | #8, #6, #4, #2 | 10 |
| ECCP-100 | #1/0, #2/0 | 10 |
| ECCP-200 | #3/0, #4/0 | 10 |



## *STAMPED STEEL*
## 1-HOLE SERVICE ENTRANCE STRAPS

### FEATURES

- Electroplated Zinc
- Corrosion-resistant

| Cat. No. | Description | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **SES1-50** | Three #8, #6, #4 | 100 | 500 |
| **SES1-75** | Three #3, #2 | 100 | 500 |
| **SES1-100** | Three #1, #1/0, #2/0 | 50 | 250 |
| **SES1-200** | Three #3/0, #4/0 | 25 | 250 |



## *STAMPED STEEL*
## 2-HOLE SERVICE ENTRANCE STRAPS

### FEATURES

- Electroplated Zinc
- Corrosion-resistant

| Cat. No. | Description | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **SES2-50** | Three #8, #6, #4 | 20 | 100 |
| **SES2-75** | Three #3, #2 | 20 | 100 |
| **SES2-100** | Three #1, #1/0, #2/0 | 20 | 100 |
| **SES2-200** | Three #3/0, #4/0 | 20 | 100 |



## *DIE CAST COPPER-FREE ALUMINUM*
## THREADED SERVICE ENTRANCE CONDUIT BODIES
## *"SLB" SERIES*


WEATHERPROOF

### FEATURES


- With Die Cast Cover and Neoprene Gasket
- Gray color

| Cat. No. | Trade Size | DIMENSIONS - SLB SERIES A | B | C | Std. Pkg. |
|---|---|---|---|---|---|
| **SLB-50** | 1/2" | 1-5/8" | 1-3/8" | 3-9/32" | 20 |
| **SLB-75** | 3/4" | 1-27/32" | 1-9/16" | 3-19/32" | 20 |
| **SLB-100** | 1" | 2-1/8" | 1-31/32" | 4-5/16" | 10 |
| **SLB-125** | 1-1/4" | 2-19/32" | 2-7/16" | 5-9/16" | 10 |
| **SLB-150** | 1-1/2" | 2-19/32" | 2-5/8" | 6-1/4" | 6 |
| **SLB-200** | 2" | 3-1/8" | 3-1/8" | 6-3/4" | 3 |





*SLB*



## *ZINC DIE CAST* WATERTIGHT SERVICE ENTRANCE CABLE CONNECTORS

### FEATURES

- Watertight

| Cat. No. | Trade Size | Wire Size | Grommet Opening | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|---|
| **WECC-100-8** | 1" | #8 | 0.40" - 0.68" | 10 | 100 |
| **WECC-100-6** | 1" | #6 | 0.44" - 0.70" | 10 | 100 |
| **WECC-100-4** | 1" | #4 | 0.52" - 0.84" | 10 | 100 |
| **WECC-125-3** | 1-1/4" | #3 | 0.56" - 0.92" | 10 | 50 |
| **WECC-125-2** | 1-1/4" | #2 | 0.60" - 1.00" | 10 | 50 |
| **WECC-125-1** | 1-1/4" | #1 | 0.65" - 1.09" | 10 | 50 |
| **WECC-150-10** | 1-1/2" | #1/0 | 0.72" - 1.24" | 5 | 50 |
| **WECC-150-20** | 1-1/2" | #2/0 | 0.86" - 1.34" | 5 | 50 |
| **WECC-150-30** | 1-1/2" | #3/0 | 0.87" - 1.37" | 5 | 50 |
| **WECC-200-10** | 2" | #1/0 | 0.72" - 1.24" | 5 | 25 |
| **WECC-200-20** | 2" | #2/0 | 0.86" - 1.34" | 5 | 25 |
| **WECC-200-30** | 2" | #3/0 | 0.87" - 1.34" | 5 | 25 |
| **WECC-200-40** | 2" | #4/0 | 0.90" - 1.50" | 5 | 25 |
| **WECC-200-40N** | 2" | #4/0 | 1.11" - 1.73" | 5 | 25 |



## *ZINC DIE CAST* NON-METALLIC CABLE CONNECTORS

### NOTE

- Sizes 1” to 2” are also suitable for service entrance

| Cat. No. | For Use With | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| **RX-50** | (1) 14/2 to 10/2 NM, (2) 14/2 or (2) 12/2 NM, 0.340” to 0.380” Dia. Flex Cord (Dry Location) 14/3, 16/2, and 16/3 SJO | 1/2” | 100 | 1000 |
| **RX-75** | (2) 14-2 NM, AWG, 0.340” to 0.515” Dia. Flex Cord (Dry Location) 14/3, 14/2 SJO | 3/4” | 25 | 250 |
| ***For Service Entrace*** | | | | |
| **RX-100** | (4) 14/2, (1) 8/3, 8/2, 6/2, 6/3, 4/2, 4/3 NM (1) 2 SE Cable | 1” | 10 | 100 |
| **RX-125** | 4/3 or 2/3 NM | 1-1/4” | 5 | 50 |
| **RX-150** | 3-2/0 or 3-4/0 NM | 1-1/2” | 5 | 50 |
| **RX-200** | 3-2/0 or 3-4/0 NM | 2” | 5 | 50 |



## HEAVY-DUTY PVC
## SILL PLATES

| Cat. No. | Description | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| SPP | 3 - #4 thru #3/0 | 5 | 15 |



## DIE CAST ALUMINUM
## METER HUBS

### FEATURES

- Electroplated Zinc
- Rain-Tight

| Cat. No. | Trade Size | Std. Pkg. |
|---|---|---|
| AMH-100 | 1” | 10 |
| AMH-125 | 1-1/4” | 10 |
| AMH-150 | 1-1/2” | 10 |
| AMH-200 | 2” | 10 |
| AMH-250 | 2-1/2” | 10 |




## 24GA GALVANIZED STEEL
## ROOF JACKS

SOLAR

### FEATURES

- Uninsulated
- For service entrance conduit or ventilation pipe
- Fits Flat to 40º

| Cat. No. | Trade Size | Std. Pkg. |
|---|---|---|
| RJ-50 | 1/2” | 24 |
| RJ-75 | 3/4” | 24 |
| RJ-100 | 1” | 24 |
| RJ-125 | 1-1/4” | 24 |
| RJ-150 | 1-1/2” | 24 |
| RJ-200 | 2” | 24 |
| RJ-300 | 3” | 12 |
| RJ-400 | 4” | 12 |



## SERVICE ENTRANCE WEDGE GRIP CLAMPS

### FEATURES

- Designed to make quick sag adjustments.
- For use with ACSR, AAC, AAAC service cables
- Aluminum Body
- Stainless Steel Solid Bail

| Cat. No. | ACSR Wire Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **SEWG-1** | #6 - #2 | 10 | 50 |
| **SEWG-2** | #4 - 1/0 | 5 | 25 |
| **SEWG-3** | 2/0 - 4/0 | 5 | 25 |



## *PORCELAIN* WIRE HOLDERS

### FEATURES

- Porcelain & Galvanized Steel
- Varies according to sizes

| Cat. No. | Description | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| **PWH-L** | With 2-1/4" Lag Bolt | 2-3/4" | 5 | 20 |
| **PWH-M** | With Steel Clip for 1-1/4" to 3" Mast | 1-1/4" to 3" | 5 | 20 |



*PWH-L*



*PWH-M*

## *MACHINED STEEL*
## REDUCING BUSHINGS

### FEATURES

- Electroplated Zinc
- Meets Federal Spec. A-A-50553

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **RB-50/38** | 1/2" to 3/8" | 100 | 500 |
| **RB-75/50** | 3/4" to 1/2" | 100 | 500 |
| **RB-100/50** | 1" to 1/2" | 50 | 250 |
| **RB-100/75** | 1" to 3/4" | 50 | 250 |
| **RB-125/50** | 1-1/4" to 1/2" | 20 | 100 |
| **RB-125/75** | 1-1/4" to 3/4" | 20 | 100 |
| **RB-125/100** | 1-1/4" to 1" | 20 | 100 |
| **RB-150/50** | 1-1/2" to 1/2" | 10 | 50 |
| **RB-150/75** | 1-1/2" to 3/4" | 10 | 50 |
| **RB-150/100** | 1-1/2" to 1" | 10 | 50 |
| **RB-150/125** | 1-1/2" to 1-1/4" | 10 | 50 |
| **RB-200/50** | 2" to 1/2" | 10 | 50 |
| **RB-200/75** | 2" to 3/4" | 10 | 50 |
| **RB-200/100** | 2" to 1" | 10 | 50 |
| **RB-200/125** | 2" to 1-1/4" | 10 | 50 |
| **RB-200/150** | 2" to 1-1/2" | 10 | 50 |



## *MALLEABLE IRON*
## REDUCING BUSHINGS

### FEATURES

- Electroplated Zinc

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **RB-250/200** | 2-1/2" to 2" | 10 | 50 |
| **RB-300/200** | 3" to 2" | 10 | 50 |
| **RB-300/250** | 3" to 2-1/2" | 10 | 50 |
| **RB-350/250** | 3-1/2" to 2-1/2" | 5 | 20 |
| **MRB-350/300** | 3-1/2" to 3" | 5 | 20 |
| **MRB-400/350** | 4" to 3-1/2" | 5 | 20 |



## *STEEL* RIGID MALE ENLARGERS

### FEATURES

- Electroplated Zinc

| Cat. No. | Male Size | Female Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| **SME-50/75** | 1/2” | 3/4” | 25 | 250 |
| **SME-75/100** | 3/4” | 1” | 10 | 100 |
| **SME-100/125** | 1” | 1-1/4” | 10 | 100 |



*SME-50/75*



*SME-100/125*

## *PVC PLASTIC* INSULATING BUSHINGS

### FEATURES

- 105ºC rated
- Meets Federal Spec. A-A-50553

### NOTE

- Color may vary

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **PB-50** | 1/2” | 100 | 1000 |
| **PB-75** | 3/4” | 100 | 1000 |
| **PB-100** | 1” | 50 | 500 |
| **PB-125** | 1-1/4” | 25 | 250 |
| **PB-150** | 1-1/2” | 25 | 250 |
| **PB-200** | 2” | 10 | 100 |
| **PB-250** | 2-1/2” | 10 | 100 |
| **PB-300** | 3” | - | 20 |
| **PB-350** | 3-1/2” | - | 20 |
| **PB-400** | 4” | - | 10 |
| **PB-500** | 5” | - | 10 |
| **PB-600** | 6” | - | 10 |



## *ZINC DIE CAST* CONDUIT BUSHINGS

### FEATURES

- Full Machine-Cut Internal Threads
- Meets Federal Spec. A-A-50553

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **CB-50** | 1/2” | 100 | 1000 |
| **CB-75** | 3/4” | 50 | 500 |
| **CB-100** | 1” | 50 | 500 |
| **CB-125** | 1-1/4” | 25 | 250 |
| **CB-150** | 1-1/2” | 25 | 250 |
| **CB-200** | 2” | 15 | 90 |
| **CB-250** | 2-1/2” | 2 | 10 |
| **CB-300** | 3” | 2 | 10 |
| **CB-350** | 3-1/2” | - | 5 |
| **CB-400** | 4” | - | 5 |



## *ZINC DIE CAST* CONDUIT BUSHINGS INSULATED

### FEATURES

- Full Machine-Cut Internal Threads
- Insulated Throat
- Meets Federal Spec. A-A-50553

### NOTE

- Insulated color may vary

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **CBI-50** | 1/2” | 100 | 1000 |
| **CBI-75** | 3/4” | 50 | 500 |
| **CBI-100** | 1” | 50 | 500 |
| **CBI-125** | 1-1/4” | 25 | 250 |
| **CBI-150** | 1-1/2” | 25 | 250 |
| **CBI-200** | 2” | 15 | 90 |
| **CBI-250** | 2-1/2” | 2 | 10 |
| **CBI-300** | 3” | 2 | 10 |
| **CBI-350** | 3-1/2” | - | 5 |
| **CBI-400** | 4” | - | 5 |



## *MALLEABLE IRON* INSULATED CONDUIT BUSHINGS

### FEATURES

- Electroplated Zinc
- 105°C rated insulated throat

### NOTE

- Insulated color may vary

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **MCBI-50** | 1/2” | 100 | 1000 |
| **MCBI-75** | 3/4” | 50 | 500 |
| **MCBI-100** | 1” | 50 | 500 |
| **MCBI-125** | 1-1/4” | 25 | 250 |
| **MCBI-150** | 1-1/2” | 25 | 100 |
| **MCBI-200** | 2” | 10 | 100 |
| **MCBI-250** | 2-1/2” | - | 50 |
| **MCBI-300** | 3” | - | 25 |
| **MCBI-350** | 3-1/2” | - | 25 |
| **MCBI-400** | 4” | - | 10 |
| **MCBI-500** | 5” | - | 10 |
| **MCBI-600** | 6” | - | 10 |



*MCBI-75*



*MCBI-125*

## *ZINC DIE CAST* GROUND BUSHINGS INSULATED WITH UNIVERSAL LAY-IN LUG

### FEATURES

- 105ºC rated Throat Insulator

| Cat. No. | Trade Size | Lug Range | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| **GBLL-50** | 1/2” | #14 - #4 | 50 | 500 |
| **GBLL-75** | 3/4” | #14 - #4 | 40 | 400 |
| **GBLL-100** | 1” | #14 - #4 | 15 | 150 |
| **GBLL-125** | 1-1/4” | #14 - #4 | 15 | 150 |
| **GBLL-125-10** | 1-1/4" | #14 - #1/0 | 20 | 200 |
| **GBLL-150** | 1-1/2” | #14 - #4 | 10 | 100 |
| **GBLL-150-10** | 1-1/2" | #14 - #1/0 | 10 | 100 |
| **GBLL-200** | 2” | #14 - #4 | 5 | 50 |
| **GBLL-200-10** | 2" | #14 - #1/0 | 10 | 100 |
| **GBLL-250** | 2-1/2” | #6 - #250MCM | 5 | 50 |
| **GBLL-250-10** | 2-1/2" | #14 - #1/0 | - | 50 |
| **GBLL-300** | 3” | #6 - #250MCM | 5 | 50 |
| **GBLL-300-10** | 3" | #14 - #1/0 | - | 50 |
| **GBLL-350** | 3-1/2” | #6 - #250MCM | 4 | 40 |
| **GBLL-350-10** | 3-1/2" | #14 - #1/0 | - | 10 |
| **GBLL-400** | 4” | #6 - #250MCM | 4 | 40 |
| **GBLL-400-10** | 4" | #14 - #1/0 | - | 10 |



## *MALLEABLE IRON* GROUND BUSHINGS INSULATED WITH UNIVERSAL LAY-IN LUG

### FEATURES

- Electroplated Zinc
- Full Machine-Cut Internal Threads
- Meets Federal Spec. A-A-50553

| Cat. No. | Trade Size | Lug Range | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| **MGBLL-50** | 1/2” | #14 - #4 | 50 | 200 |
| **MGBLL-75** | 3/4” | #14 - #4 | 25 | 100 |
| **MGBLL-100** | 1” | #14 - #4 | 25 | 100 |
| **MGBLL-125** | 1-1/4” | #14 - #4 | 10 | 50 |
| **MGBLL-125-10** | 1-1/4" | #14 - #1/0 | 20 | 200 |
| **MGBLL-150** | 1-1/2” | #14 - #4 | 10 | 50 |
| **MGBLL-150-10** | 1-1/2" | #14 - #1/0 | 10 | 100 |
| **MGBLL-200** | 2” | #14 - #4 | 10 | 50 |
| **MGBLL-200-10** | 2" | #14 - #1/0 | 10 | 100 |
| **MGBLL-250** | 2-1/2” | #6 - #250MCM | 5 | 25 |
| **MGBLL-250-10** | 2-1/2" | #14 - #1/0 | - | 50 |
| **MGBLL-300** | 3” | #6 - #250MCM | 5 | 25 |
| **MGBLL-300-10** | 3" | #14 - #1/0 | - | 25 |
| **MGBLL-350** | 3-1/2” | #6 - #250MCM | - | 5 |
| **MGBLL-350-10** | 3-1/2" | #14 - #1/0 | - | 10 |
| **MGBLL-400** | 4” | #6 - #250MCM | - | 5 |
| **MGBLL-400-10** | 4" | #14 - #1/0 | - | 10 |
| **MGBLL-500** | 5” | #6 - #250MCM | - | 5 |
| **MGBLL-500-30** | 5" | #6 - #3/0 | - | 5 |
| **MGBLL-600** | 6” | #6 - #250MCM | - | 5 |
| **MGBLL-600-30** | 6" | #6 - #3/0 | - | 5 |



## *STEEL* FLEX BUSHINGS

### FEATURES

- Electroplated Zinc
- Used to insulate cut Flex when the conduit is used for data cables without a junction box

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **FB-50** | 1/2” | 100 | 1000 |
| **FB-75** | 3/4” | 100 | 500 |
| **FB-100** | 1” | 25 | 250 |





*Shown Installed*

## *PLASTIC* EMT BUSHINGS

### FEATURES

- Protects wires from damage by sharp edges of EMT
- Size 2-1/2” to 4” can be also used for Rigid, IMC and PVC conduit

### NOTE

- Color may vary

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **TPB-50** | 1/2” | 100 | 1000 |
| **TPB-75** | 3/4” | 100 | 1000 |
| **TPB-100** | 1” | 50 | 500 |
| **TPB-125** | 1-1/4” | 25 | 250 |
| **TPB-150** | 1-1/2” | 25 | 250 |
| **TPB-200** | 2” | 10 | 100 |
| **TPB-250** | 2-1/2” | 10 | 100 |
| **TPB-300** | 3” | - | 20 |
| **TPB-350** | 3-1/2” | - | 20 |
| **TPB-400** | 4” | - | 10 |



## *PLASTIC* NON-METALLIC CABLE QUICK-LOCK CONNECTORS

### FEATURES

- Easy and fast installation
- Simply remove with screwdriver if necessary

| Cat. No. | NM Cable Range | Trade Size | KO Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|---|
| **PQLC-38** | 14/2 - 10/3 | 3/8” | 1/2” | 100 | 1000 |
| **PQLC-75** | 14/3 - 6/3 | 3/4” | 3/4” | 50 | 500 |



*PQLC-38*



*PQLC-75*

## *PLASTIC* UNIVERSAL METAL STUD GROMMETS

### FEATURES


- High strength, non-conductive polypropylene
- Universal design fits into a standard 1" trade size hole and all factory-punched stud holes
- Lightweight material eases installation

| Cat. No. | Description | Std. Pkg. |
|---|---|---|
| **PUSG** | Universal Snap-in type Bushings for metal stud, fit all factory punched metal stud holes | 100 |




### INSTALLATION INSTRUCTION:

**Step1:** Separate the two halves
**Step2:** Snap the bushing end and the washer end together through the hole
**Step3:** Install cable through the grommet



### COMMON HOLE SHAPES IN METAL STUDS:

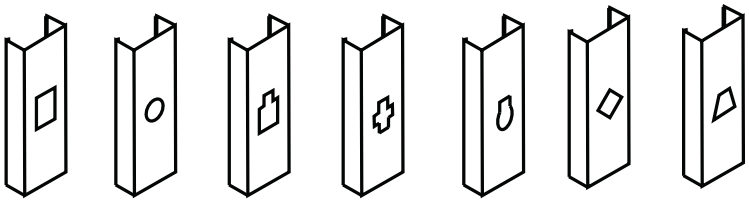

## ANTI-SHORT BUSHINGS THERMOPLASTIC

### FEATURES

- High-Temperature Plastic
- Fits BX (AC) and Flex conduits

| Cat. No. | For Use With | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| **ASB-516** | 14/2, 14/3, 12/2 | 5/16” | 35 | 3500 |
| **ASB-38** | 14/4, 12/3, 6/1, 4/1 | 3/8” | 35 | 2100 |
| **ASB-716** | 12/4, 10/2, 10/3, 2/1 | 7/16” | 35 | 700 |
| **ASB-50** | 10/4, 8/2, 8/3, 1/1 | 1/2” | 20 | 400 |
| **ASB-75** | 8/4, 6/2, 4/2, 4/3, 6/4 | 3/4” | 16 | 320 |



## *ZINC DIE CAST* CONDUIT LOCKNUTS

### FEATURES

- Full-Cut Internal Threads
- Meets Federal Spec. A-A-50553

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **LN-50** | 1/2” | 100 | 1000 |
| **LN-75** | 3/4” | 100 | 1000 |
| **LN-100** | 1” | 100 | 1000 |
| **LN-125** | 1-1/4” | 50 | 500 |
| **LN-150** | 1-1/2” | 50 | 500 |
| **LN-200** | 2” | 25 | 250 |
| **LN-250** | 2-1/2” | 10 | 100 |
| **LN-300** | 3” | 5 | 50 |
| **LN-350** | 3-1/2” | 5 | 50 |
| **LN-400** | 4” | - | 25 |



## *STEEL* CONDUIT LOCKNUTS

### FEATURES

- Electroplated Zinc
- Full-Cut Internal Threads
- Meets Federal Spec. A-A-50553

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **SLN-50** | 1/2” | 100 | 1000 |
| **SLN-75** | 3/4” | 100 | 1000 |
| **SLN-100** | 1” | 100 | 1000 |
| **SLN-125** | 1-1/4” | 50 | 500 |
| **SLN-150** | 1-1/2” | 50 | 500 |
| **SLN-200** | 2” | 25 | 250 |
| **SLN-250** | 2-1/2” | 10 | 100 |
| **SLN-300** | 3” | 5 | 50 |
| **SLN-350** | 3-1/2” | 5 | 50 |
| **SLN-400** | 4” | - | 25 |
| **SLN-500** | 5” | - | 10 |
| **SLN-600** | 6” | - | 10 |



## *STEEL* SEALING LOCKNUTS

### FEATURES

- Electroplated Zinc
- Bonded with Molten Sealing Material
- Meets Federal Spec. A-A-50553

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **SSLN-50** | 1/2” | 100 | 1000 |
| **SSLN-75** | 3/4” | 100 | 1000 |
| **SSLN-100** | 1” | 100 | 1000 |
| **SSLN-125** | 1-1/4” | 50 | 500 |
| **SSLN-150** | 1-1/2” | 50 | 500 |
| **SSLN-200** | 2” | 25 | 250 |
| **SSLN-250** | 2-1/2” | 10 | 100 |
| **SSLN-300** | 3” | 5 | 50 |
| **SSLN-350** | 3-1/2” | 5 | 50 |
| **SSLN-400** | 4” | - | 25 |
| **SSLN-500** | 5” | - | 10 |
| **SSLN-600** | 6” | - | 10 |



## *STEEL* GROUNDING (BONDING) RIGID LOCKNUTS

### FEATURES

- Electroplated Zinc

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **GL-50** | 1/2” | 50 | 200 |
| **GL-75** | 3/4” | 25 | 100 |
| **GL-100** | 1” | 25 | 100 |
| **GL-125** | 1-1/4” | 10 | 50 |
| **GL-150** | 1-1/2” | 10 | 50 |
| **GL-200** | 2” | 10 | 50 |
| **GL-250** | 2-1/2” | 5 | 25 |
| **GL-300** | 3” | 5 | 25 |
| **GL-350** | 3-1/2” | - | 5 |
| **GL-400** | 4” | - | 5 |
| **GL-500** | 5” | - | 5 |
| **GL-600** | 6” | - | 5 |



## *NYLON PLASTIC* LOCKNUTS

### FEATURES

- Full-cut Internal threads
- Meets Federal Spec. A-A-50553

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| PLN-38 | 3/8” | 50 | - |



## *STEEL* LIQUID TIGHT SEALING RINGS

### FEATURES

- Neoprene Rubber Gasket
- Steel Retainer
- Form liquid tight seal between connector and box

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| LTSR-50 | 1/2” | 250 | 2500 |
| LTSR-75 | 3/4” | 200 | 2000 |
| LTSR-100 | 1” | 150 | 1500 |
| LTSR-125 | 1-1/4” | 100 | 1000 |
| LTSR-150 | 1-1/2” | 50 | 500 |
| LTSR-200 | 2” | 50 | 500 |
| LTSR-250 | 2-1/2” | - | 100 |
| LTSR-300 | 3” | - | 100 |
| LTSR-350 | 3-1/2” | - | 50 |
| LTSR-400 | 4” | - | 50 |



## GALVANIZED STAMPED STEEL
## REDUCING WASHERS

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| RW-75/50 | 3/4" to 1/2" | 250 | 1000 |
| RW-100/50 | 1" to 1/2" | 250 | 1000 |
| RW-100/75 | 1" to 3/4" | 250 | 1000 |
| RW-125/50 | 1-1/4" to 1/2" | 100 | 400 |
| RW-125/75 | 1-1/4" to 3/4" | 100 | 400 |
| RW-125/100 | 1-1/4" to 1" | 100 | 400 |
| RW-150/50 | 1-1/2" to 1/2" | - | 100 |
| RW-150/75 | 1-1/2" to 3/4" | - | 100 |
| RW-150/100 | 1-1/2" to 1" | - | 100 |
| RW-150/125 | 1-1/2" to 1-1/4" | - | 100 |
| RW-200/50 | 2" to 1/2" | - | 50 |
| RW-200/75 | 2" to 3/4" | - | 50 |
| RW-200/100 | 2" to 1" | - | 50 |
| RW-200/125 | 2" to 1-1/4" | - | 50 |
| RW-200/150 | 2" to 1-1/2" | - | 50 |
| RW-250/50 | 2-1/2" to 1/2" | 25 | 100 |
| RW-250/75 | 2-1/2" to 3/4 | 25 | 100 |
| RW-250/100 | 2-1/2" to 1" | 25 | 100 |
| RW-250/125 | 2-1/2" to 1-1/4" | 25 | 100 |
| RW-250/150 | 2-1/2" to 1-1/2" | 25 | 100 |
| RW-250/200 | 2-1/2" to 2" | 25 | 100 |
| RW-300/50 | 3" to 1/2" | - | 25 |
| RW-300/75 | 3" to 3/4" | - | 25 |
| RW-300/100 | 3" to 1" | - | 25 |
| RW-300/125 | 3" to 1-1/4" | - | 25 |
| RW-300/150 | 3" to 1-1/2" | - | 25 |
| RW-300/200 | 3" to 2" | - | 25 |
| RW-300/250 | 3" to 2-1/2" | - | 25 |
| RW-350/50 | 3-1/2" to 1/2" | - | 10 |
| RW-350/75 | 3-1/2" to 3/4" | - | 10 |
| RW-350/100 | 3-1/2" to 1" | - | 10 |
| RW-350/125 | 3-1/2" to 1-1/4" | - | 10 |
| RW-350/150 | 3-1/2" to 1-1/2" | - | 10 |
| RW-350/200 | 3-1/2" to 2" | - | 10 |
| RW-350/250 | 3-1/2" to 2-1/2" | - | 10 |
| RW-350/300 | 3-1/2" to 3" | - | 10 |
| RW-400/50 | 4" to 1/2" | - | 10 |
| RW-400/75 | 4" to 3/4" | - | 10 |
| RW-400/100 | 4" to 1" | - | 10 |
| RW-400/125 | 4" to 1-1/4" | - | 10 |
| RW-400/150 | 4" to 1-1/2" | - | 10 |
| RW-400/200 | 4" to 2" | - | 10 |
| RW-400/250 | 4" to 2-1/2" | - | 10 |
| RW-400/300 | 4" to 3" | - | 10 |
| RW-400/350 | 4" to 3-1/2" | - | 10 |



## *STEEL* FIXED BAR HANGERS

### FEATURES

- Electroplated Zinc
- For T-Bar or Hard Lid Ceiling Joists

| Cat. No. | Description | Master Ctn. |
|---|---|---|
| **BHT-1** | 24" T-Bar Box Hanger, Clip Included, for use with boxes 1-1/2" or 2-1/8" deep | 50 |
| **BHT-1A** | 24" T-Bar Box Hanger, Clip Included, 8" adjustable height | 50 |
| **BHT-1HD** | 24" Heavy Duty T-Bar Box Hanger, Clip Included, for use with boxes 1-1/2" or 2-1/8" deep | 25 |
| **BHT-1HDEEP** | 24" Heavy Duty T-Bar Box Hanger, Clip Included, with 1-1/2" Extension Brackets for use with boxes up to 3-5/8" deep | 25 |
| **BH-1** | 24" Straight Bar Hanger for mounting ceiling boxes, Slotted, Includes 2 Stove Bolt / Unit | 50 |
| **BH-1C** | 24" Straight bar hanger for mounting ceiling boxes, with BH-C Box Clip | 50 |
| **BH-1S** | 20" Straight bar hanger for mounting ceiling boxes, slotted, includes 2 Stove Bolt / unit | 50 |
| **BH-1SC** | 20" Straight Bar Hanger for mounting ceiling boxes, with Box Clip BH-C | 50 |
| **BH-2NC** | 21" Offset (1-1/2") Bar Hanger for mounting boxes with ring, Slotted | 50 |
| **BH-C** | Additional Box Clip & Screw set for use with BH-1, BH-1S & BH-2NC | 100 |
| **BH-3** | Straight Bracket for architectural recessed lights 25-1/4" long with notches 24" apart for use on T-Bar | 50 |
| **BHT-C** | Additional Box Clip & Screw set for use with BHT-1 & BHT-1A | 100 |



***Preassembled***
*BHT-1*



***Preassembled***
*BHT-1A*



*BHT-1HD*



*BHT-1HDEEP*



*BH-1*



*BH-1C*




*BH-1S*



*BH-1SC*



*BH-2NC*



*BH-3*



*BH-C*



*BHT-C*

## *STEEL* ADJUSTABLE BAR HANGERS

### FEATURES

- Electroplated Zinc
- For wall stud and hard lid ceiling joists

| Cat. No. | Description | Master Ctn. |
|---|---|---|
| *BHA-1 | Adjustable Bar Hanger with Stud for joist spacing 16” to 24” with #3/8-18 NPS Threaded Stud | 50 |
| *BHA-1C | Adjustable Bar Hanger with Stud for joist spacing 16” to 24” with Box Clip | 50 |
| BHA-16 | 11” to 18” Adjustable Box Bracket - Mount box with self-tapping screws on notches<br>Ends bend and wrap around stud - Can be used with boxes 1-1/2”, 2-1/8” or 2-1/2” deep | 50 |
| BHA-24 | 15-3/4" to 26” Adjustable Box Bracket - Mount box with self-tapping screws on notches<br>Ends bend and wrap around stud - Can be used with boxes 1-1/2”, 2-1/8” or 2-1/2” deep | 50 |

*50 lbs fixture rating at 16" stud



*BHA-1*



*BHA-1C*



*BHA-16*

Adjusts 11" - 18”



*BHA-24*


Adjusts 15-3/4" - 26"

## NAIL SAFETY PLATES

### FEATURES

- Provides protection from nail and screw penetration

| Cat. No. | Description | Trade Size | Std. Pkg. |
|---|---|---|---|
| **SP-1** | 16GA Safety Plate with prongs | 1.5” x 2.75” | 100 |
| **SP-1-500** | 16GA Safety Plate with prongs | 1.5” x 2.75” | 500 |
| **SP-35** | 16GA Safety Plate with prongs | 3” x 5” | 100 |
| **SP-6** | 16GA Safety Plate with prongs | 1.5” x 6” | 100 |
| **SP-9** | 16GA Safety Plate with nail holes | 1.5” x 9” | 50 |
| **SP-12** | 16GA Safety Plate with nail holes | 1.5” x 12” | 50 |
| **SP-18** | 16GA Safety Plate with nail holes | 1.5” x 18” | 50 |
| **SP-24** | 16GA Safety Plate with nail holes | 1.5” x 24” | 50 |
| **SPH-9** | 12GA Safety Plate with nail holes | 1.5” x 9” | 50 |
| **SPH-12** | 12GA Safety Plate with nail holes | 1.5” x 12” | 50 |
| **SPH-18** | 12GA Safety Plate with nail holes | 1.5” x 18” | 50 |
| **SPH-24** | 12GA Safety Plate with nail holes | 1.5” x 24” | 50 |

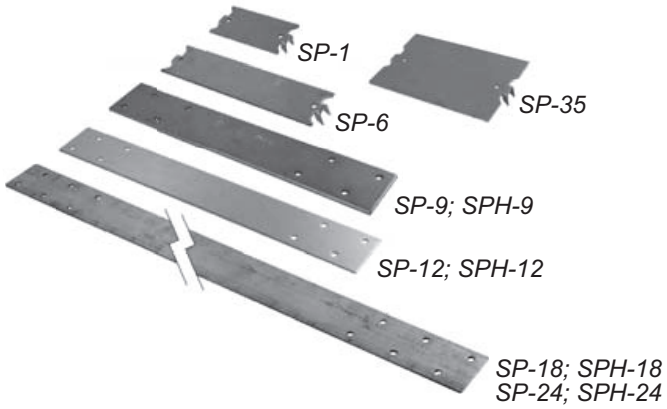


## SWITCH BOX SUPPORTS

### FEATURES

- Bendable Tabs

| Cat. No. | Description | Std. Pkg. |
|---|---|---|
| **SBS** | 20GA | 100 |



## *STAMPED STEEL* SNAP-IN KNOCKOUT SEALS

### FEATURES

- Electroplated Zinc
- Held by spring tension
- For capping unused knockout holes

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **KO-50** | 1/2” | 100 | 1000 |
| **KO-75** | 3/4” | 100 | 1000 |
| **KO-100** | 1” | 100 | 500 |
| **KO-125** | 1-1/4” | 50 | 100 |
| **KO-150** | 1-1/2” | - | 50 |
| **KO-200** | 2” | - | 25 |



## *STAMPED STEEL* THREE-PIECE KNOCKOUT SEALS

### FEATURES

- Electroplated Zinc
- For capping unused knockout holes
- Embossed for quick self centering
- Installed using the screw and back strap

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **KO3P-50** | 1/2” | 100 | 500 |
| **KO3P-75** | 3/4” | 50 | 500 |
| **KO3P-100** | 1” | 25 | 500 |
| **KO3P-125** | 1-1/4” | 25 | 250 |
| **KO3P-150** | 1-1/2” | 10 | 300 |
| **KO3P-200** | 2” | 10 | 300 |
| **KO3P-250** | 2-1/2” | 10 | 100 |
| **KO3P-300** | 3” | 10 | 100 |
| **KO3P-350** | 3-1/2” | 10 | 100 |
| **KO3P-400** | 4” | 10 | 100 |



## *STEEL* REGULAR SPRING NUTS

### FEATURES

- Electroplated Zinc

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **SNR-1420** | 1/4” - 20 | 100 | 600 |
| **SNR-3816** | 3/8” - 16 | 100 | 600 |
| **SNR-1213** | 1/2” - 13 | 100 | 600 |



*SNR-1420*



*SNR-3816*



*SNR-1213*

## *STEEL* JACK CHAIN

### FEATURES

- Electroplated Zinc
- In Steel Reel
- 25 lbs. max. load

| Cat. No. | Trade Size | Std. Pkg. |
|---|---|---|
| **JC-12** | 12GA | 100 |




## *24GA GALVANIZED STEEL* ROOF JACKS

### FEATURES

- Uninsulated
- Fits Flat to 40º
- For service entrance conduit or ventilation pipe

| Cat. No. | Trade Size | Std. Pkg. |
|---|---|---|
| **RJ-50** | 1/2” | 24 |
| **RJ-75** | 3/4” | 24 |
| **RJ-100** | 1” | 24 |
| **RJ-125** | 1-1/4” | 24 |
| **RJ-150** | 1-1/2” | 24 |
| **RJ-200** | 2” | 24 |
| **RJ-300** | 3” | 12 |
| **RJ-400** | 4” | 12 |



## SCREW KITS, PLASTIC ANCHOR KITS & EASY ANCHOR KITS

### FEATURES

- In Plastic Partition Kits

| Cat. No. | Description | Trade Size | Screw Count/Kit | Std. Pkg. |
|---|---|---|---|---|
| **KIT-632FH** | 6-32 Flat Head, 1/2" to 2", Slot | #6-32 | 370 | 10 |
| **KIT-632RH** | 6-32 Round Head, 1/2" to 2", Slot/Phillips | #6-32 | 370 | 10 |
| **KIT-832RH** | 8-32 Round Head, 1/2" to 2", Slot/Phillips | #8-32 | 370 | 10 |
| **KIT-10PAK** | #10 x 1" Screws & Plastic Anchors, with Masonry Drill Bit | #10 x 1" | 110 | 10 |
| **KIT-8EZ** | #8 x 1-1/2" Zinc Dry Wall Easy Anchor Kit | #8 x 1-1/2" | 50 | 10 |
| **KIT-1032TC** | #10 x 1-1/4" Tri-Combo Screw (Hex/Phillips/Slot) Self-Tapping Screw & #8-10 x 1-1/4" Anchors (One 1/4" Masonry drill bit) | #10-32 x 1-1/4" | 100 | 10 |

**Machine Screw Kits Screw Count**

| Size | Qty. |
|---|---|
| 1/2" | 100 |
| 3/4" | 75 |
| 1" | 75 |
| 1-1/4" | 50 |
| 1-1/2" | 40 |
| 2" | 30 |
| **Total** | **370** |



*KIT-632FH*



*KIT-632RH*



*KIT-832RH*



*KIT-10PAK*



*KIT-8EZ*



*KIT-1032TC*

## *STEEL* BEAM CLAMPS

### FEATURES

- Electroplated Zinc
- 2 Threaded Holes
- Single Screw

| Cat. No. | Description | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **BC-25** | 1/4"-20 Tap, 3/4" Jaw, 100 lb. Load | 50 | 250 |
| **BC-38** | 3/8"-16 Tap, 7/8" Jaw, 200 lb. Load | 25 | 100 |



## *MALLEABLE IRON* BEAM CLAMPS

### FEATURES

- Electroplated Zinc
- Single Screw
- 2 Threaded Holes

| Cat. No. | Description | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **BCM-25** | 1/4”-20 Tap, 3/4” Jaw, 125 lb. Load | 50 | 250 |
| **BCM-38** | 3/8”-16 Tap, 7/8” Jaw, 300 lb. Load | 25 | 100 |
| **BCM-50** | 1/2”-13 Tap, 1” Jaw, 600 lb. Load | 10 | 50 |



## *STEEL* “S” HOOKS

### FEATURES

- Electroplated Zinc
- 25 lbs. max. load

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **SH-2** | 12GA, 1-1/4” | 100 | 1000 |



## *STEEL* HANGER SCREWS WITH SINGLE HOLE

### FEATURES

- Wood Screw Thread

| Cat. No. | Description | Dimension | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| **H-SCREW** | Flat Hanger Screw | 1/4” x 3” | 100 | 500 |



## *STEEL* FIXTURE HANGERS

| Cat. No. | For Use With | Mount Position | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| **FH-E** | 2, 3, or 4 Light Fixtures | End Mount | 100 | 500 |
| **FH-S** | 2, 3, or 4 Light Fixtures | Side Mount | 100 | 500 |



*FH-S*



*FH-E*

## SERVICE ENTRANCE WEDGE GRIP CLAMPS

### FEATURES

- Designed to make quick sag adjustments
- For use with ACSR, AAC, AAAC service cables
- Aluminum Body
- Stainless Steel Solid Bail

| Cat. No. | ACSR Wire Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **SEWG-1** | #6 - #2 | 10 | 50 |
| **SEWG-2** | #4 - 1/0 | 5 | 25 |
| **SEWG-3** | 2/0 - 4/0 | 5 | 25 |



## *PORCELAIN* WIRE HOLDERS

### FEATURES

- Porcelain & Galvanized Steel
- Varies according to sizes

| Cat. No. | Description | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| **PWH-L** | With 2-1/4" Lag Bolt | 2-3/4" | 5 | 20 |
| **PWH-M** | With Steel Clip for 1-1/4" to 3" Mast | 1-1/4" to 3" | 5 | 20 |



*PWH-L*



*PWH-M*

## *BLACK ANNEALED STEEL* TIE WIRE

### FEATURES

- 16-1/2GA

| Cat. No. | Description | Trade Size | Std. Pkg. |
|---|---|---|---|
| **TW** | Tie Wire | 16GA, 400' | 20 |



## *MALLEABLE IRON*
## RIGID FLOOR FLANGES

### FEATURES

- Electroplated Zinc

| Cat. No. | Trade Size | Std. Pkg. |
|---|---|---|
| **FR-50** | 1/2” | 50 |
| **FR-75** | 3/4” | 50 |
| **FR-100** | 1” | 50 |
| **FR-125** | 1-1/4” | 25 |
| **FR-150** | 1-1/2” | 25 |
| **FR-200** | 2” | 25 |



## *MALLEABLE IRON*
## CONCRETE SLAB INSERTS STRAIGHT

### FEATURES

- Electroplated Zinc

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **MCSI-50** | 1/2” | 10 | 100 |
| **MCSI-75** | 3/4” | 10 | 100 |
| **MCSI-100** | 1” | 10 | 50 |



## *MALLEABLE IRON*
## CONCRETE SLAB INSERTS 90˚ANGLE

### FEATURES

- Electroplated Zinc

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **MCSI90-50** | 1/2” | 10 | 100 |
| **MCSI90-75** | 3/4” | 10 | 100 |
| **MCSI90-100** | 1” | 10 | 50 |






# ELECTRICAL & FASTENING
## SUPPORT SOLUTIONS

Orbit features an extensive variety of Fastening and Support products for electrical and datacom installations. Many of Orbit's Fasteners are composed of Spring Steel material, which are incredibly versatile, and often require no tools to install. Orbit constantly evaluates its product mix to ensure contractors have access to the products they need. Our vast Fastener and Support selection includes Spring Steel Cable & Conduit Clips, Wall Mounted Box Brackets, Ceiling Hangers & Plates, Datacom Support Products, and more.

## Cable & Conduit



## Straps



## Stud Wall




## Simple Support Brackets



## The HABIT



## Adjustable Rings



## Box & Conduit Hangers



## Recessed Light Mounting Solutions



## Ceiling & Acoustical



## Bar Hangers



## Beam & Purlin



## Datacom & Low Voltage



## Safety Plates



## Accessories



# Spring Steel



Spring Steel Fastening products are manufactured from annealed, low alloy metals that feature a high yield strength. Spring Steel Fasteners 'snap' back to their original shape, even after repeated bending and twisting. Each fastener is electrocoated with a grey finish, then cured in an oven to promote cross-linking. This electrocoating is extremely resistant to wear-and-tear, and even provides a degree of electrical insulation. Spring Steel Fasteners can be used for a variety of electrical, mechanical, and low voltage applications.

# Steel




Steel Fasteners and Box Supports are machined from a solid bar or sheet of stock steel. Steel Fasteners are coated with zinc plating for corrosion protection, and offer a higher tensile strength and higher yield strength than zinc die-cast fittings. Steel Fasteners are suitable for dry locations, and are considered to be “specification grade” fittings.

# Modular Simple Support Bracket Family

Pg. 190, 216

Accomplish an estimated 95% of all wall rough work...with fewer than 20 items! Orbit's award-winning Simple Support Bracket system starts with the Universal Mounting Adapter (UMA or UMA-LVBS) as its "platform" to build on. Assemble it with any 4", 4-11/16" or even 5" square box. Adapters allow for pairing of readily-available 4" mud rings with any 4-11/16" or 5" box. Quickly mount the box/adapter assembly direct-to-stud OR between-studs with the Simple Support Bracket (SSB-T5). A go-anywhere solution for electrical, low voltage, life safety, and lighting installs. Install these devices direct-to - and between - wall studs. Or mount them overhead, between hard-lid joists or T-grid ceiling channel!

### Ceiling T-Bar

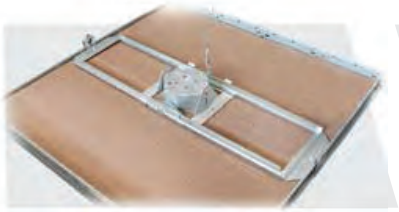

### Ceiling Hard Lid



### Fire Alarm



### Direct-to-Stud



### Between Studs




### Multi-gang



**PATENTED**

# Universal Mounting Adapter with Back Support


Pg. 191

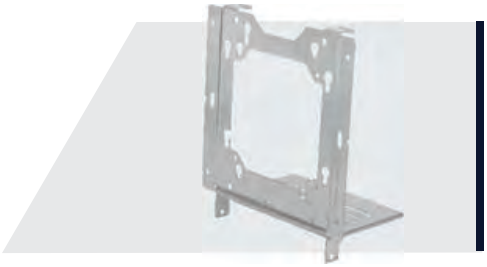

Universal Mounting Adapter with Back Support is the only mounting adapter of its kind that accepts 4”, 4-11/16” and now 5” square boxes. UMA-LVBS features a unique keyhole pattern that allows any size box to be turned 90°. Keyholes also allow 4" rings to be paired with any 4-11/16" or 5" square box. Integrated back support for 2-1/2" and 3-1/2" stud depths. Increase back support range up to 6" with the FS-456-EXT extender.

# Preassembled SSB with 4" or 4-11/16" Sq. Deep Box and Pigtail

Pg. 193

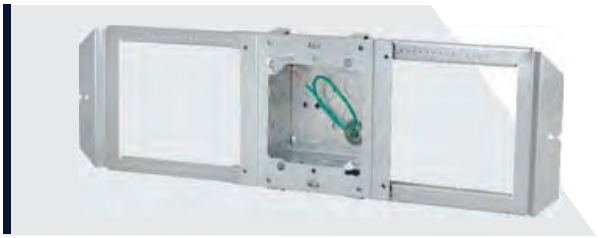

Order the Simple Support Bracket preassembled - with UMA and 4" Sq. (SSB-4S-MKO) or 4-11/16" Sq. (SSB-5S-MKO) 2-1/8" deep box and 10" pigtail. Expand the bracket from 15" to 25" with box/adapter attached. Rigid bracket requires no back support!

*Contact our PROFAB Division at info@orbitprofab.com to purchase the SSB System with pre-installed boxes and rings.*



PATENTED

## Preassembled SSB with Adjustable Multigang Masonry Box

Pg. 195






The SSB-MB Series is available in 3,4,5 and 6-gang configurations. 3-1/2" deep masonry box adjusts from 5/8" to 1-1/2" via outside screws. Outlets and devices attach to the box without a ring, making SSB-MB Series ideal for hospital nurse call stations.

## Preassembled SSB with True 5" Square Box

Pg. 193

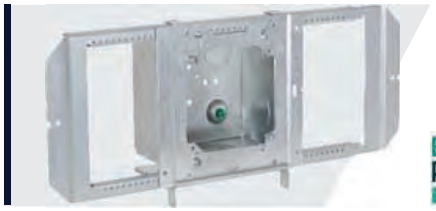

EC&M Product of the Year 2020 Category Winner 20 YEARS

The SSB-T5B-200 comes preassembled with SSB-T5 bracket, UMA-LVBS, True 5" Box (T5B-200), Reducer (T5R), and pre-installed screws for 4" rings and covers.

## Box Mounted Cable / Conduit Supports

Pg. 179, 196

EC&M Product of the Year 2020 Category Winner 20 YEARS




Box Mounted Cable & Conduit Supports eliminate the need to install NEC-required First Means of Support in the field. BMCS Series attaches to the back of any 4", 4-11/16" or 5" square box with just one Tek screw. Horizontal pin holes accommodate up to 2" conduit. Secure MC/AC cable via bendable forks , or CS-CJ6 on model no. BMCS-CJ6.

**PATENTED**

# Box and Conduit Hanger Support Plate up to 12" x 12" Boxes

Pg. 206

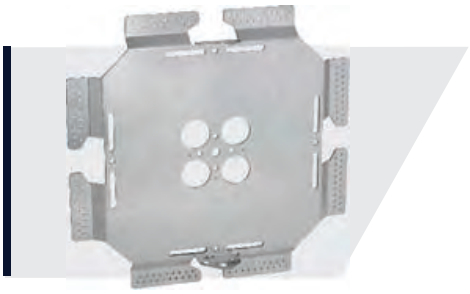

MADE IN USA

Box and Conduit Hanger Support plates are available to fit boxes and enclosures up to 12" x 12". BCHS Series make it possible to mount several conduit runs and boxes from one threaded rod. Select models feature offset flanges with pinholes, allowing the use of 1-hole straps. Pipe hangers may be inserted into slots and center holes on each end of the plate. Stamped measures on the plate provide a guide for box placement and spacing. Made in the USA.

# Simple Support Bracket with T-Bar Drop Ceiling Mounting Clips

Pg. 216

2018 NECA Show Stopper



SSB-T5 with T-Bar Mounting Clips easily drops into ceiling grid channel without tools, and require less measuring than traditional T-grid box hangers. Mounting clips on the SSB-TBAR are secured to grid with Tek screws, and feature designated holes for branch line restraints. For 6-way adjustability, pair with UMAB Series. Pair with UMA for standard 4" and 4-11/16" boxes, and with UMA-LVBS for up to 5" Sq. Boxes.

PATENTED

## MC/AC Cable to Stud Clips

Pg. 178, 186



MC/AC Cable to Stud Clips snap onto metal studs and beam flanges (up to 1/8" thick) without tools. FMAC2 can secure two runs of MC or AC cable 1/4" from the stud face in compliance with NEC 300.4(d). Pre-punched holes allow clip to be screwed to wood stud or concrete. FMAC2 also snaps in half for a single run of cable, effectively making two clips out of one.



## Conduit to Stud Attachments

Pg. 177, 184

Conduit to Stud Attachments easily snap onto wood or metal studs without tools. The MF Series features a snap-close conduit support for 3/8" thru 1-1/4" EMT. As an option, Conduit to Stud Attachment can be fastened to the stud face with a screw for added support.

## Cable Supports with Locking Tabs

Pg. 179, 186, 196



Cable Supports with Locking Tabs makes it easy to install and secure NM, AC, or MC-type cables to stud frames. CS-CJ6 reliably supports up to 6 runs of NM cables; or up to 4 runs of MC/AC cables. CS-CJ6 features flared edges for wire protection, locating ribs to keep cables separate, and collapsible locking tabs to secure cables. Helps comply with NEC 300.30(b). Neat, efficient packaging ensures individual pieces can be taken out of the box quickly, without linking together.

## Cable & Conduit Clips

Pg. 170



Cable & Conduit Clips are used to support a wide variety of conduit from rods, drop wires, or flanges. The CC Series accomodates AC/MC cable, EMT, Rigid, flexible metallic tubing, portable cables, control tubes, and data cable. Flexible spring steel material requires no tools to install.



## Conduit to Z-Purlin Clips

Pg. 167

Conduit to Z-Purlin Clips feature a tool-free, snap-close conduit clip that can be rotated 360°, and supports 1/2" or 3/4" EMT. Snaps into 0.06" thru 0.1" thick Z-purlin flanges.

## Conduit & Pipe to Flange Clips, Side Mount

Pg. 167



Conduit & Pipe to Flange Clips require only a hammer to install onto I-beam flanges. MSM Series features a conduit clip that can be rotated 360°, for horizontal or vertical runs of EMT or Rigid raceway.



## Datacom Cable J-Hooks

Pg. 229

Datacom Cable J-Hooks provide superior support for Cat 5E, Cat 6, Cat 6A, Cat 7 and fiber optic network cables. CAT Series J-Hooks are available in 3/4" thru 4" diameters, and feature rounded edges for proper cable bend radius. Pre-punched holes allow for attachment of rod clips or beam clamps.

## J-Hooks with Rod & Wire Clip


Pg. 229



J-Hooks with Rod & Wire Clips feature a J-hook riveted to a multipurpose spring steel clip. Depending on the model, clip can be attached to either a beam flange (1/8" thru 7/16") or threaded rod (1/4" or 3/8"). Model no. FCAT124Z3 can also be attached to a #12-#8 drop wire. J-Hook features a bendable cable retainer.

## Threaded Bridle Rings and Multi-purpose Clips

Pg. 228

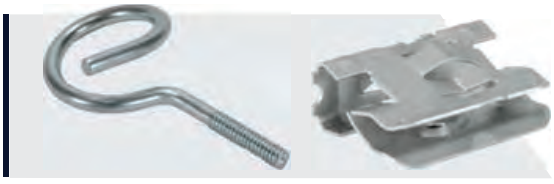

Threaded Bridle Rings and Multi-Purpose Clips (sold separately) secure datacom and low voltage cables vertically or horizontal. Steel Threaded Bridle Rings are available in 3/4" thru 4" diameter, and screw into the Multi-Purpose Clip without tools. The spring steel Multi-Purpose Clip requires only a hammer to install on beam flanges from 1/8" to 1/2" thick.



## Pipe Sleeve Positioners

Pg. 233

Pipe Sleeve Positioners are used to align pipe sleeves and prevent movement during concrete pours. HOSP can be installed with just a hammer, and is ideal for Schedule 40 pipe with sleeve diameters from 2" thru 6". HOSP can be used for wall thicknesses of 5/16" and under, with any sleeve diameter.

## Independent Acoustical Support Clips

Pg. 213



Independent Acoustical Support Clips provide a means to support lighting fixtures from common 15/16" T-grid ceiling channel. ISC requires no tools to install, and can support fixtures 65 lbs or under. Each ISC kit includes a break-apart T-grid perimeter clip which cinches both sides of the channel, and includes pre-punched holes for branch line restraints. Also includes 5/8" long screw and washer-wingnut.



## Wire Basket Tray Clips

Pg. 171, 233

Wire Basket Tray Clips are used to attach 3/16" thru 5/16" wire basket trays to struts. No additional tools or hardware are required, thanks to CCTs spring steel design. Use two clips per strut for trays up to 12". Use three clips per strut for trays up to 18", and one clip per strut for each additional 6" of tray width.



## Spring Steel Beam Clamps

Pg. 222

Spring Steel Beam Clamps make it easy to suspend threaded rod from beam flanges. BCSS includes a set screw with universal head and features serrated teeth that clamp tightly to beam flanges up to 1/2" thick. BCSS also features a 7/16" thru-hole for 1/4" or 3/8" threaded rod, and will hold up to 100 lbs.

## Rod to Flange Clips

Pg. 225



Rod to Flange Clips are a versatile way to suspend threaded rod from beams and joists. F4TI Series requires only a hammer to install, and can fit flange thicknesses from 1/8" thru 3/4". Threaded rod cage can swivel 180° for vertical dropdown, no matter the angle of the beam or joist it is attached to. Takes 1/4" threaded rod and will hold up to 200lbs of weight.



## Inline Hammer-On Strap Hangers

Pg. 226

Inline Hammer-On Strap Hangers are ideal when supporting pipe or duct from structural members using banding or strapping (sold by other). The FMSS Series includes fasteners for 1/8" thru 3/4" beam flanges, as well as Z-purlins. FMSS Series requires only a hammer to install, accomodates up to 1-1/4" strap, and holds up to 200 lbs. of weight.

## SPRING STEEL
## CONDUIT CLAMPS
## SNAP CLOSE

### FEATURES

- Easy snap-close
- For vertical or horizontal installations
- When only one Snapping hole is provided use for EMT or Rigid; When two Snapping holes are provided use the first hole for Rigid, the second for EMT

| Cat. No. | EMT/Rigid Size | FMC Size | MC/AC Size | Hole Size | Static Load | | Std. Pkg. |
|---|---|---|---|---|---|---|---|
| | | | | | Vertical | Horizontal | |
| **F6M4I** | - | 3/8" | 14/2 to 12/3 | 1/4", Threaded | 100 lb | 25 lb | 100 |
| **F812M4I** | 1/2", 3/4" | - | - | 1/4", Threaded | 100 lb | 25 lb | 100 |
| **F16M4I** | 1" | - | - | 1/4", Threaded | 100 lb | 25 lb | 100 |
| **F20M4I** | 1-1/4" | - | - | 1/4", Threaded | 100 lb | 25 lb | 100 |
| **F24M4I** | 1-1/2" | - | - | 1/4", Threaded | 100 lb | 25 lb | 100 |
| **F32M4I** | 2" | - | - | 1/4", Threaded | 100 lb | 25 lb | 100 |
| **F6M** | - | 3/8" | 14/2 to 12/3 | 1/4", Plain | 100 lb | 25 lb | 100 |
| **F812M** | 1/2", 3/4" | - | - | 1/4", Plain | 100 lb | 25 lb | 100 |
| **F16M** | 1" | - | - | 1/4", Plain | 100 lb | 25 lb | 100 |
| **F20M** | 1-1/4" | - | - | 1/4", Plain | 100 lb | 25 lb | 100 |
| **F24M** | 1-1/2" | - | - | 1/4", Plain | 100 lb | 25 lb | 100 |
| **F32M** | 2" | - | - | 1/4", Plain | 100 lb | 25 lb | 100 |







## SPRING STEEL
## CONDUIT CLAMPS
## PUSH IN

### FEATURES

- Push in installation of conduit
- Eliminates the need for offset conduit bending
- For vertical or horizontal installations

| Cat. No. | EMT Size | Rigid Size | Hole Size | Static Load | | Std. Pkg. |
|---|---|---|---|---|---|---|
| | | | | Vertical | Horizontal | |
| ***F8P** | 1/2" | - | 1/4", Plain | 25 lb | 15 lb | 100 |
| **F12P** | 3/4" | 1/2" | 1/4", Plain | 25 lb | 15 lb | 100 |
| **F16P** | 1" | 3/4" | 1/4", Plain | 25 lb | 15 lb | 100 |





## *STAMPED STEEL* CONDUIT HANGERS *WITH BOLTS*

### FEATURES

- Electroplated Zinc

| Cat. No. | Trade Size | EMT Size | Rigid Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|---|
| **PH-50B** | #0B | 1/2” | 1/2” & 3/8” | 50 | 500 |
| **PH-75B** | #1B | 3/4” | 3/4” | 50 | 500 |
| **PH-100B** | #2B | 1” | 1” | 25 | 250 |
| **PH-105B** | #2-1/2B | 1-1/4” | - | 25 | 250 |
| **PH-125B** | #3B | 1-1/2” | 1-1/4” | 50 | 250 |
| **PH-150B** | #4B | - | 1-1/2” | 50 | 250 |
| **PH-200B** | #5B | 2” | 2” | 20 | 100 |
| **PH-250B** | #6B | 2-1/2” | 2-1/2” | 10 | 50 |
| **PH-300B** | #7B | 3” | 3” | 10 | 50 |
| **PH-350B** | #8B | 3-1/2” | 3-1/2” | 10 | 50 |
| **PH-400B** | #9B | 4” | 4” | 5 | 25 |



## *SPRING STEEL* CONDUIT TO FLANGE CLIPS BOTTOM MOUNT, SNAP CLOSE

### FEATURES

- Supports conduit/ pipe or cable from beam flanges
- Snap-close Clip can pivot through 360°
- Requires only a hammer to install

| Cat. No. | Flange Thickness | EMT/Rigid Size | FMC Size | MC/AC Size | Static Load | Std. Pkg. |
|---|---|---|---|---|---|---|
| **F6M24** | 1/8" to 1/4" | - | 3/8" | 14/2 to 12/3 | 75 lb | 100 |
| **F6M58** | 5/16" to 1/2" | - | 3/8" | 14/2 to 12/3 | 75 lb | 100 |
| **F6M912** | 9/16" to 3/4" | - | 3/8" | 14/2 to 12/3 | 75 lb | 100 |
| **F812M24** | 1/8" to 1/4" | 1/2", 3/4" | - | - | 75 lb | 100 |
| **F812M58** | 5/16" to 1/2" | 1/2", 3/4" | - | - | 75 lb | 100 |
| **F812M912** | 9/16" to 3/4" | 1/2", 3/4" | - | - | 75 lb | 100 |
| **F16M24** | 1/8" to 1/4" | 1" | - | - | 75 lb | 100 |
| **F16M912** | 9/16" to 3/4" | 1" | - | - | 75 lb | 50 |





## *SPRING STEEL*
## CONDUIT TO FLANGE CLIPS
## SIDE MOUNT, SNAP CLOSE

### FEATURES
- Supports conduit/ pipe or cable from beam flanges
- Snap close clip can pivot through 360°
- Requires only a hammer to install

| Cat. No. | Flange Thickness | EMT/Rigid Size | FMC Size | MC/AC Size | Static Load | Std. Pkg. |
|---|---|---|---|---|---|---|
| **F6M24SM** | 1/8" to 1/4" | - | 3/8" | 14/2 to 12/3 | 25 lb | 100 |
| **F6M58SM** | 5/16" to 1/2" | - | 3/8" | 14/2 to 12/3 | 25 lb | 100 |
| **F6M912SM** | 9/16" to 3/4" | - | 3/8" | 14/2 to 12/3 | 25 lb | 100 |
| **F812M24SM** | 1/8" to 1/4" | 1/2", 3/4" | - | - | 25 lb | 100 |
| **F812M58SM** | 5/16" to 1/2" | 1/2", 3/4" | - | - | 25 lb | 100 |
| **F812M912SM** | 9/16" to 3/4" | 1/2", 3/4" | - | - | 25 lb | 100 |
| **F16M24SM** | 1/8" to 1/4" | 1" | - | - | 25 lb | 100 |
| **F16M58SM** | 5/16" to 1/2" | 1" | - | - | 25 lb | 100 |
| **F16M912SM** | 9/16" to 3/4" | 1" | - | - | 25 lb | 100 |
| **F20M24SM** | 1/8" to 1/4" | 1-1/4" | - | - | 25 lb | 100 |
| **F20M58SM** | 5/16" to 1/2" | 1-1/4" | - | - | 25 lb | 100 |
| **F20M912SM** | 9/16" to 3/4" | 1-1/4" | - | - | 25 lb | 100 |
| **F24M24SM** | 1/8" to 1/4" | 1-1/2" | - | - | 25 lb | 50 |
| **F24M58SM** | 5/16" to 1/2" | 1-1/2" | - | - | 25 lb | 50 |
| **F32M24SM** | 1/8" to 1/4" | 2" | - | - | 25 lb | 50 |
| **F32M58SM** | 5/16" to 1/2" | 2" | - | - | 25 lb | 50 |
| **F32M912SM** | 9/16" to 3/4" | 2" | - | - | 25 lb | 50 |





## *SPRING STEEL*
## CONDUIT TO ANGLE PURLIN CLIPS

### FEATURES
- Provides attachment for conduit/pipe or cable to angle purlins
- Snap-close Clip can pivot through 360°
- Requires only a hammer to install

| Cat. No. | EMT Size | Flange Thickness | Static Load | Std.Pkg. |
|---|---|---|---|---|
| **F123812M** | 1/2", 3/4" | 3/32" MAX | 100 lb | 100 |





## SPRING STEEL
## CONDUIT TO FLANGE CLIPS BOTTOM MOUNT, PUSH IN

### FEATURES
- Supports conduit/pipe from beam flanges
- Push-in Clip can pivot through 360°
- Requires only a hammer to install

| Cat. No. | Flange Thickness | EMT Size | Rigid Size | Static Load | Std. Pkg. |
|---|---|---|---|---|---|
| **F8P24** | 1/8" to 1/4" | 1/2" | - | 25 lb | 100 |
| **F8P58** | 5/16" to 1/2" | 1/2" | - | 25 lb | 100 |
| **F8P912** | 9/16" to 3/4" | 1/2" | - | 25 lb | 50 |
| **F12P24** | 1/8" to 1/4" | 3/4" | 1/2" | 25 lb | 100 |
| **F12P58** | 5/16" to 1/2" | 3/4" | 1/2" | 25 lb | 100 |
| **F12P912** | 9/16" to 3/4" | 3/4" | 1/2" | 25 lb | 100 |
| **F16P24** | 1/8" to 1/4" | 1" | 3/4" | 25 lb | 100 |
| **F16P58** | 5/16" to 1/2" | 1" | 3/4" | 25 lb | 50 |
| **F16P912** | 9/16" to 3/4" | 1" | 3/4" | 25 lb | 50 |





## SPRING STEEL
## CONDUIT TO FLANGE CLIPS SIDE MOUNT, PUSH IN

### FEATURES
- Supports conduit/ pipe from beam flanges
- Push-in Clip can pivot through 360°
- Requires only a hammer to install

| Cat. No. | Flange Thickness | EMT Size | Rigid Size | Static Load | Std. Pkg. |
|---|---|---|---|---|---|
| **F8P24SM** | 1/8" to 1/4" | 1/2" | - | 15 lb | 100 |
| **F8P58SM** | 5/16" to 1/2" | 1/2" | - | 15 lb | 100 |
| **F8P912SM** | 9/16" to 3/4" | 1/2" | - | 15 lb | 100 |
| **F12P24SM** | 1/8" to 1/4" | 3/4" | 1/2" | 15 lb | 100 |
| **F12P58SM** | 5/16" to 1/2" | 3/4" | 1/2" | 15 lb | 100 |
| **F12P912SM** | 9/16" to 3/4" | 3/4" | 1/2" | 15 lb | 50 |
| **F16P24SM** | 1/8" to 1/4" | 1" | 3/4" | 15 lb | 100 |
| **F16P58SM** | 5/16" to 1/2" | 1" | 3/4" | 15 lb | 100 |
| **F16P912SM** | 9/16" to 3/4" | 1" | 3/4" | 15 lb | 50 |





## SPRING STEEL
## CABLE/CONDUIT TO ROD/WIRE CLIPS SNAP CLOSE

### FEATURES
- Provides attachment of conduit and boxes
- Snap-close Clip can pivot through 360°
- Easy installation

| Cat. No. | EMT/Rigid Size | FMC Size | MC/AC Size | Flange Thickness | Rod Size | Wire Load | Std. Pkg. |
|---|---|---|---|---|---|---|---|
| **F4Z346M** | - | 3/8" | 14/2 to 12/3 | 1/8" to 3/8" | 1/4" | #12 | 100 |
| **F4Z34812M** | 1/2", 3/4" | - | - | 1/8" to 3/8" | 1/4" | #12 | 100 |
| **F6Z34812M** | 1/2", 3/4" | - | - | 3/8" to 7/16" | 3/8" | - | 100 |
| **F4Z3416M** | 1" | - | - | 1/8" to 3/8" | 1/4" | #12 | 100 |
| **F6Z3416M** | 1" | - | - | 3/8" to 7/16" | 3/8" | - | 100 |





## SPRING STEEL
## CABLE/CONDUIT TO ROD/WIRE CLIPS PUSH IN

### FEATURES
- Provides attachment of conduit and boxes
- Push-in Clip can pivot through 360°
- Easy installation

| Cat. No. | EMT Size | Rigid Size | Flange Thickness | Rod Size | Wire Load | Std. Pkg. |
|---|---|---|---|---|---|---|
| **F4Z348P** | 1/2" | - | 1/8" to 3/8" | 1/4" | #12 | 100 |
| **F6Z348P** | 1/2" | - | 3/8" to 7/16" | 3/8" | - | 100 |
| **F4Z3412P** | 3/4" | 1/2" | 1/8" to 3/8" | 1/4" | #12 | 100 |
| **F6Z3412P** | 3/4" | 1/2" | 3/8" to 7/16" | 3/8" | - | 100 |
| **F4Z3416P** | 1" | 3/4" | 1/8" to 3/8" | 1/4" | #12 | 100 |
| **F6Z3416P** | 1" | 3/4" | 3/8" to 7/16" | 3/8" | - | 100 |





## *SPRING STEEL*
## CABLE/ CONDUIT TO ROD/ WIRE CLIPS

### FEATURES

- Supports conduit to rod, wire or flange
- Can be used for flexible metallic tubing, armored cable, portable cables, control tubes and communication cables
- Available for EMT, Rigid, ENT and aluminum conduit
- No tools required to install

| Cat. No. | Static Load | | | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|---|
| | Vertical Wire/Rod | Horizontal Flange | Vertical Flange | | |
| **CC** | - | - | - | 100 | 1000 |
| **CC-8** | 50 lb | 100 lb | 15 lb | 100 | 1000 |
| **CC-12** | 50 lb | 100 lb | 15 lb | 100 | 1000 |
| **CC-16** | 50 lb | 100 lb | 15 lb | 100 | 1000 |
| **CC-20** | 50 lb | 100 lb | 22lb | 100 | - |

| Cable Size | #12 WIRE | #8, #9, #10 WIRE |
|---|---|---|
| **14-2, 14-3, 12-2** | CC | CC |
| **12-3** | CC | CC-8 |

| Conduit Size | #10, #12 Wire | #8, #9 Wire | 3/16", 1/4" Rod | 1/8" - 1/4" Flange | 5/16" - 3/8" Flange | 7/16" - 1/2" Flange |
|---|---|---|---|---|---|---|
| **1/2" EMT** | CC-8 | CC-8 | CC-8 | CC-8 | CC-12 | CC-12 |
| **1/2" RIGID** | CC-8 | CC-12 | CC-12 | CC-12 | CC-12 | CC-16 |
| **3/4" EMT** | CC-12 | CC-12 | CC-12 | CC-12 | CC-16 | CC-16 |
| **3/4" RIGID** | CC-12 | CC-12 | CC-16 | CC-16 | CC-20 | CC-20 |
| **1" EMT** | - | CC-16 | CC-16 | CC-16 | CC-20 | CC-20 |
| **1" RIGID** | - | - | - | CC-20 | CC-20 | CC-20 |
| **1 1/4" EMT** | - | CC-20 | CC-20 | CC-20 | - | - |




*CC*





*CC-8*
*CC-12*




*CC-16*
*CC-20*










## *SPRING STEEL*
## CABLE/CONDUIT TO WIRE CLIPS

### FEATURES
- Supports cable and conduit without bending drop wire
- No tools required to install

| Cat. No. | MC/AC Size | Wire Size | Hole Size | Static Load | Std. Pkg. |
|---|---|---|---|---|---|
| **CWC1** | 14/2 to 12/3 | #12 to #8 | 1/4", Plain | 25 lb | 100 |






## *SPRING STEEL*
## WIRE BASKET TRAY CLIPS

### FEATURES
- Attaches wire basket tray to strut
- No tools required to install

| Cat. No. | Wire Size | Std. Pkg. |
|---|---|---|
| **CCT** | 3/16” to 5/16” | 100 |





## *STAMPED STEEL* SADDLE TYPE STRUT CLAMPS

### FEATURES
- Electroplated Zinc
- Tri-Combo Hex Screw Head
- Wide Saddle design

| Cat. No. | EMT/Rigid Conduit Size | Cable O.D. Range | Std. Pkg. |
|---|---|---|---|
| **STS-50** | 5/16” - 1/2” | 0.260" - 0.890" | 100 |
| **STS-75** | 3/4” | 0.670" - 1.090" | 100 |
| **STS-100** | 1” | 0.890" - 1.450" | 100 |
| **STS-125** | 1-1/4” | 1.150" - 1.700" | 50 |
| **STS-150** | 1-1/2” | 1.350" - 2.000" | 50 |
| **STS-200** | 2” | 1.875" - 2.570" | 50 |
| **STS-250** | 2-1/2” | 2.500" - 3.060" | 25 |
| **STS-300** | 3” | 3.000" - 3.600" | 25 |
| **STS-350** | 3-1/2” | 3.600" - 4.100" | 25 |
| **STS-400** | 4” | 4.100" - 4.700" | 25 |



## *STAMPED STEEL* UNIVERSAL STRUT CLAMPS

### FEATURES

- Electroplated Zinc
- Listed for EMT, IMC and Rigid
- 1/2" to 2 ": Break-apart design without Nut
- 2-1/2" to 4": Two-pieces design with Nut

| Cat. No. | EMT/RIGID Size | Std. Pkg. |
|---|---|---|
| **ST-50** | 1/2” | 100 |
| **ST-75** | 3/4” | 100 |
| **ST-100** | 1” | 100 |
| **ST-125** | 1-1/4” | 100 |
| **ST-150** | 1-1/2” | 50 |
| **ST-200** | 2” | 50 |
| **ST-250** | 2-1/2” | 50 |
| **ST-300** | 3” | 25 |
| **ST-350** | 3-1/2” | 25 |
| **ST-400** | 4” | 25 |



## *STEEL* U-BOLTS WITH HEX NUTS

### FEATURES

- Electroplated Zinc

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **SUB-50** | 1/2” | 25 | 250 |
| **SUB-75** | 3/4” | 25 | 250 |
| **SUB-100** | 1” | 25 | 250 |
| **SUB-125** | 1-1/4” | 20 | 200 |
| **SUB-150** | 1-1/2” | 20 | 200 |
| **SUB-200** | 2” | 20 | 200 |
| **SUB-250** | 2-1/2” | - | 10 |
| **SUB-300** | 3” | - | 10 |
| **SUB-350** | 3-1/2” | - | 10 |
| **SUB-400** | 4” | - | 10 |



*SUB-75*



*SUB-125*

## MALLEABLE IRON
## CONDUIT CLAMPS
## EDGE TYPE

### FEATURES

- Electroplated Zinc

| Cat. No. | Trade Size | Std. Pkg. |
|---|---|---|
| MCCE-50 | 1/2” | 50 |
| MCCE-75 | 3/4” | 50 |
| MCCE-100 | 1” | 25 |
| MCCE-125 | 1-1/4” | 25 |
| MCCE-150 | 1-1/2” | 25 |
| MCCE-200 | 2” | 25 |
| MCCE-250 | 2-1/2” | 10 |
| MCCE-300 | 3” | 10 |



*MCCE-50*



*MCCE-100*

## MALLEABLE IRON
## CONDUIT CLAMPS
## RIGHT ANGLE TYPE

### FEATURES

- Electroplated Zinc

| Cat. No. | Trade Size | Std. Pkg. |
|---|---|---|
| MCCR-50 | 1/2” | 50 |
| MCCR-75 | 3/4” | 50 |
| MCCR-100 | 1” | 50 |
| MCCR-125 | 1-1/4” | 50 |
| MCCR-150 | 1-1/2” | 50 |
| MCCR-200 | 2” | 50 |
| MCCR-250 | 2-1/2” | 25 |
| MCCR-300 | 3” | 25 |
| MCCR-350 | 3-1/2” | 25 |
| MCCR-400 | 4” | 25 |



*MCCR-50*



*MCCR-100*

## *MALLEABLE IRON*
## CONDUIT CLAMPS PARALLEL TYPE

### FEATURES
- Electroplated Zinc

| Cat. No. | Trade Size | Std. Pkg. |
|---|---|---|
| **MCCP-50** | 1/2” | 50 |
| **MCCP-75** | 3/4” | 50 |
| **MCCP-100** | 1” | 50 |
| **MCCP-125** | 1-1/4” | 25 |
| **MCCP-150** | 1-1/2” | 25 |
| **MCCP-200** | 2” | 25 |
| **MCCP-250** | 2-1/2” | 10 |
| **MCCP-300** | 3” | 10 |
| **MCCP-350** | 3-1/2” | 10 |
| **MCCP-400** | 4” | 10 |



*MCCP-50*



*MCCP-100*

## *SPRING STEEL*
## CABLE SNAP CLIPS

### FEATURES
- Clip snaps on flange and cable snaps into clip

| Cat. No. | Flange Thickness | Outer Diameter | Std. Pkg. |
|---|---|---|---|
| **FSC2D** | 1/16" - 3/16" | 0.468" - 0.562" | 100 |
| **FSC2E** | 1/16" - 3/16" | 0.591" - 0.709" | 100 |
| **FSC2F** | 1/16" - 3/16" | 0.748" - 0.945" | 100 |
| **FSC4D** | 3/16" - 9/32" | 0.468" - 0.562" | 100 |





## SPRING STEEL
## NM CABLE TO FLANGE CLIP

### FEATURES
- Attaches NM cable to beam flange
- Supports cable sizes with ground wire
- Requires only a hammer to install

| Cat. No. | MC/AC Size | Outer Diameter | Flange Thickness | Std. Pkg. |
|---|---|---|---|---|
| **FRMX58** | 14/2, 12/2 | 0.28" to 0.32" | 5/16" to 1/2" | 100 |






## SPRING STEEL
## BOX/ CONDUIT HANGERS

### FEATURES
- Pre-Galvanized Steel Hanger
- Spring Steel Clamps
- Supports overhead boxes and conduit from threaded rod
- Eliminates need for offset conduit bending


| Cat. No. | EMT Size | FMC Size | MC/AC Size | Hole Size | Screw Size | Std. Pkg. |
|---|---|---|---|---|---|---|
| **F6MB18A** | - | 3/8" | 14/2 to 12/3 | 1/4", Plain | - | 25 |
| **F812MB18A** | 1/2", 3/4" | - | - | 1/4", Plain | - | 25 |
| **F812MB18S** | 1/2", 3/4" | - | - | - | 1/4"-20 X 9/16" | 25 |
| **F16MB18A** | 1" | - | - | 1/4", Plain | - | 25 |



*F812MB18S*



*F6MB18A*
*F812MB18A*
*F16MB18A*



## *SPRING STEEL*
## CONDUIT TO T-GRID CLIPS
## TOP MOUNT, SNAP CLOSE

### FEATURES

- Supports conduit above acoustical T-bar
- No tools required to install

| Cat. No. | EMT Size | FMC Size | MC/AC Size | Std. Pkg. |
|---|---|---|---|---|
| *F6MATA | - | 3/8" | 14/2 to 12/3 | 100 |
| *F812MATA | 1/2", 3/4" | - | - | 100 |





## *SPRING STEEL*
## CONDUIT TO T-GRID CLIPS
## SIDE MOUNT, PUSH IN

### FEATURES

- Supports conduit above acoustical T-bar
- No tools required to install

| Cat. No. | EMT Size | Std. Pkg. |
|---|---|---|
| F8PATS | 1/2” | 100 |





## SPRING STEEL
## CONDUIT TO STUD CLIPS
## SNAP ON, SNAP CLOSE

### FEATURES

- Easily snaps onto stud
- Snap-close conduit support
- Screw provision for additional support

| Cat. No. | EMT Size | FMC Size | MC/AC Size | Stud Clip Size | Std. Pkg. |
|---|---|---|---|---|---|
| **F6MF** | - | 3/8" | 14/2 to 12/3 | 1-3/8" to 1-1/2" | 100 |
| **F812MF** | 1/2", 3/4" | - | - | 1-3/8" to 1-1/2" | 100 |
| **F16MF** | 1" | - | - | 1-3/8" to 1-1/2" | 100 |
| **F20MF** | 1-1/4" | - | - | 1-3/8" to 1-1/2" | 50 |






## SPRING STEEL
## CABLE TO STUD CLIPS

### FEATURES

- Secures NMC or MC/AC cable to wood or metal studs
- Compliance with NEC® 300.4(d), CEC 12-618 and CEC 12-510
- No tools required to install
- Screw provision for additional support

| Cat. No. | MC/AC Size | NM Size | Cable Clip Size | Stud Clip Size | Std. Pkg. |
|---|---|---|---|---|---|
| **FFXC20** | 14/2 to 12/3 | 14/2 to 12/3 | 7/16" to 9/16" | 1-3/8" to 1-1/2" | 100 |







## *SPRING STEEL*
### CONDUIT TO STUD ATTACHMENTS
### SNAP CLOSE

**FEATURES**

- Positions conduit on metal or wood stud of any size
- Held to stud with screw
- Snap-close conduit support

| Cat. No. | EMT Size | Std. Pkg. |
|---|---|---|
| **F350812M** | 1/2”, 3/4” | 100 |






## *SPRING STEEL*
### MC/AC CABLE TO STUD CLIPS

**FEATURES**

- No tools required to install
- Holes in clip allow it to be screwed into wood stud, concrete or block
- Stabilizer Legs provide "wobble-free" support
- Compliant with NEC® Article 300.4(d), allowing cable to be positioned a minimum of 1-1/4" from face of stud
- Compliant with CEC Rule 12-618 for support of MC/AC cable
- Snaps in half, making two clips out of one

| Cat. No. | Flange Thickness | MC/AC Size | Std. Pkg. |
|---|---|---|---|
| **FMAC2** | 1/8” MAX | 14/2 to 10/3 | 100 |





## *STAMPED STEEL*
### NAIL STRAPS

**FEATURES**

- Electroplated Zinc

**NOTE**

- Varies according to sizes

| Cat. No. | EMT Size | FLEX/RIGID Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| **NS-50** | 1/2” | 3/8” | 100 | 1000 |
| **NS-50/75** | 3/4” | 1/2” | 100 | 1000 |
| **NS-100** | 1” | 3/4” | 100 | 1000 |



## *SPRING STEEL*
## MC/AC CABLE TO METAL STUD CLIPS

### FEATURES
- Easy installation of MC/AC to metal stud
- No tools required to install

| Cat. No. | Outer Diameter | MC/AC Size | Std. Pkg. |
|---|---|---|---|
| **MSC** | 0.429" - 0.531" | 14/2 to 12/3 | 100 |





## *PRE-GALVANIZED STEEL*
## STUD MOUNTING CABLE SUPPORTS

### FEATURES
- wood or metal Stud
- Easy to lock
- Space-saving packaging

| Cat. No. | Description | Non-Metallic | MC/AC/BX | Std. Pkg. |
|---|---|---|---|---|
| **CS-CJ6** | Stud Mounting Cable Support with locking tab | Max. 6 | Max. 4 | 100 |







## BOX MOUNTED CONDUIT/ CABLE SUPPORTS NEW!


### FEATURES
- No more field-installed First Means of Support
- Attaches directly to any size junction box for a cost-saving solution to First Means of Support needs
- Satisfies NEC 330.30 (B)
- Eliminates the need for additional bar hangers in the field
- BMCS-CJ6 includes a CS-CJ6 for tool-less cable installation
- UL Listed

| Cat. No. | Description | Std. Pkg. |
|---|---|---|
| **BMCS** | Box Mounted Cable Support | 50 |
| **BMCS-CJ6** | Box Mounted Cable Support with CS-CJ6 for tool-less installation | 50 |

EC&M Product of the Year 20 YEARS 2020 Category Winner



*BMCS*



*BMCS-CJ6*

## STAMPED STEEL
### 1-HOLE RG6U CABLE STRAPS

**FEATURES**
- Electroplated Zinc

| Cat. No. | Description | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **S1-25** | RG6U (Coaxial Cable) 1-Hole Strap | 100 | 1000 |



## STAMPED STEEL
### 1-HOLE MC(BX) CABLE STRAPS

**FEATURES**
- Electroplated Zinc
- Corrosion-resistant

| Cat. No. | Description | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **S1-38** | 12-2, 12-3, 10-2, 10-3 MC (BX) 1-Hole Strap | 100 | 1000 |



## STAMPED STEEL
### 1-HOLE EMT STRAPS

**FEATURES**
- Electroplated Zinc

**NOTE**
- Sizes 2-1/2” to 4” are also listed for Rigid and IMC conduits

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **SE1-50** | 1/2” | 100 | 1000 |
| **SE1-75** | 3/4” | 100 | 1000 |
| **SE1-100** | 1” | 100 | 500 |
| **SE1-125** | 1-1/4” | 100 | 500 |
| **SE1-150** | 1-1/2” | 50 | 500 |
| **SE1-200** | 2” | 50 | 500 |
| **SU1-250** | 2-1/2” | 25 | 100 |
| **SU1-300** | 3” | 25 | 100 |
| **SU1-350** | 3-1/2” | 25 | 100 |
| **SU1-400** | 4” | 25 | 100 |



*SE1-50 to SE1-200*



*SU1-250 to SU1-400*

## STAMPED STEEL
## 2-HOLE EMT STRAPS

### FEATURES
- Electroplated Zinc

### NOTE
- Sizes 2-1/2” to 4” are also listed for Rigid and IMC conduits

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **SE2-50** | 1/2” | 100 | 1000 |
| **SE2-75** | 3/4” | 100 | 1000 |
| **SE2-100** | 1” | 100 | 500 |
| **SE2-125** | 1-1/4” | 100 | 500 |
| **SE2-150** | 1-1/2” | 50 | 500 |
| **SE2-200** | 2” | 50 | 500 |
| **SU2-250** | 2-1/2” | 25 | 100 |
| **SU2-300** | 3” | 25 | 100 |
| **SU2-350** | 3-1/2” | 25 | 100 |
| **SU2-400** | 4” | 25 | 100 |





## STAMPED STEEL
## 1-HOLE RIGID STRAPS

### FEATURES
- Electroplated Zinc

### NOTE
- Sizes 2-1/2” to 4” are also listed for EMT and IMC conduits

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **SR1-50** | 1/2” | 100 | 1000 |
| **SR1-75** | 3/4” | 100 | 1000 |
| **SR1-100** | 1” | 100 | 500 |
| **SR1-125** | 1-1/4” | 100 | 500 |
| **SR1-150** | 1-1/2” | 50 | 500 |
| **SR1-200** | 2” | 50 | 500 |
| **SU1-250** | 2-1/2” | 25 | 100 |
| **SU1-300** | 3” | 25 | 100 |
| **SU1-350** | 3-1/2” | 25 | 100 |
| **SU1-400** | 4” | 25 | 100 |





## *STAMPED STEEL*
## 2-HOLE RIGID STRAPS

### FEATURES
- Electroplated Zinc

### NOTE
- Sizes 2-1/2” to 4” are also listed for EMT and IMC conduits

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **SR2-50** | 1/2” | 100 | 1000 |
| **SR2-75** | 3/4” | 100 | 1000 |
| **SR2-100** | 1” | 100 | 500 |
| **SR2-125** | 1-1/4” | 100 | 500 |
| **SR2-150** | 1-1/2” | 50 | 500 |
| **SR2-200** | 2” | 50 | 500 |
| **SU2-250** | 2-1/2” | 25 | 100 |
| **SU2-300** | 3” | 25 | 100 |
| **SU2-350** | 3-1/2” | 25 | 100 |
| **SU2-400** | 4” | 25 | 100 |



## *MALLEABLE IRON*
## 1-HOLE RIGID STRAPS

### FEATURES
- Electroplated Zinc

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **SRM1-50** | 1/2” | 100 | 1000 |
| **SRM1-75** | 3/4” | 50 | 500 |
| **SRM1-100** | 1” | 25 | 250 |
| **SRM1-125** | 1-1/4” | 20 | 200 |
| **SRM1-150** | 1-1/2” | 10 | 100 |
| **SRM1-200** | 2” | 10 | 50 |
| **SRM1-250** | 2-1/2” | - | 25 |
| **SRM1-300** | 3” | - | 25 |
| **SRM1-350** | 3-1/2” | - | 10 |
| **SRM1-400** | 4” | - | 10 |



## *MALLEABLE IRON*
## CLAMP BACK SPACERS

### FEATURES
- Electroplated Zinc

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| *CBS-50 | 1/2” | 25 | 250 |
| *CBS-75 | 3/4” | 25 | 250 |
| *CBS-100 | 1” | 25 | 250 |
| *CBS-125 | 1-1/4” | 10 | 100 |
| *CBS-150 | 1-1/2” | 10 | 100 |
| *CBS-200 | 2” | 5 | 50 |
| *CBS-250 | 2-1/2” | - | 25 |
| *CBS-300 | 3” | - | 10 |
| *CBS-350 | 3-1/2” | - | 10 |
| *CBS-400 | 4” | - | 10 |



## *STAMPED STEEL*
## 1-HOLE SERVICE ENTRANCE STRAPS

### FEATURES
- Corrosion-resistant

| Cat. No. | Description | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| *SES1-50 | Three #8, #6, #4 | 100 | 500 |
| *SES1-75 | Three #3, #2 | 100 | 500 |
| *SES1-100 | Three #1, #1/0, #2/0 | 50 | 250 |
| *SES1-200 | Three #3/0, #4/0 | 25 | 250 |



## *STAMPED STEEL*
## 2-HOLE SERVICE ENTRANCE STRAPS

### FEATURES
- Corrosion-resistant

| Cat. No. | Description | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| *SES2-50 | Three #8, #6, #4 | 20 | 100 |
| *SES2-75 | Three #3, #2 | 20 | 100 |
| *SES2-100 | Three #1, #1/0, #2/0 | 20 | 100 |
| *SES2-200 | Three #3/0, #4/0 | 20 | 100 |



## SPRING STEEL
## CONDUIT TO STUD CLIPS
## SNAP ON, SNAP CLOSE

### FEATURES

- Easily snaps onto stud
- Snap-close conduit support
- Fasten to stud with screw for additional support

| Cat. No. | EMT Size | FMC Size | MC/AC Size | Stud Clip Size | Std. Pkg. |
|---|---|---|---|---|---|
| **F6MF** | - | 3/8" | 14/2 to 12/3 | 1-3/8" to 1-1/2" | 100 |
| **F812MF** | 1/2", 3/4" | - | - | 1-3/8" to 1-1/2" | 100 |
| **F16MF** | 1" | - | - | 1-3/8" to 1-1/2" | 100 |
| **F20MF** | 1-1/4" | - | - | 1-3/8" to 1-1/2" | 50 |






## SPRING STEEL
## CABLE TO STUD CLIPS

### FEATURES

- Secures NMC or MC/AC to metal or wood studs
- Complies with NEC® 300.4(d), CEC 12-618 and CEC 12-510
- No tools required to install
- Screw provision for additional support

| Cat. No. | MC/AC Size | NM Size | Cable Clip Size | Stud Clip Size | Std. Pkg. |
|---|---|---|---|---|---|
| **FFXC20** | 14/2 to 12/3 | 14/2 to 12/3 | 7/16” to 9/16” | 1-3/8” to 1-1/2” | 100 |







## SPRING STEEL
## CONDUIT TO STUD ATTACHMENTS
## SNAP CLOSE

### FEATURES

- Positions conduit on metal or wood stud of any size
- Held to stud with screw
- Snap-close conduit support

| Cat. No. | EMT Size | Std. Pkg. |
|---|---|---|
| **F350812M** | 1/2”, 3/4” | 100 |





## SPRING STEEL
## CABLE/CONDUIT TO STUD ATTACHMENTS NEW!

### FEATURES

- Supports EMT conduit or MC/AC cable
- Ensures conduit is in-line with junction box knockout
- Allows for overlap of other fasteners sharing the same screw(s)
- For wood or metal studs
- Eliminates offset bending of conduit
- Complies with NEC® Article 358.30(A), which requires conduit support within 36" of an electrical box
- Complies with CEC Rule 12-1404, which requires conduit support within 1 m of an electrical box
- Complies with CEC Rule 12-618, which requires support of armoured cable within 300 mm (12") of an electrical box

| Cat. No. | EMT Size | Box Depth | Std. Pkg. |
|---|---|---|---|
| **FCS812** | 1/2", 3/4" | 1-1/2” | 100 |
| **FCS812D** | 1/2", 3/4" | 2-1/8” | 100 |
| **FCS16** | 1" | 2-1/8” | 100 |







## *SPRING STEEL*
## MC/AC CABLE TO STUD CLIPS

### FEATURES

- No tools required to install
- Holes in clip allow it to be screwed into wood stud, concrete or block
- Stabilizer Legs provide "wobble-free" support
- Compliant with NEC® Article 300.4(d), allowing cable to be positioned a minimum of 1-1/4" from face of stud
- Compliant with CEC Rule 12-618 for support of MC/AC cable
- Snaps in half, making two clips out of one

| Cat. No. | Flange Thickness | MC/AC Size | Std. Pkg. |
|---|---|---|---|
| **FMAC2** | 1/8" MAX | 14/2 to 10/3 | 100 |






## *SPRING STEEL*
## MC/AC CABLE TO METAL STUD CLIPS

### FEATURES

- Easy installation of MC/AC to metal stud
- No tools required to install

| Cat. No. | Outer Diameter | MC/AC Size | Std. Pkg. |
|---|---|---|---|
| **MSC** | 0.429" - 0.531" | 14/2 to 12/3 | 100 |





## *PRE-GALVANIZED STEEL*
## STUD MOUNTING CABLE SUPPORTS

### FEATURES

- Wood or metal stud
- Easy to lock
- Space-saving packaging

| Cat. No. | Description | Non-Metallic | MC/AC/BX | Std. Pkg. |
|---|---|---|---|---|
| **CS-CJ6** | Stud Mounting Cable Support with locking tab | Max. 6 | Max. 4 | 100 |







## *PLASTIC* UNIVERSAL METAL STUD GROMMETS

### FEATURES


- High strength, non-conductive polypropylene
- Universal design fits into a standard 1" trade size hole and all factory-punched stud holes
- Lightweight material eases installation

| Cat. No. | Description | Std. Pkg. |
|---|---|---|
| **PUSG** | Universal Snap-in type Bushings for metal stud, fit all factory punched metal stud holes | 100 |



### INSTALLATION INSTRUCTION:

**Step1:** Separate the two halves
**Step2:** Snap the bushing end and the washer end together through the hole
**Step3:** Install cable through the grommet



## SWITCH BOX SUPPORTS

### FEATURES

- Bendable Tabs

| Cat. No. | Description | Std. Pkg. |
|---|---|---|
| **SBS** | 20GA | 100 |





## ACCESSORIES

| Cat. No. | Description | Std. Pkg. |
|---|---|---|
| **DLR-1G** | Device Leveler and Retainer, 1-Gang | 50 |





## ADJUSTABLE BAR HANGERS

### FEATURES

- Ends bend and wrap around stud
- Can be used with boxes 1-1/2", 2-1/8" or 2-1/2" deep


| Cat. No. | Description | Std. Pkg. |
|---|---|---|
| **BHA-16** | 11" to 18" Adjustable Box Bracket - Mount box with self-tapping screws Ends bend and wrap around stud - Can be used with boxes 1-1/2", 2-1/8" or 2-1/2" deep | 50 |
| **BHA-24** | 15-3/4" to 26" Adjustable Box Bracket - Mount box with self-tapping screws Ends bend and wrap around stud - Can be used with boxes 1-1/2", 2-1/8" or 2-1/2" deep | 50 |

**SHIPS PREASSEMBLED**



*BHA-16*
Adjusts from 11" to 18"

*BHA-24*
Adjust from 15-3/4" to 26"

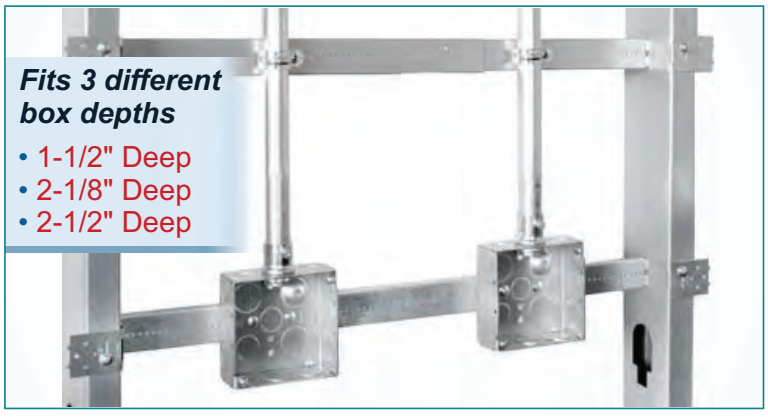


**BOX AND CONDUIT SUPPORT BETWEEN STUDS USING BHA**

BHA-16 adjusts from 11" up to 18"
BHA-24 adjusts from 15-3/4" up to 26"

## DROP-ON-BAR SLIDER BRACKETS

### FEATURES

- Quickly attach to any 4" or 4-11/16" square box with Wafer Head Screw
- Easily drops onto Orbit's BHA-16 and BHA-24
- A BARB and box assembly can easily be repositioned along the hanger
- Multiple BARB assemblies can be added before and after the BHA is installed
- Can be fully prefabricated and locked onto the BHA without setting final box position
- BARB-CS comes complete with cable support pin holes

| Cat. No. | Description | Std. Pkg. |
|---|---|---|
| **BARB** | Drop-On-Bar Slider Bracket | 50 |
| **BARB-CS** | Drop-On-Bar Slider Bracket with conduit & cable support pin holes | 50 |

PATENTED

ORBIT INDUSTRIES EXCLUSIVE


Video Available On Our Website!



*BARB*



*BARB-CS*

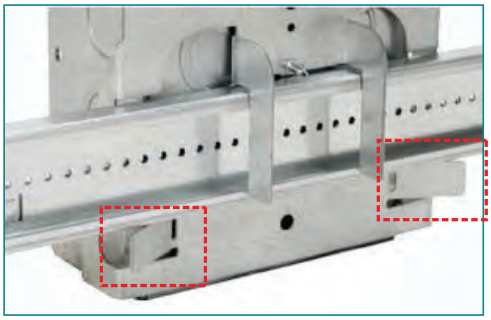

A BARB and box assembly can be locked onto a BHA before arriving on the job site for quick adjustment in the field.

## SIMPLE SUPPORT BRACKET NEW!

### FEATURES

- Telescoping bracket adjusts from 15” to 25”
- Rigidity eliminates need for far-side back support
- SSB-T5 expands without removing adapters or junction boxes (ideal for prefabrication)
- Compatible with Adjustable Rings
- Must be used with boxes 2-1/8" deep or deeper
- Must be accompanied with either UMA or UMA-LVBS to mount a junction box
- UMAB's also snap onto SSB Brackets


| Cat. No. | Description | Std. Pkg. |
|---|---|---|
| **SSB-T5** | Simple Support Bracket adjusts from 15" to 25" for mounting 4", 4-11/16" & 5 Sq. boxes between studs | 25 |

PATENTED

ORBIT INDUSTRIES EXCLUSIVE


Video Available On Our Website!



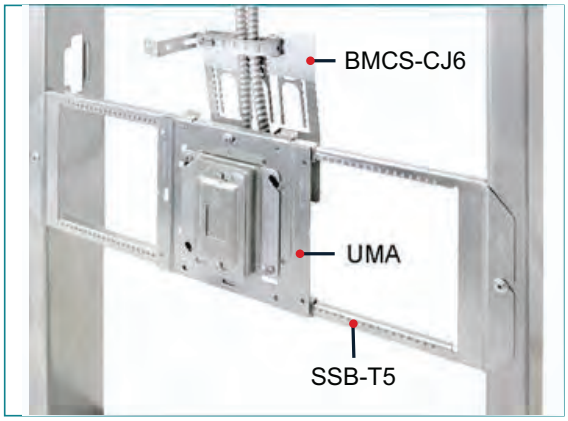


**SSB-T5 INSTALLED BETWEEN WALL STUDS**

BMCS-CJ6 eliminates need for additional bar hangers in the field

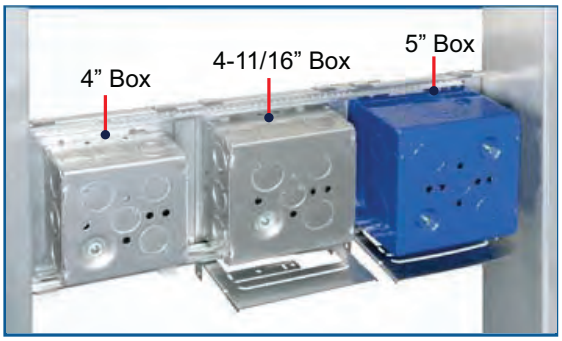


**ANY SIZE J-BOX**

**SSB-T5** fits up to three 4", 4-11/16" or 5" boxes between 24" studs

## UNIVERSAL MOUNTING ADAPTERS


### FEATURES

- UMA or UMA-LVBS mount directly to-stud
- Compatible with the SSB-T5 and SSB-TBAR for between stud and overhead installations
- UMA accepts 4" or 4-11/16" boxes
- UMA-LVBS features unique keyhole pattern that accepts 4", 4-11/16" and 5" Sq. boxes
- UMA-LVBS allows for use of 4" rings with 4-11/16" and 5" boxes
- UMA-LVBS allows for dual-direction box mounting (turn any box 90°)
- UMA-LVBS includes back support for up to 3-1/2" deep studs (up to 6" with FS-456-EXT)


| Cat. No. | Description | Std. Pkg. |
|---|---|---|
| **UMA** | Universal Mounting Adapter for 4" and 4-11/16" boxes to mount to SSB-T5, SSB-TBAR, USB and directly to stud | 25 |
| **UMA-LVBS** | Universal Mounting Adapter w/ Back Support, allows for 4", 4-11/16" & 5" Sq. boxes to mount to SSB-T5, SSB-TBAR, USB and directly to stud | 25 |

PATENTED

**Video Available On Our Website!**

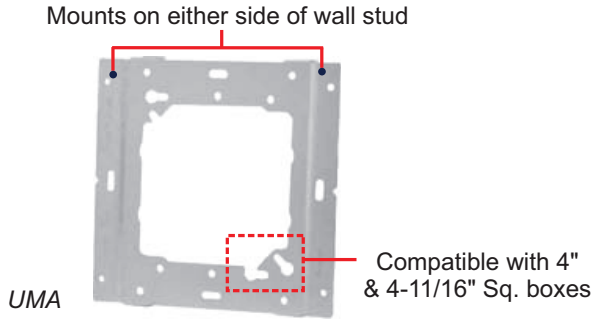



*UMA*

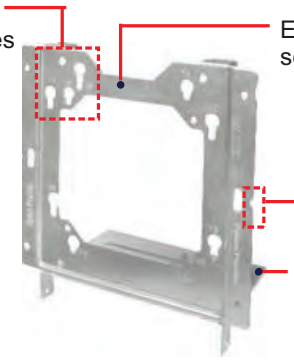



*UMA-LVBS*



Both adapters easily snap onto SSB-T5 & SSB-TBAR




Pair 4" rings with any 4-11/16" or 5" Sq. box



Turn any 4", 4-11/16" and 5" Sq. box 90° with UMA-LVBS

## UNIVERSAL MOUNTING ADJUSTABLE BOXES

### FEATURES

- Adjustable from 0" to 1-1/2" (ships with box set at 5/8" raise)
- Allows for direct-to-stud installations
- Compatible with the SSB-T5 and SSB-TBAR for between stud and overhead installations
- UMAB-4R include 10" Solid Cu. #12AWG Pigtail and 10-32 Ground Screw

| Cat. No. | Description | Std. Pkg. |
|---|---|---|
| **UMAB** | 4" Square, 3-1/2" Deep Box, 46 Cu. In., Adjustable up to 1-1/2". Adapter included | 10 |
| **FA-UMAB** | Red 4" Square, 3-1/2" Deep Box, 46 Cu. In., Adjustable up to 1-1/2". Adapter included | 10 |
| **UMAB-4R** NEW! | 4" (4O), 2-1/8" Deep Box w/ 10" PT, 21.1 Cu. In., Adjustable up to 1-1/2". Adapter Included | 20 |
| **FA-UMAB-4R** NEW! | Red 4" (4O), 2-1/8" Deep Box w/ 10" PT, 21.1 Cu. In., Adjustable up to 1-1/2". Adapter Included | 20 |

PATENTED

**Video Available On Our Website!**




*UMAB*



*FA-UMAB*

Adjustment screws & guided slots

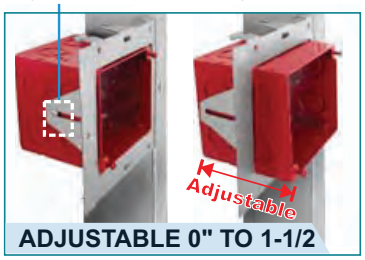




*UMAB-4R* NEW!



*FA-UMAB-4R* NEW!

Adjustment screws & guided slots




**DIRECT-TO-STUD**


Guided-slots on each side allow the box to be easily adjusted by simply loosening the screws

## SSB ASSEMBLIES


### FEATURES

- Telescoping bracket adjusts from 15” to 25”
- Rigidity eliminates need for far-side back support
- SSB's expand without removing adapters or junction boxes (ideal for prefabrication)
- Compatible with adjustable rings
- Must be used with boxes 2-1/8" deep or deeper
- FA-SSB-UMAB offers 6-way adjustability

| Cat. No. | Description | Std. Pkg. |
|---|---|---|
| **SSB-4S-MKO** | Preassembled SSB-T5 w/ UMA & 4SDB-MKO-PT-10 | 12 |
| **SSB-5S-MKO** | Preassembled SSB-T5 w/ UMA & 5SDB-MKO-PT-10 | 12 |
| **SSB-T5B-200** NEW! | Preassembled SSB-T5 w/ UMA-LVBS, T5B-200 (2" KO faces up) & T5R, compatible with 4" rings | 10 |
| **FA-SSB-UMAB** NEW! | Preassembled SSB-T5 w/ FA-UMAB | 10 |



*SSB-4S-MKO*
*SSB-5S-MKO*



EC&M Product of the Year

*SSB-T5B-200* NEW!




*FA-SSB-UMAB* NEW!

## SSB-TBAR ASSEMBLIES NEW!

### FEATURES

- Telescoping bracket adjusts from 15" to 25"
- Includes two (2) riveted T-bar clips with holes for Tek screw (helps comply with NEC 314.23 (D) (1))
- 6-way adjustability
- Built-in adapter allows box adjustment from flush to 1-1/2" via guided slots (ships with box set at 5/8” raised)
- Two (2) outside-facing screws lock box at desired depth
- Designated holes approved for branch line restraints
- Ships preassembled to reduce installation time

| Cat. No. | Description | Std. Pkg. |
|---|---|---|
| **SSBT-4R** | Preassembled SSB-TBAR with UMAB-4R | 20 |
| **FA-TBAR-UMAB** | Preassembled SSB-TBAR w/ FA-UMAB | 10 |




*SSBT-4R*



*FA-TBAR-UMAB*

PATENTED

2018 NECA Show Stopper



Branch Line Restraint Holes

Tek screw provisions on each clip comply with NEC 314.23 (D) (1)




**SSBT-4R ON T-BAR**

SSBT-4R installed in drop ceiling w/ branch line restraint

***Includes clips for between T-bar drop ceiling grids***

## PREASSEMBLED UMA-LVBS WITH SQUARE BOX AND DEVICE RING

NEW!


### FEATURES

- UMA-LVBS can either mount to-stud directly or clip onto SSB-T5
- Includes far-side back support for up to 3-1/2" deep studs (up to 6" with FS-456-EXT)
- 4" Sq., 2-1/8" Deep Boxes, 30.3 Cu. In.
- With 10-32 Ground Screw and 10" Solid Cu. #12AWG Pigtail
- KO Bottom: (2) - 1/2", (2) - MKO
- KO Sides: (8) - 1/2", (4) - MKO

| Cat No. | Components | | Std. Pkg |
|---|---|---|---|
|  LVBS-4 |  UMA-LVBS +  4SDB-MKO-PT-10 | – | 25 |
|  LVBS-4-158 | |  1-G, 5/8 RAISE | 25 |
|  LVBS-4-258 | |  2-G, 5/8 RAISE | 25 |
|  LVBS-4-A158 | |  1-G, 5/8 - 1-1/4" RAISE | 25 |
|  LVBS-4-A258 | |  2-G, 5/8 - 1-1/2" RAISE | 25 |

***Don't see assemblies you're looking for?***
***Email info@orbitprofab.com for more custom assemblies!***



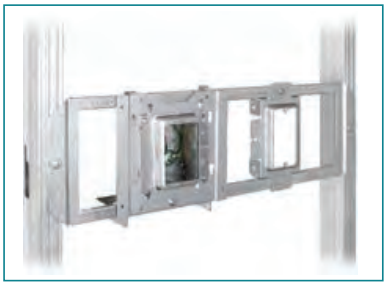

Shown Installed on SSB-T5

## SSB WITH PREASSEMBLED ADJUSTABLE MASON BOXES 3-1/2" DEEP

### FEATURES

- Telescoping bracket adjusts from 15" to 25"
- Rigidity eliminates need for far-side back support
- Built-in adapter allows box adjustment from 1/2" to 1-1/2" via guided slots (ships with box set at 5/8" raised)
- Guided-slots on each side allow the box depth to be easily adjusted by simply loosening the screws
- Masonry Box can be moved along SSB-T5 bracket until set in final position with a Tek screw

| Cat. No. | No. of Gangs | KO Ends | KO Bottom | KO Sizes | Cu. Inches | Std. Pkg. |
|---|---|---|---|---|---|---|
| **SSB-MB3** | 3 | (6) - CKO | (3) - CKO | (4) - CKO | 69.3 | 10 |
| **SSB-MB4** | 4 | (8) - CKO | (4) - CKO | (4) - CKO | 92.1 | 10 |
| **SSB-MB5** | 5 | (10) - CKO | (5) - CKO | (4) - CKO | 116.1 | 10 |
| **SSB-MB6** | 6 | (12) - CKO | (6) - CKO | (4) - CKO | 139 | 10 |




*SSB-MB3*






An ideal solution in nurse call systems and headwall assemblies for healthcare projects

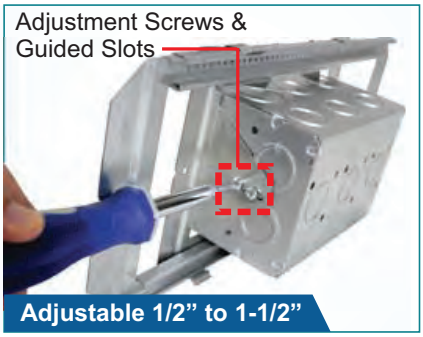


**SSB-MB3 SIDE VIEW**

## BOX MOUNTED CONDUIT/ CABLE SUPPORTS

NEW!

### FEATURES


- No more field-installed First Means of Support
- Attaches directly to any size junction box for a cost-saving solution to First Means of Support needs
- Satisfies NEC 330.30 (B)
- Eliminates the need for additional bar hangers in the field BMCS-CJ6 includes CS-CJ6 for tool-less cable installation

| Cat. No. | Description | Std. Pkg. |
|---|---|---|
| **BMCS** | Box Mounted Cable Support | 50 |
| **BMCS-CJ6** | Box Mounted Cable Support with CS-CJ6 for tool-less installation | 50 |

EC&M Product of the Year 20 YEARS
2020 Category Winner



*BMCS*



*BMCS-CJ6*



BMCS-CJ6 installed on SSB-T5 bracket helps minimize the field work





Installed with just one wafer head screw

## *PRE-GALVANIZED STEEL* STUD MOUNTING CABLE SUPPORTS

### FEATURES

- Wood or metal stud
- Easy to lock
- Space-saving packaging

| Cat. No. | Description | Non-Metallic | MC/AC/BX | Std. Pkg. |
|---|---|---|---|---|
| **CS-CJ6** | Stud Mounting Cable Support with Locking Tab | Max. 6 | Max. 4 | 100 |





## HEIGHT ADJUSTABLE BOX INSTALL TOOL

### FEATURES

- Adjustable and magnetic platform
- Platform can be preset at a specific height for a consistent box and bracket installation
- Compatible with all Orbit Stud Brackets

| Cat. No. | Description | Std. Pkg. | Mst. Pkg. |
|---|---|---|---|
| **HABIT** | Height Adjustable Box Installation Template | 1 | 4 |

PATENTED

ORBIT INDUSTRIES EXCLUSIVE

Video Available On Our Website!



Front View



Back View



SSB-4S-MKO



SSB-5S-MKO



SSB-T5



SSB-T5B-200



TSB



FB-3



FB-4



FMB




MBBH



BHA

2017 NECA Show Stopper

***Compatible with all of Orbit Stud Brackets***

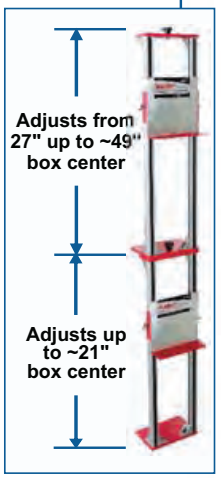


***Tool-free stackability for switch and receptacles!***



NEW DESIGN



***Bubble Leveler***



***Adjustable via hand nuts***



***Magnets hold box and bracket***

## LOW VOLTAGE STUD MOUNTING BRACKETS

### FEATURES

- 1/2" raise
- Mounts vertically or horizontally
- Attaches to wooden or metal studs with the use of self-tapping screws or nails
- Can install onto the front or side of wood or metal studs
- Compatible with Simple Support Bracket (SSB-T5) and Ultimate Support Bracket (USB)

| Cat. No. | Description | Std. Pkg. |
|---|---|---|
| **LVSB1** | Low Voltage Stud Mounting Bracket 1-Gang | 50 |
| **LVSB2** | Low Voltage Stud Mounting Bracket 2-Gang | 25 |




*LVSB1*



*LVSB2*






**LVSB1 & LVSB2 SHOWN INSTALLED**

## BOX MOUNTING ADAPTERS


### FEATURES

- Mounts to 4” and 4-11/16” square boxes
- Adjustable Back Support helps maintain rigidity when installed
- Low profile design limits drywall bulging
- For use with metal or wood studs


| Cat. No. | Description | Std. Pkg. |
|---|---|---|
| **BMA-23** | Box Mounting Adapter with up to 3-1/2" Far Side Support | 25 |
| **BMA-4** | Box Mounting Adapter with up to 4" Far Side Support | 25 |



*BMA-23*



*BMA-4*



**DIRECT-TO-STUD**

BMA allows for boxes to be mounted directly-to-stud


## FAR SIDE SUPPORT EXTENSIONS NEW!

### FEATURES


- Folds onto UMA-LVBS (pg. 191), BMA-23 and BMA-4 for a tool-less far-side support, up to 6"
- Attach to brackets without tools

| Cat. No. | Description | Std. Pkg. |
|---|---|---|
| **FS-456-EXT** | Far-side Support Extender for up to 6" Studs, compatible with UMA-LVBS, BMA-23 & BMA-4, tool-less | 50 |



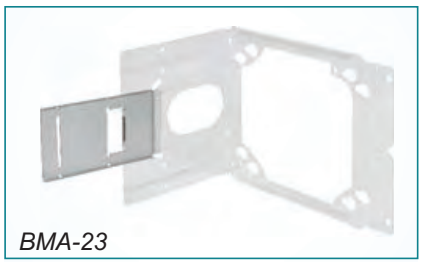

*BMA-23*



*UMA-LVBS*

Fold FS-456-EXT onto UMA-LVBS, BMA-23 or BMA-4 for up to 6" far-side support

## *STEEL* BACK SUPPORTS

### FEATURES

- Electroplated Zinc

| Cat. No. | Description | Std. Pkg. |
|---|---|---|
| **ABS** | Far-Side Box Support for 1-1/2" & 2-1/8" deep boxes, for use with 4" metal studs | 50 |
| **ABS-6** | Far-Side Box Support for 1-1/2" & 2-1/8" deep boxes, for use with 6" metal studs | 50 |



*ABS*



*ABS-6*

## TELESCOPING SUPPORT BRACKETS

### FEATURES

- Telescoping bracket adjusts from 16” to 27”
- Accepts 4", 4-11/16" square, and up to 10-gang boxes and rings
- Easily adjust position of boxes in field
- Packaged preassembled and ready to use
- Markings on bracket allow for quick and consistent adjustability
- Rigidity eliminates need for far-side back support

| Cat. No. | Description | Std. Pkg. |
|---|---|---|
| **TSB** | Telescoping Support Bracket adjusts from 16” to 27” for mounting 4", 4-11/16" square and up to 10-gang boxes between studs. | 25 |


**SHIPS PREASSEMBLED**

**Video Available On Our Website!**





***Extra bend ensures a sturdy design***

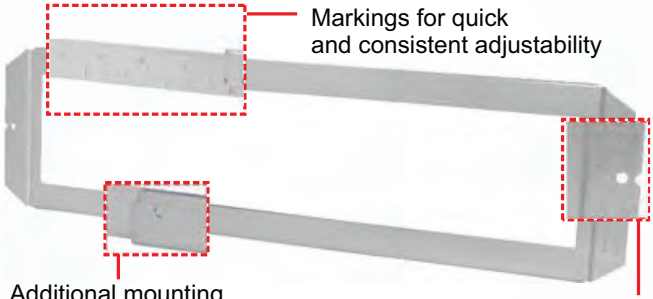







Fits 4", 4-11/16" square, and up to 10-gang boxes

## FIXED “O” BRACKETS

### FEATURES

- Pre-galvanized 18 GA sheet metal
- Accommodates 4", 4-11/16" square, and multi-gang boxes
- Allows steel boxes to adjust easily horizontally along the bracket
- Reduces assembly time on job site


| Cat. No. | Application | Dimensions (W x L) | Std. Pkg. |
|---|---|---|---|
| **MBBH-16** | For 16” stud spacing | 6" x 16" | 50 |
| **MBBH-24** | For 24” stud spacing | 6" x 24" | 50 |



*MBBH-16*



*MBBH-24*

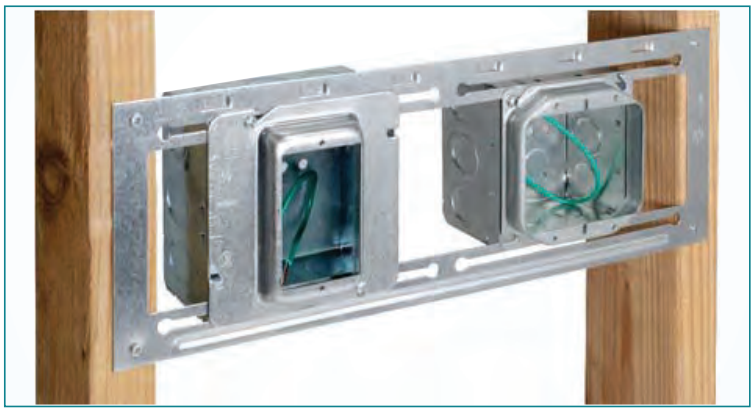


Shown installed with both 4" and 4-11/16" square boxes


## FIXED POSITION MOUNTING BRACKETS

### FEATURES

- Compatible with 4”, 4-11/16” and 5” square boxes
- 4" rings can be mounted on their own for low voltage applications using 8/32 screws
- Low profile design limits drywall bulging


| Cat. No. | Description | Std. Pkg. |
|---|---|---|
| **FMB-16** | Fixed Position Box Mounting Bracket for 16” stud | 25 |
| **FMB-24** | Fixed Position Box Mounting Bracket for 24” stud | 25 |

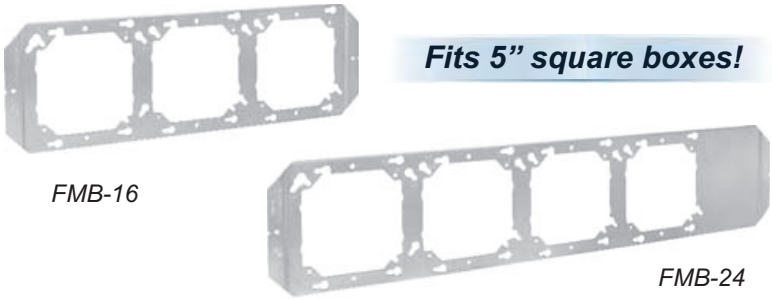

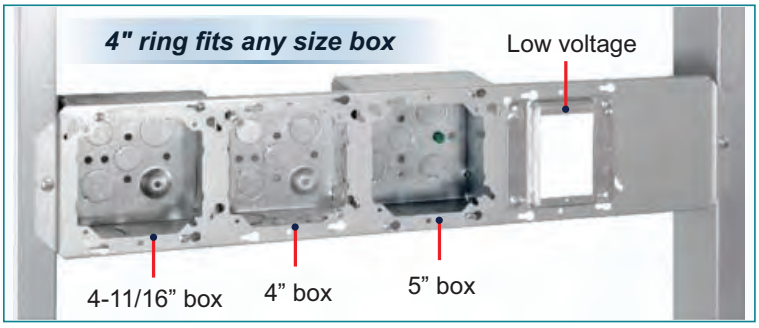
### FMB INSTALLED ON STUDS

Mount up to 3 boxes between 16” studs with FMB-16 and 4 boxes between 24” with FMB-24




### MOUNTING HOLES

Mounting Holes are marked to easily identify box and ring placement

## FLAT BRACKET FAMILY

### FEATURES

- Compatible with 4”, 4-11/16” and 5” square boxes
- Allows 5” boxes to use 4” rings, reducing material costs
- 4" rings can be mounted on their own for low voltage applications using 8/32 screws
- Low profile design accepts up to 2” fittings
- Additional width and slotted mounting holes allow for extra flexibility on studs
- **KB-18, KFB-318, KFB-418** contain up to 6" Back Support for additional stability
- **KB-18** contains optional Stud Supports that can be folded out when installed between studs
- Compatible with Orbit's UL Adjustable Rings

| Cat. No. | Description | Std. Pkg. |
|---|---|---|
| **FB-3** | Flat Box Mounting Bracket 3-Box for 16” stud | 25 |
| **FB-4** | Flat Box Mounting Bracket 4-Box for 24” stud | 25 |
| ***KB-18** NEW! | Kick Bracket 1-Box Position 18” box center height w/CS-CJ6 | 10 |
| **KFB-318** | Flat Bracket 3-Positions with 18” box center height Kick Stand for 16” stud w/CS-CJ6 | 10 |
| **KFB-418** | Flat Bracket 4-Positions with 18” box center height Kick Stand for 24” stud | 10 |

*KB-18 Spec Updated January 2024

ORBIT INDUSTRIES EXCLUSIVE

***Compatible with 5” Sq. Boxes!***




*FB-3*




*FB-4*




*KB-18* NEW!



*KFB-318*



*KFB-418*

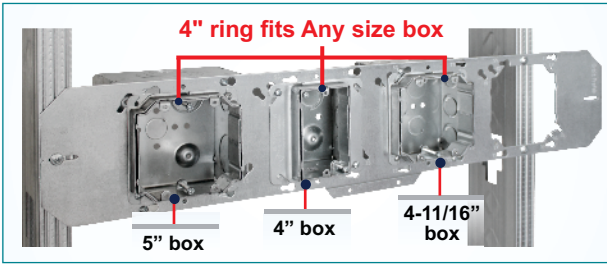


The Flat Bracket can be positioned to accommodate irregular stud spacings

## ULTIMATE SUPPORT BRACKETS AND ACCESSORIES

### FEATURES

- Can be floor or wall mounted on wooden or metal studs
- Telescoping bracket adjusts from 15” to 25”
- Ideal alternative to kick-in brackets, for floor mounted outlets above / below 18" box center
- Infinite height and width combinations
- Provides flexibility at job site
- Compatible with all adjustable rings
- Markings on bracket allow for quick and consistent adjustability

### NOTE

USB must be accompanied with either US4SB, UMA, UMA-LVBS, WBAR1G or WBAR2G mounting brackets to attach a steel box

| Cat. No. | Description | Std. Pkg. |
|---|---|---|
| **USB** | Ultimate Support Bracket, Adj. 8”-24” as a floor brkt or 14”-24” as a wall brkt between studs | 12 |
| **US4SB** | Mounting Bracket for 4” Square Box, snaps to USB | 24 |
| **UMA** | Universal Mounting Adapter for 4" and 4-11/16" Boxes to mount to SSB, SSB-T5, SSB-TBAR, USB and directly to stud | 25 |
| **LVSB1** | Low Voltage Stud Mounting Bracket 1-Gang | 50 |
| **LVSB2** | Low Voltage Stud Mounting Bracket 2-Gang | 25 |
| **USDBM** | For use with USB to create a double box in floor mount assembly with built-in back support | 50 |
| **USTBM** | For use with USB to create a triple box in floor mount assembly with built-in back support | 50 |
| **USTS** | USB floor mount stud-to-stud top support | 50 |

PATENTED

ORBIT INDUSTRIES EXCLUSIVE



*USB*



*US4SB*



*UMA*



*LVSB1*



*LVSB2*



*USTBM*



*USDBM*



*USTS*

| Cat. No. | Description | Std. Pkg. |
|---|---|---|
| **USB-4SDB-50/75-PT** | Preassembled USB with a 4” Square 2-1/8” Deep Box, includes installed Far-Side Back Support and Ground Pigtail | 12 |
| **USB-5SDB-50/75-PT** | Preassembled USB with a 4-11/16” Square 2-1/8” Deep Box, includes installed Far-Side Back Support and Ground Pigtail | 12 |





*USB-4SDB-50/75-PT*

Complete prefabricated assembly




*USB-5SDB-50/75-PT*

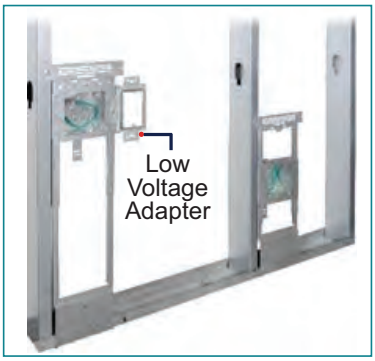


**FLOOR BRACKET**

Mount vertically at heights 8” to 24” and allows for the installation of the LVSB for low voltage applications

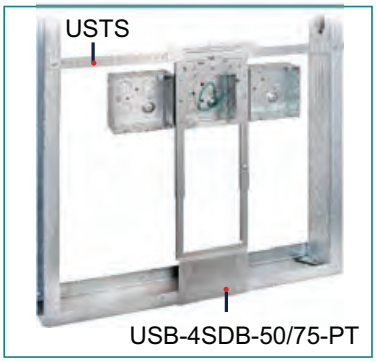


**USB ASSEMBLY**

USB accessories allow for vertical mounting between studs and 3 box applications using the USTBM

## BOX AND CONDUIT HANGER SUPPORT PLATES

### FEATURES

- Pre-Galvanized 16 Gauge Steel
- No cutting required
- Pin holes and slots allow for use of conduit straps
- Self-reinforcing as more conduit is added
- Requires only one rod for installation
- Stamped markings provide guide lines
- Easy to preassemble to save time and material
- Support rating of 100lbs (45.36kg) or less


| Cat. No. | Description | Std. Pkg. |
|---|---|---|
| **BCHS-10** | Fits up to 6" x 6" Box for horizontal mounting | 25 |
| **BCHS-6** | Fits up to 6" x 6" Box for horizontal mounting and provides bent tabs for vertical mounting | 10 |
| **BCHS-6S** | Fits up to 8" x 8" Box for horizontal mounting, provides bent tabs for vertical mounting and offsets allow for use of one-hole straps | 10 |
| **BCHS-12** | Fits up to 12" x 12" Box or multiple small sized boxes for horizontal mounting and provides bent tabs for vertical mounting | 5 |

PATENTED

ORBIT INDUSTRIES EXCLUSIVE

MADE IN USA


Video Available On Our Website!




*BCHS-10*



*BCHS-6*




*BCHS-6S*

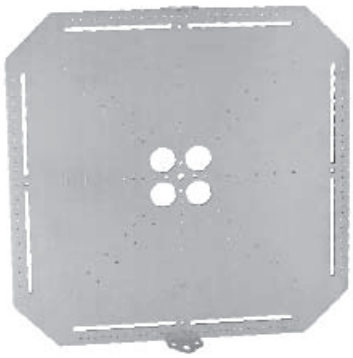


*BCHS-12*

***Use ONE rod to mount multiple boxes and conduits***




**BCHS-10**

Horizontally mount boxes up to 6" x 6”

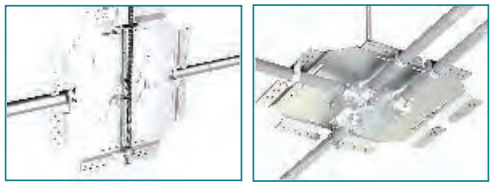


**BCHS-6S**

Horizontally or vertically mount boxes up to 8" x 8" and allows for the use of one-hole straps




**BCHS-6**

Horizontally or vertically mount boxes up to 6" x 6”

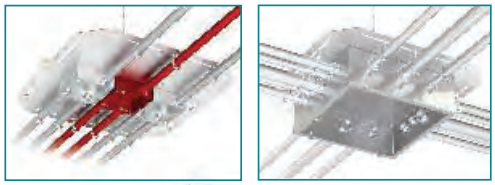

**BCHS-12**

Fits multiple boxes for multi-system installations or up to 12” x 12” NEMA enclosures



**TRADITIONAL METHOD**

This application would require installer to measure and cut five pieces of threaded rod. Use only one rod with Orbit’s BCHS Series.

## *SPRING STEEL*
## BOX/ CONDUIT HANGERS


### FEATURES

- Pre-galvanized Steel Hanger
- Spring Steel Clamps
- Provides support for both sides of horizontal electrical box or conduit from threaded rod
- Eliminates need for offset conduit bending

| Cat. No. | EMT Size | FMC Size | MC/AC Size | Hole Size | Screw Size | Std. Pkg. |
|---|---|---|---|---|---|---|
| **F6MB18A** | - | 3/8" | 14/2 to 12/3 | 1/4", Plain | - | 25 |
| **F812MB18A** | 1/2", 3/4" | - | - | 1/4", Plain | - | 25 |
| **F812MB18S** | 1/2", 3/4" | - | - | - | 1/4"-20 X 9/16" | 25 |
| **F16MB18A** | 1" | - | - | 1/4", Plain | - | 25 |



*F812MB18S*



*F6MB18A*
*F812MB18A*
*F16MB18A*



## RECESSED LIGHT ADAPTER PLATES

### FEATURES

- Available for hard-lid (RAP) and T-bar (RAP-T) applications
- Multiple CKOs accommodate most 4" up to 8" round and **up to 5-1/4" square downlights**
- Can be easily preassembled for a quicker job site install
- A faster installation than bar hangers and recessed fixture brackets


| Cat. No. | Description | Std. Pkg. |
|---|---|---|
| **RAP** | Recessed Lighting Fixture Adapter Plate for hard lid applications | 10 |
| **RAP-T** | Recessed Lighting Fixture Adapter Plate for T-bar | 10 |

PATENTED

ORBIT INDUSTRIES EXCLUSIVE

MADE IN USA

Video Available On Our Website!

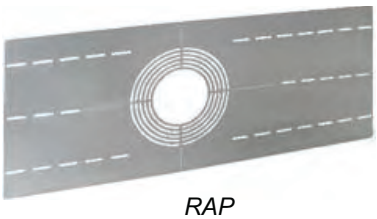


*RAP*




*RAP-T*

***Installs up to 4x FASTER than traditional methods!***

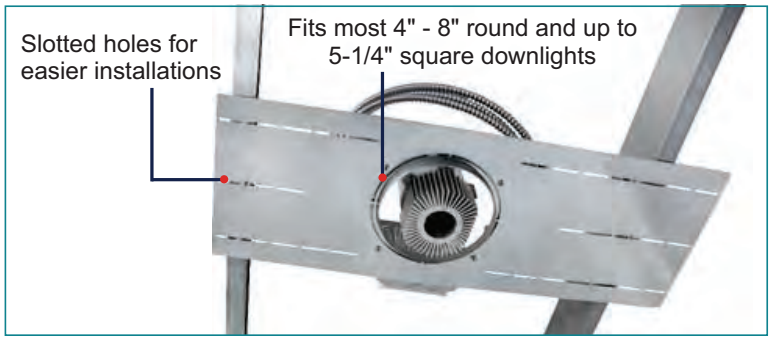


**RAP INSTALLATION**

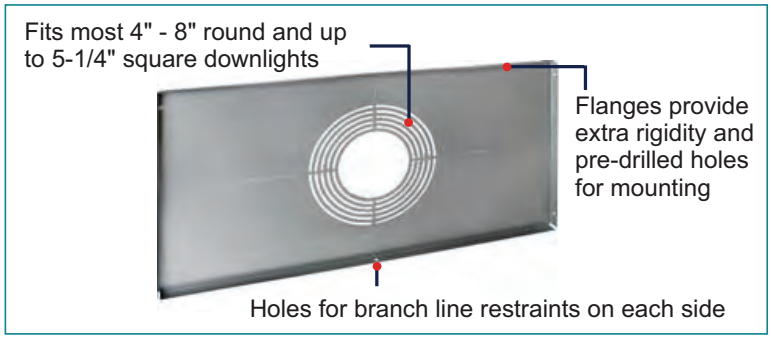


**RAP-T INSTALLATION**


## T-GRID BAR HANGERS

### FEATURES

- Steel
- Electroplated Zinc
- For stud and T-bar


| Cat. No. | Description | Std. Pkg. |
|---|---|---|
| **BH-3** | Straight Bracket for mounting architectural recessed lights 25-1/4" long with notches 24" apart for use on T-bar | 50 |






**BH-3 FEATURES**

Secure to T-bar using bending tabs to comply with NEC 315.23(d)

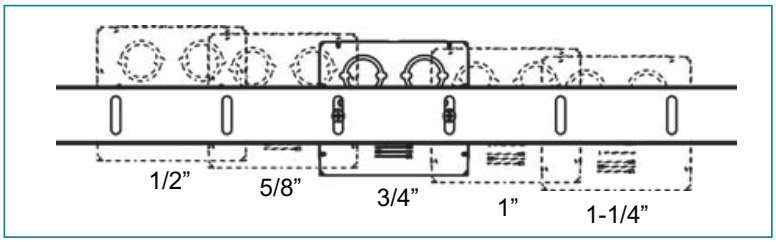


**BH-3 FEATURES**

Adjust vertically from 1/2” to 1-1/4” between 5 different positions

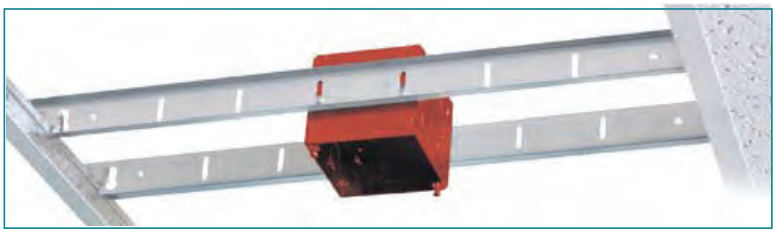

**6-WAY ADJUSTABLE T-BAR HANGER**

The BH-3 is ideal for recessed lighting applications, fire alarm device installation, and LED retrofit lighting applications. Compatible with Orbit's 4SEDB-CKO and FA-4SEDB-CKO

## ADJUSTABLE RINGS

### FEATURES

- For use with 4" and 4-11/16" square deep boxes
- 1/4” to 1-1/4” adjustability range
- Rings achieve a flush finish every time
- Compatible with exclusive extensions for infinite wall depths

| Cat. No. | Description | Standard | With One Extension Installed | | Std. Pkg. |
|---|---|---|---|---|---|
| | | | +1GX75 | +2GX75 | |
| 4SAR1G | 1-Gang Adjustable Ring for 4" sq. deep boxes | 1/4” to 1-1/4” | 1” to 2” | - | 25 |
| 4SAR2G | 2-Gang Adjustable Ring for 4" sq. deep boxes | 1/4” to 1-1/4” | - | 1” to 2” | 25 |
| 5SAR1G | 1-Gang Adjustable Ring for 4-11/16" sq. deep boxes | 1/4” to 1-1/4” | 1” to 2” | - | 25 |
| 5SAR2G | 2-Gang Adjustable Ring for 4-11/16" sq. deep boxes | 1/4” to 1-1/4” | - | 1” to 2” | 25 |

PATENTED

ORBIT INDUSTRIES EXCLUSIVE

Video Available On Our Website!



*4SAR1G*




*4SAR2G*



*5SAR1G*



*5SAR2G*





**ACCESSIBLE ADJUSTABILITY**

Corner screws are easily accessible for adjustment before and after the device has been installed

## STUD MOUNTING ADJUSTABLE RINGS

### FEATURES

- Accepts 4" or 4-11/16" square boxes in line voltage applications
- Mount to any stud, shear wall, 6" X 6" NEMA 1 enclosure, Simple Support Bracket (pg. 190) or Ultimate Support Bracket (pg. 204)
- Can be used standalone for low voltage communications applications
- UL Listed

| Cat. No. | Description | Standard | With One Extension Installed | | Std. Pkg. |
|---|---|---|---|---|---|
| | | | +1GX75 | +2GX75 | |
| **WBAR1G** | 1-Gang Universal Box Bracket | 1/4" to 1-1/4" | 1" to 2" | - | 25 |
| **WBAR2G** | 2-Gang Universal Box Bracket | 1/4" to 1-1/4" | - | 1" to 2" | 25 |

PATENTED

ORBIT INDUSTRIES EXCLUSIVE



*WBAR1G*



*WBAR2G*

## EXTENSIONS AND ACCESSORIES

### FEATURES

- Extensions ensure flush finish regardless of wall thickness
- Attach to adjustable ring for additional 3/4" of depth
- Mount easily to ring with two 8-32 screws
- Multiple extensions can be installed on one ring

| Cat. No. | Description | For Use With | Std. Pkg. |
|---|---|---|---|
| **1GX75** | 1-Gang 3/4" Extension | 4SAR1G, 5SAR1G, or WBAR1G Only | 50 |
| **2GX75** | 2-Gang 3/4" Extension | 4SAR2G, 5SAR2G, or WBAR2G Only | 50 |
| **UPC** | Gangable, Steel Universal Protective Cover protects any device during drywall, painting, routing, mudding & plastering | | 25 |
| **UPCTS** | Optional Plastic Insert for UPC to protect toggle switch | | 25 |



*1GX75*



*2GX75*



*UPC*



*UPCTS*

## UL-APPROVED ADJUSTABLE RINGS

### FEATURES

- Can be adjusted on the job site for a quick installation
- Adjusts to achieve a flush finish every time
- Patented design provides strong electrical and mechanical connections to meet UL requirements

| Cat. No. | Description | Adjustability Range | Std. Pkg. |
|---|---|---|---|
| **4AR1G-58** | 1-Gang Adjustable Ring for 4" square deep boxes | 5/8" to 1-1/4" | 25 |
| **4AR1G-34** | 1-Gang Adjustable Ring for 4" square deep boxes | 3/4" to 1-1/2" | 25 |
| **4AR2G-58** | 2-Gang Adjustable Ring for 4" square deep boxes | 5/8" to 1-1/2" | 25 |
| **5AR1G-58** | 1-Gang Adjustable Ring for 4-11/16" square deep boxes | 5/8" to 1-1/4" | 25 |
| **5AR2G-58** | 2-Gang Adjustable Ring for 4-11/16" square deep boxes | 5/8" to 1-1/2" | 25 |
| **4ARR-34** | Round Adjustable Ring for 4" square deep boxes | 3/4" to 1-1/2" | 25 |
| **3GAR-34** | 3-Gang Adjustable Ring | 3/4" to 1-1/2" | 25 |



*4AR1G-58*



*4AR1G-34*



*4AR2G-58*




*5AR1G-58*



*5AR2G-58*



*4ARR-34*




*3GAR-34*

## SPRING STEEL
## INDEPENDENT SUPPORT CLIPS

### FEATURES
- Wing-Nut included
- Independent support of fixtures
- No tools required to install

| Cat. No. | T-Grid Size | Screw Size | Static Load | Std. Pkg. |
|---|---|---|---|---|
| ISC | 15/16” | 1/4"-20 X 9/16" | 65lb | 100 |





## SPRING STEEL
## TWIST CLIPS WITH WING NUT

### FEATURES
- Wing-Nut included
- Supports electrical fixtures from acoustical T-grid
- No tools needed for installation

| Cat. No. | T-Grid Size | Screw Size | Static Load | Std. Pkg. |
|---|---|---|---|---|
| F4G16 | 15/16” | 1/4"-20 X 9/16" | 50lb | 100 |





## SPRING STEEL
## TWIST CLIPS WITH PLAIN HOLE

### FEATURES
- Supports wire, S-hooks or chain from T-grid
- No tools required to install

| Cat. No. | T-Grid Size | Screw Size | Static Load | Std. Pkg. |
|---|---|---|---|---|
| F4G16H | 15/16” | 1/4", Plain | 40lb | 100 |






## SPRING STEEL
### T- GRID CLIPS SIDE MOUNT

**FEATURES**

- Supports box vertically above acoustical T-bar
- No tools required to install

| Cat. No. | Hole Size | Std. Pkg. |
|---|---|---|
| FATS4I | 1/4", Threaded | 100 |





## SPRING STEEL
### CONDUIT TO T-GRID CLIPS TOP MOUNT, SNAP CLOSE

**FEATURES**

- Supports box vertically above acoustical T-bar
- No tools needed for installation

| Cat. No. | EMT Size | FMC Size | MC/AC Size | Std. Pkg. |
|---|---|---|---|---|
| F6MATA | - | 3/8" | 14/2” to 12/3” | 100 |
| F812MATA | 1/2", 3/4" | - | - | 100 |





## *SPRING STEEL*
## CONDUIT TO T-GRID CLIPS SIDE MOUNT, PUSH IN

### FEATURES
- Supports conduit horizontal and vertical above acoustical T-bar
- No tools required to install

| Cat. No. | EMT Size | Std. Pkg. |
|---|---|---|
| **F8PATS** | 1/2” | 100 |





## *STEEL*
## HEAVY DUTY T-GRID BOX HANGERS NEW!

### FEATURES
- Pre-galvanized Steel Hanger
- Includes spring steel box mounting clip
- No tools required to install
- Accommodates multiple junction boxes
- Mounts flush with face of tile
- 50 lbs. static load rating

| Cat. No. | Included Components | Length | Box Depth | Std. Pkg. |
|---|---|---|---|---|
| **BHT-1HD** | Mounting Clip | 24” | 1-1/2"<br>2-1/8" | 25 |
| **BHT-1HDEEP** | Mounting Clip, 1 1/2" Extension Bracket | 24” | 1-1/2"<br>2-1/8"<br>3-5/8" | 25 |



*BHT-1HD*



*BHT-1HDEEP*

## SIMPLE SUPPORT BRACKETS

### FEATURES


- Telescoping bracket adjusts from 15” to 25”
- Rigidity eliminates need for far-side back support
- SSB's expand without removing adapters or junction boxes (ideal for prefabrication)
- Compatible with adustable rings
- Must be used with boxes 2-1/8" deep or deeper
- SSB-T5 must be accompanied with either UMA or UMA-LVBS to mount a junction box
- UMAB's also snaps onto SSB brackets

| Cat. No. | Description | Std. Pkg. |
|---|---|---|
| **SSB-T5** | Simple Support Bracket adjusts from 15" to 25" for mounting 4", 4-11/16" & 5 sq. boxes between studs | 25 |
| **SSB-TBAR** NEW! | SSB-T5 with T-Bar Drop Ceiling Mounting Clips | 20 |

PATENTED

ORBIT INDUSTRIES EXCLUSIVE

Video Available On Our Website!



*SSB-T5*

Branch Line Restraint Holes




FIRE ALARM/LIGHTING ON HARD LID

UMAB's can be installed on SSB-T5 for hard-lid ceiling applications

2018 NECA Show Stopper




*SSB-TBAR*
NEW!




Includes clips for between T-bar drop ceiling grids

Branch Line Restraint Holes

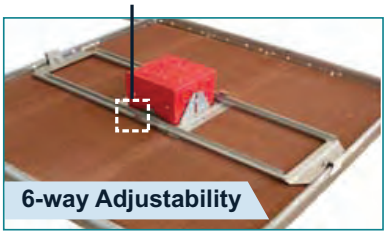


FIRE ALARM ON T-BAR

SSB-TBAR with FA-UMAB installed in drop ceiling grid



Branch Line Restraint Holes

Tek screw provisions on each clip comply with NEC 314.23 (D) (1)

## *STEEL* FIXED BAR HANGERS

### FEATURES

- Electroplated Zinc
- For T-Bar or Hard Lid Ceiling Joists

| Cat. No. | Description | Master Ctn. |
|---|---|---|
| **BHT-1** | 24" T-Bar Box Hanger, Clip Included, for use with boxes 1-1/2" or 2-1/8" deep | 50 |
| **BHT-1A** | 24" T-Bar Box Hanger, Clip Included, 8" adjustable height | 50 |
| **BH-1** | 24" Straight Bar Hanger for mounting ceiling boxes, Slotted, Includes 2 Stove Bolt / Unit | 50 |
| **BH-1C** | 24" Straight bar hanger for mounting ceiling boxes, with BH-C Box Clip | 50 |
| **BH-1S** | 20" Straight bar hanger for mounting ceiling boxes, slotted, includes 2 Stove Bolt / unit | 50 |
| **BH-1SC** | 20" Straight Bar Hanger for mounting ceiling boxes, with Box Clip BH-C | 50 |
| **BH-2NC** | 21" Offset (1-1/2") Bar Hanger for mounting boxes with ring, Slotted | 50 |
| **BH-C** | Additional Box Clip & Screw set for use with BH-1, BH-1S & BH-2NC | 100 |
| **BH-3** | Straight Bracket for architectural recessed lights 25-1/4" long with notches 24" apart for use on T-Bar | 50 |
| **BHT-C** | Additional Box Clip & Screw set for use with BHT-1 & BHT-1A | 100 |



***Preassembled***
*BHT-1*



***Preassembled***
*BHT-1A*



*BH-1*



*BH-1C*




*BH-1S*



*BH-1SC*



*BH-2NC*



*BH-3*



*BH-C*



*BHT-C*

## STEEL ADJUSTABLE BAR HANGERS

### FEATURES

- Electroplated Zinc
- For stud and hard lid ceiling joists

| Cat. No. | Description | Master Ctn. |
|---|---|---|
| *BHA-1 | Adjustable Bar Hanger with Stud for joist spacing 16” to 24” with #3/8-18 NPS Threaded Stud | 50 |
| *BHA-1C | Adjustable Bar Hanger with Stud for joist spacing 16” to 24” with Box Clip | 50 |
| BHA-16 | 11” to 18” Adjustable Box Bracket - Mount box with Tek screws on notches<br>Ends bend and wrap around stud - Can be used with boxes 1-1/2”, 2-1/8” or 2-1/2” deep | 50 |
| BHA-24 | 15-3/4" to 26” Adjustable Box Bracket - Mount box with Tek screws on notches<br>Ends bend and wrap around stud - Can be used with boxes 1-1/2”, 2-1/8” or 2-1/2” Deep | 50 |

*50 lbs fixture rating at 16" stud



*BHA-1*



*BHA-1C*



*BHA-16*
Adjusts 11" - 18”



*BHA-24*
Adjusts 15-3/4" - 26"

## *STEEL* U-BOLTS WITH HEX NUTS

### FEATURES

- Electroplated Zinc

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **SUB-50** | 1/2” | 25 | 250 |
| **SUB-75** | 3/4” | 25 | 250 |
| **SUB-100** | 1” | 25 | 250 |
| **SUB-125** | 1-1/4” | 20 | 200 |
| **SUB-150** | 1-1/2” | 20 | 200 |
| **SUB-200** | 2” | 20 | 200 |
| **SUB-250** | 2-1/2” | - | 10 |
| **SUB-300** | 3” | - | 10 |
| **SUB-350** | 3-1/2” | - | 10 |
| **SUB-400** | 4” | - | 10 |



*SUB-75*



*SUB-125*

## *MALLEABLE IRON* CONDUIT CLAMPS EDGE TYPE

### FEATURES

- Electroplated Zinc

| Cat. No. | Trade Size | Std. Pkg. |
|---|---|---|
| **MCCE-50** | 1/2” | 50 |
| **MCCE-75** | 3/4” | 50 |
| **MCCE-100** | 1” | 25 |
| **MCCE-125** | 1-1/4” | 25 |
| **MCCE-150** | 1-1/2” | 25 |
| **MCCE-200** | 2” | 25 |
| **MCCE-250** | 2-1/2” | 10 |
| **MCCE-300** | 3” | 10 |



*MCCE-50*



*MCCE-100*

## MALLEABLE IRON
## CONDUIT CLAMPS
## RIGHT ANGLE TYPE

### FEATURES
- Electroplated Zinc

| Cat. No. | Trade Size | Std. Pkg. |
|---|---|---|
| MCCR-50 | 1/2” | 50 |
| MCCR-75 | 3/4” | 50 |
| MCCR-100 | 1” | 50 |
| MCCR-125 | 1-1/4” | 50 |
| MCCR-150 | 1-1/2” | 50 |
| MCCR-200 | 2” | 50 |
| MCCR-250 | 2-1/2” | 25 |
| MCCR-300 | 3” | 25 |
| MCCR-350 | 3-1/2” | 25 |
| MCCR-400 | 4” | 25 |



*MCCR-50*



*MCCR-100*

## MALLEABLE IRON
## CONDUIT CLAMPS
## PARALLEL TYPE

### FEATURES
- Electroplated Zinc

| Cat. No. | Trade Size | Std. Pkg. |
|---|---|---|
| MCCP-50 | 1/2” | 50 |
| MCCP-75 | 3/4” | 50 |
| MCCP-100 | 1” | 50 |
| MCCP-125 | 1-1/4” | 25 |
| MCCP-150 | 1-1/2” | 25 |
| MCCP-200 | 2” | 25 |
| MCCP-250 | 2-1/2” | 10 |
| MCCP-300 | 3” | 10 |
| MCCP-350 | 3-1/2” | 10 |
| MCCP-400 | 4” | 10 |



*MCCP-50*



*MCCP-100*

## SPRING STEEL
## HAMMER ON FLANGE CLIPS
## BOTTOM MOUNT

### FEATURES

- Supports boxes, fixtures or other attachments from beam flanges
- Requires only a hammer to install

| Cat. No. | Flange Thickness | Hole Size | Bottom Hole | Side Hole | Strap | Std. Pkg. |
|---|---|---|---|---|---|---|
| **FM24** | 1/8" to 1/4" | 1/4", Threaded | 100 lb | 25 lb | 75 lb | 100 |
| **FM58** | 5/16" to 1/2" | 1/4", Threaded | 100 lb | 25 lb | 75 lb | 100 |
| **FM912** | 9/16" to 3/4" | 1/4", Threaded | 100 lb | 25 lb | 75 lb | 100 |





## SPRING STEEL
## HAMMER ON FLANGE CLIPS
## BOTTOM MOUNT WITH STUD

### FEATURES

- Supports boxes, fixtures or other attachments from beam flanges
- Requires only a hammer to install

| Cat. No. | Flange Thickness | Hole Size | Screw Size | Bottom Hole | Side Hole | Strap | Std. Pkg. |
|---|---|---|---|---|---|---|---|
| **FM24S** | 1/8" to 1/4" | 1/4", Threaded | 1/4" X 3/8" | 100 lb | 25 lb | 75 lb | 100 |
| **FM58S** | 5/16" to 1/2" | 1/4", Threaded | 1/4" X 3/8" | 100 lb | 25 lb | 75 lb | 100 |
| **FM912S** | 9/16" to 3/4" | 1/4", Threaded | 1/4" X 3/8" | 100 lb | 25 lb | 75 lb | 100 |





## SPRING STEEL
## HAMMER ON FLANGE CLIPS
## SIDE MOUNT

### FEATURES

- Provides attachment for wire, S-hooks, chain to flanges
- Fits most beams
- Requires only a hammer to install

| Cat. No. | Flange Thickness | Hole Size | Static Load | Std. Pkg. |
|---|---|---|---|---|
| **F2H4** | 3/32" to 9/64" | 1/4", Plain | 160 lb | 100 |
| **F4H24** | 1/8" to 1/4" | 1/4", Plain | 200 lb | 100 |
| **F4H58** | 5/16" to 1/2" | 1/4", Plain | 200 lb | 100 |
| **F4H912** | 9/16" to 3/4" | 1/4", Plain | 200 lb | 100 |



*F2H4*
*F4H24*



*F4H58*
*F4H912*



## *SPRING STEEL* BEAM CLAMPS

### FEATURES

- Supports threaded rod, electrical boxes and conduit
- Supports #10-24 and 1/4"-20 threaded bridle rings
- Easy installation from beam flanges

| Cat. No. | Flange Thickness | Hole Size | Rod Size | Static Load | Std. Pkg. |
|---|---|---|---|---|---|
| **BCSS** | 1/2" MAX | 7/16", Plain | 1/4", 3/8 | 100 lb | 100 |





## *MALLEABLE IRON* BEAM CLAMPS

### FEATURES

- Electroplated Zinc
- 2 Threaded Holes
- Single Screw

| Cat. No. | Description | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **BCM-25** | 1/4"-20 Tap, 3/4" Jaw, 125 lb. load | 50 | 250 |
| **BCM-38** | 3/8"-16 Tap, 7/8" Jaw, 300 lb. load | 25 | 100 |
| **BCM-50** | 1/2"-13 Tap, 1" Jaw, 600 lb. load | 10 | 50 |



## *STEEL* BEAM CLAMPS

### FEATURES

- Electroplated Zinc
- 2 Threaded Holes
- Single Screw

| Cat. No. | Description | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **BC-25** | 1/4"-20 Tap, 3/4" Jaw, 100 lb. load | 50 | 250 |
| **BC-38** | 3/8"-16 Tap, 7/8" Jaw, 200 lb. load | 25 | 100 |



## SPRING STEEL
## MULTI-FUNCTION CLIPS

### FEATURES

- Provides attachment of conduit and boxes
- Supports #10-24 and 1/4"-20 threaded bridle rings

| Cat. No. | Flange Thickness | Rod/Wire Size | Hole Size | Screw Size | Flange | Drop Rod/Wire | Std. Pkg. |
|---|---|---|---|---|---|---|---|
| **F4Z34** | 1/8" to 3/8" | 1/4" Rod<br>#12 to #8 Wire | #10-24, Threaded<br>1/4"-20, Threaded<br>1/4", Plain | - | 25 lb | 20 lb | 100 |
| **F4Z4S** | 1/8" to 3/8" | 1/4" Rod<br>#12 to #8 Wire | - | 1/4"-20 | 25 lb | 20 lb | 100 |
| **F6Z34** | 3/8" to 7/16" | 3/8" Rod | #10-24, Threaded<br>1/4"-20, Threaded<br>1/4", Plain | - | 25 lb | 20 lb | 100 |





## SPRING STEEL
## VERTICAL PURLIN CLIPS

### FEATURES

- Fits vertical purlins and bar joist
- Provides attachment for wire, S-hooks, chain to flanges
- Requires only a hammer to install

| Cat. No. | Flange Thickness | Hole Size | Static Load | Std. Pkg. |
|---|---|---|---|---|
| **FVF14** | 1/16" to 1/4" | 1/4", Plain | 160 lb | 100 |




## SPRING STEEL
## ANGLE PURLIN CLIPS

### FEATURES

- Compensates angle of purlin
- Provides attachment for wire, S-hooks, chain to flanges
- Requires only a hammer to install

| Cat. No. | Flange Thickness | Hole Size | Static Load | Std. Pkg. |
|---|---|---|---|---|
| **FAF14** | 1/16" to 1/4" | 1/4", Plain | 100 lb | 100 |




## SPRING STEEL
## ROD TO ANGLE PURLIN CLIPS

### FEATURES
- Compensates angle of purlin
- Provides attachment for threaded rod to purlins
- Requires only a hammer to install

| Cat. No. | Flange Thickness | Hole Size | Static Load | Std. Pkg. |
|---|---|---|---|---|
| **FAF146TI** | 1/16" to 1/4" | 1/4", Threaded | 100 lb | 100 |
| **FAF144TI** | 1/16" to 1/4" | 3/8", Threaded | 100 lb | 100 |
| **FAF146T** | 1/16" to 1/4" | 3/8", Plain | 100 lb | 100 |





## SPRING STEEL
## ANGLE PURLIN CLIPS
## SIDE MOUNT

### FEATURES
- Compensates angle of purlin
- Requires only a hammer to install

| Cat. No. | Flange Thickness | Hole Size | Static Load | Std. Pkg. |
|---|---|---|---|---|
| **F122** | 3/32” MAX | 1/4", Plain | 100 lb | 100 |





## SPRING STEEL
## ROD TO ANGLE PURLIN CLIPS
## SIDE MOUNT

### FEATURES
- Provides attachment for threaded rod to purlins
- Requires only a hammer to install

| Cat. No. | Flange Thickness | Hole Size | Static Load | Std. Pkg. |
|---|---|---|---|---|
| **F1226TI** | 3/32” MAX | 3/8”, Threaded | 100 lb | 100 |





## *SPRING STEEL*
## ROD TO FLANGE CLIPS

### FEATURES
- Provides attachment for threaded rod to flanges
- Can swivel to provide a vertical dropdown
- Requires only a hammer to install

| Cat. No. | Flange Thickness | Hole Size | Static Load | Std. Pkg. |
|---|---|---|---|---|
| **F4TI24** | 1/18" to 1/4" | 1/4", Threaded | 200 lb | 100 |
| **F4TI58** | 5/16" to 1/2" | 1/4", Threaded | 200 lb | 100 |
| **F4TI912** | 9/16" to 3/4" | 1/4", Threaded | 200 lb | 100 |





## *SPRING STEEL*
## ROD TO FLANGE ANGLE CLIPS

### FEATURES
- Suspends plain rod from beam flanges
- Can swivel to provide a vertical dropdown
- Requires only a hammer to install

| Cat. No. | Flange Thickness | Hole Size | Static Load | Std. Pkg. |
|---|---|---|---|---|
| **F6A24** | 1/18" to 1/4" | 3/8", Plain | 200 lb | 100 |
| **F6A912** | 9/16" to 3/4" | 3/8", Plain | 200 lb | 100 |





## STEEL
## STRAP HANGERS FOR FLANGE PARALLEL

### FEATURES
- Spring Steel Clip
- Pre-galvanized Steel Hanger
- Suspends straps at right angles to beams
- Requires only a hammer to install

| Cat. No. | Flange Thickness | Strap Width | Static Load | Std. Pkg. |
|---|---|---|---|---|
| **FMSS24** | 1/18" to 1/4" | 1-1/4" MAX | 200 lb | 50 |
| **FMSS58** | 5/16" to 1/2" | 1-1/4" MAX | 200 lb | 50 |
| **FMSS912** | 9/16" to 3/4" | 1-1/4" MAX | 200 lb | 50 |





## STEEL
## STRAP HANGERS FOR FLANGE RIGHT ANGLE

### FEATURES
- Spring Steel Clip
- Pre-galvanized Steel Hanger
- Suspends straps parallel to beams
- Requires only a hammer to install

| Cat. No. | Flange Thickness | Strap Width | Static Load | Std. Pkg. |
|---|---|---|---|---|
| **FMSR58** | 5/16" to 1/2" | 1-1/4" MAX | 200 lb | 50 |





## STEEL
## STRAP HANGERS FOR ANGLE PURLIN PARALLEL

### FEATURES
- Spring Steel Clip
- Pre-galvanized Steel Hanger
- Compensates angle of purlin
- Suspends straps parallel to purlins
- Requires only a hammer to install

| Cat. No. | Flange Thickness | Strap Width | Static Load | Std. Pkg. |
|---|---|---|---|---|
| **FMSS122** | 3/32” MAX | 1-1/4" MAX | 100 lb | 50 |





## STEEL
## STRAP HANGERS FOR ANGLE PURLIN RIGHT ANGLE

### FEATURES
- Spring Steel Clip
- Pre-galvanized Steel Hanger
- Compensates angle of purlin
- Suspends straps at right angles to purlins
- Requires only a hammer to install

| Cat. No. | Flange Thickness | Strap Width | Static Load | Std. Pkg. |
|---|---|---|---|---|
| **FMSR122** | 3/32” MAX | 1-1/4" MAX | 100 lb | 50 |





## *STEEL* BRIDLE RINGS

### FEATURES

- Zinc Electroplated
- Supports low voltage communication cables from beams, rods or purlins combined with other Orbit fasteners

| Cat. No. | Diameter | Tread Size | Screw Type | Std. Pkg. |
|---|---|---|---|---|
| **F2BRT12** | 3/4" | #10-24 | Metal | 100 |
| **F2BRT20** | 1-1/4" | #10-24 | Metal | 100 |
| **F2BRT32** | 2" | #10-24 | Metal | 100 |
| **F4BRT20** | 1-1/4" | 1/4"-20 | Metal | 100 |
| **F4BRT32** | 2" | 1/4"-20 | Metal | 100 |
| **F4BRT32WS** | 2" | 1/4"-10 | Wood | 100 |
| **F4BRT64** | 4" | 1/4"-20 | Metal | 50 |



*WS*





## *SPRING STEEL* MULTI PURPOSE CLIPS FOR BRIDLE RINGS

### FEATURES

- Requires only a hammer to install
- Supports threaded bridle rings, unthreaded bridle rings or drive rings from flange

| Cat. No. | Flange Thickness | Tread Size | Std. Pkg. |
|---|---|---|---|
| **MPC** | 1/8” to 1/2” | #10-24, 1/4"-20 | 100 |





## *STEEL* J-HOOKS

### FEATURES

- Pre-galvanized Steel
- Cost effective alternative to expenisve cable tray
- Galvanized finish on J-Hooks provides smoother cable pull and greater corrosion resistance
- Supports fiber optic, innerduct and low voltage cable

| Cat. No. | Diameter | Std. Pkg. |
|---|---|---|
| **FCAT12** | 3/4" | 50 |
| **FCAT21** | 1-5/16" | 50 |
| **FCAT32** | 2" | 50 |
| **FCAT64** | 4" | 25 |



*FCAT12*



*FCAT21*
*FCAT32*
*FCAT64*



## *STEEL* J-HOOKS WITH ROD/WIRE CLIP

### FEATURES

- Pre-galvanized Steel J-Hook with Spring Steel Clip
- Threaded rod attachment with attached J-Hook
- Support low voltage cables

| Cat. No. | Diameter | Flange Thickness | Rod Size | Wire Size | Std. Pkg. |
|---|---|---|---|---|---|
| **FCAT124Z34** | 3/4" | 1/8" to 3/8" | 1/4" | #12 - #8 | 40 |
| **FCAT126Z34** | 3/4" | 3/8" to 7/16" | 3/8" | - | 60 |





## LOW VOLTAGE STUD MOUNTING BRACKETS

### FEATURES

- 1/2" raise
- Mounts vertically or horizontally
- Attaches to wooden or metal studs with the use of self-tapping screws or nails
- Can install onto the front or side of wood or metal studs
- Compatible with Simple Support Bracket (SSB-T5) and Ultimate Support Bracket (USB)


| Cat. No. | Description | Std. Pkg. |
|---|---|---|
| **LVSB1** | Low Voltage Stud Mounting Bracket 1-Gang | 50 |
| **LVSB2** | Low Voltage Stud Mounting Bracket 2-Gang | 25 |



*LVSB1*



*LVSB2*

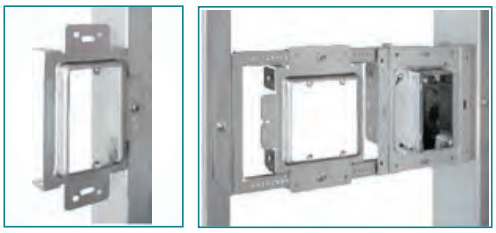

**LVSB1 & LVSB2 SHOWN INSTALLED**

## LOW VOLTAGE WALL MOUNTING PLATES


### FEATURES

- For Old Work applications
- Fits 1/2" to 1-1/4" drywall thickness
- Can also be used in plaster or tile openings
- Eliminates need to use electrical box for low voltage Class 2 wiring
- Requires only a drywall saw and screwdriver to install

| Cat. No. | Description | Std. Pkg. |
|---|---|---|
| **LVWP1** | 1-Gang Low Voltage Wall Mounting Plate | 50 |
| **LVWP2** | 2-Gang Low Voltage Wall Mounting Plate | 25 |



*LVWP1*

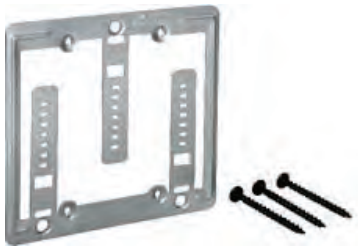


*LVWP2*

## NAIL SAFETY PLATES

### FEATURES

- Provides protection from nail and screw penetration

| Cat. No. | Description | Trade Size | Std. Pkg. |
|---|---|---|---|
| **SP-1** | 16GA Safety Plate with prongs | 1.5” x 2.75” | 100 |
| **SP-1-500** | 16GA Safety Plate with prongs | 1.5” x 2.75” | 500 |
| **SP-35** | 16GA Safety Plate with prongs | 3” x 5” | 100 |
| **SP-6** | 16GA Safety Plate with prongs | 1.5” x 6” | 100 |
| **SP-9** | 16GA Safety Plate with nail holes | 1.5” x 9” | 50 |
| **SP-12** | 16GA Safety Plate with nail holes | 1.5” x 12” | 50 |
| **SP-18** | 16GA Safety Plate with nail holes | 1.5” x 18” | 50 |
| **SP-24** | 16GA Safety Plate with nail holes | 1.5” x 24” | 50 |
| **SPH-9** | 12GA Safety Plate with nail holes | 1.5” x 9” | 50 |
| **SPH-12** | 12GA Safety Plate with nail holes | 1.5” x 12” | 50 |
| **SPH-18** | 12GA Safety Plate with nail holes | 1.5” x 18” | 50 |
| **SPH-24** | 12GA Safety Plate with nail holes | 1.5” x 24” | 50 |

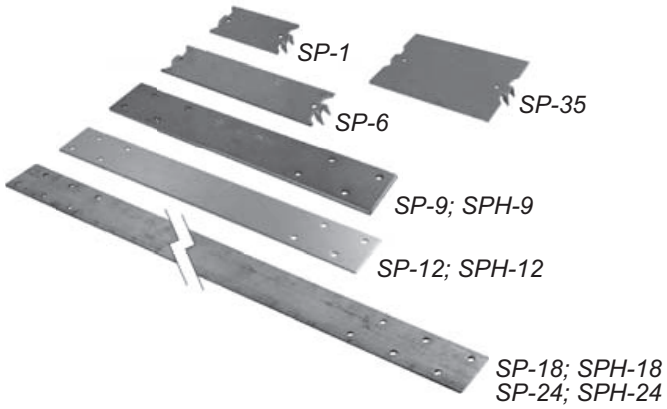


## *SPRING STEEL*
## SNAP ON SAFETY PLATES

### FEATURES

- Protects electrical and mechanical installation through studs
- For wood and metal studs
- No tools required to install
- Breakable tabs permit multiple plates to be ganged together
- Complies with NEC Article 300-4, CEC Rule 12-516 and 12-616
- Holes on legs and surface of plate are provided to secure with nail or screw

| Cat. No. | Size | Std. Pkg. |
|---|---|---|
| **SOSP** | 3-1/8" X 1-1/2" | 100 |





## *STEEL*
## ANGLE BRACKETS

### FEATURES
- Pre-galvanized
- Provides attachment for wire, threaded rod, S-hooks or chain from concrete or wood

| Cat. No. | Side Hole | Bottom Hole | Static Load | Std. Pkg. |
|---|---|---|---|---|
| **AB4** | 1/4", Plain | 1/4", Plain | 160 lb | 100 |
| **AB6** | 1/4", Plain | 3/8", Plain | 160 lb | 100 |





## *SPRING STEEL*
## THREADED INSTALL ROD HANGERS

### FEATURES
- Supports wire or rod from block or concrete walls

| Cat. No. | Side Hole | Bottom Hole | Static Load | Std. Pkg. |
|---|---|---|---|---|
| **F4TI** | 1/4", Plain | 1/4", Plain | 160 lb | 100 |
| **F6TI** | 1/4", Plain | 3/8", Plain | 160 lb | 100 |
| **F6T** | 1/4", Plain | 3/8", Plain | 160 lb | 100 |



*F6TI*



*F6T*



## *STEEL*
## THREADED INSTALL ROD HANGERS WITH ANGLE BRACKET

### FEATURES
- Spring Steel Hanger
- Pre-galvanized Steel Bracket
- Suspends threaded rod from horizontal structures such as laminated wood or concrete beams, joists, ceilings and walls

| Cat. No. | Side Hole | Bottom Hole | Static Load | Std. Pkg. |
|---|---|---|---|---|
| **F4TIB** | 1/4", Plain | 1/4", Threaded | 160 lb | 100 |
| **F6TIB** | 1/4", Plain | 3/8", Threaded | 160 lb | 100 |





## *SPRING STEEL*
## PIPE SLEEVE POSITIONERS

### FEATURES
- Positions pipe sleeves and keeps stable during concrete pours
- Requires only a hammer to install

| Cat. No. | Pipe Size | Sleeve Diameter | Wall Thickness | Std. Pkg. |
|---|---|---|---|---|
| **HOSP** | Schedule 40 | 2” to 6” | 5/16” MAX | 100 |






## *SPRING STEEL*
## WIRE BASKET TRAY CLIPS

### FEATURES
- Attaches wire basket tray to strut
- No tools required to install

| Cat. No. | Wire Size | Std. Pkg. |
|---|---|---|
| **CCT** | 3/16” to 5/16” | 100 |





## *STEEL* REGULAR SPRING NUTS

### FEATURES
- Electroplated Zinc

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **SNR-1420** | 1/4” - 20 | 100 | 600 |
| **SNR-3816** | 3/8” - 16 | 100 | 600 |
| **SNR-1213** | 1/2” - 13 | 100 | 600 |



*SNR-1420*



*SNR-3816*



*SNR-1213*

## *STEEL* JACK CHAIN

### FEATURES

- Electroplated Zinc
- 25 lbs. max. load
- In steel reel

| Cat. No. | Trade Size | Std. Pkg. |
|---|---|---|
| JC-12 | 12GA | 100 |



## *STEEL* "S" HOOKS

### FEATURES

- Electroplated Zinc
- 25 lbs. max. load

| Cat. No. | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| SH-2 | 12GA, 1-1/4" | 100 | 1000 |



## *STEEL* HANGER SCREWS WITH SINGLE HOLE

### FEATURES

- Wood Screw Thread

| Cat. No. | Description | Dimension | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| H-SCREW | Flat Hanger Screw | 1/4" x 3" | 100 | 500 |



## *STEEL* FIXTURE HANGERS

| Cat. No. | For Use With | Mount Position | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| FH-E | 2, 3, or 4 light fixtures | End Mount | 100 | 500 |
| FH-S | 2, 3, or 4 light fixtures | Side Mount | 100 | 500 |



*FH-S*



*FH-E*

## SERVICE ENTRANCE WEDGE GRIP CLAMPS

### FEATURES

- Designed to make quick sag adjustments.
- For use with ACSR, AAC, AAAC service cables
- Aluminum Body
- Stainless Steel Solid Bail

| Cat. No. | ACSR Wire Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|
| **SEWG-1** | #6 - #2 | 10 | 50 |
| **SEWG-2** | #4 - 1/0 | 5 | 25 |
| **SEWG-3** | 2/0 - 4/0 | 5 | 25 |



## *PORCELAIN* WIRE HOLDERS

### FEATURES

- Porcelain & Galvanized Steel

| Cat. No. | Description | Trade Size | Std. Pkg. | Master Ctn. |
|---|---|---|---|---|
| **PWH-L** | With 2-1/4" Lag Bolt | 2-3/4" | 5 | 20 |
| **PWH-M** | With Steel Clip for 1-1/4" to 3" mast | 1-1/4" to 3" | 5 | 20 |



*PWH-L*



*PWH-M*

## *BLACK ANNEALED STEEL* TIE WIRE

### FEATURES

- 16-1/2GA

| Cat. No. | Description | Trade Size | Std. Pkg. |
|---|---|---|---|
| **TW** | Tie Wire | 16GA, 400' | 20 |



# PRODUCT INDEX


| Cat. No. | Page |
|---|---|
| 1GX75 | 211 |
| 1MFC-B | 100 |
| 1MFC-D | 100 |
| 1MFC-TS | 100 |
| 1MFD-100 | 99 |
| 1MFD-50 | 99 |
| 1MFD-75 | 99 |
| 1MFDC-100 | 99 |
| 1MFDC-50 | 99 |
| 1MFDC-75 | 99 |
| 1MFS-100 | 99 |
| 1MFS-50 | 99 |
| 1MFS-75 | 99 |
| 1MFSC-100 | 99 |
| 1MFSC-50 | 99 |
| 1MFSC-75 | 99 |
| 1SFC-B | 100 |
| 1SFC-D | 100 |
| 1SFC-G | 100 |
| 1SFC-TS | 100 |
| 2GX75 | 211 |
| 3GAR-34 | 212 |
| 4AR1G-34 | 212 |
| 4AR1G-58 | 212 |
| 4AR2G-58 | 212 |
| 4ARR-34 | 212 |
| 4SAR1G | 210 |
| 4SAR2G | 210 |
| 5AR1G-58 | 212 |
| 5AR2G-58 | 212 |
| 5SAR1G | 210 |
| 5SAR2G | 210 |
| AB4 | 232 |
| AB6 | 232 |
| ABS | 199 |
| ABS-6 | 199 |
| AC-100 | 86 |
| AC-125/150 | 86 |
| AC-200 | 86 |
| AC-250/300 | 86 |
| AC-350/400 | 86 |
| AC-50 | 86 |
| AC-75 | 86 |
| AGS-100 | 109 |
| AGS-50 | 109 |
| AGS-75 | 109 |
| AMH-100 | 71, 131 |
| AMH-125 | 71, 131 |
| AMH-150 | 71, 131 |
| AMH-200 | 71, 131 |
| AMH-250 | 71, 131 |
| ASB-38 | 30, 140 |
| ASB-50 | 30, 140 |
| ASB-516 | 30, 140 |
| ASB-716 | 30, 140 |
| ASB-75 | 30, 140 |
| BARB | 189 |
| BARB-CS | 189 |
| BC-25 | 125, 150, 222 |
| BC-38 | 125, 150, 222 |

| Cat. No. | Page |
|---|---|
| BCHS-10 | 206 |
| BCHS-12 | 206 |
| BCHS-6 | 206 |
| BCHS-6S | 206 |
| BCM-25 | 125, 151, 222 |
| BCM-38 | 125, 151, 222 |
| BCM-50 | 125, 151, 222 |
| BCSS | 222 |
| BH-1 | 145, 217 |
| BH-1C | 145, 217 |
| BH-1S | 145, 217 |
| BH-1SC | 145, 217 |
| BH-2NC | 145, 217 |
| BH-3 | 145, 209, 217 |
| BHA-1 | 146, 218 |
| BHA-16 | 146, 188, 218 |
| BHA-1C | 146, 218 |
| BHA-24 | 146, 188, 218 |
| BH-C | 145, 217 |
| BHT-1 | 145, 217 |
| BHT-1A | 145, 217 |
| BHT-1HD | 145, 215 |
| BHT-1HDEEP | 145, 215 |
| BHT-C | 145, 217 |
| BMA-23 | 198 |
| BMA-4 | 198 |
| BMCS | 179, 196 |
| BMCS-CJ6 | 179, 196 |
| C-100 | 81 |
| C-100A | 78 |
| C-125 | 81 |
| C-125A | 78 |
| C-150 | 81 |
| C-150A | 78 |
| C-200 | 81 |
| C-200A | 78 |
| C-250 | 81 |
| C-250A | 78 |
| C-300 | 81 |
| C-300A | 78 |
| C-400 | 81 |
| C-400A | 78 |
| C-50 | 81 |
| C-50A | 78 |
| C7-100 | 91 |
| C7-125 | 91 |
| C7-150 | 91 |
| C7-200 | 91 |
| C7-250 | 91 |
| C7-300 | 91 |
| C-75 | 81 |
| C7-50 | 91 |
| C-75A | 78 |
| C7-75 | 91 |
| C8-100 | 95 |
| C8-125 | 95 |
| C8-150 | 95 |
| C8-200 | 95 |
| C8-250 | 95 |
| C8-300 | 95 |

| Cat. No. | Page |
|---|---|
| C8-50 | 95 |
| C8-75 | 95 |
| CB-100 | 61, 135 |
| CB-125 | 61, 135 |
| CB-150 | 61, 135 |
| CB-200 | 61, 135 |
| CB-250 | 61, 135 |
| CB-300 | 61, 135 |
| CB-350 | 61, 135 |
| CB-400 | 61, 135 |
| CB-50 | 61, 135 |
| CB-75 | 61, 135 |
| CBI-100 | 61, 135 |
| CBI-125 | 61, 135 |
| CBI-150 | 61, 135 |
| CBI-200 | 61, 135 |
| CBI-250 | 61, 135 |
| CBI-300 | 61, 135 |
| CBI-350 | 61, 135 |
| CBI-400 | 61, 135 |
| CBI-50 | 61, 135 |
| CBI-75 | 61, 135 |
| CBS-100 | 58, 122, 183 |
| CBS-125 | 58, 122, 183 |
| CBS-150 | 58, 122, 183 |
| CBS-200 | 58, 122, 183 |
| CBS-250 | 58, 122, 183 |
| CBS-300 | 58, 122, 183 |
| CBS-350 | 58, 122, 183 |
| CBS-400 | 58, 122, 183 |
| CBS-50 | 58, 122, 183 |
| CBS-75 | 58, 122, 183 |
| CC | 170 |
| CC-12 | 170 |
| CC-16 | 170 |
| CC-20 | 170 |
| CC-8 | 170 |
| CC90-50 | 13 |
| CCT | 171, 233 |
| CG-100 | 82 |
| CG-100-375/500 | 44 |
| CG-100-500/625 | 44 |
| CG-100-625/750 | 44 |
| CG-100-750/880 | 44 |
| CG-100-880/985 | 44 |
| CG-125/150 | 82 |
| CG-200 | 82 |
| CG-250/300 | 82 |
| CG-350/400 | 82 |
| CG-50 | 82 |
| CG-50-190/260 | 44 |
| CG-50-260/375 | 44 |
| CG-50-375/500 | 44 |
| CG-75 | 82 |
| CG-75-375/500 | 44 |
| CG-75-500/625 | 44 |
| CG-75-625/750 | 44 |
| CLCSL-50 | 71 |
| CLCSL-75 | 71 |
| CN-100 | 69, 117 |

| Cat. No. | Page |
|---|---|
| CN-100L | 68, 117 |
| CN-125 | 69, 117 |
| CN-150 | 69, 117 |
| CN-200 | 69, 117 |
| CN-50 | 69, 117 |
| CN-50L | 68, 117 |
| CN-75 | 69, 117 |
| CN-75L | 68, 117 |
| CNI-100 | 69, 118 |
| CNI-125 | 69, 118 |
| CNI-150 | 69, 118 |
| CNI-200 | 69, 118 |
| CNI-250 | 69, 118 |
| CNI-300 | 69, 118 |
| CNI-350 | 69, 118 |
| CNI-400 | 69, 118 |
| CNI-50 | 69, 118 |
| CNI-75 | 69, 118 |
| CS-CJ6 | 43, 123, 179, 186, 196 |
| CWC1 | 171 |
| DLR-1G | 187 |
| DSC-38 | 25 |
| DSC-38C | 25 |
| EC-100 | 128 |
| EC-125 | 128 |
| EC-150 | 128 |
| EC-200 | 128 |
| EC-250 | 128 |
| EC-300 | 128 |
| EC-300L | 128 |
| EC-350 | 128 |
| EC-400 | 128 |
| EC-50 | 128 |
| EC-75 | 128 |
| ECCP-100 | 128 |
| ECCP-200 | 128 |
| ECCP-50 | 128 |
| ECP-100 | 128 |
| ECP-125 | 128 |
| ECP-150 | 128 |
| ECP-50 | 128 |
| ECP-75 | 128 |
| ECS-50 | 14 |
| ECS-75 | 14 |
| EEL22-100 | 111 |
| EEL22-125 | 111 |
| EEL22-150 | 111 |
| EEL22-200 | 111 |
| EEL22-250 | 111 |
| EEL22-300 | 111 |
| EEL22-350 | 111 |
| EEL22-400 | 111 |
| EEL22-50 | 111 |
| EEL22-75 | 111 |
| EEL45-100 | 111 |
| EEL45-125 | 111 |
| EEL45-150 | 111 |
| EEL45-200 | 111 |
| EEL45-250 | 111 |
| EEL45-300 | 111 |
| EEL45-350 | 111 |
| EEL45-400 | 111 |
| EEL45-50 | 111 |
| EEL45-75 | 111 |
| EEL90-100 | 112 |
| EEL90-125 | 112 |
| EEL90-150 | 112 |
| EEL90-200 | 112 |
| EEL90-250 | 112 |
| EEL90-300 | 112 |
| EEL90-350 | 112 |
| EEL90-400 | 112 |
| EEL90-50 | 112 |
| EEL90-75 | 112 |
| F122 | 224 |
| F1226TI | 224 |
| F123812M | 167 |
| F12P | 165 |
| F12P24 | 168 |
| F12P24SM | 168 |
| F12P58 | 168 |
| F12P58SM | 168 |
| F12P912 | 168 |
| F12P912SM | 168 |
| F16M | 165 |
| F16M24 | 166 |
| F16M24SM | 167 |
| F16M4I | 165 |
| F16M58SM | 167 |
| F16M912 | 166 |
| F16M912SM | 167 |
| F16MB18A | 175, 207 |
| F16MF | 177, 184 |
| F16P | 165 |
| F16P24 | 168 |
| F16P24SM | 168 |
| F16P58 | 168 |
| F16P58SM | 168 |
| F16P912 | 168 |
| F16P912SM | 168 |
| F20M | 165 |
| F20M24SM | 167 |
| F20M4I | 165 |
| F20M58SM | 167 |
| F20M912SM | 167 |
| F20MF | 177, 184 |
| F24M | 165 |
| F24M24SM | 167 |
| F24M4I | 165 |
| F24M58SM | 167 |
| F2BRT12 | 228 |
| F2BRT20 | 228 |
| F2BRT32 | 228 |
| F2H4 | 221 |
| F32M | 165 |
| F32M24SM | 167 |
| F32M4I | 165 |
| F32M58SM | 167 |
| F32M912SM | 167 |
| F350812M | 178, 185 |
| F4BRT20 | 228 |
| F4BRT32 | 228 |
| F4BRT32WS | 228 |
| F4BRT64 | 228 |
| F4G16 | 213 |
| F4G16H | 213 |
| F4H24 | 221 |
| F4H58 | 221 |
| F4H912 | 221 |
| F4TI | 232 |
| F4TI24 | 225 |
| F4TI58 | 225 |
| F4TI912 | 225 |
| F4TIB | 232 |
| F4Z34 | 223 |
| F4Z3412P | 169 |
| F4Z3416M | 169 |
| F4Z3416P | 169 |
| F4Z346M | 169 |
| F4Z34812M | 169 |
| F4Z348P | 169 |
| F4Z4S | 223 |
| F6A24 | 225 |
| F6A912 | 225 |
| F6M | 165 |
| F6M24 | 166 |
| F6M24SM | 167 |
| F6M4I | 165 |
| F6M58 | 166 |
| F6M58SM | 167 |
| F6M912 | 166 |
| F6M912SM | 167 |
| F6MATA | 176, 214 |
| F6MB18A | 175, 207 |
| F6MF | 177, 184 |
| F6T | 232 |
| F6TI | 232 |
| F6TIB | 232 |
| F6Z34 | 223 |
| F6Z3412P | 169 |
| F6Z3416M | 169 |
| F6Z3416P | 169 |
| F6Z34812M | 169 |
| F6Z348P | 169 |
| F812M | 165 |
| F812M24 | 166 |
| F812M24SM | 167 |
| F812M4I | 165 |
| F812M58 | 166 |
| F812M58SM | 167 |
| F812M912 | 166 |
| F812M912SM | 167 |
| F812MATA | 176, 214 |
| F812MB18A | 175, 207 |
| F812MB18S | 175, 207 |
| F812MF | 177, 184 |
| F8P | 165 |
| F8P24 | 168 |
| F8P24SM | 168 |
| F8P58 | 168 |

# PRODUCT INDEX


| Cat. No. | Page |
|---|---|
| F8P58SM | 168 |
| F8P912 | 168 |
| F8P912SM | 168 |
| F8PATS | 176, 215 |
| FAF14 | 223 |
| FAF144TI | 224 |
| FAF146T | 224 |
| FAF146TI | 224 |
| FA-SSB-UMAB | 193 |
| FA-TBAR-UMAB | 193 |
| FATS4I | 214 |
| FA-UMAB | 192 |
| FA-UMAB-4R | 192 |
| FB-100 | 18, 139 |
| FB-3 | 203 |
| FB-4 | 203 |
| FB-50 | 18, 139 |
| FB-75 | 18, 139 |
| FCAT12 | 229 |
| FCAT124Z34 | 229 |
| FCAT126Z34 | 229 |
| FCAT21 | 229 |
| FCAT32 | 229 |
| FCAT64 | 229 |
| FCS16 | 185 |
| FCS812 | 185 |
| FCS812D | 185 |
| FFXC20 | 177, 184 |
| FG-1 | 100 |
| FH-E | 127, 151, 234 |
| FH-S | 127, 151, 234 |
| FLC-50 | 26 |
| FLC-50L | 26 |
| FLC-75L | 26 |
| FLD-50 | 27 |
| FM24 | 221 |
| FM24S | 221 |
| FM58 | 221 |
| FM58S | 221 |
| FM912 | 221 |
| FM912S | 221 |
| FMAC2 | 178, 186 |
| FMB-16 | 202 |
| FMB-24 | 202 |
| FMSR122 | 227 |
| FMSR58 | 226 |
| FMSS122 | 227 |
| FMSS24 | 226 |
| FMSS58 | 226 |
| FMSS912 | 226 |
| FR-100 | 70, 153 |
| FR-125 | 70, 153 |
| FR-150 | 70, 153 |
| FR-200 | 70, 153 |
| FR-50 | 70, 153 |
| FR-75 | 70, 153 |
| FRMX58 | 175 |
| FS-456-EXT | 199 |
| FSC2D | 174 |
| FSC2E | 174 |

| Cat. No. | Page |
|---|---|
| FSC2F | 174 |
| FSC4D | 174 |
| FT2L-14/100 | 105 |
| FT2L-14/200 | 105 |
| FT2L-2/600 | 105 |
| FT2L-300/800 | 105 |
| FT2L-500/1000 | 105 |
| FT2L-6/250 | 105 |
| FT2L-6/350 | 105 |
| FTL-14/100 | 104 |
| FTL-14/2 | 104 |
| FTL-14/200 | 104 |
| FTL-14/4 | 104 |
| FTL-2/600 | 104 |
| FTL-300/800 | 104 |
| FTL-4/500 | 104 |
| FTL-500/1000 | 104 |
| FTL-6/250 | 104 |
| FTL-6/300 | 104 |
| FTL-6/350 | 104 |
| FVF14 | 223 |
| G-100 | 83 |
| G-125/150 | 83 |
| G-200 | 83 |
| G-250/300 | 83 |
| G-350/400 | 83 |
| G-50 | 83 |
| G-75 | 83 |
| GBLL-100 | 63, 102, 137 |
| GBLL-125 | 63, 102, 137 |
| GBLL-125-10 | 63, 102, 137 |
| GBLL-150 | 63, 102, 137 |
| GBLL-150-10 | 63, 102, 137 |
| GBLL-200 | 63, 102, 137 |
| GBLL-200-10 | 63, 102, 137 |
| GBLL-250 | 63, 102, 137 |
| GBLL-250-10 | 63, 102, 137 |
| GBLL-300 | 63, 102, 137 |
| GBLL-300-10 | 63, 102, 137 |
| GBLL-350 | 63, 102, 137 |
| GBLL-350-10 | 63, 102, 137 |
| GBLL-400 | 63, 102, 137 |
| GBLL-400-10 | 63, 102, 137 |
| GBLL-50 | 63, 102, 137 |
| GBLL-75 | 63, 102, 137 |
| GCA-125/200 | 107 |
| GCA-250/400 | 107 |
| GCA-450/600 | 107 |
| GCA-50/100 | 107 |
| GCAB-50/100 | 107 |
| GCAH-125/200 | 108 |
| GCAH-50/100 | 108 |
| GCB-125/200 | 106 |
| GCB-250/400 | 106 |
| GCB-450/600 | 106 |
| GCB-50/100 | 106 |
| GCBB-125/200 | 107 |
| GCBB-50/100 | 107 |
| GCBR-50/100 | 106 |
| GCBZ-50/100 | 106 |

| Cat. No. | Page |
|---|---|
| GCH-50/100-100 | 109 |
| GCH-50/100-50 | 109 |
| GCH-50/100-75 | 109 |
| GCR-50/100 | 108 |
| GCRL-38/100 | 108 |
| GCRLDB-38/100 | 109 |
| GICG7-100 | 93 |
| GICG7-125 | 93 |
| GICG7-150 | 93 |
| GICG7-200 | 93 |
| GICG7-250/300 | 93 |
| GICG7-350/400 | 93 |
| GICG7-50 | 93 |
| GICG7-75 | 93 |
| GICG8-100 | 96 |
| GICG8-125 | 96 |
| GICG8-150 | 96 |
| GICG8-200 | 96 |
| GICG8-250/300 | 96 |
| GICG8-350/400 | 96 |
| GICG8-50 | 96 |
| GICG8-75 | 96 |
| GL-100 | 67, 101, 142 |
| GL-125 | 67, 101, 142 |
| GL-150 | 67, 101, 142 |
| GL-200 | 67, 101, 142 |
| GL-250 | 67, 101, 142 |
| GL-300 | 67, 101, 142 |
| GL-350 | 67, 101, 142 |
| GL-400 | 67, 101, 142 |
| GL-50 | 67, 101, 142 |
| GL-500 | 67, 101, 142 |
| GL-600 | 67, 101, 142 |
| GL-75 | 67, 101, 142 |
| GRC-50 | 110 |
| GRC-58 | 110 |
| GRC-75 | 110 |
| H-100 | 110 |
| H-50 | 110 |
| H-75 | 110 |
| HABIT | 197 |
| HOSP | 233 |
| H-SCREW | 127, 151, 234 |
| IGBB-5 | 105 |
| IGBB-5B | 105 |
| ISC | 213 |
| JC-12 | 149, 234 |
| KB-18 | 203 |
| KFB-318 | 203 |
| KFB-418 | 203 |
| KIT-1032TC | 150 |
| KIT-10PAK | 150 |
| KIT-632FH | 150 |
| KIT-632RH | 150 |
| KIT-832RH | 150 |
| KIT-8EZ | 150 |
| KO-100 | 148 |
| KO-125 | 148 |
| KO-150 | 148 |
| KO-200 | 148 |

| Cat. No. | Page |
|---|---|
| KO3P-100 | 148 |
| KO3P-125 | 148 |
| KO3P-150 | 148 |
| KO3P-200 | 148 |
| KO3P-250 | 148 |
| KO3P-300 | 148 |
| KO3P-350 | 148 |
| KO3P-400 | 148 |
| KO3P-50 | 148 |
| KO3P-75 | 148 |
| KO-50 | 148 |
| KO-75 | 148 |
| LB-100 | 80 |
| LB-100A | 77 |
| LB-125 | 80 |
| LB-125A | 77 |
| LB-150 | 80 |
| LB-150A | 77 |
| LB-200 | 80 |
| LB-200A | 77 |
| LB-250 | 80 |
| LB-250A | 77 |
| LB-300 | 80 |
| LB-300A | 77 |
| LB-350 | 80 |
| LB-350A | 77 |
| LB-400 | 80 |
| LB-400A | 77 |
| LB-50 | 80 |
| LB-50A | 77 |
| LB7-100 | 90 |
| LB7-125 | 90 |
| LB7-150 | 90 |
| LB7-200 | 90 |
| LB7-250 | 90 |
| LB7-300 | 90 |
| LB7-350 | 90 |
| LB7-400 | 90 |
| LB-75 | 80 |
| LB7-50 | 90 |
| LB-75A | 77 |
| LB7-75 | 90 |
| LB8-100 | 93 |
| LB8-125 | 93 |
| LB8-150 | 93 |
| LB8-200 | 93 |
| LB8-250 | 93 |
| LB8-300 | 93 |
| LB8-350 | 93 |
| LB8-400 | 93 |
| LB8-50 | 93 |
| LB8-75 | 93 |
| LBM-150 | 89 |
| LBM-200 | 89 |
| LBM-250 | 89 |
| LBM-300 | 89 |
| LBM-350 | 89 |
| LBM-400 | 89 |
| LL-100 | 80 |
| LL-100A | 77 |

| Cat. No. | Page |
|---|---|
| LL-125 | 80 |
| LL-125A | 77 |
| LL-150 | 80 |
| LL-150A | 77 |
| LL-200 | 80 |
| LL-200A | 77 |
| LL-250 | 80 |
| LL-250A | 77 |
| LL-300 | 80 |
| LL-300A | 77 |
| LL-400 | 80 |
| LL-400A | 77 |
| LL-50 | 80 |
| LL-50A | 77 |
| LL7-100 | 91 |
| LL7-125 | 91 |
| LL7-150 | 91 |
| LL7-200 | 91 |
| LL7-250 | 91 |
| LL7-300 | 91 |
| LL7-400 | 91 |
| LL-75 | 80 |
| LL7-50 | 91 |
| LL-75A | 77 |
| LL7-75 | 91 |
| LL8-100 | 94 |
| LL8-125 | 94 |
| LL8-150 | 94 |
| LL8-200 | 94 |
| LL8-250 | 94 |
| LL8-300 | 94 |
| LL8-50 | 94 |
| LL8-75 | 94 |
| LLDB-14/4 | 104 |
| LLTDB-14/4 | 104 |
| LLTDB-SP-14/4 | 104 |
| LN-100 | 66, 141 |
| LN-125 | 66, 141 |
| LN-150 | 66, 141 |
| LN-200 | 66, 141 |
| LN-250 | 66, 141 |
| LN-300 | 66, 141 |
| LN-350 | 66, 141 |
| LN-400 | 66, 141 |
| LN-50 | 66, 141 |
| LN-75 | 66, 141 |
| LR-100 | 81 |
| LR-100A | 78 |
| LR-125 | 81 |
| LR-125A | 78 |
| LR-150 | 81 |
| LR-150A | 78 |
| LR-200 | 81 |
| LR-200A | 78 |
| LR-250 | 81 |
| LR-250A | 78 |
| LR-300 | 81 |
| LR-300A | 78 |
| LR-400 | 81 |
| LR-400A | 78 |

| Cat. No. | Page |
|---|---|
| LR-50 | 81 |
| LR-50A | 78 |
| LR7-100 | 90 |
| LR7-125 | 90 |
| LR7-150 | 90 |
| LR7-200 | 90 |
| LR7-250 | 90 |
| LR7-300 | 90 |
| LR7-400 | 90 |
| LR-75 | 81 |
| LR7-50 | 90 |
| LR-75A | 78 |
| LR7-75 | 90 |
| LR8-100 | 94 |
| LR8-125 | 94 |
| LR8-150 | 94 |
| LR8-200 | 94 |
| LR8-250 | 94 |
| LR8-300 | 94 |
| LR8-50 | 94 |
| LR8-75 | 94 |
| LT-100 | 33 |
| LT-125 | 33 |
| LT-150 | 33 |
| LT-200 | 33 |
| LT-250 | 33 |
| LT-300 | 33 |
| LT-350 | 33 |
| LT-38 | 33 |
| LT-400 | 33 |
| LT-50 | 33 |
| LT-75 | 33 |
| LT90-100 | 37 |
| LT90-125 | 37 |
| LT90-150 | 37 |
| LT90-200 | 37 |
| LT90-250 | 37 |
| LT90-300 | 37 |
| LT90-350 | 37 |
| LT90-38 | 37 |
| LT90-400 | 37 |
| LT90-50 | 37 |
| LT90-75 | 37 |
| LTI-100 | 33 |
| LTI-125 | 33 |
| LTI-150 | 33 |
| LTI-200 | 33 |
| LTI-250 | 33 |
| LTI-300 | 33 |
| LTI-350 | 33 |
| LTI-38 | 33 |
| LTI-400 | 33 |
| LTI-50 | 33 |
| LTI-75 | 33 |
| LTI90-100 | 37 |
| LTI90-125 | 37 |
| LTI90-150 | 37 |
| LTI90-200 | 37 |
| LTI90-250 | 37 |
| LTI90-300 | 37 |

# PRODUCT INDEX


| Cat. No. | Page |
|---|---|
| LTI90-350 | 37 |
| LTI90-38 | 37 |
| LTI90-400 | 37 |
| LTI90-50 | 37 |
| LTI90-75 | 37 |
| LTSR-100 | 31, 68, 143 |
| LTSR-125 | 31, 68, 143 |
| LTSR-150 | 31, 68, 143 |
| LTSR-200 | 31, 68, 143 |
| LTSR-250 | 31, 68, 143 |
| LTSR-300 | 31, 68, 143 |
| LTSR-350 | 31, 68, 143 |
| LTSR-400 | 31, 68, 143 |
| LTSR-50 | 31, 68, 143 |
| LTSR-75 | 31, 68, 143 |
| LVBS-4 | 194 |
| LVBS-4-158 | 194 |
| LVBS-4-258 | 194 |
| LVBS-4-A158 | 194 |
| LVBS-4-A258 | 194 |
| LVSB1 | 198, 204, 230 |
| LVSB2 | 198, 204, 230 |
| LVWP1 | 230 |
| LVWP2 | 230 |
| MBBH-16 | 201 |
| MBBH-24 | 201 |
| MC-100 | 85 |
| MC-125 | 85 |
| MC-150 | 85 |
| MC-200 | 85 |
| MC-250 | 85 |
| MC-300 | 85 |
| MC-350 | 85 |
| MC-400 | 85 |
| MC-50 | 85 |
| MC-75 | 85 |
| MCBI-100 | 62, 136 |
| MCBI-125 | 62, 136 |
| MCBI-150 | 62, 136 |
| MCBI-200 | 62, 136 |
| MCBI-250 | 62, 136 |
| MCBI-300 | 62, 136 |
| MCBI-350 | 62, 136 |
| MCBI-400 | 62, 136 |
| MCBI-50 | 62, 136 |
| MCBI-500 | 62, 136 |
| MCBI-600 | 62, 136 |
| MCBI-75 | 62, 136 |
| MCCE-100 | 54, 125, 173, 219 |
| MCCE-125 | 54, 125, 173, 219 |
| MCCE-150 | 54, 125, 173, 219 |
| MCCE-200 | 54, 125, 173, 219 |
| MCCE-250 | 54, 125, 173, 219 |
| MCCE-300 | 54, 125, 173, 219 |
| MCCE-50 | 54, 125, 173, 219 |
| MCCE-75 | 54, 125, 173, 219 |
| MC-CL-100 | 28 |
| MC-CL-150 | 28 |
| MC-CL-250 | 28 |
| MC-CL-300 | 28 |
| MC-CL-350 | 28 |
| MCCP-100 | 55, 126, 174, 220 |
| MCCP-125 | 55, 126, 174, 220 |
| MCCP-150 | 55, 126, 174, 220 |
| MCCP-200 | 55, 126, 174, 220 |
| MCCP-250 | 55, 126, 174, 220 |
| MCCP-300 | 55, 126, 174, 220 |
| MCCP-350 | 55, 126, 174, 220 |
| MCCP-400 | 55, 126, 174, 220 |
| MCCP-50 | 55, 126, 174, 220 |
| MCCP-75 | 55, 126, 174, 220 |
| MCCR-100 | 54, 126, 173, 220 |
| MCCR-125 | 54, 126, 173, 220 |
| MCCR-150 | 54, 126, 173, 220 |
| MCCR-200 | 54, 126, 173, 220 |
| MCCR-250 | 54, 126, 173, 220 |
| MCCR-300 | 54, 126, 173, 220 |
| MCCR-350 | 54, 126, 173, 220 |
| MCCR-400 | 54, 126, 173, 220 |
| MCCR-50 | 54, 126, 173, 220 |
| MCCR-75 | 54, 126, 173, 220 |
| MC-DX-50 | 29 |
| MCSI-100 | 70, 153 |
| MCSI-50 | 70, 153 |
| MCSI-75 | 70, 153 |
| MCSI90-100 | 70, 153 |
| MCSI90-50 | 70, 153 |
| MCSI90-75 | 70, 153 |
| MGBLL-100 | 64, 103, 138 |
| MGBLL-125 | 64, 103, 138 |
| MGBLL-125-10 | 64, 103, 138 |
| MGBLL-150 | 64, 103, 138 |
| MGBLL-150-10 | 64, 103, 138 |
| MGBLL-200 | 64, 103, 138 |
| MGBLL-200-10 | 64, 103, 138 |
| MGBLL-250 | 64, 103, 138 |
| MGBLL-250-10 | 64, 103, 138 |
| MGBLL-300 | 64, 103, 138 |
| MGBLL-300-10 | 64, 103, 138 |
| MGBLL-350 | 64, 103, 138 |
| MGBLL-350-10 | 64, 103, 138 |
| MGBLL-400 | 64, 103, 138 |
| MGBLL-400-10 | 64, 103, 138 |
| MGBLL-50 | 64, 103, 138 |
| MGBLL-500 | 64, 103, 138 |
| MGBLL-500-30 | 64, 103, 138 |
| MGBLL-600 | 64, 103, 138 |
| MGBLL-600-30 | 64, 103, 138 |
| MGBLL-75 | 64, 103, 138 |
| MLB-100 | 83 |
| MLB-125 | 83 |
| MLB-150 | 83 |
| MLB-200 | 83 |
| MLB-250 | 83 |
| MLB-300 | 83 |
| MLB-350 | 83 |
| MLB-400 | 83 |
| MLB-50 | 83 |
| MLB-75 | 83 |
| MLDB-14/10 | 103 |
| MLDB-14/4 | 103 |
| MLDB-14/6 | 103 |
| MLDB-6/100 | 103 |
| MLL-100 | 84 |
| MLL-125 | 84 |
| MLL-150 | 84 |
| MLL-200 | 84 |
| MLL-250 | 84 |
| MLL-300 | 84 |
| MLL-350 | 84 |
| MLL-400 | 84 |
| MLL-50 | 84 |
| MLL-75 | 84 |
| MLR-100 | 84 |
| MLR-125 | 84 |
| MLR-150 | 84 |
| MLR-200 | 84 |
| MLR-250 | 84 |
| MLR-300 | 84 |
| MLR-350 | 84 |
| MLR-400 | 84 |
| MLR-50 | 84 |
| MLR-75 | 84 |
| MLT-100 | 34 |
| MLT-125 | 34 |
| MLT-150 | 34 |
| MLT-200 | 34 |
| MLT-250 | 34 |
| MLT-300 | 34 |
| MLT-350 | 34 |
| MLT-38 | 34 |
| MLT-400 | 34 |
| MLT45-100 | 35 |
| MLT45-125 | 35 |
| MLT45-150 | 35 |
| MLT45-200 | 35 |
| MLT45-250 | 35 |
| MLT45-300 | 35 |
| MLT45-350 | 35 |
| MLT45-38 | 35 |
| MLT45-400 | 35 |
| MLT45-50 | 35 |
| MLT45-75 | 35 |
| MLT-50 | 34 |
| MLT-75 | 34 |
| MLT90-100 | 38 |
| MLT90-125 | 38 |
| MLT90-150 | 38 |
| MLT90-200 | 38 |
| MLT90-250 | 38 |
| MLT90-300 | 38 |
| MLT90-350 | 38 |
| MLT90-38 | 38 |
| MLT90-400 | 38 |
| MLT90-50 | 38 |
| MLT90-75 | 38 |
| MLTI-100 | 34 |
| MLTI-125 | 34 |
| MLTI-150 | 34 |
| MLTI-200 | 34 |
| MLTI-250 | 34 |
| MLTI-300 | 34 |
| MLTI-350 | 34 |
| MLTI-38 | 34 |
| MLTI-400 | 34 |

# PRODUCT INDEX


| Cat. No. | Page |
|---|---|
| MLTI45-100 | 36 |
| MLTI45-125 | 36 |
| MLTI45-150 | 36 |
| MLTI45-200 | 36 |
| MLTI45-250 | 36 |
| MLTI45-300 | 36 |
| MLTI45-350 | 36 |
| MLTI45-38 | 36 |
| MLTI45-400 | 36 |
| MLTI45-50 | 36 |
| MLTI45-75 | 36 |
| MLTI45LL-100 | 36 |
| MLTI45LL-125 | 36 |
| MLTI45LL-150 | 36 |
| MLTI45LL-200 | 36 |
| MLTI45LL-250 | 36 |
| MLTI45LL-300 | 36 |
| MLTI45LL-350 | 36 |
| MLTI45LL-38 | 36 |
| MLTI45LL-400 | 36 |
| MLTI45LL-50 | 36 |
| MLTI45LL-75 | 36 |
| MLTI-50 | 34 |
| MLTI-75 | 34 |
| MLTI90-100 | 38 |
| MLTI90-125 | 38 |
| MLTI90-150 | 38 |
| MLTI90-200 | 38 |
| MLTI90-250 | 38 |
| MLTI90-300 | 38 |
| MLTI90-350 | 38 |
| MLTI90-38 | 38 |
| MLTI90-400 | 38 |
| MLTI90-50 | 38 |
| MLTI90-75 | 38 |
| MLTI90LL-100 | 39 |
| MLTI90LL-125 | 39 |
| MLTI90LL-150 | 39 |
| MLTI90LL-200 | 39 |
| MLTI90LL-250 | 39 |
| MLTI90LL-300 | 39 |
| MLTI90LL-350 | 39 |
| MLTI90LL-38 | 39 |
| MLTI90LL-400 | 39 |
| MLTI90LL-50 | 39 |
| MLTI90LL-75 | 39 |
| MLTILL-100 | 35 |
| MLTILL-125 | 35 |
| MLTILL-150 | 35 |
| MLTILL-200 | 35 |
| MLTILL-250 | 35 |
| MLTILL-300 | 35 |
| MLTILL-350 | 35 |
| MLTILL-38 | 35 |
| MLTILL-400 | 35 |
| MLTILL-50 | 35 |
| MLTILL-75 | 35 |
| MPC | 228 |
| MR3C-100 | 48 |
| MR3C-125 | 48 |
| MR3C-150 | 48 |
| MR3C-200 | 48 |
| MR3C-250 | 48 |
| MR3C-300 | 48 |
| MR3C-350 | 48 |
| MR3C-400 | 48 |
| MR3C-50 | 48 |
| MR3C-75 | 48 |
| MRB-350/300 | 59, 133 |
| MRB-400/350 | 59, 133 |
| MRT-100 | 47 |
| MRT-125 | 47 |
| MRT-150 | 47 |
| MRT-200 | 47 |
| MRT-250 | 47 |
| MRT-300 | 47 |
| MRT-350 | 47 |
| MRT-400 | 47 |
| MRT-50 | 47 |
| MRT-75 | 47 |
| MRTC-100 | 48 |
| MRTC-125 | 48 |
| MRTC-150 | 48 |
| MRTC-200 | 48 |
| MRTC-250 | 48 |
| MRTC-300 | 48 |
| MRTC-350 | 48 |
| MRTC-400 | 48 |
| MRTC-50 | 48 |
| MRTC-75 | 48 |
| MSC | 179, 186 |
| MSE90-100 | 53 |
| MSE90-50 | 53 |
| MSE90-75 | 53 |
| MSRC-200 | 49 |
| MSRC-250 | 49 |
| MSRC-300 | 49 |
| MSRC-350 | 49 |
| MSRC-400 | 49 |
| MT-100 | 85 |
| MT-125 | 85 |
| MT-150 | 85 |
| MT-200 | 85 |
| MT-250 | 85 |
| MT-300 | 85 |
| MT-350 | 85 |
| MT-400 | 85 |
| MT-50 | 85 |
| MT-75 | 85 |
| MWHG-100 | 52 |
| MWHG-125 | 52 |
| MWHG-150 | 52 |
| MWHG-200 | 52 |
| MWHG-250 | 52 |
| MWHG-300 | 52 |
| MWHG-350 | 52 |
| MWHG-400 | 52 |
| MWHG-50 | 52 |
| MWHG-75 | 52 |
| NGC100-709/984 | 45 |
| NGC-38-197/394 | 45 |
| NGC-50-384/551 | 45 |
| NGC-75-551/709 | 45 |
| NM-50 | 40 |
| NM-75 | 40 |
| NMLT-100 | 31 |
| NMLT-125 | 31 |
| NMLT-150 | 31 |
| NMLT-200 | 31 |
| NMLT-38 | 31 |
| NMLT-50 | 31 |
| NMLT-75 | 31 |
| NMLT90-100 | 32 |
| NMLT90-125 | 32 |
| NMLT90-150 | 32 |
| NMLT90-200 | 32 |
| NMLT90-38 | 32 |
| NMLT90-50 | 32 |
| NMLT90-75 | 32 |
| NMP-50 | 40 |
| NS-100 | 9, 30, 123, 178 |
| NS-50 | 9, 30, 123, 178 |
| NS-50/75 | 9, 30, 123, 178 |
| OCC-50 | 13 |
| OCC-75 | 13 |
| OCS-50 | 13 |
| OCS-75 | 13 |
| OF1611 | 13, 24, 74 |
| OF1612 | 13, 24, 74 |
| OF1613 | 13, 24, 74 |
| OF1701 | 14 |
| OF1702 | 14 |
| OF520 | 13, 23, 74 |
| OF521 | 13, 23, 74 |
| OF522 | 13, 23, 74 |
| OF523 | 13, 23, 74 |
| OF530 | 12, 23, 74 |
| OF531 | 12, 23, 74 |
| OF532 | 12, 23, 74 |
| OF533 | 12, 23, 74 |
| OF601 | 7 |
| OF601-S | 7 |
| OF601-SW | 7 |
| OF601-W | 7 |
| OF602 | 7 |
| OF602-S | 7 |
| OF602-SW | 7 |
| OF602-W | 7 |
| OF603 | 7 |
| OF603-S | 7 |
| OF603-SW | 7 |
| OF603-W | 7 |
| OF604 | 7 |
| OF604-S | 7 |
| OF604-SW | 7 |
| OF604-W | 7 |
| OF605 | 7 |
| OF605-S | 7 |
| OF605-SW | 7 |
| OF605-W | 7 |

# PRODUCT INDEX


| Cat. No. | Page |
|---|---|
| OF606 | 7 |
| OF606-S | 7 |
| OF606-SW | 7 |
| OF606-W | 7 |
| OF607 | 7 |
| OF607-S | 7 |
| OF607-SW | 7 |
| OF607-W | 7 |
| OF608 | 7 |
| OF608-S | 7 |
| OF608-SW | 7 |
| OF608-W | 7 |
| OF609 | 7 |
| OF609-S | 7 |
| OF609-SW | 7 |
| OF609-W | 7 |
| OF610 | 7 |
| OF610-S | 7 |
| OF610-SW | 7 |
| OF610-W | 7 |
| OF611 | 8 |
| OF611-W | 8 |
| OF612 | 8 |
| OF612-W | 8 |
| OF613 | 8 |
| OF613-W | 8 |
| OF614 | 8 |
| OF614-W | 8 |
| OF615 | 8 |
| OF615-W | 8 |
| OF616 | 8 |
| OF616-W | 8 |
| OF617 | 8 |
| OF617-W | 8 |
| OF618 | 8 |
| OF618-W | 8 |
| OF619 | 8 |
| OF619-W | 8 |
| OF620 | 8 |
| OF620-W | 8 |
| OF623 | 29, 41 |
| OF6231 | 27 |
| OF6232 | 27 |
| OF643 | 21 |
| OF644 | 21 |
| OF645 | 21 |
| OF6463 | 22 |
| OF6464 | 22 |
| OF6465 | 22 |
| OF6466 | 22 |
| OF6467 | 22 |
| OF6468 | 22 |
| OF6469 | 22 |
| OF6470 | 22 |
| OF653 | 28 |
| OF654 | 21 |
| OF655 | 21 |
| OF657 | 21 |
| OF6620 | 28 |
| OF671 | 18 |

| Cat. No. | Page |
|---|---|
| OF671-S | 18 |
| OF672 | 18 |
| OF672-S | 18 |
| OF673 | 18 |
| OF673-S | 18 |
| OF674 | 18 |
| OF674-S | 18 |
| OF675 | 18 |
| OF675-S | 18 |
| OF676 | 18 |
| OF677 | 18 |
| OF678 | 18 |
| OF679 | 18 |
| OF681 | 18 |
| OF681-S | 18 |
| OF682 | 18 |
| OF682-S | 18 |
| OF685 | 18 |
| OF686 | 18 |
| OF694 | 24, 50, 76 |
| OF695 | 24, 50, 76 |
| OF697 | 24, 50, 76 |
| OF701 | 5 |
| OF701-S | 6 |
| OF702 | 5 |
| OF702-S | 6 |
| OF703 | 5 |
| OF703-S | 6 |
| OF704 | 5 |
| OF704-S | 6 |
| OF705 | 5 |
| OF705-S | 6 |
| OF706 | 5 |
| OF706-S | 6 |
| OF707 | 5 |
| OF707-S | 6 |
| OF708 | 5 |
| OF708-S | 6 |
| OF709 | 5 |
| OF709-S | 6 |
| OF710 | 5 |
| OF710-S | 6 |
| OF711 | 6 |
| OF712 | 6 |
| OF713 | 6 |
| OF714 | 6 |
| OF715 | 6 |
| OF716 | 6 |
| OF717 | 6 |
| OF718 | 6 |
| OF719 | 6 |
| OF720 | 6 |
| OF730 | 19 |
| OF730-S | 19 |
| OF731 | 19 |
| OF731-S | 19 |
| OF732 | 19 |
| OF732-S | 19 |
| OF733 | 19 |
| OF733-S | 19 |

| Cat. No. | Page |
|---|---|
| OF734 | 19 |
| OF734-S | 19 |
| OF735 | 19 |
| OF735-S | 19 |
| OF736 | 19 |
| OF736-S | 19 |
| OF737 | 19 |
| OF737-S | 19 |
| OF738 | 19 |
| OF738-S | 19 |
| OF739 | 19 |
| OF739-S | 19 |
| OF740 | 19 |
| OF740-S | 19 |
| OF7601 | 3 |
| OF7601-S | 3 |
| OF7601-SW | 3 |
| OF7601-W | 3 |
| OF7602 | 3 |
| OF7602-S | 3 |
| OF7602-SW | 3 |
| OF7602-W | 3 |
| OF7603 | 3 |
| OF7603-S | 3 |
| OF7603-SW | 3 |
| OF7603-W | 3 |
| OF7604 | 3 |
| OF7604-S | 3 |
| OF7604-SW | 3 |
| OF7604-W | 3 |
| OF7605 | 3 |
| OF7605-S | 3 |
| OF7605-SW | 3 |
| OF7605-W | 3 |
| OF7606 | 3 |
| OF7606-S | 3 |
| OF7606-SW | 3 |
| OF7606-W | 3 |
| OF7607 | 3 |
| OF7607-S | 3 |
| OF7607-SW | 3 |
| OF7607-W | 3 |
| OF7608 | 3 |
| OF7608-S | 3 |
| OF7608-SW | 3 |
| OF7608-W | 3 |
| OF7609 | 3 |
| OF7609-S | 3 |
| OF7609-SW | 3 |
| OF7609-W | 3 |
| OF7610 | 3 |
| OF7610-S | 3 |
| OF7610-SW | 3 |
| OF7610-W | 3 |
| OF7611 | 4 |
| OF7611-W | 4 |
| OF7612 | 4 |
| OF7612-W | 4 |
| OF7613 | 4 |
| OF7613-W | 4 |

| Cat. No. | Page |
|---|---|
| OF7614 | 4 |
| OF7614-W | 4 |
| OF7615 | 4 |
| OF7615-W | 4 |
| OF7616 | 4 |
| OF7616-W | 4 |
| OF7617 | 4 |
| OF7617-W | 4 |
| OF7618 | 4 |
| OF7618-W | 4 |
| OF7619 | 4 |
| OF7619-W | 4 |
| OF7620 | 4 |
| OF7620-W | 4 |
| OF7701 | 1 |
| OF7701-S | 1 |
| OF7702 | 1 |
| OF7702-S | 1 |
| OF7703 | 1 |
| OF7703-S | 1 |
| OF7704 | 1 |
| OF7704-S | 1 |
| OF7705 | 1 |
| OF7705-S | 1 |
| OF7706 | 1 |
| OF7706-S | 1 |
| OF7707 | 1 |
| OF7707-S | 1 |
| OF7708 | 1 |
| OF7708-S | 1 |
| OF7709 | 1 |
| OF7709-S | 1 |
| OF7710 | 1 |
| OF7710-S | 1 |
| OF7711 | 2 |
| OF7712 | 2 |
| OF7713 | 2 |
| OF7714 | 2 |
| OF7715 | 2 |
| OF7716 | 2 |
| OF7717 | 2 |
| OF7718 | 2 |
| OF7719 | 2 |
| OF7720 | 2 |
| OF781 | 118 |
| OF781-S | 118 |
| OF9674 | 21 |
| ON-100 | 68, 117 |
| ON-125 | 68, 117 |
| ON-150 | 68, 117 |
| ON-200 | 68, 117 |
| ON-50 | 68, 117 |
| ON-75 | 68, 117 |
| OWG | 146 |
| PB-100 | 60, 134 |
| PB-125 | 60, 134 |
| PB-150 | 60, 134 |
| PB-200 | 60, 134 |
| PB-250 | 60, 134 |
| PB-300 | 60, 134 |
| PB-350 | 60, 134 |
| PB-400 | 60, 134 |
| PB-50 | 60, 134 |
| PB-500 | 60, 134 |
| PB-600 | 60, 134 |
| PB-75 | 60, 134 |
| PE-100 | 53, 97 |
| PE-125 | 53, 97 |
| PE-50 | 53, 97 |
| PE-75 | 53, 97 |
| PEB-100 | 53, 97 |
| PEB-125 | 53, 97 |
| PEB-50 | 53, 97 |
| PEB-75 | 53, 97 |
| PH-100B | 11, 56, 124, 166 |
| PH-105B | 11, 56, 124, 166 |
| PH-125B | 11, 56, 124, 166 |
| PH-150B | 11, 56, 124, 166 |
| PH-200B | 11, 56, 124, 166 |
| PH-250B | 11, 56, 124, 166 |
| PH-300B | 11, 56, 124, 166 |
| PH-350B | 11, 56, 124, 166 |
| PH-400B | 11, 56, 124, 166 |
| PH-50B | 11, 56, 124, 166 |
| PH-75B | 11, 56, 124, 166 |
| PLN-38 | 143 |
| PQLC-38 | 40, 139 |
| PQLC-75 | 40, 139 |
| PUSG | 41, 140, 187 |
| PWH-L | 132, 152, 235 |
| PWH-M | 132, 152, 235 |
| RAP | 208 |
| RAP-T | 208 |
| RB-100/50 | 59, 133 |
| RB-100/75 | 59, 133 |
| RB-125/100 | 59, 133 |
| RB-125/50 | 59, 133 |
| RB-125/75 | 59, 133 |
| RB-150/100 | 59, 133 |
| RB-150/125 | 59, 133 |
| RB-150/50 | 59, 133 |
| RB-150/75 | 59, 133 |
| RB-200/100 | 59, 133 |
| RB-200/125 | 59, 133 |
| RB-200/150 | 59, 133 |
| RB-200/50 | 59, 133 |
| RB-200/75 | 59, 133 |
| RB-250/200 | 59, 133 |
| RB-300/200 | 59, 133 |
| RB-300/250 | 59, 133 |
| RB-350/250 | 59, 133 |
| RB-50/38 | 59, 133 |
| RB-75/50 | 59, 133 |
| RC-100 | 49 |
| RC-125 | 49 |
| RC-150 | 49 |
| RC-200 | 49 |
| RC-250 | 49 |
| RC-300 | 49 |
| RC-350 | 49 |
| RC-400 | 49 |
| RC-50 | 49 |
| RC-500 | 49 |
| RC-600 | 49 |
| RC-75 | 49 |
| RCP-100 | 71 |
| RCP-125 | 71 |
| RCP-150 | 71 |
| RCP-200 | 71 |
| RCP-50 | 71 |
| RCP-75 | 71 |
| REL22-100 | 112 |
| REL22-125 | 112 |
| REL22-150 | 112 |
| REL22-200 | 112 |
| REL22-250 | 112 |
| REL22-300 | 112 |
| REL22-350 | 112 |
| REL22-400 | 112 |
| REL22-50 | 112 |
| REL22-75 | 112 |
| REL45-100 | 113 |
| REL45-125 | 113 |
| REL45-150 | 113 |
| REL45-200 | 113 |
| REL45-250 | 113 |
| REL45-300 | 113 |
| REL45-350 | 113 |
| REL45-400 | 113 |
| REL45-50 | 113 |
| REL45-75 | 113 |
| REL90-100 | 113 |
| REL90-125 | 113 |
| REL90-150 | 113 |
| REL90-200 | 113 |
| REL90-250 | 113 |
| REL90-300 | 113 |
| REL90-350 | 113 |
| REL90-400 | 113 |
| REL90-50 | 113 |
| REL90-75 | 113 |
| RJ-100 | 131, 149 |
| RJ-125 | 131, 149 |
| RJ-150 | 131, 149 |
| RJ-200 | 131, 149 |
| RJ-300 | 131, 149 |
| RJ-400 | 131, 149 |
| RJ-50 | 131, 149 |
| RJ-75 | 131, 149 |
| RN-100-1000 | 114 |
| RN-100-1200 | 114 |
| RN-100-200 | 114 |
| RN-100-250 | 114 |
| RN-100-300 | 114 |
| RN-100-350 | 114 |
| RN-100-400 | 114 |
| RN-100-500 | 114 |
| RN-100-600 | 114 |
| RN-100-800 | 114 |
| RN-100-C | 114 |
| RN-125-1000 | 115 |
| RN-125-1200 | 115 |

# PRODUCT INDEX


| Cat. No. | Page |
|---|---|
| RN-125-200 | 114 |
| RN-125-250 | 114 |
| RN-125-300 | 114 |
| RN-125-350 | 114 |
| RN-125-400 | 114 |
| RN-125-500 | 114 |
| RN-125-600 | 114 |
| RN-125-800 | 114 |
| RN-125-C | 114 |
| RN-150-1000 | 115 |
| RN-150-1200 | 115 |
| RN-150-200 | 115 |
| RN-150-250 | 115 |
| RN-150-300 | 115 |
| RN-150-350 | 115 |
| RN-150-400 | 115 |
| RN-150-500 | 115 |
| RN-150-600 | 115 |
| RN-150-800 | 115 |
| RN-150-C | 115 |
| RN-200-1000 | 115 |
| RN-200-1200 | 115 |
| RN-200-250 | 115 |
| RN-200-300 | 115 |
| RN-200-350 | 115 |
| RN-200-400 | 115 |
| RN-200-500 | 115 |
| RN-200-600 | 115 |
| RN-200-800 | 115 |
| RN-200-C | 115 |
| RN-250-1000 | 115 |
| RN-250-1200 | 115 |
| RN-250-300 | 115 |
| RN-250-350 | 115 |
| RN-250-400 | 115 |
| RN-250-500 | 115 |
| RN-250-600 | 115 |
| RN-250-800 | 115 |
| RN-250-C | 115 |
| RN-300-1000 | 115 |
| RN-300-1200 | 115 |
| RN-300-300 | 115 |
| RN-300-350 | 115 |
| RN-300-400 | 115 |
| RN-300-500 | 115 |
| RN-300-600 | 115 |
| RN-300-800 | 115 |
| RN-300-C | 115 |
| RN-350-1000 | 116 |
| RN-350-1200 | 116 |
| RN-350-400 | 115 |
| RN-350-500 | 115 |
| RN-350-600 | 116 |
| RN-350-800 | 116 |
| RN-350-C | 115 |
| RN-400-1000 | 116 |
| RN-400-1200 | 116 |
| RN-400-400 | 116 |
| RN-400-500 | 116 |
| RN-400-600 | 116 |

| Cat. No. | Page |
|---|---|
| RN-400-800 | 116 |
| RN-400-C | 116 |
| RN-500-1000 | 116 |
| RN-500-1200 | 116 |
| RN-500-500 | 116 |
| RN-500-600 | 116 |
| RN-500-800 | 116 |
| RN-500-C | 116 |
| RN-50-1000 | 114 |
| RN-50-1200 | 114 |
| RN-50-150 | 114 |
| RN-50-200 | 114 |
| RN-50-250 | 114 |
| RN-50-300 | 114 |
| RN-50-350 | 114 |
| RN-50-400 | 114 |
| RN-50-500 | 114 |
| RN-50-600 | 114 |
| RN-50-800 | 114 |
| RN-50-C | 114 |
| RN-600-1000 | 116 |
| RN-600-1200 | 116 |
| RN-600-500 | 116 |
| RN-600-600 | 116 |
| RN-600-800 | 116 |
| RN-600-C | 116 |
| RN-75-1000 | 114 |
| RN-75-1200 | 114 |
| RN-75-150 | 114 |
| RN-75-200 | 114 |
| RN-75-250 | 114 |
| RN-75-300 | 114 |
| RN-75-350 | 114 |
| RN-75-400 | 114 |
| RN-75-500 | 114 |
| RN-75-600 | 114 |
| RN-75-800 | 114 |
| RN-75-C | 114 |
| RS-100 | 46 |
| RS-125 | 46 |
| RS-150 | 46 |
| RS-200 | 46 |
| RS-50 | 46 |
| RS-75 | 46 |
| RSC-100 | 46 |
| RSC-125 | 46 |
| RSC-150 | 46 |
| RSC-200 | 46 |
| RSC-50 | 46 |
| RSC-75 | 46 |
| RT-100 | 46 |
| RT-125 | 46 |
| RT-150 | 46 |
| RT-200 | 46 |
| RT-50 | 46 |
| RT-75 | 46 |
| RTC-100 | 47 |
| RTC-125 | 47 |
| RTC-150 | 47 |
| RTC-200 | 47 |

| Cat. No. | Page |
|---|---|
| RTC-50 | 47 |
| RTC-75 | 47 |
| RW-100/50 | 65, 144 |
| RW-100/75 | 65, 144 |
| RW-125/100 | 65, 144 |
| RW-125/50 | 65, 144 |
| RW-125/75 | 65, 144 |
| RW-150/100 | 65, 144 |
| RW-150/125 | 65, 144 |
| RW-150/50 | 65, 144 |
| RW-150/75 | 65, 144 |
| RW-200/100 | 65, 144 |
| RW-200/125 | 65, 144 |
| RW-200/150 | 65, 144 |
| RW-200/50 | 65, 144 |
| RW-200/75 | 65, 144 |
| RW-250/100 | 65, 144 |
| RW-250/125 | 65, 144 |
| RW-250/150 | 65, 144 |
| RW-250/200 | 65, 144 |
| RW-250/50 | 65, 144 |
| RW-250/75 | 65, 144 |
| RW-300/100 | 65, 144 |
| RW-300/125 | 65, 144 |
| RW-300/150 | 65, 144 |
| RW-300/200 | 65, 144 |
| RW-300/250 | 65, 144 |
| RW-300/50 | 65, 144 |
| RW-300/75 | 65, 144 |
| RW-350/100 | 65, 144 |
| RW-350/125 | 65, 144 |
| RW-350/150 | 65, 144 |
| RW-350/200 | 65, 144 |
| RW-350/250 | 65, 144 |
| RW-350/300 | 65, 144 |
| RW-350/50 | 65, 144 |
| RW-350/75 | 65, 144 |
| RW-400/100 | 65, 144 |
| RW-400/125 | 65, 144 |
| RW-400/150 | 65, 144 |
| RW-400/200 | 65, 144 |
| RW-400/250 | 65, 144 |
| RW-400/300 | 65, 144 |
| RW-400/350 | 65, 144 |
| RW-400/50 | 65, 144 |
| RW-400/75 | 65, 144 |
| RW-75/50 | 65, 144 |
| RX-100 | 42, 130 |
| RX-125 | 42, 130 |
| RX-150 | 42, 130 |
| RX-200 | 42, 130 |
| RX-50 | 42, 130 |
| RX-75 | 42, 130 |
| S1-25 | 43, 121, 180 |
| S1-38 | 29, 121, 180 |
| SBCC-10 | 110 |
| SBCC-2 | 110 |
| SBCC-20 | 110 |
| SBCC-250 | 110 |
| SBCC-2S | 110 |

| Cat. No. | Page |
|---|---|
| SBCC-30 | 110 |
| SBCC-350 | 110 |
| SBCC-4 | 110 |
| SBCC-500 | 110 |
| SBCC-6 | 110 |
| SBCC-750 | 110 |
| SBCC-8 | 110 |
| SBS | 147, 187 |
| SC-100 | 86 |
| SC-125/150 | 86 |
| SC-200 | 86 |
| SC-250/300 | 86 |
| SC-350/400 | 86 |
| SC-50 | 86 |
| SC-75 | 86 |
| SCG-100-450/560 | 44 |
| SCG-100-560/650 | 44 |
| SCG-100-650/750 | 44 |
| SCG-100-750/850 | 44 |
| SCG-100-850/950 | 44 |
| SCG-100-950/1050 | 44 |
| SCG-50-125/250 | 44 |
| SCG-50-250/350 | 44 |
| SCG-50-350/450 | 44 |
| SCG-50-450/560 | 44 |
| SCG-50-560/650 | 44 |
| SCG7-100 | 92 |
| SCG7-125 | 92 |
| SCG7-150 | 92 |
| SCG7-200 | 92 |
| SCG7-250/300 | 92 |
| SCG7-350/400 | 92 |
| SCG7-50 | 92 |
| SCG-75-125/250 | 44 |
| SCG-75-250/350 | 44 |
| SCG-75-350/450 | 44 |
| SCG-75-450/560 | 44 |
| SCG-75-560/650 | 44 |
| SCG-75-650/750 | 44 |
| SCG-75-750/850 | 44 |
| SCG7-75 | 92 |
| SCG8-100 | 96 |
| SCG8-125 | 96 |
| SCG8-150 | 96 |
| SCG8-200 | 96 |
| SCG8-250/300 | 96 |
| SCG8-350/400 | 96 |
| SCG8-50 | 96 |
| SCG8-75 | 96 |
| SE1-100 | 8, 119, 180 |
| SE1-125 | 8, 119, 180 |
| SE1-150 | 8, 119, 180 |
| SE1-200 | 8, 119, 180 |
| SE1-50 | 8, 119, 180 |
| SE1-75 | 8, 119, 180 |
| SE2-100 | 9, 119, 181 |
| SE2-125 | 9, 119, 181 |
| SE2-150 | 9, 119, 181 |
| SE2-200 | 9, 119, 181 |
| SE2-50 | 9, 119, 181 |

| Cat. No. | Page |
|---|---|
| SE2-75 | 9, 119, 181 |
| SEFCD-50 | 11, 23, 73 |
| SEFCD-75 | 11, 23, 73 |
| SEFSD-38 | 12, 22, 72 |
| SEFSD-50 | 12, 22, 72 |
| SEFSD-75 | 12, 22, 72 |
| SELTC-100 | 4, 32, 75 |
| SELTC-50 | 4, 32, 75 |
| SELTC-75 | 4, 32, 75 |
| SES1-100 | 43, 121, 129, 183 |
| SES1-200 | 43, 121, 129, 183 |
| SES1-50 | 43, 121, 129, 183 |
| SES1-75 | 43, 121, 129, 183 |
| SES2-100 | 43, 121, 129, 183 |
| SES2-200 | 43, 121, 129, 183 |
| SES2-50 | 43, 121, 129, 183 |
| SES2-75 | 43, 121, 129, 183 |
| SEWG-1 | 132, 152, 235 |
| SEWG-2 | 132, 152, 235 |
| SEWG-3 | 132, 152, 235 |
| SFID-100 | 20 |
| SFID-38 | 20 |
| SFID-50 | 20 |
| SFID-75 | 20 |
| SH-2 | 151, 234 |
| SLB-100 | 79, 129 |
| SLB-125 | 79, 129 |
| SLB-150 | 79, 129 |
| SLB-200 | 79, 129 |
| SLB-50 | 79, 129 |
| SLB-75 | 79, 129 |
| SLN-100 | 66, 141 |
| SLN-125 | 66, 141 |
| SLN-150 | 66, 141 |
| SLN-200 | 66, 141 |
| SLN-250 | 66, 141 |
| SLN-300 | 66, 141 |
| SLN-350 | 66, 141 |
| SLN-400 | 66, 141 |
| SLN-50 | 66, 141 |
| SLN-500 | 66, 141 |
| SLN-600 | 66, 141 |
| SLN-75 | 66, 141 |
| SME-100/125 | 60, 134 |
| SME-50/75 | 60, 134 |
| SME-75/100 | 60, 134 |
| SNR-1213 | 149, 233 |
| SNR-1420 | 149, 233 |
| SNR-3816 | 149, 233 |
| SOSP | 231 |
| SP-1 | 147, 231 |
| SP-12 | 147, 231 |
| SP-1-500 | 147, 231 |
| SP-18 | 147, 231 |
| SP-24 | 147, 231 |
| SP-35 | 147, 231 |
| SP-6 | 147, 231 |
| SP-9 | 147, 231 |
| SPH-12 | 147, 231 |
| SPH-18 | 147, 231 |

| Cat. No. | Page |
|---|---|
| SPH-24 | 147, 231 |
| SPH-9 | 147, 231 |
| SPP | 131 |
| SR1-100 | 57, 120, 181 |
| SR1-125 | 57, 120, 181 |
| SR1-150 | 57, 120, 181 |
| SR1-200 | 57, 120, 181 |
| SR1-50 | 57, 120, 181 |
| SR1-75 | 57, 120, 181 |
| SR2-100 | 57, 120, 182 |
| SR2-125 | 57, 120, 182 |
| SR2-150 | 57, 120, 182 |
| SR2-200 | 57, 120, 182 |
| SR2-50 | 57, 120, 182 |
| SR2-75 | 57, 120, 182 |
| SREC-100 | 5, 50, 75 |
| SREC-50 | 5, 50, 75 |
| SREC-75 | 5, 50, 75 |
| SRECS-100 | 2, 46, 73 |
| SRECS-50 | 2, 46, 73 |
| SRECS-75 | 2, 46, 73 |
| SRLTC-100 | 32, 51, 75 |
| SRLTC-125 | 32, 51, 75 |
| SRLTC-150 | 32, 51, 75 |
| SRLTC-200 | 32, 51, 75 |
| SRLTC-50 | 32, 51, 75 |
| SRLTC-75 | 32, 51, 75 |
| SRM1-100 | 58, 122, 182 |
| SRM1-125 | 58, 122, 182 |
| SRM1-150 | 58, 122, 182 |
| SRM1-200 | 58, 122, 182 |
| SRM1-250 | 58, 122, 182 |
| SRM1-300 | 58, 122, 182 |
| SRM1-350 | 58, 122, 182 |
| SRM1-400 | 58, 122, 182 |
| SRM1-50 | 58, 122, 182 |
| SRM1-75 | 58, 122, 182 |
| SSB-4S-MKO | 193 |
| SSB-5S-MKO | 193 |
| SSB-MB3 | 195 |
| SSB-MB4 | 195 |
| SSB-MB5 | 195 |
| SSB-MB6 | 195 |
| SSBT-4R | 193 |
| SSB-T5 | 190, 216 |
| SSB-T5B-200 | 193 |
| SSB-TBAR | 216 |
| SSC-100 | 88 |
| SSC-125 | 88 |
| SSC-150 | 88 |
| SSC-200 | 88 |
| SSC-50 | 88 |
| SSC-75 | 88 |
| SSLB-100 | 87 |
| SSLB-125 | 87 |
| SSLB-150 | 87 |
| SSLB-200 | 87 |
| SSLB-250 | 87 |
| SSLB-300 | 87 |
| SSLB-350 | 87 |

# PRODUCT INDEX


| Cat. No. | Page |
|---|---|
| SSLB-400 | 87 |
| SSLB-50 | 87 |
| SSLB-75 | 87 |
| SSLL-100 | 88 |
| SSLL-125 | 88 |
| SSLL-150 | 88 |
| SSLL-200 | 88 |
| SSLL-50 | 88 |
| SSLL-75 | 88 |
| SSLN-100 | 67, 142 |
| SSLN-125 | 67, 142 |
| SSLN-150 | 67, 142 |
| SSLN-200 | 67, 142 |
| SSLN-250 | 67, 142 |
| SSLN-300 | 67, 142 |
| SSLN-350 | 67, 142 |
| SSLN-400 | 67, 142 |
| SSLN-50 | 67, 142 |
| SSLN-500 | 67, 142 |
| SSLN-600 | 67, 142 |
| SSLN-75 | 67, 142 |
| SSLR-100 | 87 |
| SSLR-125 | 87 |
| SSLR-150 | 87 |
| SSLR-200 | 87 |
| SSLR-50 | 87 |
| SSLR-75 | 87 |
| SSPE-100 | 14, 98 |
| SSPE-125 | 14, 98 |
| SSPE-50 | 14, 98 |
| SSPE-75 | 14, 98 |
| SSPEB-100 | 15, 98 |
| SSPEB-125 | 15, 98 |
| SSPEB-50 | 15, 98 |
| SSPEB-75 | 15, 98 |
| SSPEB-G100 | 15, 97 |
| SSPEB-G125 | 15, 97 |
| SSPEB-G50 | 15, 97 |
| SSPEB-G75 | 15, 97 |
| SSPE-G100 | 14, 98 |
| SSPE-G125 | 14, 98 |
| SSPE-G50 | 14, 98 |
| SSPE-G75 | 14, 98 |
| SST-100 | 89 |
| SST-125 | 89 |
| SST-150 | 89 |
| SST-200 | 89 |
| SST-50 | 89 |
| SST-75 | 89 |
| ST-100 | 10, 55, 123, 172 |
| ST-125 | 10, 55, 123, 172 |
| ST-150 | 10, 55, 123, 172 |
| ST-200 | 10, 55, 123, 172 |
| ST-250 | 10, 55, 123, 172 |
| ST-300 | 10, 55, 123, 172 |
| ST-350 | 10, 55, 123, 172 |
| ST-400 | 10, 55, 123, 172 |
| ST-50 | 10, 55, 123, 172 |
| ST-75 | 10, 55, 123, 172 |
| STS-100 | 10, 30, 56, 124, 171 |
| STS-125 | 10, 30, 56, 124, 171 |
| STS-150 | 10, 30, 56, 124, 171 |
| STS-200 | 10, 30, 56, 124, 171 |
| STS-250 | 10, 30, 56, 124, 171 |
| STS-300 | 10, 30, 56, 124, 171 |
| STS-350 | 10, 30, 56, 124, 171 |
| STS-400 | 10, 30, 56, 124, 171 |
| STS-50 | 10, 30, 56, 124, 171 |
| STS-75 | 10, 30, 56, 124, 171 |
| SU1-250 | 8, 57, 119, 120, 180, 181 |
| SU1-300 | 8, 57, 119, 120, 180, 181 |
| SU1-350 | 8, 57, 119, 120, 180, 181 |
| SU1-400 | 8, 57, 119, 120, 180, 181 |
| SU2-250 | 9, 57, 119, 120, 181, 182 |
| SU2-300 | 9, 57, 119, 120, 181, 182 |
| SU2-350 | 9, 57, 119, 120, 181, 182 |
| SU2-400 | 9, 57, 119, 120, 181, 182 |
| SUB-100 | 127, 172, 219 |
| SUB-125 | 127, 172, 219 |
| SUB-150 | 127, 172, 219 |
| SUB-200 | 127, 172, 219 |
| SUB-250 | 127, 172, 219 |
| SUB-300 | 127, 172, 219 |
| SUB-350 | 127, 172, 219 |
| SUB-400 | 127, 172, 219 |
| SUB-50 | 127, 172, 219 |
| SUB-75 | 127, 172, 219 |
| T-100 | 82 |
| T-100A | 79 |
| T-125 | 82 |
| T-125A | 79 |
| T-150 | 82 |
| T-150A | 79 |
| T-200 | 82 |
| T-200A | 79 |
| T-250 | 82 |
| T-250A | 79 |
| T-300 | 82 |
| T-300A | 79 |
| T-400 | 82 |
| T-400A | 79 |
| T-50 | 82 |
| T-50A | 79 |
| T7-100 | 92 |
| T7-125 | 92 |
| T7-150 | 92 |
| T7-200 | 92 |
| T7-250 | 92 |
| T7-300 | 92 |
| T7-400 | 92 |
| T-75 | 82 |
| T7-50 | 92 |
| T-75A | 79 |
| T7-75 | 92 |
| T8-100 | 95 |
| T8-125 | 95 |
| T8-150 | 95 |
| T8-200 | 95 |
| T8-250 | 95 |
| T8-300 | 95 |
| T8-50 | 95 |
| T8-75 | 95 |
| TPB-100 | 15, 139 |
| TPB-125 | 15, 139 |
| TPB-150 | 15, 139 |
| TPB-200 | 15, 139 |
| TPB-250 | 15, 139 |
| TPB-300 | 15, 139 |
| TPB-350 | 15, 139 |
| TPB-400 | 15, 139 |
| TPB-50 | 15, 139 |
| TPB-75 | 15, 139 |
| TSB | 200 |
| TW | 152, 235 |
| UMA | 191, 204 |
| UMAB | 192 |
| UMAB-4R | 192 |
| UMA-LVBS | 191 |
| UPC | 211 |
| UPCTS | 211 |
| US4SB | 204 |
| USB | 204 |
| USB-4SDB-50/75-PT | 205 |
| USB-5SDB-50/75-PT | 205 |
| USDBM | 204 |
| USTBM | 204 |
| USTS | 204 |
| WBAR1G | 211 |
| WBAR2G | 211 |
| WECC-100-4 | 42, 45, 130 |
| WECC-100-6 | 42, 45, 130 |
| WECC-100-8 | 42, 45, 130 |
| WECC-125-1 | 42, 45, 130 |
| WECC-125-2 | 42, 45, 130 |
| WECC-125-3 | 42, 45, 130 |
| WECC-150-10 | 42, 45, 130 |
| WECC-150-20 | 42, 45, 130 |
| WECC-150-30 | 42, 45, 130 |
| WECC-200-10 | 42, 45, 130 |
| WECC-200-20 | 42, 45, 130 |
| WECC-200-30 | 42, 45, 130 |
| WECC-200-40 | 42, 45, 130 |
| WECC-200-40N | 42, 45, 130 |
| WH-100 | 51 |
| WH-125 | 51 |
| WH-150 | 51 |
| WH-200 | 51 |
| WH-250 | 51 |
| WH-300 | 51 |
| WH-350 | 51 |
| WH-400 | 51 |
| WH-50 | 51 |
| WH-75 | 51 |
| WHG-100 | 52 |
| WHG-125 | 52 |
| WHG-150 | 52 |
| WHG-200 | 52 |
| WHG-250 | 52 |
| WHG-300 | 52 |
| WHG-350 | 52 |
| WHG-400 | 52 |
| WHG-50 | 52 |
| WHG-75 | 52 |

# Orbit Product Lines

Your Universal Source for Electrical Products



PREFAB PRODUCTS



ELECTRICAL JUNCTION BOXES



NEMA ENCLOSURES



WEATHERPROOF PRODUCTS



ELECTRICAL FITTINGS



SPRING STEEL FASTENERS



WIRING DEVICES




EXIT & EMERGENCY LIGHTING



LANDSCAPE LIGHTING



LINE VOLTAGE LIGHTING



LED LIGHTING



VENTILATION FANS

**Corporate Headquarters**
2100 S. Figueroa St., Los Angeles, CA 90007
Tel: 1.800.90.ORBIT (67248)  Fax: 213.745.2015

**West Coast  Distribution Center**
7533 Garfield Ave, Bell Gardens, CA 90201

**East Coast Distribution Center**
5303 E. Morris Blvd, Morristown, TN 37813



orbit®
Orbit Industries, Inc.

Copyright© 2022, Orbit Industries, Inc. All rights reserved.