
Deadbolts

KM, KT, KV Series

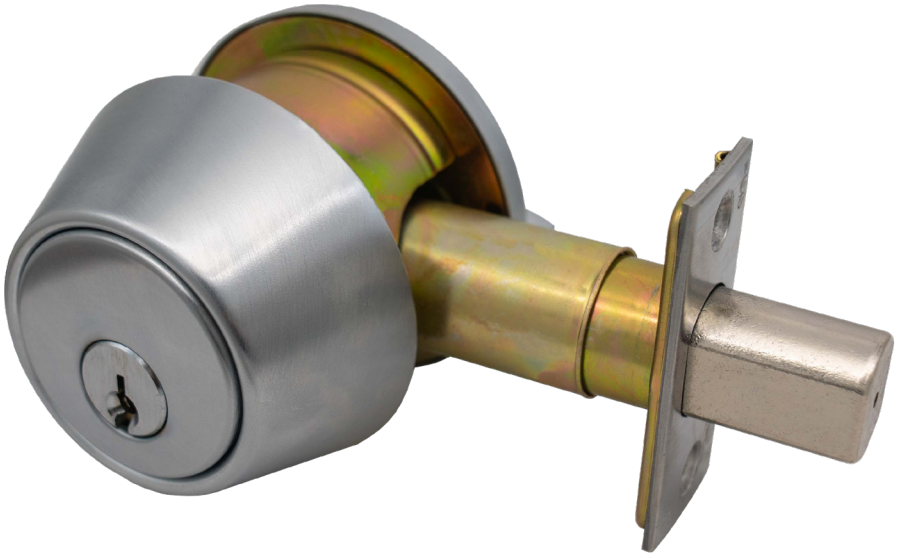

pdqlocks.com

DEADBOLTS
KM, KT, KV SERIES BORED

Table of Contents

KT Series Bored Deadbolts **3-4**

KM Series Bored Deadbolt **5-6**

KV Series Bored Deadbolt **7-8**

KV Series Bored Deadbolt With Privacy Indicators **9**

KT Series (Extra Heavy Duty Commercial Grade)

Typical Applications

- Commercial
- Government
- Hospitality
- Institutional
- Military
- Multi-family
- Offices
- Retail





CERTIFIED

Specifications

FOR DOORS:	• 1-3/4" thick standard, contact factory for other thicknesses
DOOR PREP:	• 2-1/8" DIA
BACKSET:	• 2-3/4" (Default) • 2-3/8" available
FRONT:	• 2-1/4" x 1-1/8" or 2-1/4" x 1" • Stainless Steel or Wrought Brass
STRIKE:	• 2-3/4" x 1-1/8" • Stainless Steel or Wrought Brass • Dust Box Included
DEADBOLT:	• 1" Throw • Brass Bolt containing two concealed 1/4" case-hardened Steel Roll Pins
HAND:	• Non-handed
TRIM:	• Wrought Brass Scalp • Reinforced Zinc Diecast Rose
KEYS:	• Two (2) per Lock
KEYWAYS:	• SCC standard (Schlage C Compatible) • Also available in keyways of other manufacturers
CYLINDER:	• 6-pin Brass Mortise Cylinder keyed to 5-pins
KEYING:	• Options: MK, CMK or GMK • Zero Bitted (KO), Keyed Different (KD) or Keyed Alike (KA) • Can be keyed into existing master key systems
FINISHES:	• 605 (US3), 606 (US4), 613E, 625 (US26), 626 (US26D)
WARRANTY:	• One (1) year Limited Warranty
LISTINGS:	• UL 10C listed, 3-hour fire rated as auxiliary locks for A label single doors • UL 10B listed for neutral pressure doors

PDQ Functions

FUNCTION	FUNCTION NUMBER	INSIDE | OUTSIDE	DESCRIPTION	ANSI NUMBER
Entrance	116		• Lock or unlock by key from outside, by thumb turn from inside	E1151
Single Cylinder	121		• Lock or unlock by key from outside • Blank mortise cylinder on inside	E1161
Single Sided	125		• Deadbolt by inside thumb turn only • Blank mortise cylinder on outside	E11111
Double Cylinder	137		• Lock or unlock by key from both sides	E1141
Classroom	148		• Lock or unlock by key from outside • Turnpiece inside retracts deadbolt, but will not project it	E1171

How to Order

QUANTITY	SERIES	FUNCTION	FINISH	BACKSET	CYLINDER	KEYWAY	KEYING
10	**KT**	**116**	**626** **605** **606** **613E** **625** **626**	**234** — 2-1/4" x 1-1/8" (Standard) **234R** — 2-1/4" x 1-1/8" x 1/4" Radius **234D** — Drive-in **238** — 2-1/4" x 1" **238R** — 2-1/4" x 1" x 1/4" Radius **238D** — Drive-in	**D** — Default **L** — Less Cylinder	**SCC**	**KD**

NOTE: Case quantity is 10 / Case weight is 19 lbs. Single Cylinder / Case weight is 22 lbs. Double Cylinder / For split finishes, designate O/S trim first, then I/S


Keyways

CONVENTIONAL CYLINDER	
KEYWAY	PDQ KEYWAY DESIGNATOR
Schlage C (Default)	SCC
PDQ Restricted	TA
Arrow AR1	ARA
Corbin 59A1	CO59A1
Corbin 60	CO6
Corbin L4	CL4
Russwin D1	RUD
Russwin 981	RUD981
Schlage E	SCE
Schlage C	SCC
Schlage C-K	SCC-K
Sargent LA	SAL
Sargent RA-RC	RA-RC
Accentra (Yale) E1R	YA8
Accentra (Yale) GA	GA
Falcon E-R	FAL
Kwikset	KW

Keying

DESCRIPTION	PDQ KEYING DESIGNATOR
Keyed Different (Default)	KD
Keyed Alike	KA
"O" Zero Bitted	KO
Master Keyed	MK
Construction Master Keyed	CMK
Grand Master Keyed	GMK

KM Series (Heavy Duty Commercial Grade)

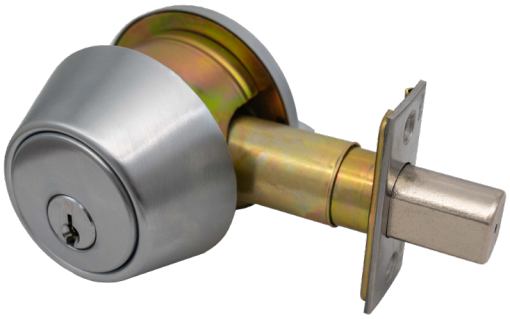




Typical Applications

- Commercial
- Government
- Hospitality
- Institutional
- Military
- Multi-family
- Offices
- Retail

Specifications

FOR DOORS:	• 1-3/8" to 1-3/4" thick for Conventional Cylinder, 1-1/2" to 2" for SFIC
DOOR PREP:	• 2-1/8" DIA
BACKSET:	• 2-3/4" - 2-3/8" adjustable (Default) • 2-3/4" (Option)
FRONT:	• 2-1/4" x 1-1/8" (Default) • 2-1/4" x 1" faceplate available • Stainless Steel or Wrought Brass
STRIKE:	• 2-3/4" x 1-1/8" • Stainless Steel or Wrought Brass • Dust Box Included
DEADBOLT:	• 1" Throw • Brass Bolt containing one 1/4" case-hardened Steel Roll Pin
THUMBTURN:	• ADA Compliant
HAND:	• Non-handed
TRIM:	• Stainless Steel or Wrought Brass Scalp • Reinforced Zinc Diecast Rose
KEYS:	• Two (2) per Lock
KEYWAYS:	• SCC standard (Schlage C Compatible) • Also available in keyways of other manufacturers
INTERCHANGE-ABLE CORE:	• 6 or 7-pin • Compatible with Best, Falcon and Arrow
CYLINDER:	• 6-pin Brass Insert Cylinder keyed to 5-pins • Standard High Security Cylinders Available • Large Format IC Core
KEYING:	• Options: MK, CMK or GMK • Zero Bitted (KO), Keyed Different (KD) or Keyed Alike (KA) • Can be keyed into existing master key systems
FINISHES:	• 605 (US3), 606 (US4), 613E, 622 (US19), 626 (US26D), 630 (US32D)
CERTIFICATIONS, LISTINGS, COMPLIANCES:	• UL 10C listed, 3-hour fire rated as auxiliary locks for A label single doors • UL 10B listed for neutral pressure doors • Complies with ADA (Americans with Disabilities Act) and ICC/ANSI 117.1 for Accessible and Usable Buildings • TAA compliant. Country of origin: KR
WARRANTY:	• One (1) year Limited Warranty

PDQ Functions

FUNCTION	FUNCTION NUMBER	INSIDE | OUTSIDE	DESCRIPTION	ANSI NUMBER
Single Cylinder	116		• Lock or unlock by key from outside, by thumb turn from inside	E1151
Double Cylinder	137		• Lock or unlock by key from both sides	E1141
Classroom	148		• Lock or unlock by key from outside • Turnpiece inside retracts deadbolt, but will not project it	E1171

How to Order

QUANTITY	SERIES	FUNCTION	FINISH	BACKSET	CYLINDER	KEYWAY	KEYING
20	KM	116	630 605 606 613E 622 626 630	ADJ **234** – 2-3/4" **238** – 2-3/8" **ADJ** – Adjustable 2-3/4"–2-3/8"(Default)	D **D** Default **L** Less Cylinder **SF6** Lock is SFIC prepped w/ 6 pin core **SF7** Lock is SFIC prepped w/ 7 pin core **SFL** Lock is SFIC prepped but less core **SFC** Lock is SFIC prepped w/ construction core **SFP** Lock is SFIC prepped w/ plastic construction core **LFL** Lock is Schlage LFIC prepped but less core	SCC	KD

NOTE: Case quantity is 20 / Case weight varies


Keyways

CONVENTIONAL CYLINDER		SMALL FORMAT INTERCHANGEABLE CORE		LARGE FORMAT INTERCHANGEABLE CORE	
KEYWAY	PDQ KEYWAY DESIGNATOR	KEYWAY (BEST COMPATIBLE)	PDQ KEYWAY DESIGNATOR	KEYWAY	PDQ KEYWAY DESIGNATOR
Schlage C (Default)	SCC	BEST A (Default), B, C, D, E, F, G, H, J, K, L, M, Q, R, WA, WB, WG, WH, TB, TD, TE, R	A (Default), B, C, D, E, F, G, H, J, K, L, M, Q, R, WA, WB, WG, WH, TB, TD, TE, R	Schlage C (Default)	SCC
PDQ Restricted	TA			PDQ Restricted	TA
Arrow AR1	ARA				
Corbin 59A1	CO59A1				
Corbin 60	CO6				
Corbin L4	CL4				
Russwin D1	RUD	PDQ Exclusive	PDQ1		
Russwin 981	RUD981		PDQ2		
Schlage E	SCE	PDQ Exclusive and Restricted	PDQ3		
Schlage C	SCC				
Schlage C-K	SCC-K				
Sargent LA	SAL				
Sargent RA-RC	RA-RC				
Accentra (Yale) E1R	YA8				
Accentra (Yale) GA	GA				
Falcon E-R	FAL				
Kwikset	KW				

Keying

DESCRIPTION	PDQ KEYING DESIGNATOR
Keyed Different (Default)	KD
Keyed Alike	KA
"O" Zero Bitted	KO
Master Keyed	MK
Construction Master Keyed	CMK
Grand Master Keyed	GMK

KV Series (Standard Duty Commercial Grade)

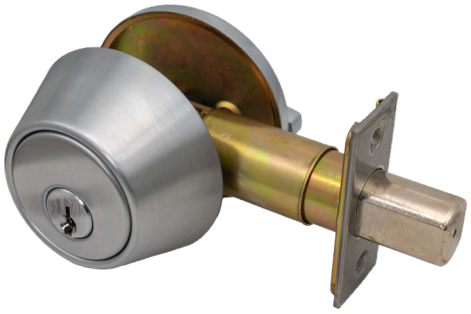

Typical Applications

- Light Commercial Installations
- Low Security Applications
- Residential

Specifications

FOR DOORS:	• 1-3/8" to 1-3/4" thick for Conventional Cylinder, 1-1/2" to 2" for SFIC
DOOR PREP:	• 2-1/8" DIA
BACKSET:	• 2-3/4" - 2-3/8" adjustable (Default)
FRONT:	• 2-1/4" x 1" with filler plate • Stainless Steel or Wrought Brass
STRIKE:	• 2-3/4" x 1" • Stainless Steel or Wrought Brass • Dust Box Included
DEADBOLT:	• 1" Throw • Brass Bolt containing one 1/4" case-hardened Steel Roll Pin
HAND:	• Non-handed
TRIM:	• Stainless Steel or Wrought Brass Scalp
KEYS:	• Two (2) per Lock
KEYWAYS:	• SCC standard (Schlage C Compatible) • Also available in keyways of other manufacturers
INTERCHANGEABLE CORE:	• 6 or 7-pin • Compatible with Best, Falcon and Arrow
CYLINDER:	• 6-pin Brass Insert Cylinder keyed to 5-pins • Standard High Security Cylinders Available
KEYING:	• Options: MK, CMK or GMK • Zero Bitted (KO), Keyed Different (KD) or Keyed Alike (KA) • Can be keyed into existing master key systems
FINISHES:	• 605 (US3), 606 (US4), 613E, 622 (US19), 629 (US32), 630 (US32D)
CERTIFICATIONS, LISTINGS, COMPLIANCES:	• ANSI "Positive Pressure Fire Tests of Door Assemblies" for up to and including 3 hrs. • Complies with ADA (Americans with Disabilities Act) and ICC/ANSI 117.1 for Accessible and Usable Building • UL 10C listed, 3-hour fire rated as auxiliary locks for A label single doors • UL 10B listed for neutral pressure doors • TAA compliant. Country of origin: KR
WARRANTY:	• One (1) year Limited Warranty

PDQ Functions

FUNCTION	FUNCTION NUMBER	INSIDE | OUTSIDE	DESCRIPTION	ANSI NUMBER
Single Cylinder	116		• Lock or unlock by key from outside, by thumb turn from inside	E2152
Single Sided	125		• Deadbolt by inside thumb turn only • Special door preparation required • Surface mounted, 1-3/4" bore hole, one side	E2192
Single Sided	125 BK		• Deadbolt by inside thumb turn only	E21112
Single Sided Indicator Deadbolt	125 IND		• No key outside • Indicator outside • Thumbturn inside extends/retracts deadbolt • Emergency key outside retracts deadbolt	–
Double Cylinder	137		• Lock or unlock by key from both sides	E2142

How to Order

QUANTITY	SERIES	FUNCTION	FINISH	BACKSET	CYLINDER	KEYWAY	KEYING	OPTION
20	**KV**	**116**	**630**	**ADJ**	**D**	**SCC**	**KD**	**—**
NOTE: Case quantity is 20 / Case weight is 26 lbs. Single Cylinder / Case weight is 35 lbs. Double Cylinder			**605** **606** **613E** **622** **630**	**ADJ** — 2-1/4" x 1" (Default) **ADJR** — 2-1/4" x 1" x 1/4" Radius	**D** Default **L** Less Cylinder **SF6** Lock is SFIC prepped w/ 6 pin core **SF7** Lock is SFIC prepped w/ 7 pin core **SFL** Lock is SFIC prepped but less core **SFC** Lock is SFIC prepped w/ construction core **SFP** Lock is SFIC prepped w/ plastic construction core			**DB** — Dust Box

Keyways

CONVENTIONAL CYLINDER		SMALL FORMAT INTERCHANGEABLE CORE	
KEYWAY	PDQ KEYWAY DESIGNATOR	KEYWAY (BEST COMPATIBLE)	PDQ KEYWAY DESIGNATOR
Schlage C (Default)	SCC	BEST A (Default), B, C, D, E, F, G, H, J, K, L, M, Q, R, WA, WB, WG, WH, TB, TD, TE, R	A (Default), B, C, D, E, F, G, H, J, K, L, M, Q, R, WA, WB, WG, WH, TB, TD, TE, R
PDQ Restricted	TA		
Arrow AR1	ARA		
Corbin 59A1	CO59A1		
Corbin 60	CO6		
Corbin L4	CL4		
Russwin D1	RUD	PDQ Exclusive	PDQ1
Russwin 981	RUD981		PDQ2
Schlage E	SCE	PDQ Exclusive and Restricted	PDQ3
Schlage C	SCC		
Schlage C-K	SCC-K		
Sargent LA	SAL		
Sargent RA-RC	RA-RC		
Accentra (Yale) E1R	YA8		
Accentra (Yale) GA	GA		
Falcon E-R	FAL		
Kwikset	KW		


Keying

DESCRIPTION	PDQ KEYING DESIGNATOR
Keyed Different (Default)	KD
Keyed Alike	KA
"O" Zero Bitted	KO
Master Keyed	MK
Construction Master Keyed	CMK
Grand Master Keyed	GMK


KV Series with Privacy Indicator
(Light Duty Commercial Grade)

Specifications

PRIVACY INDICATOR:	• Symbol showing Unoccupied- Occupied
THUMBTURN:	• ADA Compliant
FOR DOORS:	• 1-3/8" to 1-3/4" Thick
BACKSET:	• 2-3/4" (Factory Default) adjustable to 2-3/8"
DOOR PREP:	• 2-1/8" DIA
FACEPLATE:	• 1" x 2-1/4"
STRIKE:	• Non-handed
DEADBOLT:	• 1" Throw with hardened steel roller • Brass Bolt containing one concealed 1/4" case-hardened Steel Roll Pin
TRIM:	• Wrought Brass
KEYS:	• Emergency Key Included
FINISHES:	• 613E, 622 (US19), 626 (US26D)
WARRANTY:	• One (1) year Limited Warranty
LISTINGS:	• UL 10C listed, 3-hour fire rated as auxiliary locks for A label single doors • UL 10B listed for neutral pressure doors



UNOCCUPIED

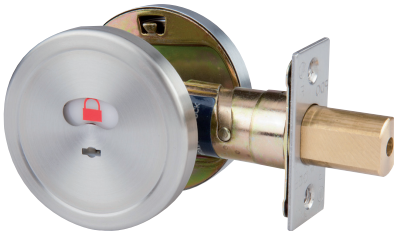

OCCUPIED

Functions

FUNCTION	FUNCTION NUMBER	INSIDE | OUTSIDE	DESCRIPTION	ANSI NUMBER
Single Sided	KV125IND		• No key outside • Indicator outside • Thumbturn inside extends/retracts deadbolt • Emergency key outside retracts deadbolt	E2192

How To Order

SERIES	FUNCTION	FINISH	BACKSET
KV	125IND	626 613E 626 630	ADJ - 2-3/4" AND 2-3/8"

ORDERING EXAMPLE: KV 125IND 626 ADJ

SECURING
CONFIDENCE
OPENING
POSSIBILITIES

Phone: 717.656.4281
Tech Support: 800.441.9692
Email: help@pdqlocks.com

Headquarters: 2230 Embassy Drive, Lancaster, PA 17603 P.O Box 6426, Lancaster, PA 17607

Regional Distribution Centers: Lancaster, PA | Norcross, GA | Auburn, WA

Middle East Manufacturing: Dammam, Kingdom of Saudi Arabia