XE360™ Series

Wireless Mortise Lock with Interchangeable FleX Module™



FleX Module

FleXible Connectivity is Here

The XE360 Series is the next generation of wireless locks from Schlage. The sleek design offers customers a solution that looks as good as it performs, at an affordable price point. XE360 devices feature an interchangeable FleX Module™ that provides options for access control connectivity mode. Choose from two modes—persistent (real-time) online via Wi-Fi® or offline via Bluetooth®.

NEW Wi-Fi mode includes **RealSync™**, which has the groundbreaking ability to:
- request and receive a lock's status in seconds
- send a command to a lock and receive verification in seconds

All while requiring no additional hardware or wiring, saving time and money.

Wi-Fi mode provides continuous, real-time access control updates, beneficial for those that prefer constant monitoring. Because it uses a building's Wi-Fi network, updates can be made anytime, from anywhere, no need to visit the lock.

Offline mode is suitable when access control updates can be periodic and infrequent, as they must be made directly at the lock via a BLE mobile app. If enabled, No-Tour functionality can also be used to make updates, removing the need to visit, or tour, each lock.

This XE360 device can be managed by Allegion software or be integrated into popular physical access control and Proptech systems through our Technology Alliances program. This enables customers to choose what best fits their requirements now and transition to another solution at any time.

Encryption Key & Credential Interoperability

- Hardware configured with Allegion's default encryption key or custom key developed by Schlage Custom Encryption Key Service (SCEKS)
- Schlage MIFARE® DESFire® and MIFARE Classic® credentials[2]
- NFC mobile credentials in Apple Wallet® and Google Wallet™
- Schlage Mobile Bluetooth® Credential
- Other competitive 13.56 MHz Smart credentials where encryption keys are compatible and shareable

Schlage Credential Services

- CardTrax™ credential format sequencing service offering industry standard formats

Features & Benefits

- Multiple connectivity modes:
  - RealSync - real-time via Wi-Fi on the Yonomi Platform (choose WF mode)
  - Offline via Bluetooth on the ENGAGE™ platform (choose OF mode)
- Offline mode supports No-Tour feature, allowing updates to access rights without visiting each lock
- Credential support includes Schlage MIFARE®, Bluetooth® and NFC mobile[1]
- Interior functions include LED indicator, push button, or deadbolt with thumbturn
- Wireless (Bluetooth®) configuration using connected smartphones or tablets
- Ready for the future with the innovative FleX Module that allows for communication type, memory and encryption upgrades
- Utilizes a heavy-duty Grade 1 mortise chassis for exceptional quality and reliability
- Uniquely concealed key override
- Open architecture – interoperable and simpler than ever for software alliances to integrate
- Also available as tubular or exit trim and suites seamlessly with other wireless locks to provide a wide selection that meets the needs of any opening


1. Dependent on access control software provider support of specific mobile credentials.
2. MIFARE Classic is disabled by default on WF locks upon commissioning, and can be re-enabled if desired.

CYBERSECURITY
Learn about Allegion's commitment


XE360™ Series

Wireless Mortise Lock with Interchangeable FleX Module™


Exterior

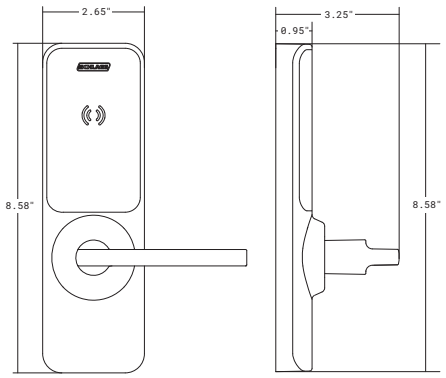

Interior

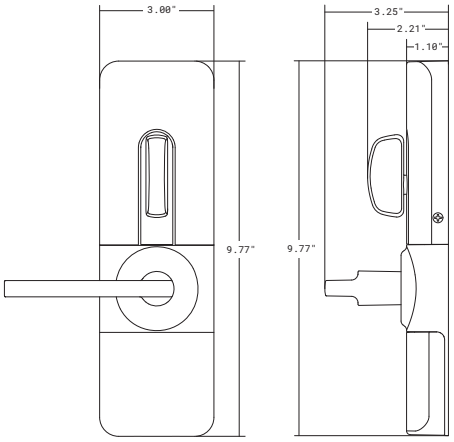

Profile

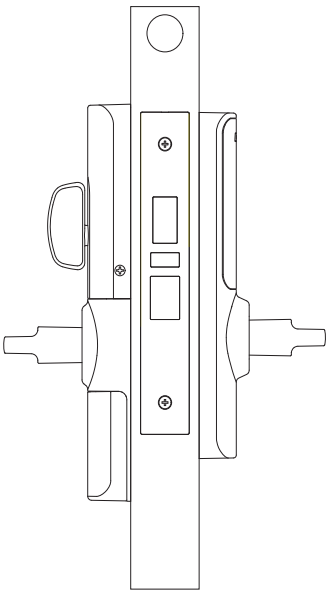

XE360 Wireless Electronic Lock Specifications	
Credentials	2,000[1]
Audits	2,000[1, 7]
Visual communications	LED (red, amber, green, blue, purple)
Audible communications	Yes, field configurable
Communication and encryption standards – lock	• 2.4GHz Wi-Fi (IEEE 802.11b/g/n) • WPA2, 802.1x • Bluetooth low energy (BLE) version 5 • Transport Layer Security (TLS) version 1.2 • Advanced Encryption Standard (AES), 128-bit and 256-bit
Communication and encryption standards – mobile credentials	Bluetooth® Low Energy: AES 256-bit using CBC & ECDSA 256
Credential verification time	Smart: ≤ 1 second Mobile: mobile device dependent
System interface	Via Bluetooth using compatible apps from Allegion or our Technology Alliances Compatible with iOS and Android
Battery life[2]	Up to 2 years using offline mode 1 year life using Wi-Fi mode 4 AA batteries, included
Operating temperature	Exterior: -31° to 151°F (-35° to 66°C) Interior: 32° to 120°F (0° to 49°C)
Operating humidity	0 - 100% non-condensing
Certifications	ANSI/BHMA A156.13-2022; ANSI/BHMA A156.25-2023 Locked Outdoor Type; ANSI/BHMA A156.5-2020; UL 294; ULC 60839; UL 10C 3-hour; CAN/ULC S104 3-hour (20 minute wood core doors); FCC Part 15; Industry Canada (IC); Industry Canada (IC)-RSS210; ADA Compliant[3]; RoHS; REACH; TAA; FL12400; FL4613; FL1592; FL14482; FL10356; FL3905[4]

Functionality[5]

- With Indicator (I)
  - Storeroom
- With Button (B)
  - Office
  - Privacy
  - Apartment
  - Storeroom*
- With Deadbolt (D)
  - Privacy
  - Apartment

Note: Door Position Sensor is required for privacy and apartment functions.

*Ignores button when in that mode.

Available Status Signals[5]

- Battery level
- Door position
- Lock/unlock
- Request-to-exit
- Deadbolt position[4]

Connectivity Options

- Wi-Fi mode - persistent, real-time
- Offline mode - direct updates via BLE mobile app, No-Tour[6]

1. Maximum storage capacity of lock; allocation of credentials per user can vary by access control software.
2. Assuming default settings, 40 actuations per day. When using Wi-Fi mode, 1 year minimum battery life is achievable when access points and XE360 locks are deployed in alignment with Allegion's Wi-Fi Network Setup Guide.
3. See 'Lever Styles' section for available options.
4. Mortise deadbolt (D) chassis only.
5. Consult your access control software provider for specific scope of support.
6. With MT20W and smart credential or mobile credential (consult your access control software provider for specific support).
7. Audits are first in, first out. Full audits are preserved while wi-fi mode is temporarily disconnected, and are synced once wi-fi reconnects.


XE360 Mortise Mechanical Specifications	
Chassis	Mortise
Handing	On-site handing with included hex key
ANSI standard (Meets or exceeds)	ANSI/BHMA A156.13-2022 ANSI/BHMA A156.25-2023 Locked outdoor type ANSI/BHMA A156.5-2020
Door thickness	1-3/4" (44mm)
Backset	2-3/4" (70mm)
Latchbolt	Standard: 3/4" (19mm) throw stainless steel latch bolt with anti-friction tongue
Deadbolt	1" (25mm) throw, stainless steel
Armored front	1-1/4" x 8" x 7/32" (32mm x 203mm x 6mm) only
Strike	Standard: 1-3/16" (30mm) curved lip, ANSI, 1-1/4" x 4-7/8" (32mm x 124mm); no box Optional: Additional strike lip lengths and ANSI strike box available
Levers	Zinc
Stile width	Minimum 4-1/2" (114mm)
Materials	All-metal chassis and escutcheon; exterior polycarbonate elements
Cylinder and keys	Schlage Classic C keyway, Conventional 6-pin cylinder with two keys; Other keyed options (see price book)

Reader Specifications	
Credential technologies	Smart (13.56 MHz), Bluetooth Low Energy (LE) (2.4 GHz), and Near Field Communication (NFC) Integrated PACS credentials
Standards	ISO standard 15693 and ISO 14443
Read range	Smart: up to .5" Bluetooth® Low Energy: up to 15' NFC: mobile device dependent
Smart credential support	**Secure application area:** Schlage MIFARE DESFire® EV1/EV2/EV3, Schlage MIFARE® Classic® **CSN only:** HID iCLASS®, HID iCLASS SE®, MIFARE DESFire/Classic
Mobile credential support[1]	Schlage Mobile Bluetooth Credential, Integrated PACS mobile credential with Bluetooth, NFC mobile credentials in Apple Wallet® and Google Wallet™ Works with Apple Wallet works with Google Wallet

Note: See the Credential Compatibility Guide for full details including interoperable credentials from other manufacturers.

1. Dependent on PACS provider capabilities. Visit us.allegion.com/alliances for more information.

Learn more about **RealSync™ Technology** and how it can simplify install and commissioning, reduce costs associated with traditional wired real-time openings, and decrease visits to the lock for maintenance.

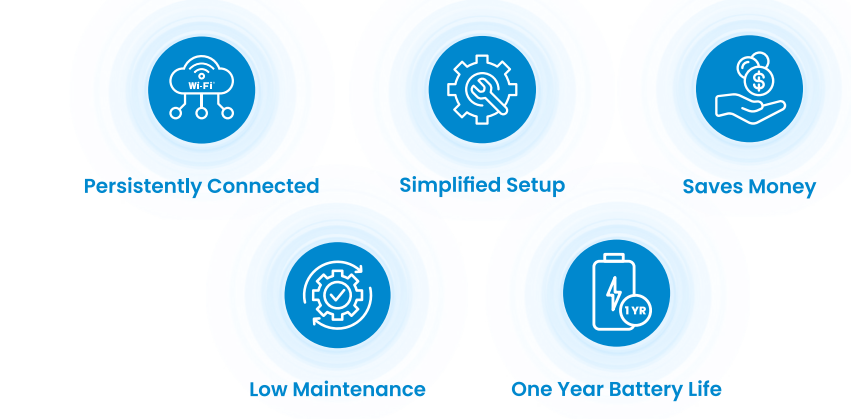



Chassis Options

The XE360 Series portfolio offers tubular, mortise and exit trim solutions to fit the needs of most applications.



Key Override

Key override is standard on all XE360 tubular, mortise, and exit trim locks. The unique design conceals the cylinder in the bottom edge of the lock to preserve the sleek look on the door while still allowing emergency access using a key.

Ordering Information

XE360	-	M	-	WF	-	I	-	SM	-	LAT	-	626	-	P6	-	C	-	09-663	-	10-072	-	134	-	47467230
Series		Chassis		Class		Function		Reader		Lever Style		Finish		Key Cylinder		Keyway		Armored Front		Strike		Door Thickness		Door Position Switch
1		2		3		4		5		6		7		8		9		10		11		12		13

Selections correspond with the numbers above. See price book for specific configuration options.

3 Class

WF	RealSync via Wi-Fi®
OF	Offline via Bluetooth

4 Function

I	Indicator
B	Button
D	Deadbolt

5 Reader

SM	Smart; Bluetooth and NFC mobile

6 Lever Style

BRW	Broadway
LAT	Latitude
LON-E	Longitude-extended length
NEP	Neptune

7 Finish

619	Satin Nickel
622	Matte Black
626	Satin Chrome

8 Key Cylinder

P6	Schlage Conventional, 6-pin
P	Schlage Conventional, 6-pin, keyed 5

See price book for additional options.

9 Keyway

C	Schlage Classic Obverse

9 Keyway

S123	Schlage Everest 23 S
S145	Schlage Everest 23 S, 6-pin
T125	Schlage Everest 23 T, 6-pin
T145	Schlage Everest 23 T, 6-pin

Custom pinning and Restricted cylinders (T) have a lead time adder of 10-20 days.

10 Armored Front

	1-1/4" x 8" x 7/32"
09-663	For indicator and button
09-666	For deadbolt

11 Strike

10-072	1-3/16" curved lip, ANSI, 1-1/4" x 4-7/8"; no box

See price book for additional strike lip lengths and ANSI strike box options.

12 Door Thickness

134	1-3/4" only

13 Door Position Switch

47467230	Door Position Switch (DPS)
LLLDPS	Less Door Position Switch (DPS)

Lever Styles



Broadway



Latitude




Longitude - Extended Length[1]



Neptune (Sparta)

1. Extended length lever is designed to lower required operational force and improve rotational grip for higher accessibility.


Finishes



619
Satin Nickel



622
Matte Black



626
Satin Chrome

Allegion, the Allegion logo, Schlage and the Schlage logo are trademarks of Allegion plc, its subsidiaries and/or affiliates in the United States and other countries. Apple and the Apple Wallet are trademarks of Apple Inc., registered in the U.S. and other countries and regions. Google Wallet is a trademark of Google LLC. The HID, iCLASS, and iCLASS SE trademarks owned by ASSA ABLOY. MIFARE and DESFire are registered trademarks of NXP B.V. All other trademarks are the property of their respective owners.

© 2026 Allegion plc

015589, Rev. 09/26