



XE360™ Series

Wireless Tubular Lock with Interchangeable Flex Module™



Tubular with Push Button

Flex Module

Flexible Connectivity is Here

The XE360™ Series is the next generation of wireless locks from Schlage. The sleek design offers customers a solution that looks as good as it performs, at an affordable price point. XE360 devices feature an interchangeable Flex Module™ that provides options for access control connectivity mode. Choose from two modes—persistent (real-time) online via Wi-Fi® or offline via Bluetooth®.

NEW Wi-Fi mode includes **RealSync™**, which has the groundbreaking ability to:

- request and receive a lock's status in seconds
- send a command to a lock and receive verification in seconds

All while requiring no additional hardware or wiring, saving time and money.

Wi-Fi mode provides continuous, real-time access control updates, beneficial for those that prefer constant monitoring. Because it uses a building's Wi-Fi network, updates can be made anytime, from anywhere, no need to visit the lock.

Offline mode is suitable when access control updates can be periodic and infrequent, as they must be made directly at the lock via a BLE mobile app. If enabled, No-Tour functionality can also be used to make updates, removing the need to visit, or tour, each lock.

The XE360 device can be managed by Allegion software or be integrated into popular physical access control and Proptech systems through our [Technology Alliances](#) program. This enables customers to choose what best fits their requirements now and transition to another solution at any time.

Encryption Key & Credential Interoperability

- Hardware configured with Allegion's default encryption key or custom key developed by Schlage Custom Encryption Key Service (SCEKS)
- Schlage MIFARE® DESFire® and MIFARE Classic® credentials²
- NFC mobile credentials in Apple Wallet® and Google Wallet™
- Schlage Mobile Bluetooth® Credential
- Other competitive 13.56 MHz Smart credentials where encryption keys are compatible and shareable

Schlage Credential Services

- CardTrax™ credential format sequencing service offering industry standard formats


Features & Benefits

- Multiple connectivity modes:
 - RealSync – real-time via Wi-Fi on the Yonomi Platform (choose WF mode)
 - Offline via Bluetooth on the ENGAGE™ platform (choose OF mode)
 - Offline mode supports No-Tour feature, allowing updates to access rights without visiting each lock
 - Credential support includes Schlage MIFARE®, Bluetooth® and NFC mobile¹
 - Interior functions include LED indicator or push button
 - Wireless (Bluetooth®) configuration using connected smartphones or tablets
 - Ready for the future with the innovative Flex Module™ that allows for communication type, memory and encryption upgrades
 - Exceeds Grade 2 testing for exceptional quality and reliability
 - Uniquely concealed key override
 - Open architecture – interoperable and simple for software alliances to integrate
 - Also available as mortise or exit trim and suites seamlessly with other wireless locks to provide a wide selection that meets the needs of any opening
1. Dependent on access control software provider support of specific mobile credentials.
 2. MIFARE Classic is disabled by default on WF locks upon commissioning and can be re-enabled if desired.


CYBERSECURITY

Learn about Allegion's commitment


Exterior

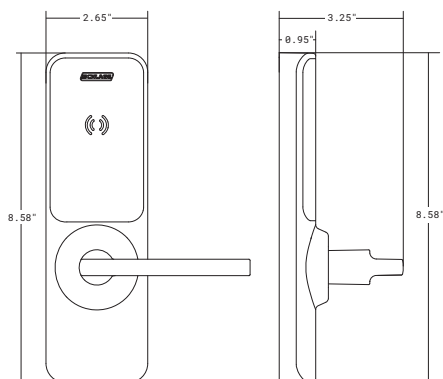

Interior

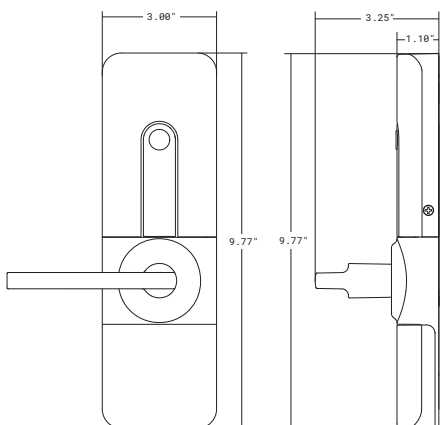

Profile

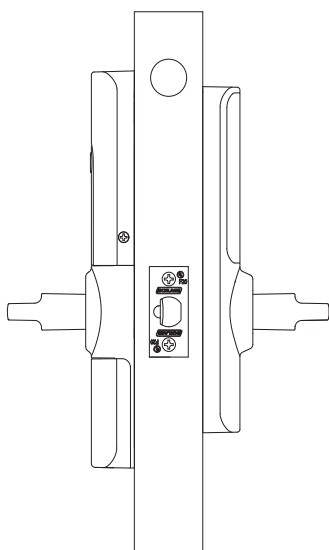

XE360 Wireless Electronic Lock Specifications

Credentials	2,000 ¹
Audits	2,000 ⁶
Visual communications	LED (red, amber, green, blue, purple)
Audible communications	Yes, field configurable
Communication and encryption standards – lock	2.4GHz Wi-Fi, IEEE 802.11b/g/n (WF only) - WPA3-Personal, WPA2-Personal, and WPA2-Enterprise (WF only) 802.1X (PEAP) with RADIUS authentication (WF only) - Transport Layer Security (TLS) version 1.2 (WF only) - Bluetooth low energy (BLE) version 5 - Advanced Encryption Standard (AES), 128-bit & 256-bit
Communication and encryption standards – mobile credentials	Bluetooth® Low Energy: AES 256-bit using CBC & ECDSA 256
Credential verification time	Smart: ≤ 1 second Mobile: mobile device dependent
System interface	Via Bluetooth using compatible apps from Allegion or our Technology Alliances Compatible with iOS and Android
Battery life ²	Up to 2 years using offline mode 1 year life using Wi-Fi mode 4 AA batteries, included
Operating temperature	Exterior: -31° to 151°F (-35° to 66°C) Interior: 32° to 120°F (0° to 49°C)
Operating humidity	0 - 100% non-condensing
Certifications	ANSI/BHMA A156.2-2022 Grade 2; ANSI/BHMA A156.25-2023 Locked Outdoor Type; ANSI/BHMA A156.5-2020; UL 294; ULC 60839; UL 10C 3-hour; CAN/ULC S104 3-hour (20 minute wood core doors); FCC Part 15; Industry Canada (IC); Industry Canada (IC)-RSS210; ADA Compliant ³ ; RoHS; REACH; TAA; FL10356

Functionality⁴

- With Indicator (I)
 - Storeroom
- With Button (B)
 - Office
 - Privacy
 - Apartment
 - Storeroom*

Note: Door Position Sensor is required for privacy and apartment functions.

*Ignores button when in storeroom function.

Available Status Signals⁴

- Battery level
- Door position
- Lock/unlock
- Request-to-exit

Connectivity Options

- Wi-fi mode – persistent, real-time
- Offline mode – direct updates via BLE mobile app, No-Tour⁵

1. Maximum storage capacity of lock; allocation of credentials per user can vary by access control software.
2. Assuming default settings, 40 actuations per day. When using Wi-Fi mode, 1 year minimum battery life is achievable when access points and XE360 locks are deployed in alignment with Allegion's Wi-Fi Network Setup Guide.
3. See 'Lever Styles' section for available options.
4. Consult your access control software provider for specific scope of support.
5. With MT20W and smart credential or mobile credential (consult your access control software provider for specific support).
6. Audits are first in, first out. Full audits are preserved while wi-fi mode is temporarily disconnected, and are synced once wi-fi reconnects.

**XE360 Tubular Mechanical Specifications**

Chassis	Tubular
Handing	On-site handing with included hex key
ANSI standard (Meets or exceeds)	ANSI/BHMA A156.02-2022 Grade 2 ANSI/BHMA A156.25-2023 Locked outdoor type (Exterior trim rated for exterior use in weather) ANSI/BHMA A156.5-2020 Grade 2
Door thickness	1-3/4" (44mm)
Backset	Standard: 2-3/4" (70mm), field adjustable to 2-3/8" (60mm)
Latchbolt	1" x 2-1/4" (25mm x 57mm); square and round corner faceplate; 1" (25mm) edge bore required
Levers	Zinc
Strike	Standard: 1-1/8" (29mm) lip, ANSI, 1-1/8" x 2-3/4" (29mm x 70mm), no box Optional: Additional strike lip lengths and ANSI strike box available
Stile width	Minimum 4-1/4" (108mm)
Materials	All-metal chassis and escutcheon; exterior polycarbonate elements
Cylinder and keys	Schlage Classic C keyway, Conventional 6-pin cylinder with two keys; Other keyed options (see price book)

Reader Specifications

Credential technologies	Smart (13.56 MHz), Bluetooth Low Energy (LE) (2.4 GHz), and Near Field Communication (NFC) Integrated PACS credentials
Standards	ISO standard 15693 and ISO 14443
Read range	Smart: up to .5" Bluetooth® Low Energy: up to 15' NFC: mobile device dependent
Smart credential support	Secure application area: Schlage MIFARE DESFire® EV1/EV2/EV3, Schlage MIFARE® Classic® CSN only: HID iCLASS®, HID iCLASS SE®, MIFARE DESFire/Classic
Mobile credential support ¹	Schlage Mobile Bluetooth Credential, Integrated PACS mobile credential with Bluetooth, NFC mobile credentials in Apple Wallet® and Google Wallet™  Works with Apple Wallet  works with Google Wallet

Note: See the [Credential Compatibility Guide](#) for full details including interoperable credentials from other manufacturers.

1. Dependent on PACS provider capabilities. Visit us.allegion.com/alliances for more information.

**Chassis Options**

The XE360 Series portfolio offers tubular, mortise and exit trim solutions to fit the needs of most applications.

**Key Override**

Key override is standard on all XE360 tubular, mortise, and exit trim locks. The unique design conceals the cylinder in the bottom edge of the lock to preserve the sleek look on the door while still allowing emergency access using a key.



Learn more about **RealSync™ Technology** and how it can simplify install and commissioning, reduce costs associated with traditional wired real-time openings, and decrease visits to the lock for maintenance.



Persistently Connected



Simplified Setup



Saves Money



Low Maintenance



One Year Battery Life

Ordering Information

XE360	- T -	WF	- I -	SM	- LAT -	626	- P6 -	KD	- C -	47535555	- A500-074 -	134	- 47467230
Series	Chassis	Class	Function	Reader	Lever Style	Finish	Key Cylinder	Bitting	Keyway	Backset & Latch	Strike	Door Thickness	Door Position Switch
1	2	3	4	5	6	7	8	9	10	11	12	13	14

Selections correspond with the numbers above. See price book for specific configuration options.

3 Class	
WF	RealSync via Wi-Fi®
OF	Offline via Bluetooth

4 Function	
I	Indicator
B	Button

5 Reader	
SM	Smart; Bluetooth and NFC mobile

6 Lever Style	
BRW	Broadway
LAT	Latitude
LON-E	Longitude-extended length
NEP	Neptune

7 Finish	
619	Satin Nickel
622	Matte Black
626	Satin Chrome

8 Key Cylinder	
P6	Schlage Conventional, 6-pin
P	Schlage Conventional, 6-pin, keyed 5

See price book for additional options.

9 Bitting	
KD	Keyed differently (standard)
KA	Keyed alike

KA (Keyed Alike) requires additional specification and has lead time adder of 10-20 days.

10 Keyway	
C	Schlage Classic Obverse
S123	Schlage Everest 29 S
S145	Schlage Everest 29 S, 6-pin
T125	Schlage Everest 29 T, 6-pin
T145	Schlage Everest 29 T, 6-pin

Custom pinning and Restricted cylinders (T) have a lead time adder of 10-20 days.

11 Backset & Latch	
47535555	Adjustable backset: 2-3/8" or 2-3/4"; 1" x 2-1/4" (round and square corner included); 1" edge bore required

12 Strike	
A500-074	Standard: 1-1/8" lip, ANSI, 1-1/8" x 2-3/4", no box

See price book for additional strike lip lengths and ANSI strike box options.

13 Door Thickness	
134	1-3/4" only

14 Door Position Switch	
47467230	Door Position Switch (DPS)
LLLDPS	Less Door Position Switch (DPS)

Lever Styles



Broadway



Latitude




Longitude - Extended Length¹



Neptune (Sparta)

1. Extended length lever is designed to lower required operational force and improve rotational grip for higher accessibility.


Finishes



619
Satin Nickel



622
Matte Black



626
Satin Chrome