

PRODUCT CATALOGUE



SEPCO

WWW.SEPCO-USA.COM

ESTABLISHED
1938



Established in 1938 and incorporated in 1952, SEPCO, a family-owned company with more than 85+ years of experience spans 4 generations and is dedicated to setting the industry standard in electrical fittings. With vertically integrated manufacturing and robust in-house capabilities, we deliver consistent quality, operational efficiency and just-in-time fulfillment — minimizing downtime and supporting critical project timelines.

We maintain one of the industry's most comprehensive and largest inventories and are committed to fast, accurate and reliable delivery. Our experienced customer service team provides expert guidance and responsive support, ensuring every interaction reflects our core values of integrity, transparency and performance.

At SEPCO, we don't just supply fittings — we build long-term partnerships through precision, reliability and an unwavering commitment to service excellence.



STEELECTRIC
PRODUCTS

718.259.6100

1.800.626.1223

FAX. 1.718.331.1874

CATALOGUE CONTENTS

Now Offering Over 2,250 Sku's,
Specializing In Malleable Iron, Steel
And Aluminum Fittings And Also Hard
To Find Larger Sized Products Such
As 5" And 6"

4-31

**MALLEABLE IRON/
HOT DIPPED
GALVANIZED
FITTINGS**

32-35

**EXPLOSION
PROOF
FITTINGS**

36-119

**RIGID/IMC
FITTINGS**

120-143

**EMT
FITTINGS**

144-163

**LIQUIDTIGHT
FITTINGS**

164-187

**AC-MC-FLEX
FITTINGS**

188-195

**NM CABLE
FITTINGS**

196-201

**GROUNDING
FITTINGS**

202-207

**CLAMP & HANGER
FITTINGS**

208-219

**SERVICE
ENTRANCE
FITTINGS**

220-227

**MISCELLANEOUS
FITTINGS**



EXPLOSION PROOF GUA BOXES

PAGES 34, 35, 38, & 39



GUAB

GUAC

GUAL

GUAT

HOT DIPPED GALVANIZED RIGID EXPANSION FITTINGS WITH 4" MOVEMENT

PAGES 6 & 40



AX-50

HOT DIPPED GALVANIZED RIGID EXPANSION FITTINGS WITH 8" MOVEMENT

PAGES 6 & 40

AVAILABLE 4TH
QUARTER 2025



AX-8-50

HOT DIPPED GALVANIZED 14" BONDING JUMPERS

PAGES 7 & 41



BJ-5075

HOT DIPPED GALVANIZED 24" BONDING JUMPERS

PAGES 7 & 41

AVAILABLE 3RD
QUARTER 2025




BJ-5075-24

Please refer to the category page(s) for product specifications.

ALUMINUM MOGULS

PAGE 49



MLB400A

RAINTIGHT RIGID COMPRESSION CONNECTORS

PAGE 104



NTC-50RT

NTC-50TRT

RAINTIGHT RIGID COMPRESSION COUPLINGS

PAGE 105



NTCC-50RT

HOT DIPPED GALVANIZED JUNCTION CONDUIT OUTLET BOXES

PAGES 8 & 43



JBDX-75G

JUNCTION CONDUIT OUTLET BOXES

PAGE 42



JBDX-75

HOT DIPPED GALVANIZED FS AND FD DEVICE BOXES – SINGLE GANG

PAGES 17 & 73



FSC-50G


FD-50G

NEW PRODUCTS

**NEW
PRODUCT**

HOT DIPPED GALVANIZED FDT AND FDCT DEVICE BOXES – SINGLE GANG

PAGES 18 & 75

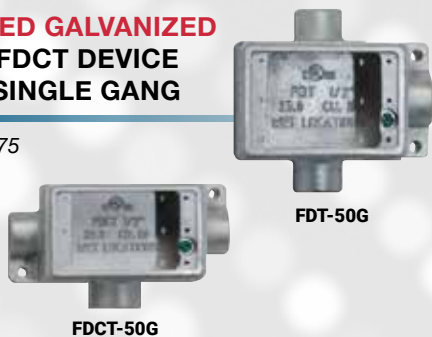

FDT AND FDCT DEVICE BOXES – SINGLE GANG

PAGE 74



HOT DIPPED GALVANIZED FS AND FD DEVICE BOXES – DOUBLE GANG

PAGES 19 & 78



HOT DIPPED GALVANIZED FS AND FD DEVICE BOX COVERS – SINGLE & DOUBLE GANG

PAGES 20, 76, & 80



HOT DIPPED GALVANIZED INSULATED GROUNDING BUSHINGS – ALUMINUM LUG

PAGES 21 & 83



HOT DIPPED GALVANIZED INSULATED GROUNDING BUSHINGS – COPPER LUG

PAGES 22 & 84



INSULATED GROUNDING BUSHINGS – COPPER LUG

PAGE 82



THREADLESS INSULATED GROUNDING BUSHINGS – COPPER LUG

PAGE 86



HOT DIPPED GALVANIZED INSULATED BUSHINGS

PAGES 23 & 89







SCAN ME

TO VIEW
PRODUCT SECTION

MALLEABLE IRON/HOT DIPPED GALVANIZED FITTINGS



MALLEABLE IRON/HOT DIPPED GALVANIZED EXPANSION FITTINGS

FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- To allow for expansion and contraction in a run of rigid metal conduit.
- For applications involving IMC, a 15" min. length of rigid conduit should be used entering the expansion fitting due to the slightly smaller O.D. of the IMC.
- Type AX provides for maximum of 4" conduit movement (2" in either direction), or 8" conduit movement (4" in either direction).

FEATURES:

- Weatherproof.
- Concrete tight.
- Wet or dry locations.
- Includes insulating bushing.
- Bonding jumpers (Sold separately, see page 7, example BJ-5075).

STANDARD MATERIALS:

Malleable Iron

STANDARD FINISH:


Hot Dipped Galvanized/
Zinc Plated



CERTIFICATIONS AND COMPLIANCES




UL LISTED E198258
UL Standard: UL514B
NEMA FB-1
ASTM Rated

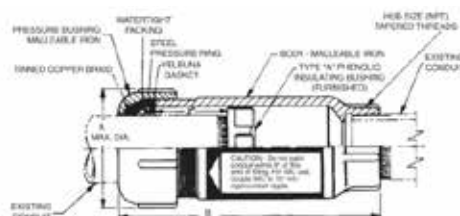

TYPE AX-50 - 4" CONDUIT MOVEMENT - 2" IN EITHER DIRECTION

CATALOG NUMBER	TRADE SIZE	MAX DIA	LENGTH	UNIT PACK	MASTER PACK	LBS./ PER 100	UPC#
AX-50	1/2"	2"	6 3/8"	2	10	145	10699
AX-75	3/4"	2 1/4"	6 3/8"	1	5	220	10674
AX-100	1"	2 5/8"	6 5/8"	1	2	295	10679
AX-125	1 1/4"	3 1/8"	6 5/8"	1	2	375	10684
AX-150	1-1/2"	3 1/2"	6 5/8"	1	2	505	10689
AX-200	2"	4"	7 1/8"	1	2	655	10694
AX-250	2 1/2"	4 1/2"	7 1/2"	—	1	900	10699
AX-300	3"	5 3/8"	8 1/8"	—	1	1200	10704
AX-350	3 1/2"	6"	8 1/2"	—	1	1445	10709
AX-400	4"	6 5/8"	8 5/8"	—	1	1655	10714
AX-500	5"	8"	9 1/2"	—	1	1955	10720

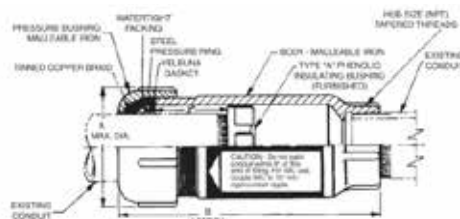

TYPE AX-8-50 - 8" CONDUIT MOVEMENT - 4" IN EITHER DIRECTION

CATALOG NUMBER	TRADE SIZE	MAX DIA	LENGTH	UNIT PACK	MASTER PACK	LBS./ PER 100	UPC#
AX-8-50	1/2"	2"	10 1/3"	2	10	280	10671
AX-8-75	3/4"	2 1/2"	10 1/3"	1	5	358	10676
AX-8-100	1"	2 13/16"	10 1/3"	1	2	460	10681
AX-8-125	1 1/4"	3 7/32"	10 3/4"	1	2	605	10686
AX-8-150	1-1/2"	3 3/4"	11 1/8"	1	2	760	10690
AX-8-200	2"	4 1/2"	11 1/8"	1	2	1020	10695
AX-8-250	2 1/2"	4 7/8"	11 2/3"	—	1	1320	10700
AX-8-300	3"	5 5/8"	12"	—	1	1760	10705
AX-8-350	3 1/2"	6 5/16"	12"	—	1	2020	10710
AX-8-400	4"	6 13/16"	12 1/4"	—	1	2370	10715



MALLEABLE IRON/HOT DIPPED GALVANIZED BONDING JUMBERS

FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- For bonding two rigid, EMT or IMC steel conduits together.

STANDARD MATERIALS:

Clamps: Malleable Iron
Braids: Tinned Copper
U-Bolts: Steel

STANDARD FINISH:

Hot Dipped Galvanized/
Zinc Plated



CERTIFICATIONS AND COMPLIANCES



UL LISTED E93683
UL Standard: UL467
NEMA FB-1
ASTM Rated



TYPE BJ-5075 – 14"

CATALOG NUMBER	TRADE SIZE	LENGTH	UNIT PACK	MASTER PACK	LBS./ PER 100	UPC#
BJ-5075	1/2"- 3/4"	14"	—	10	70	10723
BJ-1012	1"- 1 1/4"	14"	—	5	95	10728
BJ-1520	1 1/2"- 2"	14"	—	5	140	10733
BJ-2530	2 1/2"- 3"	14"	—	2	230	10738
BJ-3540	3 1/2"- 4"	14"	—	2	280	10743



TYPE BJ-5075-24 – 24"

CATALOG NUMBER	TRADE SIZE	LENGTH	UNIT PACK	MASTER PACK	LBS./ PER 100	UPC#
BJ-5075-24	1/2"- 3/4"	24"	—	10	125	69185
BJ-1012-24	1"- 1 1/4"	24"	—	5	135	69190
BJ-1520-24	1 1/2"- 2"	24"	—	5	180	69195
BJ-2530-24	2 1/2"- 3"	24"	—	2	300	69200
BJ-3540-24	3 1/2"- 4"	24"	—	2	350	69205
BJ-5060-24	5"-6"	24"	—	1	420	69210



MALLEABLE IRON/HOT DIPPED GALVANIZED JUNCTION CONDUIT OUTLET BOXES

FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- JBDX outlet boxes are installed in threaded rigid conduit systems to:
 - Act as junction boxes.
 - Act as pull outlets.
 - Accept round base wiring devices and covers intended for use on 4" outlet boxes.
 - Mount enclosed and gasketed lighting fixtures: ARB fixture hangers.

FEATURES:

- Surface mounting; flush mounting can be obtained by nailing box to concrete form through mounting lugs.
- Drilled mounting lugs.
- Four drilled and tapped conduit bosses spaced 90° apart on sides.

STANDARD MATERIALS:

Malleable Iron

STANDARD FINISH:

Hot Dipped Galvanized/Zinc Plated




OPTIONAL FINISH:

For Malleable Iron/Zinc Plated, please remove the "G" suffix from Hot Dipped Galvanized catalog number and see page 42.

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198259
UL Standard: UL514B
NEMA FB-1
ASTM Rated

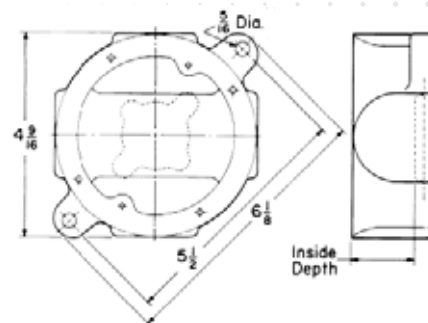

TYPE JBDX-75G

For Threaded Rigid Conduit and IMC

CATALOG NUMBER	TRADE SIZE	INSIDE DEPTH	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./PER 100	UPC#
JBDX-50G	1/2"	2.06	4.563	5.55	6.125	1	5	315	89232
JBDX-75G	3/4"	2.06	4.563	5.55	6.125	1	5	305	89237
JBDX-100G	1"	2.06	4.563	5.55	6.125	1	5	285	89242

MALLEABLE IRON/HOT DIPPED GALVANIZED JUNCTION CONDUIT OUTLET BOX COVERS AND GASKET

APPLICATION:

- Furnished with screws.
- When used with gasket provides raintight fit.

STANDARD MATERIALS:

- Cover: Malleable Iron
- Gasket: Neoprene

STANDARD FINISH:

Hot Dipped Galvanized/Zinc Plated



OPTIONAL FINISH:

For Malleable Iron/Zinc Plated, please remove the "G" suffix from Hot Dipped Galvanized catalog number and see page 42.



CERTIFICATIONS AND COMPLIANCES



UL LISTED E198259
UL Standard: UL514B
NEMA FB-1
ASTM Rated

CATALOG NUMBER	TYPE	UNIT PACK	MASTER PACK	LBS./PER 100	UPC#
JBKBG	BLANK	5	50	90	89247
JBDXG	GASKET	20	200	5	89250




MALLEABLE IRON/**HOT DIPPED GALVANIZED** MOGULS WITH COVER, GASKET & ROLLERS FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- Larger body size facilitates pulling of large and heavy conductors. Specially designed raised cast covers provide additional wiring area.
- SEPCO Moguls are used for pulling straight, 45° or 90° angle turns and/or making taps and splices.

FEATURES:

- Exclusive built-in rollers facilitate cable pulling from sizes 1-1/4"–4".
- Smooth, rounded integral bushing in each hub protects conductor insulation.
- Accurately tapped, tapered threads for tight, rigid joints and ground continuity.
- Covers have captive stainless steel screws to speed installation, prevent "freezing" of screws.
- Length requirement: distance between centerline of each hub bushing (conduit stop) exceeds eight times the trade diameter of the conduit per NEC 314.28(A)(2).

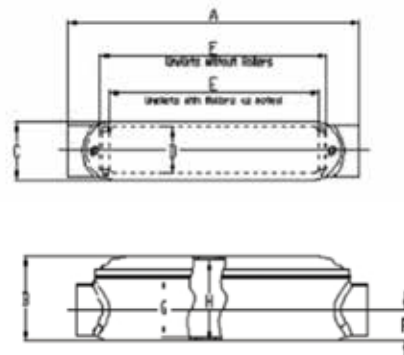

STANDARD MATERIALS:

Bodies and Covers: Malleable Iron
Gaskets: Neoprene
Screws: Stainless Steel

STANDARD FINISH:

Bodies and Covers:
Hot Dipped Galvanized

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198259
UL Standard: UL514B
NEMA FB-1
ASTM Rated

TYPE MC100G

CATALOG NUMBER	TRADE SIZE	MAX WIRE SIZE	VOL. CU.IN.	UNIT PACK	MASTER PACK	LBS./ PER 100	UPC#
MC100G	1"	3 #2 AWG	31.00	—	1	390	10039
MC125G	1-1/4"	3 #1/0 AWG	50.00	—	1	506	10040
MC150G	1-1/2"	3 #3/0 AWG	93.00	—	1	923	10041
MC200G	2"	3 #300 MCM	143.00	—	1	1327	10042
MC250G	2-1/2"	3 #400 MCM	335.00	—	1	2751	10043
MC300G	3"	3 #700 MCM	475.00	—	1	3618	10044
MC350G	3-1/2"	3 #900 MCM	830.00	—	1	5464	10045
MC400G	4"	3 #1000 MCM	1010.00	—	1	6478	10046

CATALOG NUMBER	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F	DIM G	DIM H	NUMBER OF COVER HOLES
MC100G	9.88	2.78	2.36	1.85	6.61	0.93	1.82	2.46	2
MC125G	12.20	3.43	2.44	1.93	7.83	1.14	2.27	3.11	2
MC150G	14.17	3.86	3.15	2.56	9.88	1.34	2.57	3.43	2
MC200G	18.15	4.41	3.15	2.52	13.29	1.63	3.13	3.98	2
MC250G	23.35	5.22	4.65	3.74	13.68	1.81	3.61	4.72	4
MC300G	27.17	6.06	4.72	3.66	21.04	2.20	4.45	5.57	4
MC350G	31.57	7.05	5.72	4.57	24.98	2.50	4.72	6.50	4
MC400G	35.55	7.56	5.72	4.57	29.11	2.76	5.23	7.01	4



MALLEABLE IRON/HOT DIPPED GALVANIZED MOGULS WITH COVER, GASKET & ROLLERS

FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- Larger body size facilitates pulling of large and heavy conductors. Specially designed raised cast covers provide additional wiring area.
- SEPCO Moguls are used for pulling straight, 45° or 90° angle turns and/or making taps and splices.

FEATURES:

- Exclusive built-in rollers facilitate cable pulling from sizes 1-1/4"-4".
- Smooth, rounded integral bushing in each hub protects conductor insulation.
- Accurately tapped, tapered threads for tight, rigid joints and ground continuity.
- Covers have captive stainless steel screws to speed installation, prevent "freezing" of screws.
- Length requirement: distance between centerline of each hub bushing (conduit stop) exceeds six times the trade diameter of the conduit per NEC 314.28(A)(2).

STANDARD MATERIALS:

Bodies and Covers: Malleable Iron
Gaskets: Neoprene
Screws: Stainless Steel


STANDARD FINISH:

Bodies and Covers:
Hot Dipped Galvanized

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198259
UL Standard: UL514B
NEMA FB-1
ASTM Rated

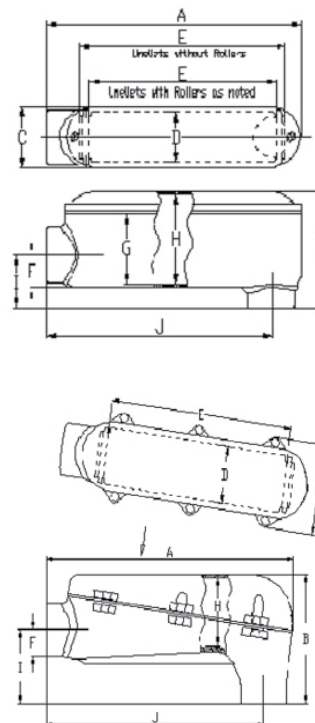

TYPE MLB100G

CATALOG NUMBER	TRADE SIZE	MAX WIRE SIZE	VOL. CU.IN.	UNIT PACK	MASTER PACK	LBS./PER 100	UPC#
MLB100G	1"	3 #2 AWG	31.00	—	1	366	10047
MLB125G	1-1/4"	3 #1/0 AWG	48.00	—	1	476	10048
MLB150G	1-1/2"	3 #3/0 AWG	107.00	—	1	831	10049
MLB200G	2"	3 #300 MCM	145.00	—	1	1224	10050
MLB250G	2-1/2"	3 #400 MCM	210.00	—	1	2104	10055
MLB300G	3"	3 #700 MCM	345.00	—	1	3237	10052
MLB350G	3-1/2"	3 #900 MCM	500.00	—	1	4427	10053
MLB400G	4"	3 #1000 MCM	740.00	—	1	5865	10054

CATALOG NUMBER	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F	DIM G	DIM H	DIM I	DIM J	NUMBER OF COVER HOLES
MLB100G	8.90	3.75	2.38	1.87	6.57	0.94	1.88	2.52	1.89	7.87	2
MLB125G	9.65	4.86	2.40	1.89	6.47	1.16	2.70	3.52	2.19	8.48	2
MLB150G	12.95	5.25	3.07	2.40	9.49	1.38	3.09	4.07	2.36	11.63	2
MLB200G	14.65	6.38	3.11	2.52	10.91	1.61	3.46	4.96	2.64	12.94	2
MLB250G	18.22	8.23	5.79	3.60	13.48	2.15	—	4.36	4.69	16.03	6
MLB300G	21.33	10.37	5.79	3.47	16.95	2.75	—	5.27	5.61	18.62	6
MLB350G	24.65	10.97	6.93	4.53	19.94	3.01	—	5.15	6.63	21.55	6
MLB400G	27.67	13.03	7.01	4.57	23.38	3.43	—	6.85	7.05	24.32	6



MALLEABLE IRON/**HOT DIPPED GALVANIZED** MOGULS WITH COVER AND GASKET


FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- Larger body size facilitates pulling of large and heavy conductors. Specially designed raised cast covers provide additional wiring area.
- SEPCO Moguls are used for pulling straight, 45° or 90° angle turns and/or making taps and splices.

FEATURES:

- Smooth, rounded integral bushing in each hub protects conductor insulation.
- Accurately tapped, tapered threads for tight, rigid joints and ground continuity.
- Covers have captive stainless steel screws to speed installation, prevent "freezing" of screws.
- Length requirement: distance between centerline of each hub bushing (conduit stop) exceeds six times the trade diameter of the conduit per NEC 314.28(A)(2).

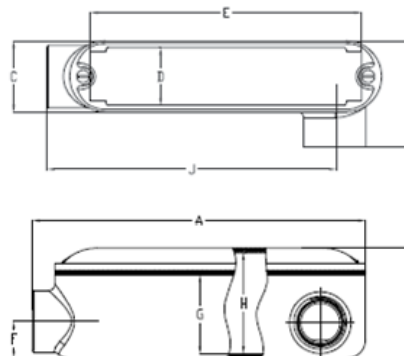

STANDARD MATERIALS:

Bodies and Covers: Malleable Iron
Gaskets: Neoprene
Screws: Stainless Steel

STANDARD FINISH:

Bodies and Covers:
 Hot Dipped Galvanized

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198259
 UL Standard: UL514B
 NEMA FB-1
 ASTM Rated

TYPE MLL100G

CATALOG NUMBER	TRADE SIZE	MAX WIRE SIZE	VOL. CU.IN.	UNIT PACK	MASTER PACK	LBS./PER 100	UPC#
MLL100G	1"	3 #4 AWG	31.00	—	1	179	10146
MLL125G	1-1/4"	3 #2 AWG	50.00	—	1	261	10147
MLL150G	1-1/2"	3 #1/0 AWG	93.00	—	1	459	10148
MLL200G	2"	3 #4/0 AWG	143.00	—	1	631	10149

CATALOG NUMBER	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F	DIM G	DIM H	DIM I	DIM J	NUMBER OF COVER HOLES
MLL100G	8.94	2.80	2.36	1.85	6.61	0.93	1.84	2.48	3.27	7.76	2
MLL125G	11.16	3.44	2.44	1.93	7.60	1.14	2.28	3.13	3.39	9.94	2
MLL150G	13.27	3.88	3.15	2.56	9.68	1.34	2.57	3.46	4.00	11.69	2
MLL200G	17.02	4.43	3.15	2.52	13.09	1.63	3.14	4.02	4.13	15.45	2



MALLEABLE IRON/HOT DIPPED GALVANIZED MOGULS WITH COVER AND GASKET


FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- Larger body size facilitates pulling of large and heavy conductors. Specially designed raised cast covers provide additional wiring area.
- SEPCO Moguls are used for pulling straight, 45° or 90° angle turns and/or making taps and splices.

FEATURES:

- Smooth, rounded integral bushing in each hub protects conductor insulation.
- Accurately tapped, tapered threads for tight, rigid joints and ground continuity.
- Covers have captive stainless steel screws to speed installation, prevent "freezing" of screws.
- Length requirement: distance between centerline of each hub bushing (conduit stop) exceeds six times the trade diameter of the conduit per NEC 314.28(A)(2).

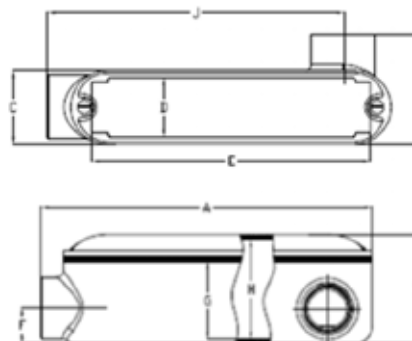

TYPE MLR100G

STANDARD MATERIALS:

Bodies and Covers: Malleable Iron
Gaskets: Neoprene
Screws: Stainless Steel

STANDARD FINISH:

Bodies and Covers:
Hot Dipped Galvanized

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198259
UL Standard: UL514B
NEMA FB-1
ASTM Rated

CATALOG NUMBER	TRADE SIZE	MAX WIRE SIZE	VOL. CU.IN.	UNIT PACK	MASTER PACK	LBS./ 100 PCS.	UPC#
MLR100G	1"	3 #4 AWG	31.00	—	1	176	10150
MLR125G	1-1/4"	3 #2 AWG	50.00	—	1	261	10151
MLR150G	1-1/2"	3 #1/0 AWG	93.00	—	1	435	10152
MLR200G	2"	3 #4/0 AWG	143.00	—	1	656	10153

CATALOG NUMBER	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F	DIM G	DIM H	DIM I	DIM J	NUMBER OF COVER HOLES
MLR100G	8.94	2.80	2.36	1.85	6.61	0.93	1.84	2.48	3.27	7.76	2
MLR125G	11.16	3.44	2.44	1.93	7.60	1.14	2.28	3.13	3.39	9.94	2
MLR150G	13.27	3.88	3.15	2.56	9.68	1.34	2.57	3.46	4.00	11.69	2
MLR200G	17.02	4.43	3.15	2.52	13.09	1.63	3.14	4.02	4.13	15.45	2



MALLEABLE IRON/**HOT DIPPED GALVANIZED** MOGULS WITH COVER AND GASKET



FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- Larger body size facilitates pulling of large and heavy conductors. Specially designed raised-cast covers provide additional wiring area.
- SEPCO Moguls are used for pulling straight, 45° or 90° angle turns and/or making taps and splices.

FEATURES:

- Smooth, rounded integral bushing in each hub protects conductor insulation.
- Accurately tapped, tapered threads for tight, rigid joints and ground continuity.
- Covers have captive stainless steel screws to speed installation, prevent "freezing" of screws.
- Length requirement: distance between centerline of each hub bushing (conduit stop) exceeds six times the trade diameter of the conduit per NEC 314.28(A)(2).

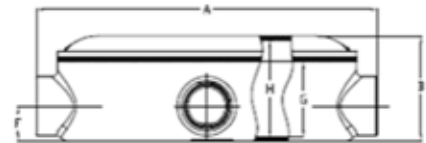

STANDARD MATERIALS:

Bodies and Covers: Malleable Iron
Gaskets: Neoprene
Screws: Stainless Steel

STANDARD FINISH:

Bodies and Covers:
Hot Dipped Galvanized

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198259
UL Standard: UL514B
NEMA FB-1
ASTM Rated

TYPE MT100G

CATALOG NUMBER	TRADE SIZE	MAX WIRE SIZE	VOL. CU.IN.	UNIT PACK	MASTER PACK	LBS./ 100 PCS.	UPC#
MT100G	1"	3 #4 AWG	31.00	—	1	187	10154
MT125G	1-1/4"	3 #2 AWG	50.00	—	1	263	10155
MT150G	1-1/2"	3 #1/0 AWG	93.00	—	1	447	10156
MT200G	2"	3 #4/0 AWG	143.00	—	1	651	10157

CATALOG NUMBER	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F	DIM G	DIM H	DIM I	NUMBER OF COVER HOLES
MT100G	9.88	2.80	2.36	1.85	6.61	0.93	1.84	2.48	3.27	2
MT125G	12.64	3.44	2.44	1.93	7.60	1.14	2.28	3.13	3.39	2
MT150G	14.17	3.88	3.15	2.56	9.68	1.34	2.57	3.46	4.00	2
MT200G	18.15	4.43	3.15	2.52	13.09	1.63	3.14	4.02	4.02	2



MALLEABLE IRON/HOT DIPPED GALVANIZED THREADED CONDUIT BODIES FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- To provide access to conductors for pulling, splicing, and maintenance. Threaded for rigid conduit and IMC.

FEATURES:

- Tapered threaded hubs (NPT).
- Flat back design for easy mounting close to walls.
- Suitable for use in concrete.

STANDARD MATERIALS:

Malleable Iron

STANDARD FINISH:

Hot Dipped Galvanized/Zinc Plated



OPTIONAL FINISH:

For Malleable Iron/Zinc Plated, please remove suffix "G" from Hot Dipped Galvanized Catalog Number and see page 50.

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198259

UL Standard: UL514B


NEMA FB-1

ASTM Rated



TYPE C1G

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	MAX WIRE SIZE	VOL. CU.IN.	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
C Type										
C1G	1/2"	5.375	1.313	1.375	N/A	4.50	10	50	98	10158
C2G	3/4"	6.000	1.500	1.688	3 #6 AWG	7.50	10	50	118	10159
C3G	1"	7.063	1.813	1.875	3 #4 AWG	12.50	5	25	170	10160
C4G	1-1/4"	9.000	2.625	2.750	3 #2 AWG	32.30	—	10	309	10161
C5G	1-1/2"	9.000	2.625	2.813	3 #1/0 AWG	35.30	—	10	368	10162
C6G	2"	11.500	3.125	3.313	3 #4/0 AWG	73.00	—	5	553	10163
C7G	2-1/2"	15.000	4.313	3.875	3 #250 MCM	138.00	—	1	1216	10188
C8G	3"	15.125	4.313	4.750	3 #250 MCM	170.00	—	1	1437	10189
C9G	3-1/2"	18.125	4.875	5.625	3 #350 MCM	300.00	—	1	2210	10190
C10G	4"	18.125	4.875	5.625	3 #350 MCM	328.00	—	1	2321	10191



TYPE LB1G

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	MAX WIRE SIZE	VOL. CU.IN.	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
LB Type										
LB1G	1/2"	4.688	1.313	2.063	N/A	4.50	10	50	71	10164
LB2G	3/4"	5.375	1.500	2.250	3 #6 AWG	7.50	10	50	97	10165
LB3G	1"	6.188	1.813	2.625	3 #4 AWG	12.50	5	25	143	10166
LB4G	1-1/4"	8.125	2.625	2.750	3 #2 AWG	32.30	—	10	287	10167
LB5G	1-1/2"	8.125	2.625	2.813	3 #1/0 AWG	35.30	—	10	332	10168
LB6G	2"	10.500	3.125	4.438	3 #4/0 AWG	73.00	—	5	534	10169
LB7G	2-1/2"	13.625	4.313	5.375	3 #350 AWG	138.00	—	1	1105	10192
LB8G	3"	13.875	4.313	5.875	3 #350 AWG	170.00	—	1	1160	10193
LB9G	3-1/2"	16.250	5.625	6.875	3 #500 MCM	300.00	—	1	1989	10194
LB10G	4"	16.625	5.625	7.188	3 #500 MCM	328.00	—	1	2100	10195



MALLEABLE IRON/HOT DIPPED GALVANIZED THREADED CONDUIT BODIES FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- To provide access to conductors for pulling, splicing, and maintenance. Threaded for rigid conduit and IMC.

FEATURES:

- Tapered threaded hubs (NPT).
- Flat back design for easy mounting close to walls.
- Suitable for use in concrete.

STANDARD MATERIALS:

Malleable Iron

STANDARD FINISH:

Hot Dipped Galvanized/Zinc Plated




OPTIONAL FINISH:

For Malleable Iron/Zinc Plated, please remove suffix "G" from Hot Dipped Galvanized Catalog Number and see page 51.

CERTIFICATIONS AND COMPLIANCES




UL LISTED E198259
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE LL1G

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	MAX WIRE SIZE	VOL. CU.IN.	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
LL Type										
LL1G	1/2"	4.688	2.063	1.375	N/A	4.50	10	50	76	10170
LL2G	3/4"	5.375	2.250	1.688	3 #6 AWG	7.50	10	50	95	10171
LL3G	1"	6.188	2.625	1.875	3 #4 AWG	12.50	5	25	138	10172
LL4G	1-1/4"	8.125	2.750	2.750	3 #2 AWG	32.30	—	10	309	10173
LL5G	1-1/2"	8.125	3.500	2.813	3 #1/0 AWG	35.30	—	10	332	10174
LL6G	2"	10.500	4.125	3.313	3 #4/0 AWG	73.00	—	5	497	10175
LL7G	2-1/2"	13.625	4.688	3.875	3 #300 MCM	138.00	—	1	1105	10196
LL8G	3"	13.875	5.875	4.750	3 #350 MCM	170.00	—	1	1437	10197
LL9G	3-1/2"	16.250	6.125	5.625	3 #350 MCM	300.00	—	1	2321	10198
LL10G	4"	16.250	6.938	5.625	3 #350 MCM	328.00	—	1	2431	10199



TYPE LR1G

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	MAX WIRE SIZE	VOL. CU.IN.	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
LR Type										
LR1G	1/2"	4.688	2.063	1.375	N/A	4.50	10	50	71	10176
LR2G	3/4"	5.375	2.250	1.688	3 #6 AWG	7.50	10	50	100	10177
LR3G	1"	6.188	2.625	1.875	3 #4 AWG	12.50	5	25	157	10178
LR4G	1-1/4"	8.125	2.750	2.750	3 #2 AWG	32.30	—	10	332	10179
LR5G	1-1/2"	8.125	2.813	2.813	3 #1/0 AWG	35.30	—	10	345	10180
LR6G	2"	10.500	4.438	3.313	3 #4/0 AWG	73.00	—	5	626	10181
LR7G	2-1/2"	13.625	5.375	3.875	3 #300 MCM	138.00	—	1	1105	10200
LR8G	3"	13.875	5.875	4.750	3 #350 MCM	170.00	—	1	1437	10201
LR9G	3-1/2"	16.250	6.875	5.625	3 #350 MCM	300.00	—	1	2321	10202
LR10G	4"	16.625	7.188	5.625	3 #350 MCM	328.00	—	1	2500	10203



MALLEABLE IRON/HOT DIPPED GALVANIZED THREADED CONDUIT BODIES

FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- To provide access to conductors for pulling, splicing, and maintenance. Threaded for rigid conduit and IMC.

FEATURES:

- Tapered threaded hubs (NPT).
- Flat back design for easy mounting close to walls.
- Suitable for use in concrete.

STANDARD MATERIALS:

Malleable Iron

STANDARD FINISH:

Hot Dipped Galvanized/Zinc Plated

OPTIONAL FINISH:

For Malleable Iron/Zinc Plated, please remove suffix "G" from Hot Dipped Galvanized Catalog Number and see page 52.

CERTIFICATIONS AND COMPLIANCES




UL LISTED E198259

UL Standard: UL514B

NEMA FB-1

ASTM Rated



TYPE T1G

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	MAX WIRE SIZE	VOL. CU.IN.	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
T Type										
T1G	1/2"	5.375	2.063	1.313	N/A	6.00	10	50	111	10182
T2G	3/4"	6.000	2.250	1.500	3 #6 AWG	9.50	10	50	137	10183
T3G	1"	7.063	2.625	1.813	3 #4 AWG	15.00	5	25	195	10184
T4G	1-1/4"	9.000	2.750	2.625	3 #2 AWG	33.00	—	10	332	10185
T5G	1-1/2"	9.000	3.500	2.625	3 #1/0 AWG	36.00	—	10	368	10186
T6G	2"	11.500	4.125	3.125	3 #1/0 AWG	75.00	—	5	663	10187
T7G	2-1/2"	15.000	5.688	4.313	3 #4/0 AWG	138.00	—	1	1271	10204
T8G	3"	15.125	5.875	4.313	3 #4/0 AWG	170.00	—	1	1547	10205
T9G	3-1/2"	18.125	6.813	4.875	3 #350 MCM	300.00	—	1	2542	10206
T10G	4"	18.125	7.188	4.875	3 #350 MCM	328.00	—	1	2542	10207

MALLEABLE IRON/HOT DIPPED GALVANIZED CONDUIT BODY COVERS

APPLICATION:

- Used with conduit bodies to cover opening.

FEATURES:

- Supplied with Stainless Steel captive screws.
- Sizes 2-1/2" thru 4" with raised dome affords additional wiring room.

STANDARD MATERIALS:

Malleable Iron

STANDARD FINISH:

Hot Dipped Galvanized/Zinc Plated

OPTIONAL FINISH:

For Malleable Iron/Zinc Plated, please remove suffix "G" from Hot Dipped Galvanized Catalog Number and see page 69.

CERTIFICATIONS AND COMPLIANCES




UL LISTED E198259

UL Standard: UL514B

NEMA FB-1

ASTM Rated



TYPE 01MG

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
01MG	1/2"	3.936	1.313	0.063	25	250	23	70224
02MG	3/4"	4.625	1.500	0.063	25	250	31	70225
03MG	1"	5.313	1.750	0.063	20	200	41	70226
04MG	1-1/4" - 1-1/2"	7.188	2.500	0.250	25	100	91	70227
05MG	2"	9.500	3.188	0.313	—	25	208	70228
06MG	2-1/2" - 3"	12.125	4.313	1.063	—	10	358	70229
07MG	3-1/2" - 4"	14.875	5.625	1.125	—	10	550	70230

MALLEABLE IRON/**HOT DIPPED GALVANIZED** FS AND FD DEVICE BOXES—SINGLE GANG FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- Accommodates wiring devices and provides opening to splice, tap or pull conductors.

FEATURES:

- Tapered threaded hubs (NPT) with integral bushing.
- Internal grounding screw.
- Suitable for use in wet locations when used with gasketed covers.
- Surface mounting lugs.

STANDARD FINISH:

Hot Dipped Galvanized/Zinc Plated




OPTIONAL FINISH:

For Malleable Iron/Zinc Plated, please remove the "G" suffix from Hot Dipped Galvanized catalog number and see page 72.

CERTIFICATIONS AND COMPLIANCES




UL LISTED E198259
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE FD-50G

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC#
FS-50G	1/2"	5.250	2.938	2.125	1	5	221	90168
FS-75G	3/4"	5.250	2.938	2.125	1	5	233	90170
FS-100G	1"	5.250	2.938	2.125	1	5	242	90172
FD-50G	1/2"	5.250	3.000	2.875	1	5	272	90174
FD-75G	3/4"	5.250	3.000	2.875	1	5	278	90176
FD-100G	1"	5.250	3.000	2.875	1	5	283	90178



TYPE FSC-50G

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC#
FSC-50G	1/2"	6.063	2.938	2.125	1	5	234	90218
FSC-75G	3/4"	6.063	2.938	2.125	1	5	240	90220
FSC-100G	1"	6.063	2.938	2.125	1	5	250	90222
FDC-50G	1/2"	6.063	3.000	2.875	1	5	293	90212
FDC-75G	3/4"	6.063	3.000	2.875	1	5	305	97214
FDC-100G	1"	6.063	3.000	2.875	1	5	313	97216



MALLEABLE IRON/HOT DIPPED GALVANIZED FDT AND FDCT DEVICE BOXES—SINGLE GANG FOR THREADED RIGID CONDUIT AND IMC



APPLICATION:

- Accommodates wiring devices and provides opening to splice, tap or pull conductors.

FEATURES:

- Tapered threaded hubs (NPT) with integral bushing.
- Internal grounding screw.
- Suitable for use in wet locations when used with gasketed covers.
- Surface mounting lugs.

STANDARD MATERIALS:

Malleable Iron

STANDARD FINISH:

Hot Dipped Galvanized/Zinc Plated



OPTIONAL FINISH:

For Malleable Iron/Zinc Plated, please remove the "G" suffix from Hot Dipped Galvanized catalog number and see page 74.

CERTIFICATIONS AND COMPLIANCES




UL LISTED E198259

UL Standard: UL514B


NEMA FB-1

ASTM Rated

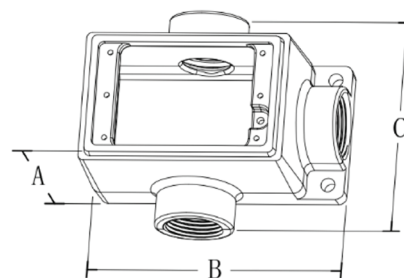

TYPE FDT-50G

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
FDT-50G	1/2"	2.90	5.31	4.59	1	10	300	89202
FDT-75G	3/4"	2.90	5.31	4.59	1	10	310	89207
FDT-100G	1"	2.90	5.31	4.59	1	10	310	89212

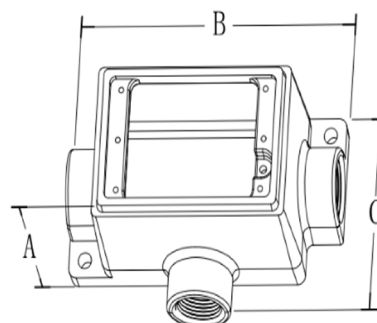

TYPE FDCT-50G

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
FDCT-50G	1/2"	2.90	6.12	3.78	1	10	300	89217
FDCT-75G	3/4"	2.90	6.12	3.78	1	10	310	89222
FDCT-100G	1"	2.90	6.12	3.78	1	10	310	89225



MALLEABLE IRON/**HOT DIPPED GALVANIZED** FS AND FD DOUBLE GANG DEVICE BOXES FOR THREADED RIGID CONDUIT AND IMC



APPLICATION:

- Accommodates wiring devices and provides opening to splice, tap or pull conductors.

FEATURES:

- Tapered threaded hubs (NPT) with integral bushing.
- Two internal grounding screws.
- Suitable for use in wet locations when used with gasketed covers.
- Surface mounting lugs.

STANDARD MATERIALS:

Body: Malleable Iron

STANDARD FINISH:

Hot Dipped Galvanized/Zinc Plated




OPTIONAL FINISH:

For Malleable Iron/Zinc Plated, please remove the "G" suffix from Hot Dipped Galvanized catalog number and see page 77.

CERTIFICATIONS AND COMPLIANCES




UL LISTED E198259
UL Standard: UL514B
NEMA FB-1
ASTM Rated

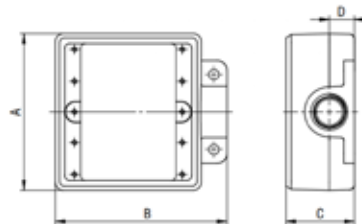

TYPE FS2-50G

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC#
FS2-50G	1/2"	5.125	5.625	2.063	1	10	297	54106
FS2-75G	3/4"	5.125	5.625	2.063	1	10	300	54107
FS2-100G	1"	5.125	5.625	2.063	1	10	317	54108
FD2-50G	1/2"	5.125	5.625	2.875	1	10	369	54100
FD2-75G	3/4"	5.125	5.625	2.875	1	10	375	54101
FD2-100G	1"	5.125	5.625	2.875	1	10	376	54102

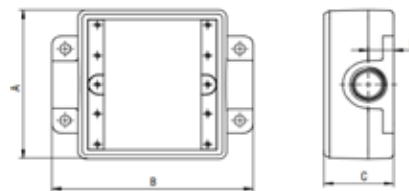

TYPE FSC2-50G

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC#
FSC2-50G	1/2"	5.938	5.625	2.063	1	10	302	54109
FSC2-75G	3/4"	5.938	5.625	2.063	1	10	315	54110
FSC2-100G	1"	5.938	5.625	2.063	1	10	335	54111
FDC2-50G	1/2"	5.938	5.625	2.875	1	10	405	54103
FDC2-75G	3/4"	5.938	5.625	2.875	1	10	415	54104
FDC2-100G	1"	5.938	5.625	2.875	1	10	418	54105



MALLEABLE IRON/HOT DIPPED GALVANIZED FS AND FD DEVICE BOX COVERS—SINGLE & DOUBLE GANG

FOR THREADED RIGID CONDUIT AND IMC



FEATURES:

- Blank cover with gasket for enclosing splices and taps where device is not used.
- For square handle general use snap or toggle switches guarded.
- Standard and 3-pole, 2 wire grounding type duplex convenience receptacles.
- Each cover individually bagged and supplied with screws.

STANDARD MATERIALS:

Body: Malleable Iron

STANDARD FINISH:

Hot Dipped Galvanized/Zinc Plated



OPTIONAL FINISH:

For Malleable Iron/Zinc Plated, please remove the "G" suffix from Hot Dipped Galvanized catalog number and see page 76.

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198259

UL Standard: UL514B

NEMA FB-1

ASTM Rated



BLANK



TOGGLE



DUPLEX

TYPE FSFDCM1G

CATALOG NUMBER	TYPE	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC#
FSFDCM1G	Blank	5	50	56	10213
FSFDCM2G	Toggle Switch	5	50	63	10214
FSFDCM3G	Duplex Receptacle	5	50	54	10215

FEATURES:

- Each cover comes with captive screws.
- FSFD2-CM1G—Raintight if used with FSFD2-CG.

STANDARD MATERIALS:

Covers: Malleable Iron

Gasket: Neoprene

STANDARD FINISH:

Hot Dipped Galvanized/Zinc Plated



OPTIONAL FINISH:

For Malleable Iron/Zinc Plated, please remove the "G" suffix from Hot Dipped Galvanized catalog number and see page 79.

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198259

UL Standard: UL514B

NEMA FB-1


ASTM Rated



BLANK



GUARDED SQUARE
HANDLE SWITCH



GASKET

TYPE FSFD2-CM1G

CATALOG NUMBER	TYPE	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC#
FSFD2-CM1G	Blank	—	10	89	54030
FSFD2-CM2G	Guarded Square Handle Switch	—	5	94	54035

TYPE FSFDCG

CATALOG NUMBER	TYPE	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC#
FSFDCG	Gasket Single Gang	10	100	3	10117
FSFD2-CG	Gasket Double Gang	—	20	4	54012



MALLEABLE IRON/**HOT DIPPED GALVANIZED** INSULATED GROUNDING BUSHINGS

FOR THREADED RIGID CONDUIT AND IMC




APPLICATION:

- Used with a locknut to terminate threaded rigid and IMC conduit to a box or enclosure and to provide a smooth pulling surface. Thermoplastic liner prevents damage to wire insulation. Liner rated at 150°C.

FEATURES:

- The plastic liner won't chip, crack, swell or shrink. It resists corrosion, chemicals and temperature extremes.
- Set-screw provided with each fitting locks bushing in any desired position.
- UL listed for use with Copper or Aluminum Grounding Conductors.

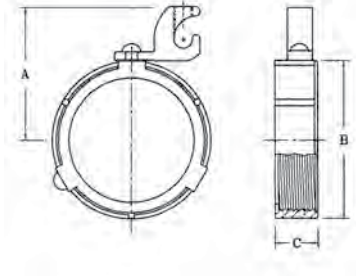

STANDARD MATERIALS:

Malleable Iron/Open side tin plated aluminum lug.

- Optional Lug: Available with copper lug; use suffix "C" instead of "L".
Example: 20BI4CG. See page 22.

STANDARD FINISH:

Hot Dipped Galvanized/Zinc Plated



OPTIONAL FINISH:

For Malleable Iron/Zinc Plated, please remove suffix "G" from Hot Dipped Galvanized Catalog Number and see page 81.

CERTIFICATIONS AND COMPLIANCES



UL LISTED E93683
UL Standard: UL514B
NEMA FB-1
ASTM Rated

TYPE 25BI4LG

CATALOG NUMBER	TRADE SIZE	INSIDE DEPTH	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS.	UPC#
20BI4LG	1/2"	#14 - #4	1.34	1.19	0.61	100	1000	7	10021
21BI4LG	3/4"	#14 - #4	1.47	1.45	0.64	50	500	11	10022
22BI4LG	1"	#14 - #4	1.63	1.76	0.72	25	250	15	10023
23BI4LG	1-1/4"	#14 - #4	1.80	2.10	0.74	25	250	18	10024
24BI4LG	1-1/2"	#14 - #4	2.11	2.33	0.80	25	250	23	10025
25BI4LG	2"	#14 - #4	2.34	2.79	0.85	25	250	28	10026
25BIOLG	2"	#14 - #1/0	2.55	2.79	0.85	25	250	41	10129
26BIOLG	2-1/2"	#14 - #1/0	2.84	3.33	1.10	—	10	57	10027
26BI4OLG	2-1/2"	#6 - #250MCM	3.47	3.33	1.10	—	10	70	10028
27BIOLG	3"	#14 - #1/0	3.11	3.87	1.10	—	10	73	10029
27BI4OLG	3"	#6 - #250MCM	3.74	3.87	1.10	—	10	85	10030
28BIOLG	3-1/2"	#14 - #1/0	3.38	4.42	1.10	—	10	88	10031
28BI4OLG	3-1/2"	#6 - #250MCM	4.02	4.42	1.10	—	10	90	10032
29BIOLG	4"	#14 - #1/0	3.62	4.89	1.10	—	10	118	10033
29BI4OLG	4"	#6 - #250MCM	4.25	4.89	1.10	—	10	121	10034
30BI4OLG	5"	#6 - #250MCM	4.87	6.00	1.10	—	10	165	10036
31BI4OLG	6"	#6 - #250MCM	5.46	7.31	1.10	—	10	203	10038



MALLEABLE IRON/HOT DIPPED GALVANIZED INSULATED GROUNDING BUSHINGS

FOR THREADED RIGID CONDUIT AND IMC




APPLICATION:

- Used with a locknut to terminate threaded rigid and IMC conduit to a box or enclosure and to provide a smooth pulling surface. Thermoplastic liner prevents damage to wire insulation. Liner rated at 150°C.

FEATURES:

- The plastic liner won't chip, crack, swell, or shrink. It resists corrosion, chemicals, and temperature extremes.
- Set-screw provided with each fitting locks bushing in any desired position.



STANDARD MATERIALS:

- Malleable Iron/Open side copper lug.
- Optional Lug: Available with aluminum lug; use suffix "L" instead of "C". Example 21BI4LG. See page 21.

TYPE 25BI4CG

STANDARD FINISH:

Hot Dipped Galvanized/Zinc plated

OPTIONAL FINISH:

For Malleable Iron/Zinc Plated, please remove suffix "G" from Hot Dipped Galvanized Catalog Number and see page 82.

CERTIFICATIONS AND COMPLIANCES



UL LISTED E93683
UL Standard: UL514B
NEMA FB-1
ASTM Rated

CATALOG NUMBER	TRADE SIZE	INSIDE DEPTH	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS.	UPC#
20BI4CG	1/2"	#14 - #4	1.34	1.19	0.61	100	1000	7	10119
21BI4CG	3/4"	#14 - #4	1.47	1.45	0.64	50	500	11	10120
22BI4CG	1"	#14 - #4	1.63	1.76	0.72	25	250	15	10121
23BI4CG	1-1/4"	#14 - #4	1.80	2.10	0.74	25	250	18	10122
24BI4CG	1-1/2"	#14 - #4	2.11	2.33	0.80	25	250	23	10123
24BIOCG	1-1/2"	#14 - #1/0	2.32	2.33	0.80	25	250	26	20031
25BI4CG	2"	#14 - #4	2.34	2.79	0.85	25	250	28	10124
25BIOCG	2"	#14 - #1/0	2.55	2.79	0.85	25	250	41	10125
25BI40CG	2"	#6 - #250MCM	2.76	2.79	0.85	—	25	45	10126
26BIOCG	2 1/2"	#14 - #1/0	2.84	3.33	1.10	—	10	57	10127
26BI40CG	2 1/2"	#6 - #250MCM	3.47	3.33	1.10	—	10	70	10128
27BIOCG	3"	#14 - #1/0	3.11	3.87	1.10	—	10	73	10130
27BI40CG	3"	#6 - #250MCM	3.74	3.87	1.10	—	10	85	10131
28BIOCG	3-1/2"	#14 - #1/0	3.38	4.42	1.10	—	10	88	10133
28BI40CG	3-1/2"	#6 - #250MCM	4.02	4.42	1.10	—	10	90	10134
29BIOCG	4"	#14 - #1/0	3.62	4.89	1.10	—	10	118	10136
29BI40CG	4"	#6 - #250MCM	4.25	4.89	1.10	—	10	121	10137
30BI40CG	5"	#6 - #250MCM	4.87	6.00	1.10	—	10	165	10140
31BI40CG	6"	#6 - #250MCM	5.46	7.31	1.10	—	10	203	10143



MALLEABLE IRON/**HOT DIPPED GALVANIZED** INSULATED BUSHINGS

FOR THREADED RIGID CONDUIT AND IMC



APPLICATION:

- Used with a locknut to terminate threaded/threadless rigid and IMC conduit to a box or enclosure and to provide a smooth pulling surface. Thermoplastic liner prevents damage to wire insulation. Liner rated at 150°C.

FEATURES:

- The plastic liner won't chip, crack, swell or shrink. It resists corrosion, chemicals and temperature extremes.

STANDARD MATERIALS:

Malleable Iron

STANDARD FINISH:

Hot Dipped Galvanized/Zinc plated



OPTIONAL FINISH:

Remove the "G" for Zinc plated
See page 88.

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198258
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE 1206G

For Threaded Rigid Conduit and IMC

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC#
1206G	1/2"	1.19	0.50	100	1000	6	12063
1207G	3/4"	1.44	0.56	100	500	10	12073
1208G	1"	1.75	0.63	50	500	15	12083
1209G	1-1/4"	2.13	0.75	25	250	20	12093
1210G	1-1/2"	2.13	0.88	25	250	25	12103
1211G	2"	2.81	0.94	—	25	30	12113
1212G	2-1/2"	3.38	1.00	—	25	55	12123
1213G	3"	4.06	1.13	—	25	66	12133
1214G	3-1/2"	4.50	1.19	—	25	72	12143
1215G	4"	5.19	1.31	—	25	103	12153
1216G	5"	6.06	1.31	—	10	147	12163
1217G	6"	7.15	1.31	—	10	184	12173

Also available with lay-in lugs.



MALLEABLE IRON/HOT DIPPED GALVANIZED WATERTIGHT CONDUIT HUBS FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- General Purpose Fitting. Insulated Throat form with Bonding Screw.

FEATURES:

- Male thread type.
- Tapered female thread for rigid conduit and IMC.
- Recessed O-ring seal ensures watertight and dust tight connections.
- Insulated throat and bonding locknut is suitable for service entrance application.

MATERIAL/FINISH:

Malleable Iron

STANDARD FINISH:

Hot Dipped Galvanized/Zinc Plated

OPTIONAL FINISH:

For Malleable Iron/Zinc Plated, please remove suffix "G" from Hot Dipped Galvanized Catalog Number and see page 97.

CERTIFICATIONS AND COMPLIANCES




UL LISTED E198258

UL Standard: UL514B

NEMA FB-1

ASTM Rated

Suitable for use in hazardous locations as follows: Class I, Div. 2 Class II, Div. I, 2 Class III, Div. I, 2 Per NEC 501-4 (b), 502-4 (a), 503-3 (a)



TYPE CHM50G

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC#
CHM50G	1/2"	0.813	0.625	1.500	25	250	18	70910
CHM75G	3/4"	0.938	0.625	1.813	25	250	25	70911
CHM100G	1"	1.063	0.750	2.063	10	100	39	70912
CHM125G	1-1/4"	1.250	0.750	2.625	5	25	54	70913
CHM150G	1-1/2"	1.250	0.813	3.125	2	20	64	70914
CHM200G	2"	1.250	0.813	3.563	2	20	98	70915
CHM250G	2-1/2"	1.625	1.188	4.125	—	10	196	70916
CHM300G	3"	1.750	1.250	4.938	—	5	282	70917
CHM350G	3-1/2"	1.813	1.313	5.750	—	5	351	70918
CHM400G	4"	1.938	1.375	6.188	—	5	395	70919
CHM500G	5"	2.063	1.438	7.625	—	1	717	70920
CHM600G	6"	2.125	1.563	8.813	—	1	888	70921

MALLEABLE IRON/HOT DIPPED GALVANIZED 3-PIECE COUPLINGS

APPLICATION:

- Used to join two lengths of threaded conduit.

FEATURES:

- Threaded (NPS) for rigid conduit and IMC.
- Concrete tight.

STANDARD MATERIALS:

Malleable Iron

STANDARD FINISH:

Hot Dipped Galvanized/Zinc Plated

OPTIONAL FINISH:

For Malleable Iron/Zinc Plated, please remove suffix "G" from Hot Dipped Galvanized Catalog Number and see page 101.

CERTIFICATIONS AND COMPLIANCES




UL LISTED E198258

UL Standard: UL514B

NEMA FB-1

ASTM Rated



TYPE 1023G

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC#
1022G	1/2"	1.38	1.36	1.36	20	200	26	10009
1023G	3/4"	1.63	1.58	1.58	10	100	37	10210
1024G	1"	1.81	1.89	1.89	—	20	55	10011
1025G	1-1/4"	2.19	2.38	2.38	—	20	111	10012
1026G	1-1/2"	2.31	2.83	2.83	—	10	172	10013
1027G	2"	2.44	3.29	3.29	—	10	203	10014
1028G	2-1/2"	3.19	4.08	4.08	2	10	327	10015
1029G	3"	3.31	4.67	4.67	2	10	442	10016
1030G	3-1/2"	3.50	5.07	5.07	1	5	608	10017
1031G	4"	3.75	5.75	5.75	1	5	718	10018
1005G	5"	3.69	6.88	7.50	—	1	1050	10019
1006G	6"	4.31	8.00	8.00	—	1	1250	10020



MALLEABLE IRON/**HOT DIPPED GALVANIZED** STRAIGHT LIQUIDTIGHT CONNECTORS

FOR LIQUIDTIGHT FLEXIBLE METALLIC CONDUIT

APPLICATION:

- To secure, ground and seal Liquidtight Flexible Metal conduit to boxes and enclosures.

FEATURES:

- Tapered threaded male hub NPT.
- Compact, slim diameter with small turning radius.
- Furnished with an insulated throat with steel locknut and sealing ring.
- Liquidtight/Raintight/Oiltight.
- Suitable for wet locations.
- Long ferrule prevents pullout and tight bend conduit "pop-out."

STANDARD MATERIALS:

Malleable Iron/Steel Ferrule

STANDARD FINISH:

Hot Dipped Galvanized/Zinc Plated



OPTIONAL FINISH:

For Malleable Iron/Zinc Plated, please remove suffix "MG" from Hot Dipped Galvanized Catalog Number and see page 146.

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198258


UL Standard: UL514B

NEMA FB-1

ASTM Rated

Liquidtight/Raintight/Concrete tight/Oiltight

UL Listed liquidtight flexible metal conduit fittings are suitable for use in the following Hazardous Locations under NEC 501-4(b), 502-4(a)(2); Class I, Div.2; Class II, Div. 1 and 2; and Class III, Div. 1 and 2 and are suitable for grounding in sizes 3/8" through 1-1/2" under NEC 351-1



TYPE SLT27TMG

All Furnished with Insulated Throats

CATALOG NUMBER	TRADE SIZE	KO SIZE	I.D.	O.D.	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS.	UPC#
SLT27TMG	1/2"	1/2"	0.590	0.793	1.250	0.500	1.280	25	250	18	16305
SLT28TMG	3/4"	3/4"	0.785	1.020	1.280	0.520	1.550	10	100	29	16310
SLT29TMG	1"	1"	0.980	1.261	1.430	0.650	1.800	5	50	40	16315
SLT30TMG	1-1/4"	1-1/4"	1.330	1.605	1.500	0.660	2.250	5	50	56	16320
SLT31TMG	1-1/2"	1-1/2"	1.530	1.844	1.610	0.730	2.440	10	50	71	16325
SLT32TMG	2"	2"	1.995	2.337	1.760	0.750	2.970	5	25	100	16330
SLT33TMG	2-1/2"	2-1/2"	2.341	2.797	2.180	1.010	4.010	1	10	367	16335
SLT34TMG	3"	3"	2.939	3.418	2.500	1.150	4.180	1	10	461	16340
SLT60TMG	3-1/2"	3-1/2"	3.406	3.915	2.610	1.180	5.250	1	10	675	16345
SLT61TMG	4"	4"	3.882	4.411	2.740	1.250	5.780	1	5	797	16350
SLT62TG	5"	5"	391.77	460.78	3.125	1.500	6.063	—	1	1047	16355
SLT63TG	6"	6"	484.65	570.18	3.375	1.563	7.500	—	1	1381	16360




MALLEABLE IRON/HOT DIPPED GALVANIZED 90° LIQUIDTIGHT CONNECTORS FOR LIQUIDTIGHT FLEXIBLE METALLIC CONDUIT

APPLICATION:

- To secure, ground seal Liquidtight Flexible Metal conduit to boxes and enclosures.

FEATURES:

- Tapered threaded male hub NPT.
- Compact, slim diameter with small turning radius.
- Furnished with an insulated throat with steel locknut and sealing ring.
- Liquid tight/Raintight/Oiltight.
- Suitable for wet locations.
- Long ferrule prevents pullout and tight bend conduit "pop-out."



STANDARD MATERIALS:

Malleable Iron/Steel Ferrule

STANDARD FINISH:

Hot Dipped Galvanized/Zinc Plated

OPTIONAL FINISH:

For Malleable Iron/Zinc Plated, please remove suffix "MG" from Hot Dipped Galvanized Catalog Number and see page 147.

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198258

UL Standard: UL514B

NEMA FB-1

ASTM Rated

Liquidtight/Raintight/Concrete tight/Oiltight

UL Listed liquidtight flexible metal conduit fittings are suitable for use in the following Hazardous Locations under NEC 501-4(b), 502-4(a)(2); Class I, Div.2; Class II, Div. 1 and 2; and Class III, Div. 1 and 2 and are suitable for grounding in sizes 3/8" through 1-1/2" under NEC 351-1

TYPE SLT35TMG

All Furnished with Insulated Throats

CATALOG NUMBER	TRADE SIZE	K.O. SIZE	I.D.	O.D.	DIM A	DIM B	DIM C	DIM D	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC#
SLT35TMG	1/2"	1/2"	0.590	0.793	1.43	0.50	1.28	1.37	10	100	31	16405
SLT36TMG	3/4"	3/4"	0.785	1.020	1.62	0.52	1.55	1.50	10	100	46	16410
SLT37TMG	1"	1"	0.980	1.261	1.93	0.65	1.80	1.81	5	50	77	16415
SLT38TMG	1-1/4"	1-1/4"	1.330	1.605	2.37	0.66	2.25	1.94	—	10	98	16420
SLT39TMG	1-1/2"	1-1/2"	1.530	1.844	2.68	0.73	2.44	2.40	—	10	124	16425
SLT40TMG	2"	2"	1.995	2.337	3.18	0.75	2.97	2.64	—	5	179	16430
SLT65TG	2-1/2"	2-1/2"	2.341	2.797	8.31	1.01	4.01	7.81	—	1	847	16435
SLT66TG	3"	3"	2.939	3.418	9.80	1.15	4.18	9.15	—	1	1243	16440
SLT67TG	3-1/2"	3-1/2"	3.406	3.915	11.18	1.18	5.25	11.22	—	1	1914	16445
SLT68TG	4"	4"	3.882	4.411	12.98	1.25	5.78	12.54	—	1	2399	16450



MALLEABLE IRON/**HOT DIPPED GALVANIZED** 45° LIQUIDTIGHT CONNECTORS


FOR LIQUIDTIGHT FLEXIBLE METALLIC CONDUIT

APPLICATION:

- To secure, ground and seal Liquidtight Flexible Metal conduit to boxes and enclosures.

FEATURES:

- Tapered threaded male hub NPT.
- Compact, slim diameter with small turning radius.
- Furnished with an insulated throat with steel locknut and sealing ring.
- Liquidtight/Raintight/Oiltight.
- Suitable for wet locations.
- Long ferrule prevents pullout and tight bend conduit "pop-out."



STANDARD MATERIALS:

Malleable Iron/Steel Ferrule

STANDARD FINISH:

Hot Dipped Galvanized/Zinc Plated



OPTIONAL FINISH:

For Malleable Iron/Zinc Plated, please remove suffix "MG" from Hot Dipped Galvanized Catalog Number and see page 148.

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198258

UL Standard: UL514B

NEMA FB-1

ASTM Rated

Liquidtight/Raintight/Concrete tight/Oiltight

UL Listed liquidtight flexible metal conduit fittings are suitable for use in the following Hazardous Locations under NEC 501-4(b), 502-4(a)(2); Class I, Div.2; Class II, Div. 1 and 2; and Class III, Div. 1 and 2 and are suitable for grounding in sizes 3/8" through 1-1/2" under NEC 351-1.

TYPE SLT35-45TMG

All Furnished with Insulated Throats

CATALOG NUMBER	TRADE SIZE	K.O. SIZE	I.D.	O.D.	DIM A	DIM B	DIM C	DIM D	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
SLT35-45TMG	1/2"	1/2"	0.590	0.793	1.64	0.50	1.28	1.51	10	100	29	16407
SLT36-45TMG	3/4"	3/4"	0.785	1.020	1.68	0.52	1.55	1.54	10	100	42	16412
SLT37-45TMG	1"	1"	0.980	1.261	2.16	0.65	1.80	1.81	5	50	66	16417
SLT38-45TMG	1-1/4"	1-1/4"	1.330	1.605	2.50	0.66	2.25	2.16	—	10	90	16422
SLT39-45TMG	1-1/2"	1-1/2"	1.530	1.844	3.10	0.73	2.44	2.43	—	10	112	16427
SLT40-45TMG	2"	2"	1.995	2.337	3.28	0.75	2.97	2.82	—	5	179	16432
SLT65-45TG	2-1/2"	2-1/2"	2.341	2.797	6.67	1.01	4.01	4.41	—	1	582	16437
SLT66-45TG	3"	3"	2.939	3.418	8.01	1.15	4.18	5.50	—	1	869	16442
SLT67-45TG	3-1/2"	3-1/2"	3.406	3.915	9.55	1.18	5.25	5.93	—	1	1296	16447
SLT68-45TG	4"	4"	3.882	4.411	10.64	1.25	5.78	8.34	—	1	1539	16452



MALLEABLE IRON/HOT DIPPED GALVANIZED STRAIGHT LIQUIDTIGHT CONNECTORS


WITH COPPER LUGS FOR LIQUIDTIGHT FLEXIBLE METALLIC CONDUIT

APPLICATION:

- Connects conduit and terminates bonding conductor run externally across liquidtight conduit.

FEATURES:

- Tapered threaded male hub NPT.
- Compact, slim diameter with small turning radius.
- Furnished with Insulated throat, steel locknut and sealing ring.
- Liquidtight/Raintight/Oiltight.
- Suitable for grounding & wet locations.
- Long ferrule prevents pullout and tight bend conduit "pop-out."



STANDARD MATERIALS:

Malleable Iron/Steel Ferrule/Copper Grounding Lug

STANDARD FINISH:

Hot Dipped Galvanized/Zinc Plated



OPTIONAL FINISH:

For Malleable Iron/Zinc Plated, please remove suffix "MG" from Hot Dipped Galvanized Catalog Number and see page 152.

CERTIFICATIONS AND COMPLIANCES



UL LISTED E93683

UL Standard: UL514B

NEMA FB-1

ASTM Rated

Liquidtight/Raintight/Concrete tight/Oiltight

UL Listed liquidtight flexible metal conduit fittings are suitable for use in the following Hazardous Locations under NEC 501-4(b), 502-4(a)(2); Class I, Div.2; Class II, Div. 1 and 2; and Class III, Div. 1 and 2 and are suitable for grounding in sizes 3/8" through 1-1/2" under NEC 351-I

TYPE SLT27CLTMG

All Furnished with Insulated Throats

CATALOG NUMBER	TRADE SIZE	LUG SIZE	I.D.	O.D.	DIM A	DIM B	DIM C	DIM D	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
SLT27CLTMG	1/2"	#4-#14	0.590	0.793	1.25	0.50	1.28	0.75	25	250	20	50503
SLT28CLTMG	3/4"	#4-#14	0.785	1.020	1.28	0.52	1.55	0.75	10	100	31	50506
SLT29CLTMG	1"	#4-#14	0.980	1.261	1.43	0.65	1.80	0.75	5	50	42	50509
SLT30CLTMG	1-1/4"	#4-#14	1.330	1.605	1.50	0.66	2.25	0.75	5	50	57	50512
SLT31CLTMG	1-1/2"	#4-#14	1.530	1.844	1.61	0.73	2.44	0.75	10	50	73	50515
SLT32CLTMG	2"	#4-#14	1.995	2.337	1.76	0.75	2.97	0.75	5	25	101	50518
SLT33CLTMG	2-1/2"	#1/0-#8	2.341	2.797	2.18	1.01	4.01	1.13	1	10	373	50521
SLT34CLTMG	3"	#1/0-#8	2.939	3.418	2.50	1.15	4.18	1.13	1	10	465	50524
SLT60CLTMG	3-1/2"	#6-#250 MCM	3.406	3.915	2.61	1.18	5.25	1.50	1	10	686	50527
SLT61CLTMG	4"	#6-#250 MCM	3.882	4.411	2.74	1.25	5.78	1.50	1	5	807	50530
SLT62CLTG	5"	#6-#250 MCM	391.77	460.78	3.13	1.50	6.06	1.69	—	1	1058	50531
SLT63CLTG	6"	#6-#250 MCM	484.65	570.18	3.13	1.56	7.50	1.69	—	1	1395	50532



MALLEABLE IRON/**HOT DIPPED GALVANIZED** 90° LIQUIDTIGHT CONNECTORS


WITH COPPER LUGS FOR LIQUIDTIGHT FLEXIBLE METALLIC CONDUIT

APPLICATION:

- Connects conduit and terminates bonding conductor run externally across liquidtight conduit.

FEATURES:

- Tapered threaded male hub NPT.
- Compact, slim diameter with small turning radius.
- Furnished with Insulated throat, steel locknut and sealing ring.
- Liquidtight/Raintight/Oiltight.
- Suitable for grounding and wet locations.
- Long ferrule prevents pullout and tight bend conduit "pop-out."



STANDARD MATERIALS:

Malleable Iron/Steel Ferrule/Copper Grounding Lug

STANDARD FINISH:

Hot Dipped Galvanized/Zinc Plated



OPTIONAL FINISH:

For Malleable Iron/Zinc Plated, please remove suffix "MG" from Hot Dipped Galvanized Catalog Number and see page 153.

CERTIFICATIONS AND COMPLIANCES



UL LISTED E93683

UL Standard: UL514B

NEMA FB-1

ASTM Rated

Liquidtight/Raintight/Concrete tight/Oiltight

UL Listed liquidtight flexible metal conduit fittings are suitable for use in the following Hazardous Locations under NEC 501-4(b), 502-4(a)(2); Class I, Div.2; Class II, Div. 1 and 2; and Class III, Div. 1 and 2 and are suitable for grounding in sizes 3/8" through 1-1/2" under NEC 351-I

TYPE SLT35CLTMG

All Furnished with Insulated Throats

CATALOG NUMBER	TRADE SIZE	LUG SIZE	I.D.	O.D.	DIM A	DIM B	DIM C	DIM D	DIM E	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
SLT35CLTMG	1/2"	#4-#14	0.590	0.793	1.43	0.50	1.28	1.37	0.75	10	100	20	16405
SLT36CLTMG	3/4"	#4-#14	0.785	1.020	1.62	0.52	1.55	1.54	0.75	10	100	31	16410
SLT37CLTMG	1"	#4-#14	0.980	1.261	1.93	0.65	1.80	1.81	0.75	5	50	42	16415
SLT38CLTMG	1-1/4"	#4-#14	1.330	1.605	2.37	0.66	2.25	1.94	0.75	—	10	57	16420
SLT39CLTMG	1-1/2"	#4-#14	1.530	1.844	2.68	0.73	2.44	2.40	0.75	—	10	73	16425
SLT40CLTMG	2"	#4-#14	1.995	2.337	3.18	0.75	2.97	2.64	0.75	—	5	101	16430
SLT65CLTG	2-1/2"	#1/0-#8	2.341	2.797	8.31	1.01	4.01	7.81	1.13	—	1	373	16435
SLT66CLTG	3"	#1/0-#8	2.939	3.418	9.80	1.15	4.18	9.15	1.13	—	1	465	16440
SLT67CLTG	3-1/2"	#6-#250 MCM	3.406	3.915	11.18	1.18	5.25	11.22	1.50	—	1	686	16445
SLT68CLTG	4"	#6-#250 MCM	3.882	4.411	12.93	1.25	5.78	12.54	1.50	—	1	1539	16452



MALLEABLE IRON/HOT DIPPED GALVANIZED 45° LIQUIDTIGHT CONNECTORS


WITH COPPER LUGS FOR LIQUIDTIGHT FLEXIBLE METALLIC CONDUIT

APPLICATION:

- Connects conduit and terminates bonding conductor run externally across liquidtight conduit.

FEATURES:

- Tapered threaded male hub NPT.
- Compact, slim diameter with small turning radius.
- Furnished with Insulated throat, steel locknut, and sealing ring.
- Liquidtight/Raintight/Oiltight.
- Suitable for grounding and wet locations.
- Long ferrule prevents pullout and tight bend conduit "pop-out."



STANDARD MATERIALS:

Malleable Iron/Steel Ferrule/Copper Grounding Lug

STANDARD FINISH:

Hot Dipped Galvanized/Zinc Plated



OPTIONAL FINISH:

For Malleable Iron/Zinc Plated, please remove suffix "MG" from Hot Dipped Galvanized Catalog Number and see page 154.

CERTIFICATIONS AND COMPLIANCES



UL LISTED E93683

UL Standard: UL514B

NEMA FB-1

ASTM Rated

Liquidtight/Raintight/Concrete tight/Oiltight

UL Listed liquidtight flexible metal conduit fittings are suitable for use in the following Hazardous Locations under NEC 501-4(b), 502-4(a)(2); Class I, Div.2; Class II, Div. 1 and 2; and Class III, Div. 1 and 2 and are suitable for grounding in sizes 3/8" through 1-1/2" under NEC 351-1

TYPE SLT35-45CLTMG

All Furnished with Insulated Throats

CATALOG NUMBER	TRADE SIZE	LUG SIZE	I.D.	O.D.	DIM A	DIM B	DIM C	DIM D	DIM E	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
SLT35-45CLTMG	1/2"	#4-#14	0.590	0.793	1.64	0.50	1.28	1.51	0.75	10	100	20	50569
SLT36-45CLTMG	3/4"	#4-#14	0.785	1.020	1.68	0.52	1.55	1.54	0.75	10	100	31	50572
SLT37-45CLTMG	1"	#4-#14	0.980	1.261	2.16	0.65	1.80	1.81	0.75	5	50	42	50575
SLT38-45CLTMG	1-1/4"	#4-#14	1.330	1.605	2.50	0.66	2.25	2.16	0.75	—	10	57	50578
SLT39-45CLTMG	1-1/2"	#4-#14	1.530	1.844	3.10	0.73	2.44	2.43	0.75	—	10	73	50581
SLT40-45CLTMG	2"	#4-#14	1.995	2.337	3.28	0.75	2.97	2.82	0.75	—	5	101	50584
SLT65-45CLTG	2-1/2"	#1/0-#8	2.341	2.797	6.67	1.01	4.01	4.41	1.13	—	1	373	50587
SLT66-45CLTG	3"	#1/0-#8	2.939	3.418	8.01	1.15	4.18	5.50	1.13	—	1	465	50590
SLT67-45CLTG	3-1/2"	#6-#250 MCM	3.406	3.915	9.55	1.18	5.25	5.93	1.50	—	1	686	50593
SLT68-45CLTG	4"	#6-#250	3.882	4.411	10.64	1.25	5.78	8.34	1.50	—	1	1539	50596



MALLEABLE IRON/HOT DIPPED GALVANIZED ONE-HOLE STRAPS

FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- Click-on type one-hole straps for rigid conduit or IMC. Provides support for the conduits, as required by the National Electrical Code.

FEATURES:

- Heavy duty casting.

STANDARD MATERIALS:

Malleable Iron

STANDARD FINISH:

Hot Dipped Galvanized/Zinc Plated




OPTIONAL FINISH:

For Malleable Iron/Zinc Plated, please remove suffix "G" from Hot Dipped Galvanized Catalog Number and see page 112.

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198338
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE 133G

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
132G	1/2"	1.437	0.625	0.312	100	1000	6	70200
133G	3/4"	1.750	0.750	0.312	100	1000	8	70201
134G	1"	2.125	0.937	0.312	50	500	9	70202
135G	1-1/4"	2.375	1.062	0.437	—	100	22	70203
136G	1-1/2"	2.750	1.062	0.500	—	50	32	70204
137G	2"	3.937	1.250	0.562	—	50	44	70205
138G	2-1/2"	3.937	1.250	0.562	—	25	66	70206
139G	3"	5.187	1.750	0.562	—	10	159	70207
141G	3-1/2"	5.562	2.125	0.750	—	10	185	70208
148G	4"	6.500	2.250	0.750	—	10	221	70209
150G	5"	10.040	2.750	0.750	—	5	369	70210
152G	6"	12.500	3.130	0.750	—	5	631	70211

MALLEABLE IRON/HOT DIPPED GALVANIZED CLAMP BACK SPACERS

FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- Provides space between conduit and mounting surface, for use with malleable iron or aluminum straps.

FEATURES:

- Heavy duty casting.
- Can be used with one-hole straps.

STANDARD MATERIALS:

Malleable Iron

STANDARD FINISH:

Hot Dipped Galvanized/Zinc Plated




OPTIONAL FINISH:

For Malleable Iron/Zinc Plated, please remove suffix "G" from Hot Dipped Galvanized Catalog Number and see page 112.

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198338
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE 901G

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	DIM D	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
900G	1/2"	2.000	1.000	0.500	0.313	100	1000	8	70212
901G	3/4"	2.300	1.060	0.500	0.313	100	500	12	70213
902G	1"	2.320	1.250	0.560	0.375	50	500	16	70214
903G	1-1/4"	3.430	1.870	0.750	0.438	50	250	22	70215
904G	1-1/2"	3.810	1.870	0.810	0.438	—	25	35	70216
905G	2"	4.750	1.920	1.000	0.563	—	25	51	70217
906G	2-1/2"	5.750	2.410	1.000	0.563	—	25	81	70218
907G	3"	6.780	2.620	1.000	0.563	—	25	83	70219
908G	3-1/2"	7.120	2.870	1.060	0.750	—	20	148	70220
909G	4"	8.830	3.060	1.060	0.750	—	10	199	70221
910G	5"	10.125	3.750	1.188	0.750	—	10	344	70222
911G	6"	12.188	4.000	1.500	0.750	—	10	419	70223







SCAN ME

TO VIEW
PRODUCT SECTION

EXPLOSION PROOF FITTINGS



MALLEABLE IRON/EXPLOSION PROOF GUAB AND GUAC, CONDUIT OUTLET BOXES FOR THREADED RIGID CONDUIT AND IMC



APPLICATION:

- Provides access to splice, tap or pull conductors.
- Allows connection of straight, branch and 90° bends of conduit runs.

FEATURES:

- O-ring gasket provided for NEMA 4 rating.
- Internal ground screw.
- Cast brackets on cover.
- Tapered threaded hubs.
- Explosion proof, dust-ignition proof, raintight, wet locations.

STANDARD MATERIALS:

Body: Malleable Iron
Covers: Aluminum

STANDARD FINISH:

Body: Zinc Plated


CERTIFICATIONS AND COMPLIANCES



PATENT PENDING
UL LISTED E533926


UL Standard: UL514B
NEMA FB-1
ASTM Rated

UL Listed suitable for use in the following Hazardous Locations Class I, Div 1&2, Groups A,B,C,D Class II, Div 1, Groups E,F, G NEMA, Type 7 & 9 Explosion proof, Dust-ignition proof, Raintight, Wet Locations

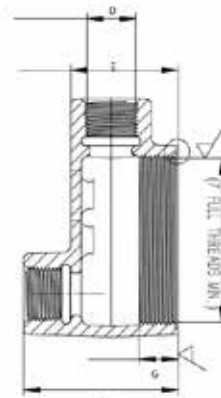

TYPE GUAB75

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F	DIM G	DIM H	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC#
GUAB75	3/4"	1.50	6.62	3.59	0.75	2.00	3.12	0.72	2.87	1	10	214	97005



TYPE GUAC50

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F	DIM G	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC#
GUAC50	1/2"	1.25	5.25	3.59	0.50	2.00	3.13	0.59	1	10	227	97100
GUAC75	3/4"	1.50	5.25	3.59	0.75	2.00	3.13	0.78	1	10	242	97105
GUAC100	1"	1.75	5.25	3.60	1.00	2.31	3.13	1.00	1	10	286	97110



MALLEABLE IRON/EXPLOSION PROOF GUAL AND GUAT, CONDUIT OUTLET BOXES FOR THREADED RIGID CONDUIT AND IMC



APPLICATION:

- Provides access to splice, tap or pull conductors.
- Allows connection of straight, branch and 90° bends of conduit runs.

FEATURES:

- O-ring gasket provided for NEMA 4 rating.
- Internal ground screw.
- Cast brackets on cover.
- Tapered threaded hubs.
- Explosion proof, dust-ignition proof, raintight, wet locations.

STANDARD MATERIALS:

Body: Malleable Iron
Covers: Aluminum

STANDARD FINISH:



Body: Zinc Plated

CERTIFICATIONS AND COMPLIANCES





PATENT PENDING
UL LISTED E533926
UL Standard: UL514B
NEMA FB-1
ASTM Rated

UL Listed suitable for use in the following Hazardous Locations Class I, Div 1&2, Groups A,B,C,D Class II, Div 1, Groups E,F, G
NEMA, Type 7 & 9
Explosion proof, Dust-ignition proof, Raintight, Wet Locations



TYPE GUAL50

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM D	DIM E	DIM F	DIM G	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
GUAL50	1/2"	1.25	3.59	0.50	2.00	3.13	0.59	1	10	214	97200
GUAL75	3/4"	1.50	3.59	0.75	2.00	3.13	0.78	1	10	220	97205
GUAL100	1"	1.75	3.60	1.00	2.31	3.13	1.00	1	10	251	97210

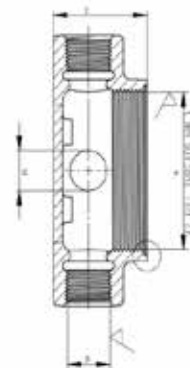

TYPE GUAT50

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F	DIM G	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC#
GUAT50	1/2"	1.25	2.63	4.43	0.50	2.00	3.13	0.59	1	10	229	97300
GUAT75	3/4"	1.50	2.63	4.43	0.75	2.00	3.13	0.78	1	10	242	97305
GUAT100	1"	1.75	2.75	4.55	1.00	2.31	3.13	1.00	1	10	286	97310







SCAN ME

TO VIEW
PRODUCT SECTION

RIGID/IMC FITTINGS



MALLEABLE IRON EXPLOSION PROOF GUAB AND GUAC CONDUIT OUTLET BOXES FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- Provides access to splice, tap or pull conductors.
- Allows connection of straight, branch and 90° bends of conduit runs.

FEATURES:

- O-ring gasket provided for NEMA 4 rating.
- Internal ground screw.
- Cast brackets on cover.
- Tapered threaded hubs.

STANDARD MATERIALS:

Body: Malleable Iron
Covers: Aluminum

STANDARD FINISH:

Body: Zinc Plated


CERTIFICATIONS AND COMPLIANCES



UL LISTED E533926
UL Standard: UL514B
NEMA FB-1
ASTM Rated


UL Listed suitable for use in the following Hazardous Locations; Class I, Div 1&2, Groups A,B,C,D Class II, Div 1, Groups E,F,G NEMA, Type 7 & 9

Explosion proof, Dust-ignition proof,
Raintight, Wet Locations

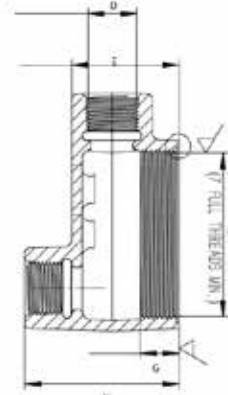

TYPE GUAB75

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F	DIM G	DIM H	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
GUAB75	3/4"	1.50	6.62	3.59	0.75	2.00	3.12	0.72	2.87	1	10	214	97005



TYPE GUAC50

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F	DIM G	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
GUAC50	1/2"	1.25	5.25	3.59	0.50	2.00	3.13	0.59	1	10	229	97100
GUAC75	3/4"	1.50	5.25	3.59	0.75	2.00	3.13	0.78	1	10	242	97105
GUAC100	1"	1.75	5.25	3.60	1.00	2.31	3.13	1.00	1	10	286	97100



MALLEABLE IRON EXPLOSION PROOF GUAL AND GUAT CONDUIT OUTLET BOXES FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- Provides access to splice, tap or pull conductors.
- Allows connection of straight, branch and 90° bends of conduit runs.

FEATURES:

- O-ring gasket provided for NEMA 4 rating.
- Internal ground screw.
- Cast brackets on cover.
- Tapered threaded hubs.

STANDARD MATERIALS:

Body: Malleable Iron
Covers: Aluminum

STANDARD FINISH:

Body: Zinc Plated


CERTIFICATIONS AND COMPLIANCES



UL LISTED E533926
UL Standard: UL514B
NEMA FB-1
ASTM Rated



UL Listed suitable for use in the following Hazardous Locations; Class I, Div 1&2, Groups A,B,C,D Class II, Div 1, Groups E,F,G NEMA, Type 7 & 9

Explosion proof, Dust-ignition proof,
Raintight, Wet Locations



TYPE GUAL50

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM D	DIM E	DIM F	DIM G	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
GUAL50	1/2"	1.25	3.59	0.50	2.00	3.13	0.59	1	10	214	97200
GUAL75	3/4"	1.50	3.59	0.75	2.00	3.13	0.78	1	10	220	97205
GUAL100	1"	1.75	3.60	1.00	2.31	3.13	1.00	1	10	251	97210

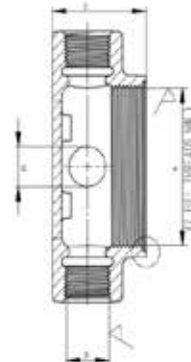

TYPE GUAT50

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F	DIM G	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
GUAT50	1/2"	1.25	2.63	4.43	0.50	2.00	3.13	0.59	1	10	229	97300
GUAT75	3/4"	1.50	2.63	4.43	0.75	2.00	3.13	0.78	1	10	242	97305
GUAT100	1"	1.75	2.75	4.55	1.00	2.31	3.13	1.00	1	10	286	97310



MALLEABLE IRON/HOT DIPPED GALVANIZED EXPANSION FITTINGS

FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- To allow for expansion and contraction in a run of rigid metal conduit.
- For applications involving IMC, a 15" min. length of rigid conduit should be used entering the expansion fitting due to the slightly smaller O.D. of the IMC.
- Type AX provides for maximum of 4" conduit movement (2" in either direction), or 8" conduit movement (4" in either direction).

FEATURES:

- Weatherproof.
- Concrete tight.
- Wet or dry locations.
- Includes insulating bushing.
- Bonding jumpers (Sold separately, see page 41, example BJ-5075).

STANDARD MATERIALS:

Malleable Iron

STANDARD FINISH:


Hot Dipped Galvanized/
Zinc Plated



CERTIFICATIONS AND COMPLIANCES




UL LISTED E198258
UL Standard: UL514B
NEMA FB-1
ASTM Rated

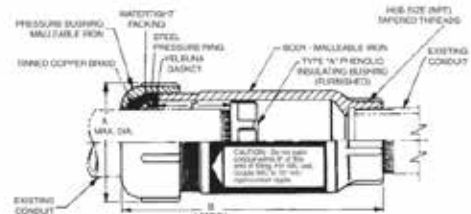

TYPE AX-50 - 4" CONDUIT MOVEMENT - 2" IN EITHER DIRECTION

CATALOG NUMBER	TRADE SIZE	MAX DIA	LENGTH	UNIT PACK	MASTER PACK	LBS./ PER 100	UPC#
AX-50	1/2"	2"	6 3/8"	2	10	145	10699
AX-75	3/4"	2 1/4"	6 3/8"	1	5	220	10674
AX-100	1"	2 5/8"	6 5/8"	1	2	295	10679
AX-125	1 1/4"	3 1/8"	6 5/8"	1	2	375	10684
AX-150	1-1/2"	3 1/2"	6 5/8"	1	2	505	10689
AX-200	2"	4"	7 1/8"	1	2	655	10694
AX-250	2 1/2"	4 1/2"	7 1/2"	—	1	900	10699
AX-300	3"	5 3/8"	8 1/8"	—	1	1200	10704
AX-350	3 1/2"	6"	8 1/2"	—	1	1445	10709
AX-400	4"	6 5/8"	8 5/8"	—	1	1655	10714
AX-500	5"	8"	9 1/2"	—	1	1955	10720

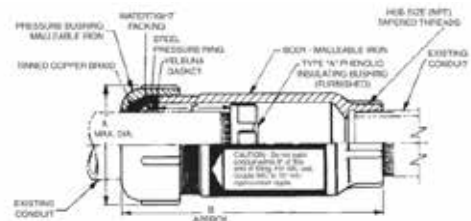

TYPE AX-8-50 - 8" CONDUIT MOVEMENT - 4" IN EITHER DIRECTION

CATALOG NUMBER	TRADE SIZE	MAX DIA	LENGTH	UNIT PACK	MASTER PACK	LBS./ PER 100	UPC#
AX-8-50	1/2"	2"	10 1/3"	2	10	280	10671
AX-8-75	3/4"	2 1/2"	10 1/3"	1	5	358	10676
AX-8-100	1"	2 13/16"	10 1/3"	1	2	460	10681
AX-8-125	1 1/4"	3 7/32"	10 3/4"	1	2	605	10686
AX-8-150	1-1/2"	3 3/4"	11 1/8"	1	2	760	10690
AX-8-200	2"	4 1/2"	11 1/8"	1	2	1020	10695
AX-8-250	2 1/2"	4 7/8"	11 2/3"	—	1	1320	10700
AX-8-300	3"	5 5/8"	12"	—	1	1760	10705
AX-8-350	3 1/2"	6 5/16"	12"	—	1	2020	10710
AX-8-400	4"	6 13/16"	12 1/4"	—	1	2370	10715



MALLEABLE IRON/**HOT DIPPED GALVANIZED** EXPANSION FITTINGS

FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- For bonding two rigid, EMT or IMC steel conduits together.

STANDARD MATERIALS:

Clamps: Malleable Iron
Braids: Tinned Copper
U-Bolts: Steel

STANDARD FINISH:

Hot Dipped Galvanized/
Zinc Plated



CERTIFICATIONS AND COMPLIANCES



UL LISTED E93683
UL Standard: UL467
NEMA FB-1
ASTM Rated



TYPE BJ-5075 – 14"

CATALOG NUMBER	TRADE SIZE	LENGTH	UNIT PACK	MASTER PACK	LBS./ PER 100	UPC#
BJ-5075	1/2" - 3/4"	14"	—	10	70	10723
BJ-1012	1" - 1 1/4"	14"	—	5	95	10728
BJ-1520	1 1/2" - 2"	14"	—	5	140	10733
BJ-2530	2 1/2" - 3"	14"	—	2	230	10738
BJ-3540	3 1/2" - 4"	14"	—	2	280	10743



TYPE BJ-5075-24 – 24"

CATALOG NUMBER	TRADE SIZE	LENGTH	UNIT PACK	MASTER PACK	LBS./ PER 100	UPC#
BJ-5075-24	1/2" - 3/4"	24"	—	10	125	69185
BJ-1012-24	1" - 1 1/4"	24"	—	5	135	69190
BJ-1520-24	1 1/2" - 2"	24"	—	5	180	69195
BJ-2530-24	2 1/2" - 3"	24"	—	2	300	69200
BJ-3540-24	3 1/2" - 4"	24"	—	2	350	69205
BJ-5060-24	5" - 6"	24"	—	1	420	69210




MALLEABLE IRON JUNCTION CONDUIT OUTLET BOXES FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- JBDX outlet boxes are installed in threaded rigid conduit systems to:
 - Act as junction boxes.
 - Act as pull outlets.
 - Accept round base wiring devices and covers intended for use on 4" outlet boxes.
 - Mount enclosed and gasketed lighting fixtures: ARB fixture hangers.

FEATURES:

- Surface mounting; flush mounting can be obtained by nailing box to concrete form through mounting lugs.
- Drilled mounting lugs.
- Four drilled and tapped conduit bosses spaced 90° apart on sides.

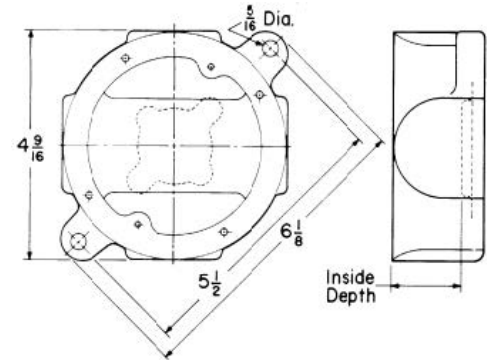

STANDARD MATERIALS:

Malleable Iron

STANDARD FINISH:

Zinc Plated

OPTIONAL FINISH:

For additional corrosion protection, specify Hot Dipped Galvanized. Add Suffix "G" to Malleable Iron catalog number. Example JBDX-75G. For more information see page 8.

CERTIFICATIONS AND COMPLIANCES



UL Standard: UL514B
NEMA FB-1
ASTM Rated

TYPE JBDX-75

For Threaded Rigid Conduit and IMC

CATALOG NUMBER	TRADE SIZE	INSIDE DEPTH	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
JBDX-50	1/2"	2.06	4.563	5.55	6.125	1	5	315	89230
JBDX-75	3/4"	2.06	4.563	5.55	6.125	1	5	305	89235
JBDX-100	1"	2.06	4.563	5.55	6.125	1	5	285	89240

MALLEABLE IRON JUNCTION CONDUIT OUTLET BOX COVERS AND GASKET

APPLICATION:

- Furnished with screws.
- When used with gasket, provides raintight fit.

STANDARD MATERIALS:

Cover: Malleable Iron

Gasket: Neoprene

STANDARD FINISH:

Zinc Plated

OPTIONAL FINISH:

For additional corrosion protection, specify Hot Dipped Galvanized. Add Suffix "G" to Malleable Iron catalog number. Example JBKGB. For more information see page 8.



CERTIFICATIONS AND COMPLIANCES



UL LISTED E198259
UL Standard: UL514B
NEMA FB-1
ASTM Rated

CATALOG NUMBER	TYPE	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
JBKB	BLANK	5	50	90	89245
JBDXG	GASKET	20	200	5	89250



MALLEABLE IRON/**HOT DIPPED GALVANIZED** JUNCTION CONDUIT OUTLET BOXES FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- JBDX outlet boxes are installed in threaded rigid conduit systems to:
 - Act as junction boxes.
 - Act as pull outlets.
 - Accept round base wiring devices and covers intended for use on 4" outlet boxes.
 - Mount enclosed and gasketed lighting fixtures: ARB fixture hangers.

FEATURES:

- Surface mounting; flush mounting can be obtained by nailing box to concrete form through mounting lugs.
- Drilled mounting lugs.
- Four drilled and tapped conduit bosses spaced 90° apart on sides.

STANDARD MATERIALS:

Malleable Iron

STANDARD FINISH:

Hot Dipped Galvanized/Zinc Plated




OPTIONAL FINISH:

For Malleable Iron/Zinc Plated, please remove the "G" to suffix from Hot Dipped Galvanized catalog number and see page 42.

CERTIFICATIONS AND COMPLIANCES



UL Standard: UL514B
NEMA FB-1
ASTM Rated

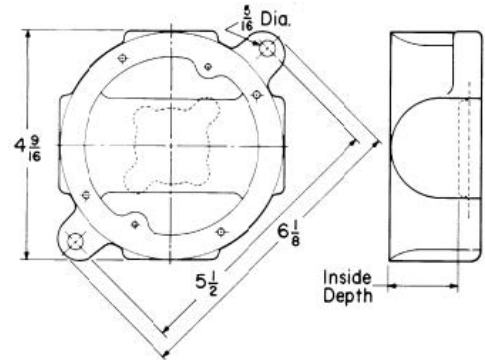

TYPE JBDX-75G

For Threaded Rigid Conduit and IMC

CATALOG NUMBER	TRADE SIZE	INSIDE DEPTH	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
JBDX-50G	1/2"	2.06	4.563	5.55	6.125	1	5	315	89232
JBDX-75G	3/4"	2.06	4.563	5.55	6.125	1	5	305	89237
JBDX-100G	1"	2.06	4.563	5.55	6.125	1	5	285	89242

MALLEABLE IRON/**HOT DIPPED GALVANIZED** JUNCTION CONDUIT OUTLET BOX COVERS AND GASKET

APPLICATION:

- Furnished with screws.
- When used with gasket provides raintight fit.

STANDARD MATERIALS:

Cover: Malleable Iron

Gasket: Neoprene

STANDARD FINISH:

Hot Dipped Galvanized/Zinc Plated



OPTIONAL FINISH:

For Malleable Iron/Zinc Plated, please remove the "G" to suffix from Hot Dipped Galvanized catalog number and see page 42.

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198259
UL Standard: UL514B
NEMA FB-1
ASTM Rated



CATALOG NUMBER	TYPE	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
JBKBG	BLANK	5	50	90	89247
JBDXG	GASKET	20	200	5	89250



MALLEABLE IRON/**HOT DIPPED GALVANIZED** MOGULS WITH COVER, GASKET AND ROLLERS


FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- Larger body size facilitates pulling of large and heavy conductors. Specially designed raised cast covers provide additional wiring area.
- SEPCO Moguls are used for pulling straight, 45° or 90° angle turns and/or making taps and splices.

FEATURES:

- Exclusive built-in rollers facilitate cable pulling from sizes 1-1/4"-4".
- Smooth, rounded integral bushing in each hub protects conductor insulation.
- Accurately tapped, tapered threads for tight, rigid joints and ground continuity.
- Covers have captive stainless steel screws to speed installation, prevent "freezing" of screws.
- Length requirement: distance between centerline of each hub bushing (conduit stop) exceeds eight times the trade diameter of the conduit per NEC 314.28(A)(2).

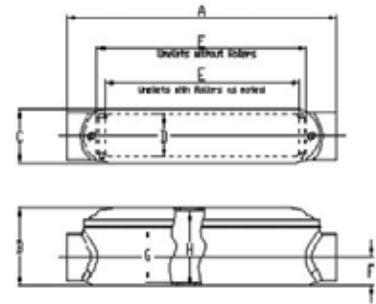

STANDARD MATERIALS:

Bodies and Covers: Malleable Iron
Gaskets: Neoprene
Screws: Stainless Steel

STANDARD FINISH:

Bodies and Covers:
 Hot Dipped Galvanized

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198259
 UL Standard: UL514B
 NEMA FB-1
 ASTM Rated

TYPE MC100G

CATALOG NUMBER	TRADE SIZE	MAX WIRE SIZE	VOL. CU. IN.	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
MC100G	1"	3 #2 AWG	31.00	—	1	390	10039
MC125G	1-1/4"	3 #1/0 AWG	50.00	—	1	506	10040
MC150G	1-1/2"	3 #3/0 AWG	93.00	—	1	923	10041
MC200G	2"	3 #300 MCM	143.00	—	1	1327	10042
MC250G	2-1/2"	3 #400 MCM	335.00	—	1	2751	10043
MC300G	3"	3 #700 MCM	475.00	—	1	3618	10044
MC350G	3-1/2"	3 #900 MCM	830.00	—	1	5464	10045
MC400G	4"	3 #1000 MCM	1010.00	—	1	6478	10046

CATALOG NUMBER	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F	DIM G	DIM H	NUMBER OF COVER HOLES
MC100G	9.88	2.78	2.36	1.85	6.61	0.93	1.82	2.46	2
MC125G	12.20	3.43	2.44	1.93	7.83	1.14	2.27	3.11	2
MC150G	14.17	3.86	3.15	2.56	9.88	1.34	2.57	3.43	2
MC200G	18.15	4.41	3.15	2.52	13.29	1.63	3.13	3.98	2
MC250G	23.35	5.22	4.65	3.74	13.68	1.81	3.61	4.72	4
MC300G	27.17	6.06	4.72	3.66	21.04	2.20	4.45	5.57	4
MC350G	31.57	7.05	5.72	4.57	24.98	2.50	4.72	6.50	4
MC400G	35.55	7.56	5.72	4.57	29.11	2.76	5.23	7.01	4



MALLEABLE IRON/**HOT DIPPED GALVANIZED** MOGULS WITH COVER, GASKET AND ROLLERS


FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- Larger body size facilitates pulling of large and heavy conductors. Specially designed raised cast covers provide additional wiring area.
- SEPCO Moguls are used for pulling straight, 45° or 90° angle turns and/or making taps and splices.

FEATURES:

- Exclusive built-in rollers facilitate cable pulling from sizes 1-1/4"-4".
- Smooth, rounded integral bushing in each hub protects conductor insulation.
- Accurately tapped, tapered threads for tight, rigid joints and ground continuity.
- Covers have captive stainless steel screws to speed installation, prevent "freezing" of screws.
- Length requirement: distance between centerline of each hub bushing (conduit stop) exceeds six times the trade diameter of the conduit per NEC 314.28(A)(2).

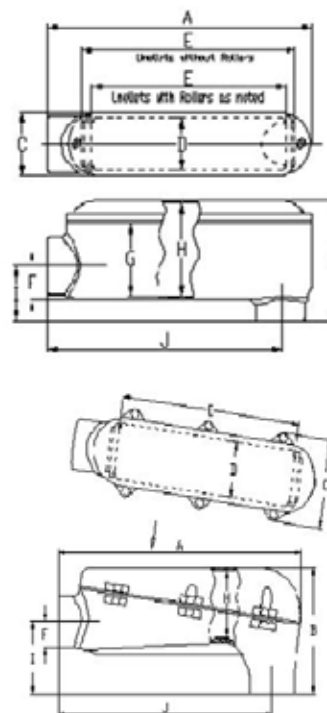

STANDARD MATERIALS:

Bodies and Covers: Malleable Iron
Gaskets: Neoprene
Screws: Stainless Steel

STANDARD FINISH:

Bodies and Covers:
Hot Dipped Galvanized

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198259
UL Standard: UL514B
NEMA FB-1
ASTM Rated

TYPE MLB100G

CATALOG NUMBER	TRADE SIZE	MAX WIRE SIZE	VOL. CU.IN.	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
MLB100G	1"	3 #2 AWG	31.00	—	1	366	10047
MLB125G	1-1/4"	3 #1/0 AWG	48.00	—	1	476	10048
MLB150G	1-1/2"	3 #3/0 AWG	107.00	—	1	831	10049
MLB200G	2"	3 #300 MCM	145.00	—	1	1224	10050
MLB250G	2-1/2"	3 #400 MCM	210.00	—	1	2104	10055
MLB300G	3"	3 #700 MCM	345.00	—	1	3237	10052
MLB350G	3-1/2"	3 #900 MCM	500.00	—	1	4427	10053
MLB400G	4"	3 #1000 MCM	740.00	—	1	5865	10054

CATALOG NUMBER	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F	DIM G	DIM H	DIM I	DIM J	NUMBER OF COVER HOLES
MLB100G	8.90	3.75	2.38	1.87	6.57	0.94	1.88	2.52	1.89	7.87	2
MLB125G	9.65	4.86	2.40	1.89	6.47	1.16	2.70	3.52	2.19	8.48	2
MLB150G	12.95	5.25	3.07	2.40	9.49	1.38	3.09	4.07	2.36	11.63	2
MLB200G	14.65	6.38	3.11	2.52	10.91	1.61	3.46	4.96	2.64	12.94	2
MLB250G	18.22	8.23	5.79	3.60	13.48	2.15	—	4.36	4.69	16.03	6
MLB300G	21.33	10.37	5.79	3.47	16.95	2.75	—	5.27	5.61	18.62	6
MLB350G	24.65	10.97	6.93	4.53	19.94	3.01	—	5.15	6.63	21.55	6
MLB400G	27.67	13.03	7.01	4.57	23.38	3.43	—	6.85	7.05	24.32	6



MALLEABLE IRON/**HOT DIPPED GALVANIZED** MOGULS WITH COVER AND GASKET

FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- Larger body size facilitates pulling of large and heavy conductors. Specially designed raised cast covers provide additional wiring area.
- SEPCO Moguls are used for pulling straight, 45° or 90° angle turns and/or making taps and splices.

FEATURES:

- Smooth, rounded integral bushing in each hub protects conductor insulation.
- Accurately tapped, tapered threads for tight, rigid joints and ground continuity.
- Covers have captive stainless steel screws to speed installation, prevent "freezing" of screws.
- Length requirement: distance between centerline of each hub bushing (conduit stop) exceeds six times the trade diameter of the conduit per NEC 314.28(A)(2).

STANDARD MATERIALS:

Bodies and Covers: Malleable Iron
Gaskets: Neoprene
Screws: Stainless Steel


STANDARD FINISH:

Bodies and Covers:
 Hot Dipped Galvanized



UL LISTED E198259
 UL Standard: UL514B
 NEMA FB-1
 ASTM Rated

CERTIFICATIONS AND COMPLIANCES

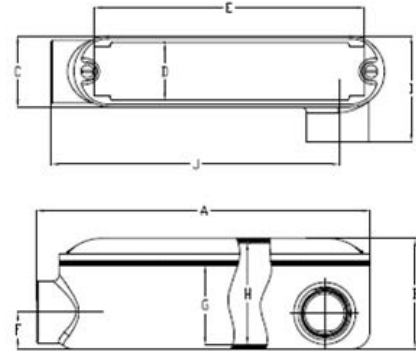

TYPE MLL100G

CATALOG NUMBER	TRADE SIZE	MAX WIRE SIZE	VOL. CU.IN.	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
MLL100G	1"	3 #4 AWG	31.00	—	1	179	10146
MLL125G	1-1/4"	3 #2 AWG	50.00	—	1	261	10147
MLL150G	1-1/2"	3 #1/0 AWG	93.00	—	1	459	10148
MLL200G	2"	3 #4/0 AWG	143.00	—	1	631	10149

CATALOG NUMBER	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F	DIM G	DIM H	DIM I	DIM J	NUMBER OF COVER HOLES
MLL100G	8.94	2.80	2.36	1.85	6.61	0.93	1.84	2.48	3.27	7.76	2
MLL125G	11.16	3.44	2.44	1.93	7.60	1.14	2.28	3.13	3.39	9.94	2
MLL150G	13.27	3.88	3.15	2.56	9.68	1.34	2.57	3.46	4.00	11.69	2
MLL200G	17.02	4.43	3.15	2.52	13.09	1.63	3.14	4.02	4.13	15.45	2



MALLEABLE IRON/**HOT DIPPED GALVANIZED** MOGULS WITH COVER AND GASKET FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- Larger body size facilitates pulling of large and heavy conductors. Specially designed raised cast covers provide additional wiring area.
- SEPCO Moguls are used for pulling straight, 45° or 90° angle turns and/or making taps and splices.

FEATURES:

- Smooth, rounded integral bushing in each hub protects conductor insulation.
- Accurately tapped, tapered threads for tight, rigid joints and ground continuity.
- Covers have captive stainless steel screws to speed installation, prevent "freezing" of screws.
- Length requirement: distance between centerline of each hub bushing (conduit stop) exceeds six times the trade diameter of the conduit per NEC 314.28(A)(2).

STANDARD MATERIALS:

Bodies and Covers: Malleable Iron
Gaskets: Neoprene
Screws: Stainless Steel


STANDARD FINISH:

Bodies and Covers:
Hot Dipped Galvanized

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198259
UL Standard: UL514B
NEMA FB-1
ASTM Rated

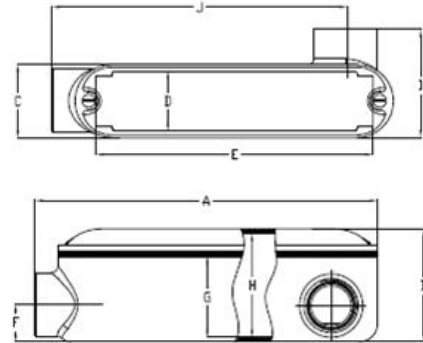

TYPE MLR100G

CATALOG NUMBER	TRADE SIZE	MAX WIRE SIZE	VOL. CU.IN.	UNIT PACK	MASTER PACK	LBS./ 100 PCS	UPC #
MLR100G	1"	3 #4 AWG	31.00	—	1	176	10150
MLR125G	1-1/4"	3 #2 AWG	50.00	—	1	261	10151
MLR150G	1-1/2"	3 #1/0 AWG	93.00	—	1	435	10152
MLR200G	2"	3 #4/0 AWG	143.00	—	1	656	10153

CATALOG NUMBER	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F	DIM G	DIM H	DIM I	DIM J	NUMBER OF COVER HOLES
MLR100G	8.94	2.80	2.36	1.85	6.61	0.93	1.84	2.48	3.27	7.76	2
MLR125G	11.16	3.44	2.44	1.93	7.60	1.14	2.28	3.13	3.39	9.94	2
MLR150G	13.27	3.88	3.15	2.56	9.68	1.34	2.57	3.46	4.00	11.69	2
MLR200G	17.02	4.43	3.15	2.52	13.09	1.63	3.14	4.02	4.13	15.45	2



MALLEABLE IRON/**HOT DIPPED GALVANIZED** MOGULS WITH COVER AND GASKET


FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- Larger body size facilitates pulling of large and heavy conductors. Specially designed raised cast covers provide additional wiring area.
- SEPCO Moguls are used for pulling straight, 45° or 90° angle turns and/or making taps and splices.

FEATURES:

- Smooth, rounded integral bushing in each hub protects conductor insulation.
- Accurately tapped, tapered threads for tight, rigid joints and ground continuity.
- Covers have captive stainless steel screws to speed installation, prevent "freezing" of screws.
- Length requirement: distance between centerline of each hub bushing (conduit stop) exceeds six times the trade diameter of the conduit per NEC 314.28(A)(2).

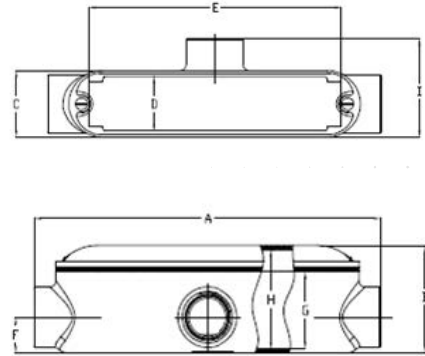

TYPE MT100G

CATALOG NUMBER	TRADE SIZE	MAX WIRE SIZE	VOL. CU.IN.	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
MT100G	1"	3 #4 AWG	31.00	—	1	187	10154
MT125G	1-1/4"	3 #2 AWG	50.00	—	1	263	10155
MT150G	1-1/2"	3 #1/0 AWG	93.00	—	1	447	10156
MT200G	2"	3 #4/0 AWG	143.00	—	1	651	10157

STANDARD MATERIALS:

Bodies and Covers: Malleable Iron
Gaskets: Neoprene
Screws: Stainless Steel

STANDARD FINISH:

Bodies and Covers:
 Hot Dipped Galvanized

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198259
 UL Standard: UL514B
 NEMA FB-1
 ASTM Rated

CATALOG NUMBER	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F	DIM G	DIM H	DIM I	NUMBER OF COVER HOLES
MT100G	9.88	2.80	2.36	1.85	6.61	0.93	1.84	2.48	3.27	2
MT125G	12.64	3.44	2.44	1.93	7.60	1.14	2.28	3.13	3.39	2
MT150G	14.17	3.88	3.15	2.56	9.68	1.34	2.57	3.46	4.00	2
MT200G	18.15	4.43	3.15	2.52	13.09	1.63	3.14	4.02	4.02	2



ALUMINUM MOGULS WITH COVER AND GASKET

FOR THREADED RIGID CONDUIT AND IMC




APPLICATION:

- Larger body size facilitates pull of large and heavy conductors. Specially designed raised covers provide additional wiring area.
- SEPCO Moguls are used for pulling straight, 45° or 90° angle turns and/or making taps and splices.

FEATURES:

- Smooth, rounded integral bushing in each hub protects conductor insulation.
- Accurately tapped, tapered threads for tight, rigid joints and ground continuity.
- Lightweight aluminum facilitates shipping, handling, and installing.

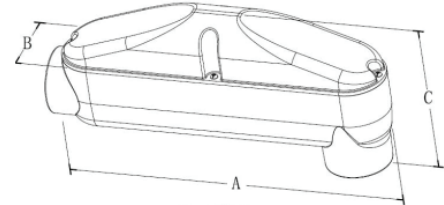

STANDARD MATERIALS:

Bodies and Covers: Aluminum
Gaskets: Fiber 1-1/4"-2",
 Neoprene 2-1/2"-4"
Screws: Stainless Steel

STANDARD FINISH:

Aluminum Enameled

CERTIFICATIONS AND COMPLIANCES



UL Listed: E198259
 UL Standard: UL514B
 NEMA FB-1
 ASTM Rated

TYPE MLB400A

CATALOG NUMBER	TRADE SIZE	MAX WIRE SIZE	VOL. CU.IN.	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
MLB125A	1-1/4"	3 #1/0 AWG	40.00	9.49	2.52	3.66	—	1	375	12811
MLB150A	1-1/2"	3 #3/0 AWG	128.00	14.53	3.23	5.18	—	1	425	12812
MLB200A	2"	3 #300 MCM	128.00	14.53	3.23	5.18	—	1	425	12813
MLB250A	2-1/2"	3 #400 MCM	547.00	22.80	4.73	8.77	—	1	1089	12814
MLB300A	3"	3 #500 MCM	547.00	22.80	4.73	8.77	—	1	976	12815
MLB350A	3-1/2"	3 #750 MCM	1051.00	29.19	5.75	10.14	—	1	1556	12816
MLB400A	4"	3 #1000 MCM	1051.00	29.19	5.75	10.14	—	1	1463	12817



MALLEABLE IRON THREADED CONDUIT BODIES

FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- To provide access to conductors for pulling, splicing and maintenance. Threaded for rigid conduit and IMC.

FEATURES:

- Tapered threaded hubs (NPT).
- Flat back design for easy mounting close to walls.
- Suitable for use in concrete.

STANDARD MATERIALS:

Malleable Iron

STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198259
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE C1

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	MAX WIRE SIZE	VOL. CU.IN.	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
C TYPE										
C1	1/2"	5.375	1.313	1.375	N/A	4.50	10	50	98	43010
C2	3/4"	6.000	1.500	1.688	3 #6 AWG	7.50	10	50	118	43020
C3	1"	7.063	1.813	1.875	3 #4 AWG	12.50	5	25	170	43030
C4	1-1/4"	9.000	2.625	2.750	3 #2 AWG	32.30	—	10	309	43040
C5	1-1/2"	9.000	2.625	2.813	3 #1/0 AWG	35.30	—	10	368	43050
C6	2"	11.500	3.125	3.313	3 #4/0 AWG	73.00	—	5	553	43060
C7	2-1/2"	15.000	4.313	3.875	3 #250 MCM	138.00	—	1	1216	43070
C8	3"	15.125	4.313	4.750	3 #250 MCM	170.00	—	1	1437	43080
C9	3-1/2"	18.125	4.875	5.625	3 #350 MCM	300.00	—	1	2210	43090
C10	4"	18.125	4.875	5.625	3 #350 MCM	328.00	—	1	2321	43100

OPTIONAL FINISH:

For additional corrosion protection, specify Hot Dipped Galvanized. Add suffix "G" to Malleable Iron catalog number. Example LB1G. For more information, see page 14.



TYPE LB1

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	MAX WIRE SIZE	VOL. CU.IN.	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
LB TYPE										
LB1	1/2"	4.688	1.313	2.063	N/A	4.50	10	50	71	40011
LB2	3/4"	5.375	1.500	2.250	3 #6 AWG	7.50	10	50	97	40021
LB3	1"	6.188	1.813	2.625	3 #4 AWG	12.50	5	25	143	40031
LB4	1-1/4"	8.125	2.625	2.750	3 #2 AWG	32.30	—	10	287	40041
LB5	1-1/2"	8.125	2.625	2.813	3 #1/0 AWG	35.30	—	10	332	40051
LB6	2"	10.500	3.125	4.438	3 #4/0 AWG	73.00	—	5	534	40061
LB7	2-1/2"	13.625	4.313	5.375	3 #350 AWG	138.00	—	1	1105	40071
LB8	3"	13.875	4.313	5.875	3 #350 AWG	170.00	—	1	1160	40081
LB9	3-1/2"	16.250	5.625	6.875	3 #500 MCM	300.00	—	1	1989	40091
LB10	4"	16.625	5.625	7.188	3 #500 MCM	328.00	—	1	2100	40101



MALLEABLE IRON THREADED CONDUIT BODIES

FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- To provide access to conductors for pulling, splicing and maintenance. Threaded for rigid conduit and IMC.

FEATURES:

- Tapered threaded hubs (NPT).
- Flat back design for easy mounting close to walls.
- Suitable for use in concrete.

STANDARD MATERIALS:

Malleable Iron


STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198259
UL Standard: UL514B
NEMA FB-1
ASTM Rated




TYPE LL1

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	MAX WIRE SIZE	VOL. CU.IN.	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
LL TYPE										
LL1	1/2"	4.688	2.063	1.375	N/A	4.50	10	50	76	41011
LL2	3/4"	5.375	2.250	1.688	3 #6 AWG	7.50	10	50	95	41021
LL3	1"	6.188	2.625	1.875	3 #4 AWG	12.50	5	25	138	41031
LL4	1-1/4"	8.125	2.750	2.750	3 #2 AWG	32.30	—	10	309	41041
LL5	1-1/2"	8.125	3.500	2.813	3 #1/0 AWG	35.30	—	10	332	41051
LL6	2"	10.500	4.125	3.313	3 #4/0 AWG	73.00	—	5	497	41061
LL7	2-1/2"	13.625	4.688	3.875	3 #300 MCM	138.00	—	1	1105	41071
LL8	3"	13.875	5.875	4.750	3 #350 MCM	170.00	—	1	1437	41081
LL9	3-1/2"	16.250	6.125	5.625	3 #350 MCM	300.00	—	1	2321	41091
LL10	4"	16.250	6.938	5.625	3 #350 MCM	328.00	—	1	2431	41101

OPTIONAL FINISH:

For additional corrosion protection, specify Hot Dipped Galvanized. Add suffix "G" to Malleable Iron catalog number. Example LL1G. For more information, see page 15.



TYPE LR1

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	MAX WIRE SIZE	VOL. CU.IN.	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
LR TYPE										
LR1	1/2"	4.688	2.063	1.375	N/A	4.50	10	50	71	42011
LR2	3/4"	5.375	2.250	1.688	3 #6 AWG	7.50	10	50	100	42021
LR3	1"	6.188	2.625	1.875	3 #4 AWG	12.50	5	25	157	42031
LR4	1-1/4"	8.125	2.750	2.750	3 #2 AWG	32.30	—	10	332	42041
LR5	1-1/2"	8.125	2.813	2.813	3 #1/0 AWG	35.30	—	10	345	42051
LR6	2"	10.500	4.438	3.313	3 #4/0 AWG	73.00	—	5	626	42061
LR7	2-1/2"	13.625	5.375	3.875	3 #300 MCM	138.00	—	1	1105	42071
LR8	3"	13.875	5.875	4.750	3 #350 MCM	170.00	—	1	1437	42081
LR9	3-1/2"	16.250	6.875	5.625	3 #350 MCM	300.00	—	1	2321	42091
LR10	4"	16.625	7.188	5.625	3 #350 MCM	328.00	—	1	2500	42101



MALLEABLE IRON THREADED CONDUIT BODIES

FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- To provide access to conductors for pulling, splicing and maintenance. Threaded for rigid conduit and IMC.

FEATURES:

- Tapered threaded hubs (NPT).
- Flat back design for easy mounting close to walls.
- Suitable for use in concrete.

STANDARD MATERIALS:

Malleable Iron

STANDARD FINISH:

Zinc Plated

OPTIONAL FINISH:

For additional corrosion protection, specify Hot Dipped Galvanized. Add suffix "G" to Malleable Iron catalog number. Example T1G. For more information, see page 16.

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198259
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE T1

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	MAX WIRE SIZE	VOL. CU.IN.	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
T TYPE										
T1	1/2"	5.375	2.063	1.313	N/A	6.00	10	50	111	44011
T2	3/4"	6.000	2.250	1.500	3 #6 AWG	9.50	10	50	137	44021
T3	1"	7.063	2.625	1.813	3 #4 AWG	15.00	5	25	195	44031
T4	1-1/4"	9.000	2.750	2.625	3 #2 AWG	33.00	—	10	332	44041
T5	1-1/2"	9.000	3.500	2.625	3 #2 AWG	36.00	—	10	368	44051
T6	2"	11.500	4.125	3.125	3 #1/0 AWG	75.00	—	5	663	44061
T7	2-1/2"	15.000	5.688	4.313	3 #4/0 AWG	138.00	—	1	1271	44071
T8	3"	15.125	5.875	4.313	3 #4/0 AWG	170.00	—	1	1547	44081
T9	3-1/2"	18.125	6.813	4.875	3 #350 MCM	300.00	—	1	2542	44091
T10	4"	18.125	7.188	4.875	3 #350 MCM	328.00	—	1	2542	44101



TYPE TB1

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	MAX WIRE SIZE	VOL. CU.IN.	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
TB TYPE										
TB1	1/2"	5.250	1.313	1.313	N/A	6	10	50	88	64011
TB2	3/4"	6.063	1.563	1.563	3 #6 AWG	9.5	10	50	120	64012
TB3	1"	7.125	1.813	1.813	3 #4 AWG	15	5	25	197	64013
TB4	1-1/4"	9.313	2.438	3.750	3 #2 AWG	33	—	10	343	64014
TB5	1-1/2"	9.313	2.563	3.750	3 #2 AWG	36	—	10	420	64015
TB6	2"	11.813	3.188	4.125	3 #1/0 AWG	75	—	5	691	64016



MALLEABLE IRON/**HOT DIPPED GALVANIZED** THREADED CONDUIT BODIES FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- To provide access to conductors for pulling, splicing and maintenance. Threaded for rigid conduit and IMC.

FEATURES:

- Tapered threaded hubs (NPT).
- Flat back design for easy mounting close to walls.
- Suitable for use in concrete.

STANDARD MATERIALS:

Malleable Iron

STANDARD FINISH:

Hot Dipped Galvanized/Zinc Plated

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198259
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE C1G

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	MAX WIRE SIZE	VOL. CU.IN.	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
C TYPE										
C1G	1/2"	5.375	1.313	1.375	N/A	4.50	10	50	98	10158
C2G	3/4"	6.000	1.500	1.688	3 #6 AWG	7.50	10	50	118	10159
C3G	1"	7.063	1.813	1.875	3 #4 AWG	12.50	5	25	170	10160
C4G	1-1/4"	9.000	2.625	2.750	3 #2 AWG	32.30	—	10	309	10161
C5G	1-1/2"	9.000	2.625	2.813	3 #1/0 AWG	35.30	—	10	368	10162
C6G	2"	11.500	3.125	3.313	3 #4/0 AWG	73.00	—	5	553	10163
C7G	2-1/2"	15.000	4.313	3.875	3 #250 MCM	138.00	—	1	1216	10188
C8G	3"	15.125	4.313	4.750	3 #250 MCM	170.00	—	1	1437	10189
C9G	3-1/2"	18.125	4.875	5.625	3 #350 MCM	300.00	—	1	2210	10190
C10G	4"	18.125	4.875	5.625	3 #350 MCM	328.00	—	1	2321	10191

OPTIONAL FINISH:

For Malleable Iron/Zinc Plated, please remove suffix "G" from Hot Dipped Galvanized Catalog Number and see page 50.



TYPE LB1G

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	MAX WIRE SIZE	VOL. CU.IN.	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
LB TYPE										
LB1G	1/2"	4.688	1.313	2.063	N/A	4.50	10	50	71	10164
LB2G	3/4"	5.375	1.500	2.250	3 #6 AWG	7.50	10	50	97	10165
LB3G	1"	6.188	1.813	2.625	3 #4 AWG	12.50	5	25	143	10166
LB4G	1-1/4"	8.125	2.625	2.750	3 #2 AWG	32.30	—	10	287	10167
LB5G	1-1/2"	8.125	2.625	2.813	3 #1/0 AWG	35.30	—	10	332	10168
LB6G	2"	10.500	3.125	4.438	3 #4/0 AWG	73.00	—	5	534	10169
LB7G	2-1/2"	13.625	4.313	5.375	3 #350 AWG	138.00	—	1	1105	10192
LB8G	3"	13.875	4.313	5.875	3 #350 AWG	170.00	—	1	1160	10193
LB9G	3-1/2"	16.250	5.625	6.875	3 #500 MCM	300.00	—	1	1989	10194
LB10G	4"	16.625	5.625	7.188	3 #500 MCM	328.00	—	1	2100	10195



MALLEABLE IRON/**HOT DIPPED GALVANIZED** THREADED CONDUIT BODIES FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- To provide access to conductors for pulling, splicing and maintenance. Threaded for rigid conduit and IMC.

FEATURES:

- Tapered threaded hubs (NPT).
- Flat back design for easy mounting close to walls.
- Suitable for use in concrete.

STANDARD MATERIALS:

Malleable Iron

STANDARD FINISH:


Hot Dipped Galvanized/Zinc Plated



CERTIFICATIONS AND COMPLIANCES



UL LISTED E198259
UL Standard: UL514B
NEMA FB-1
ASTM Rated




TYPE LL1G

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	MAX WIRE SIZE	VOL. CU.IN.	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
LL TYPE										
LL1G	1/2"	4.688	2.063	1.375	N/A	4.50	10	50	76	10170
LL2G	3/4"	5.375	2.250	1.688	3 #6 AWG	7.50	10	50	95	10171
LL3G	1"	6.188	2.625	1.875	3 #4 AWG	12.50	5	25	138	10172
LL4G	1-1/4"	8.125	2.750	2.750	3 #2 AWG	32.30	—	10	309	10173
LL5G	1-1/2"	8.125	3.500	2.813	3 #1/0 AWG	35.30	—	10	332	10174
LL6G	2"	10.500	4.125	3.313	3 #4/0 AWG	73.00	—	5	497	10175
LL7G	2-1/2"	13.625	4.688	3.875	3 #300 MCM	138.00	—	1	1105	10196
LL8G	3"	13.875	5.875	4.750	3 #350 MCM	170.00	—	1	1437	10197
LL9G	3-1/2"	16.250	6.125	5.625	3 #350 MCM	300.00	—	1	2321	10198
LL10G	4"	16.250	6.938	5.625	3 #350 MCM	328.00	—	1	2431	10199

OPTIONAL FINISH:

For Malleable Iron/Zinc Plated, please remove suffix "G" from Hot Dipped Galvanized Catalog Number and see page 51.



TYPE LR1G

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	MAX WIRE SIZE	VOL. CU.IN.	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
LR TYPE										
LR1G	1/2"	4.688	2.063	1.375	N/A	4.50	10	50	71	10176
LR2G	3/4"	5.375	2.250	1.688	3 #6 AWG	7.50	10	50	100	10177
LR3G	1"	6.188	2.625	1.875	3 #4 AWG	12.50	5	25	157	10178
LR4G	1-1/4"	8.125	2.750	2.750	3 #2 AWG	32.30	—	10	332	10179
LR5G	1-1/2"	8.125	2.813	2.813	3 #1/0 AWG	35.30	—	10	345	10180
LR6G	2"	10.500	4.438	3.313	3 #4/0 AWG	73.00	—	5	626	10181
LR7G	2-1/2"	13.625	5.375	3.875	3 #300 MCM	138.00	—	1	1105	10200
LR8G	3"	13.875	5.875	4.750	3 #350 MCM	170.00	—	1	1437	10201
LR9G	3-1/2"	16.250	6.875	5.625	3 #350 MCM	300.00	—	1	2321	10202
LR10G	4"	16.625	7.188	5.625	3 #350 MCM	328.00	—	1	2500	10203



MALLEABLE IRON/**HOT DIPPED GALVANIZED** THREADED CONDUIT BODIES FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- To provide access to conductors for pulling, splicing and maintenance. Threaded for rigid conduit and IMC.

FEATURES:

- Tapered threaded hubs (NPT).
- Flat back design for easy mounting close to walls.
- Suitable for use in concrete.

STANDARD MATERIALS:

Malleable Iron

STANDARD FINISH:

Hot Dipped Galvanized/Zinc Plated




OPTIONAL FINISH:

For Malleable Iron/Zinc Plated, please remove suffix "G" from Hot Dipped Galvanized Catalog Number and see page 52.

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198259
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE T1G

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	MAX WIRE SIZE	VOL. CU.IN.	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
T TYPE										
T1G	1/2"	5.375	2.063	1.313	N/A	6.00	10	50	111	10182
T2G	3/4"	6.000	2.250	1.500	3 #6 AWG	9.50	10	50	137	10183
T3G	1"	7.063	2.625	1.813	3 #4 AWG	15.00	5	25	195	10184
T4G	1-1/4"	9.000	2.750	2.625	3 #2 AWG	33.00	—	10	332	10185
T5G	1-1/2"	9.000	3.500	2.625	3 #1/0 AWG	36.00	—	10	368	10186
T6G	2"	11.500	4.125	3.125	3 #1/0 AWG	75.00	—	5	663	10187
T7G	2-1/2"	15.000	5.688	4.313	3 #4/0 AWG	138.00	—	1	1271	10204
T8G	3"	15.125	5.875	4.313	3 #4/0 AWG	170.00	—	1	1547	10205
T9G	3-1/2"	18.125	6.813	4.875	3 #350 MCM	300.00	—	1	2542	10206
T10G	4"	18.125	7.188	4.875	3 #350 MCM	328.00	—	1	2542	10207



FORM 7 CONDUIT BODIES

FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- To provide access to conductors for pulling, splicing, maintenance and future changes/upgrades. Allows connection of straight conduit runs, branch conduit runs and 90° bends.

FEATURES:

- Time saving clip-on covers in steel or gray iron.
- Tapered threads hubs (NPT).
- Flat back designs for greater wiring capacity and surface mounting.
- Complete interchangeability with other manufacturers' Form 7 conduit bodies.
- Internal volume and maximum wire clearly marked on castings.

STANDARD MATERIALS:

Gray Iron

STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES




UL LISTED E198259
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE C27F7

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	MAX WIRE SIZE	VOL. CU.IN.	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
C TYPE										
C17F7	1/2"	5.31	1.40	1.35	N/A	3.80	10	50	84	10480
C27F7	3/4"	6.16	1.65	1.65	3 #6 AWG	5.80	5	50	131	10481
C37F7	1"	7.30	1.79	1.79	3 #4 AWG	9.00	5	25	191	10482
C47F7	1-1/4"	7.43	2.20	2.20	3 #2 AWG	17.80	1	10	276	10483
C57F7	1-1/2"	8.16	2.45	2.45	3 #2 AWG	24.00	1	10	336	10484
C67F7	2"	9.13	3.01	3.01	3 #1/0 AWG	45.00	1	5	519	10485
C77F7	2-1/2"	12.36	4.25	4.25	3 #2/0 MCM	95.80	—	1	1068	10486
C87F7	3"	12.36	4.25	4.25	3 #2/0 MCM	119.00	—	1	1311	10487
C97F7	3-1/2"	14.49	5.31	5.31	3 #250 MCM	208.00	—	1	1764	10488
C107F7	4"	14.49	5.31	5.31	3 #250 MCM	231.00	—	1	1882	10489



TYPE LB27F7

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	MAX WIRE SIZE	VOL. CU.IN.	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
LB TYPE										
LB17F7	1/2"	4.49	2.22	1.35	N/A	3.80	10	50	86	10450
LB27F7	3/4"	5.22	2.49	1.65	3 #6 AWG	5.80	5	50	134	10451
LB37F7	1"	6.17	2.85	1.79	3 #4 AWG	9.00	5	25	188	10452
LB47F7	1-1/4"	6.50	3.24	2.20	3 #2 AWG	17.80	1	10	279	10453
LB57F7	1-1/2"	7.09	3.54	2.45	3 #2 AWG	24.50	1	10	350	10454
LB67F7	2"	8.11	4.13	3.01	3 #1/0 AWG	45.00	1	5	542	10455
LB77F7	2-1/2"	10.71	5.26	4.25	3 #2/0 MCM	95.80	—	1	1101	10456
LB87F7	3"	10.71	6.02	4.25	3 #2/0 MCM	119.00	—	1	1323	10457
LB97F7	3-1/2"	12.76	6.59	5.31	3 #250 MCM	208.00	—	1	1808	10458
LB107F7	4"	12.76	7.10	5.31	3 #250 MCM	231.00	—	1	1933	10459



FORM 7 CONDUIT BODIES

FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- To provide access to conductors for pulling, splicing, maintenance and future changes/upgrades. Allows connection of straight conduit runs, branch conduit runs and 90° bends.

FEATURES:

- Time saving clip-on covers in steel or gray iron.
- Tapered threads hubs (NPT).
- Flat back designs for greater wiring capacity and surface mounting.
- Complete interchangeability with other manufacturers' Form 7 conduit bodies.
- Internal volume and maximum wire clearly marked on castings.

STANDARD MATERIALS:

Gray Iron


STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES




UL LISTED E198259
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE LL27F7

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	MAX WIRE SIZE	VOL. CU.IN.	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
LL TYPE										
LL17F7	1/2"	4.49	1.40	1.45	N/A	3.80	10	50	85	10460
LL27F7	3/4"	5.22	1.65	2.49	3 #6 AWG	5.80	5	50	130	10461
LL37F7	1"	6.17	1.79	2.76	3 #4 AWG	9.00	5	25	190	10462
LL47F7	1-1/4"	6.50	2.20	3.13	3 #2 AWG	17.80	1	10	260	10463
LL57F7	1-1/2"	7.09	2.45	3.39	3 #2 AWG	24.50	1	10	326	10464
LL67F7	2"	8.11	3.01	4.02	3 #1/0 AWG	45.00	1	5	513	10465
LL77F7	2-1/2"	10.71	4.25	5.85	3 #250 MCM	95.80	—	1	970	10466
LL87F7	3"	10.71	4.25	5.85	3 #250 MCM	119.00	—	1	1146	10467
LL97F7	3-1/2"	12.76	5.31	6.98	3 #350 MCM	208.00	—	1	1631	10468
LL107F7	4"	12.76	5.31	6.98	3 #350 MCM	231.00	—	1	1848	10469



TYPE LR27F7

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	MAX WIRE SIZE	VOL. CU.IN.	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
LR TYPE										
LR17F7	1/2"	4.49	1.40	1.45	N/A	3.80	10	50	85	10470
LR27F7	3/4"	5.22	1.65	2.49	3 #6 AWG	5.80	5	50	130	10471
LR37F7	1"	6.17	1.79	2.76	3 #4 AWG	9.00	5	25	185	10472
LR47F7	1-1/4"	6.50	2.20	3.13	3 #2 AWG	17.80	1	10	260	10473
LR57F7	1-1/2"	7.09	2.45	3.39	3 #2 AWG	24.00	1	10	335	10474
LR67F7	2"	8.11	3.01	4.02	3 #1/0 AWG	45.00	1	5	516	10475
LR77F7	2-1/2"	10.71	4.25	5.85	3 #250 MCM	95.80	—	1	970	10476
LR87F7	3"	10.71	4.25	5.85	3 #250 MCM	119.00	—	1	1146	10477
LR97F7	3-1/2"	12.76	5.31	6.98	3 #350 MCM	208.00	—	1	1764	10478
LR107F7	4"	12.76	5.31	6.98	3 #350 MCM	231.00	—	1	1848	10479



FORM 7 CONDUIT BODIES

FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- To provide access to conductors for pulling, splicing, maintenance and future changes/upgrades. Allows connection of straight conduit runs, branch conduit runs and 90° bends.

FEATURES:

- Time saving clip-on covers in steel or gray iron.
- Tapered threads hubs (NPT).
- Flat back designs for greater wiring capacity and surface mounting.
- Complete interchangeability with other manufacturers' Form 7 conduit bodies.
- Internal volume and maximum wire clearly marked on castings.

STANDARD MATERIALS:

Gray Iron


STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198259
UL Standard: UL514B
NEMA FB-1
ASTM Rated

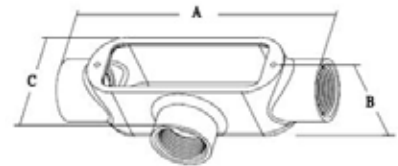

TYPE T27F7

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	MAX WIRE SIZE	VOL. CU.IN.	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
T TYPE										
T17F7	1/2"	5.31	1.77	2.48	N/A	3.80	5	50	109	10490
T27F7	3/4"	6.16	2.01	2.72	3 #6 AWG	5.80	5	50	177	10491
T37F7	1"	7.30	2.28	3.00	3 #4 AWG	9.00	5	25	242	10492
T47F7	1-1/4"	7.43	2.31	3.13	3 #2 AWG	17.80	1	10	309	10493
T57F7	1-1/2"	8.16	2.60	3.39	3 #2 AWG	24.00	1	10	384	10494
T67F7	2"	9.13	3.13	4.02	3 #1/0 AWG	45.00	1	5	586	10495
T77F7	2-1/2"	12.36	3.66	5.85	3 #2/0 MCM	95.80	—	1	1058	10496
T87F7	3"	12.36	4.45	5.85	3 #3/0 MCM	119.00	—	1	1477	10497
T97F7	3-1/2"	14.49	4.92	6.98	3 #250 MCM	208.00	—	1	1940	10498
T107F7	4"	14.49	4.92	6.98	3 #250 MCM	231.00	—	1	2116	10499



ALUMINUM THREADED CONDUIT BODIES FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- To provide access to conductors for pulling, splicing and maintenance. Threaded for rigid conduit and IMC.

FEATURES:

- Tapered threaded hubs (NPT).
- Raintight when used with gasketed covers.
- Die cast from high-strength, corrosion and weather resistant, copper-free aluminum alloy.
- Flat back design for easy mounting close to walls.

STANDARD MATERIALS:

1/2" – 2"
Die cast/Copper-free Aluminum
2-1/2" – 4"
Sand-cast/Copper-free Aluminum


STANDARD FINISH:

Aluminum Enameled

CERTIFICATIONS AND COMPLIANCES




UL LISTED E198259
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE C1A

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	MAX WIRE SIZE	VOL. CU.IN.	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
C TYPE										
C1A	1/2"	4.69	1.38	1.31	N/A	4.35	10	50	21	43015
C2A	3/4"	5.50	1.56	1.63	3 #6 AWG	7.30	10	50	33	43025
C3A	1"	6.48	1.88	1.88	3 #4 AWG	12.20	5	25	46	43035
C4A	1-1/4"	8.31	2.50	2.50	3 #2 AWG	33.50	—	10	82	43045
C5A	1-1/2"	8.38	2.50	2.50	3 #1/0 AWG	33.50	—	10	85	43055
C6A	2"	10.31	3.38	3.38	3 #4/0 AWG	69.50	—	5	188	43065
C7A	2-1/2"	13.12	4.50	4.00	3 #250 MCM	69.50	—	1	325	43075
C8A	3"	13.19	4.56	4.56	3 #250 MCM	188.00	—	1	399	43085
C9A	3-1/2"	16.12	5.69	5.63	3 #300 MCM	307.00	—	1	975	43095
C10A	4"	16.12	5.69	5.63	3 #300 MCM	309.00	—	1	875	43105



TYPE LB1A

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	MAX WIRE SIZE	VOL. CU.IN.	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
LB TYPE										
LB1A	1/2"	4.31	1.31	2.19	N/A	4.35	10	50	24	40015
LB2A	3/4"	5.06	1.56	2.44	3 #6 AWG	7.25	10	50	37	40025
LB3A	1"	5.87	1.75	2.75	3 #4 AWG	12.20	5	25	46	40035
LB4A	1-1/4"	7.81	2.50	3.44	3 #2 AWG	32.30	—	10	98	40045
LB5A	1-1/2"	7.81	2.50	3.44	3 #2 AWG	33.80	—	10	91	40055
LB6A	2"	10.06	3.12	4.31	3 #4/0 AWG	71.20	—	5	222	40065
LB7A	2-1/2"	12.81	4.50	5.31	3 #4/0 AWG	71.20	—	1	366	40075
LB8A	3"	12.81	4.50	5.94	3 #4/0 AWG	183.50	—	1	430	40085
LB9A	3-1/2"	15.62	5.56	7.06	3 #400 MCM	304.90	—	1	937	40095
LB10A	4"	15.62	5.56	7.06	3 #400 MCM	308.00	—	1	851	40106



ALUMINUM THREADED CONDUIT BODIES FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- To provide access to conductors for pulling, splicing and maintenance. Threaded for rigid conduit and IMC.

FEATURES:

- Tapered threaded hubs (NPT).
- Raintight when used with gasketed covers.
- Die cast from high-strength, corrosion and weather resistant, copper-free aluminum alloy.
- Flat back design for easy mounting close to walls.

STANDARD MATERIALS:

1/2"– 2"
Die cast/Copper-free Aluminum
2-1/2"– 4"
Sand-cast/Copper-free Aluminum


STANDARD FINISH:

Aluminum Enameled

CERTIFICATIONS AND COMPLIANCES




UL LISTED E198259
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE LL1A

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	MAX WIRE SIZE	VOL. CU.IN.	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
LL TYPE										
LL1A	1/2"	4.31	2.06	1.38	N/A	4.35	10	50	25	41015
LL2A	3/4"	5.06	2.25	1.63	3 #6 AWG	7.30	10	50	37	41025
LL3A	1"	5.87	2.63	1.88	3 #4 AWG	12.20	5	25	45	41035
LL4A	1-1/4"	7.81	3.63	2.50	3 #2 AWG	35.80	—	10	98	41045
LL5A	1-1/2"	7.81	3.63	2.50	3 #1/0 AWG	35.80	—	10	92	41055
LL6A	2"	10.06	4.44	3.38	3 #4/0 AWG	69.70	—	5	245	41065
LL7A	2-1/2"	12.81	5.75	4.00	3 #300 MCM	69.70	—	1	388	41075
LL8A	3"	12.81	5.75	4.50	3 #350 MCM	186.00	—	1	439	41085
LL9A	3-1/2"	15.62	11.69	5.63	3 #350 MCM	306.00	—	1	924	41095
LL10A	4"	15.62	11.69	5.63	3 #350 MCM	308.00	—	1	882	41105



TYPE LR1A

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	MAX WIRE SIZE	VOL. CU.IN.	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
LR TYPE										
LR1A	1/2"	4.31	2.06	1.38	N/A	4.35	10	50	23	42015
LR2A	3/4"	5.06	2.25	1.63	3 #6 AWG	7.30	10	50	38	42025
LR3A	1"	5.87	2.63	1.88	3 #4 AWG	12.20	5	25	49	42035
LR4A	1-1/4"	7.81	3.63	2.50	3 #2 AWG	35.80	—	10	98	42045
LR5A	1-1/2"	7.81	3.63	2.50	3 #1/0 AWG	35.80	—	10	94	42055
LR6A	2"	10.06	4.44	3.38	3 #4/0 AWG	69.70	—	5	254	42065
LR7A	2-1/2"	12.81	5.75	4.00	3 #300 MCM	69.70	—	1	366	42075
LR8A	3"	12.81	5.75	4.50	3 #350 MCM	186.00	—	1	406	42085
LR9A	3-1/2"	15.62	11.69	5.63	3 #350 MCM	306.00	—	1	928	42095
LR10A	4"	15.62	11.69	5.63	3 #350 MCM	308.00	—	1	902	42105



ALUMINUM THREADED CONDUIT BODIES FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- To provide access to conductors for pulling, splicing and maintenance. Threaded for rigid conduit and IMC.

FEATURES:

- Tapered threaded hubs (NPT).
- Raintight when used with gasketed covers.
- Die cast from high-strength, corrosion and weather resistant, copper-free aluminum alloy.
- Flat back design for easy mounting close to walls.

STANDARD MATERIALS:

1/2" – 2"
Die cast/Copper-free Aluminum
2-1/2" – 4"
Sand-cast/Copper-free Aluminum


STANDARD FINISH:

Aluminum Enameled

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198259
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE T1A

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	MAX WIRE SIZE	VOL. CU.IN.	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
T TYPE										
T1A	1/2"	4.75	2.06	1.38	N/A	4.35	10	50	23	44015
T2A	3/4"	5.56	2.25	1.63	3 #6 AWG	7.25	10	50	38	44025
T3A	1"	6.44	2.63	1.88	3 #4 AWG	12.20	5	25	53	44035
T4A	1-1/4"	8.25	3.56	2.50	3 #2 AWG	33.10	—	10	100	44045
T5A	1-1/2"	8.38	3.56	2.50	3 #1/0 AWG	33.10	—	10	98	44055
T6A	2"	10.69	4.38	3.13	3 #4/0 AWG	67.00	—	5	265	44065
T7A	2-1/2"	13.25	5.75	4.00	3 #4/0 AWG	67.00	—	1	375	44075
T8A	3"	13.25	5.75	4.50	3 #4/0 AWG	175.00	—	1	444	44085
T9A	3-1/2"	16.13	7.69	5.63	3 #400 MCM	298.00	—	1	1146	44095
T10A	4"	16.13	7.69	5.63	3 #400 MCM	300.00	—	1	1079	44105



ALUMINUM THREADED CONDUIT BODIES WITH COVER AND GASKET

FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- To provide access to conductors for pulling, splicing and maintenance. Threaded for rigid conduit and IMC.

FEATURES:

- Tapered threaded hubs (NPT).
- Assembled with neoprene gasket and stamped cover.
- Die cast from high-strength, corrosion and weather resistant, copper-free aluminum alloy.
- Flat back design for easy mounting close to walls.

STANDARD MATERIALS:

1/2" – 2"
Die cast/Copper-free Aluminum
2-1/2" – 4"
Sand-cast/Copper-free
Aluminum


STANDARD FINISH:

Aluminum Enameled

CERTIFICATIONS AND COMPLIANCES




UL LISTED E198259
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE C1ACG

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	MAX WIRE SIZE	VOL. CU.IN.	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
C TYPE										
C1ACG	1/2"	4.69	1.38	1.31	N/A	4.35	10	50	21	10079
C2ACG	3/4"	5.50	1.56	1.63	3 #6 AWG	7.30	10	50	33	10080
C3ACG	1"	6.48	1.88	1.88	3 #4 AWG	12.20	5	25	46	10081
C4ACG	1-1/4"	8.31	2.50	2.50	3 #2 AWG	33.50	—	10	82	10082
C5ACG	1-1/2"	8.38	2.50	2.50	3 #1/0 AWG	33.50	—	10	85	10083
C6ACG	2"	10.31	3.38	3.38	3 #4/0 AWG	69.50	—	5	188	10084
C7ACG	2-1/2"	13.12	4.50	4.00	3 #250 MCM	69.50	—	1	325	10085
C8ACG	3"	13.19	4.56	4.56	3 #250 MCM	188.00	—	1	399	10086
C9ACG	3-1/2"	16.12	5.69	5.63	3 #300 MCM	307.00	—	1	975	10087
C10ACG	4"	16.12	5.69	5.63	3 #300 MCM	309.00	—	1	875	10088



TYPE LB1ACG

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	MAX WIRE SIZE	VOL. CU.IN.	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
LB TYPE										
LB1ACG	1/2"	4.31	1.31	2.19	N/A	4.35	10	50	24	10059
LB2ACG	3/4"	5.06	1.56	2.44	3 #6 AWG	7.25	10	50	37	10060
LB3ACG	1"	5.87	1.75	2.75	3 #4 AWG	12.20	5	25	46	10118
LB4ACG	1-1/4"	7.81	2.50	3.44	3 #2 AWG	32.30	—	10	98	10062
LB5ACG	1-1/2"	7.81	2.50	3.44	3 #2 AWG	33.80	—	10	91	10063
LB6ACG	2"	10.06	3.12	4.31	3 #4/0 AWG	71.20	—	5	222	10064
LB7ACG	2-1/2"	12.81	4.50	5.31	3 #4/0 AWG	71.20	—	1	366	10065
LB8ACG	3"	12.81	4.50	5.94	3 #4/0 AWG	183.50	—	1	430	10066
LB9ACG	3-1/2"	15.62	5.56	7.06	3 #400 MCM	304.90	—	1	937	10067
LB10ACG	4"	15.62	5.56	7.06	3 #400 MCM	308.00	—	1	851	10068



ALUMINUM THREADED CONDUIT BODIES WITH COVER AND GASKET

FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- To provide access to conductors for pulling, splicing and maintenance. Threaded for rigid conduit and IMC.

FEATURES:

- Tapered threaded hubs (NPT).
- Assembled with neoprene gasket and stamped cover.
- Die cast from high-strength, corrosion and weather resistant, copper-free aluminum alloy.
- Flat back design for easy mounting close to walls.

STANDARD MATERIALS:

- 1/2" – 2" Die cast/Copper-free Aluminum
- 2-1/2" – 4" Sand-cast/Copper-free Aluminum


STANDARD FINISH:

- Aluminum Enameled

CERTIFICATIONS AND COMPLIANCES




UL LISTED E198259
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE LL1ACG

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	MAX WIRE SIZE	VOL. CU.IN.	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
LL TYPE										
LL1ACG	1/2"	4.31	2.06	1.38	N/A	4.35	10	50	25	10089
LL2ACG	3/4"	5.06	2.25	1.63	3 #6 AWG	7.30	10	50	37	10090
LL3ACG	1"	5.87	2.63	1.88	3 #4 AWG	12.20	5	25	45	10091
LL4ACG	1-1/4"	7.81	3.63	2.50	3 #2 AWG	35.80	—	10	98	10092
LL5ACG	1-1/2"	7.81	3.63	2.50	3 #1/0 AWG	35.80	—	10	92	10093
LL6ACG	2"	10.06	4.44	3.38	3 #4/0 AWG	69.70	—	5	245	10094
LL7ACG	2-1/2"	12.81	5.75	4.00	3 #300 MCM	69.70	—	1	388	10095
LL8ACG	3"	12.81	5.75	4.50	3 #350 MCM	186.00	—	1	439	10096
LL9ACG	3-1/2"	15.62	11.69	5.63	3 #350 MCM	306.00	—	1	924	10097
LL10ACG	4"	15.62	11.69	5.63	3 #350 MCM	308.00	—	1	882	10098



TYPE LR1ACG

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	MAX WIRE SIZE	VOL. CU.IN.	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
LR TYPE										
LR1ACG	1/2"	4.31	2.06	1.38	N/A	4.35	10	50	23	10099
LR2ACG	3/4"	5.06	2.25	1.63	3 #6 AWG	7.30	10	50	38	10100
LR3ACG	1"	5.87	2.63	1.88	3 #4 AWG	12.20	5	25	49	10101
LR4ACG	1-1/4"	7.81	3.63	2.50	3 #2 AWG	35.80	—	10	98	10102
LR5ACG	1-1/2"	7.81	3.63	2.50	3 #1/0 AWG	35.80	—	10	94	10103
LR6ACG	2"	10.06	4.44	3.38	3 #4/0 AWG	69.70	—	5	254	10104
LR7ACG	2-1/2"	12.81	5.75	4.00	3 #300 MCM	69.70	—	1	366	10105
LR8ACG	3"	12.81	5.75	4.50	3 #350 MCM	186.00	—	1	406	10106
LR9ACG	3-1/2"	15.62	11.69	5.63	3 #350 MCM	306.00	—	1	928	10107
LR10ACG	4"	15.62	11.69	5.63	3 #350 MCM	308.00	—	1	902	10108



ALUMINUM THREADED CONDUIT BODIES WITH COVER AND GASKET

FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- To provide access to conductors for pulling, splicing and maintenance. Threaded for rigid conduit and IMC.

FEATURES:

- Tapered threaded hubs (NPT).
- Assembled with neoprene gasket and stamped cover.
- Die cast from high-strength, corrosion and weather resistant, copper-free aluminum alloy.
- Flat back design for easy mounting close to walls.

STANDARD MATERIALS:

1/2" – 2"
Die cast/Copper-free Aluminum
2-1/2" – 4"
Sand-cast/Copper-free Aluminum


STANDARD FINISH:

Aluminum Enameled

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198259
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE T1ACG

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	MAX WIRE SIZE	VOL. CU.IN.	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
T TYPE										
T1ACG	1/2"	4.75	2.06	1.38	N/A	4.35	10	50	23	10069
T2ACG	3/4"	5.56	2.25	1.63	3 #6 AWG	7.25	10	50	38	10070
T3ACG	1"	6.44	2.63	1.88	3 #4 AWG	12.20	5	25	53	10071
T4ACG	1-1/4"	8.25	3.56	2.50	3 #2 AWG	33.10	—	10	100	10072
T5ACG	1-1/2"	8.38	3.56	2.50	3 #1/0 AWG	33.10	—	10	98	10073
T6ACG	2"	10.69	4.38	3.13	3 #4/0 AWG	67.00	—	5	265	10074
T7ACG	2-1/2"	13.25	5.75	4.00	3 #4/0 AWG	67.00	—	1	375	10075
T8ACG	3"	13.25	5.75	4.50	3 #4/0 AWG	175.00	—	1	444	10076
T9ACG	3-1/2"	16.13	7.69	5.63	3 #400 MCM	298.00	—	1	1146	10077
T10ACG	4"	16.13	7.69	5.63	3 #400 MCM	300.00	—	1	1079	10078



ALUMINUM COMBINATION CONDUIT BODIES WITH COVER AND GASKET

FOR THREADED RIGID CONDUIT, IMC AND EMT

APPLICATION:

- Used with threaded rigid conduit, IMC and EMT for providing access to the interior of a conduit system for pulling, splicing, inspection and maintenance.

FEATURES:

- Assembled with slotted/Robertson combination screws.
- Assembled with neoprene gasket and stamped cover.
- Tapered threaded hubs (NPT).
- Die cast from high-strength, corrosion and weather resistant, copper-free aluminum alloy.
- Flat back design for easy mounting close to walls.
- Suitable for use in concrete.

STANDARD MATERIALS:

Die cast/Copper-free Aluminum


STANDARD FINISH:

Aluminum Enameled

CERTIFICATIONS AND COMPLIANCES




UL LISTED E198259
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE C1CA

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	MAX WIRE SIZE	VOL. CU.IN.	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
C TYPE										
C1CA	1/2"	4.69	1.38	1.56	N/A	4.35	10	50	28	64401
C2CA	3/4"	5.50	1.56	1.75	3 #6 AWG	7.30	10	50	41	64402
C3CA	1"	6.48	1.88	2.13	3 #4 AWG	12.20	5	25	56	64403
C4CA	1-1/4"	8.31	2.50	2.75	3 #2 AWG	33.50	—	10	101	64404
C5CA	1-1/2"	8.38	2.50	2.75	3 #1/0 AWG	33.50	—	10	104	64405
C6CA	2"	10.31	3.38	3.63	3 #4/0 AWG	69.50	—	5	220	64406



TYPE LB1CA

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	MAX WIRE SIZE	VOL. CU.IN.	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
LB TYPE										
LB1CA	1/2"	4.31	1.31	2.44	N/A	4.35	10	50	24	64101
LB2CA	3/4"	5.06	1.56	2.69	3 #6 AWG	7.25	10	50	37	64102
LB3CA	1"	5.87	1.75	3.00	3 #4 AWG	12.20	5	25	46	64103
LB4CA	1-1/4"	7.81	2.50	3.69	3 #2 AWG	32.30	—	10	98	64104
LB5CA	1-1/2"	7.81	2.50	3.69	3 #2 AWG	33.80	—	10	91	64105
LB6CA	2"	10.06	3.12	4.56	3 #4/0 AWG	71.20	—	5	222	64106

ALUMINUM COMBINATION CONDUIT BODIES WITH COVER AND GASKET

FOR THREADED RIGID CONDUIT, IMC AND EMT

APPLICATION:

- Used with threaded rigid conduit, IMC and EMT for providing access to the interior of a conduit system for pulling, splicing, inspection and maintenance.

FEATURES:

- Assembled with slotted/Robertson combination screws.
- Assembled with neoprene gasket and stamped cover.
- Tapered threaded hubs (NPT).
- Die cast from high-strength, corrosion and weather resistant, copper-free aluminum alloy.
- Flat back design for easy mounting close to walls.
- Suitable for use in concrete.

STANDARD MATERIALS:

Die cast/Copper-free Aluminum


STANDARD FINISH:

Aluminum Enameled

CERTIFICATIONS AND COMPLIANCES




UL LISTED E198259
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE LL1CA

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	MAX WIRE SIZE	VOL. CU.IN.	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
LL TYPE LL1CA	1/2"	4.31	2.06	1.63	N/A	4.35	10	50	25	64201
LL2CA	3/4"	5.06	2.25	1.88	3 #6 AWG	7.30	10	50	37	64202
LL3CA	1"	5.87	2.63	2.13	3 #4 AWG	12.20	5	25	45	64203
LL4CA	1-1/4"	7.81	3.63	2.75	3 #2 AWG	35.80	—	10	98	64204
LL5CA	1-1/2"	7.81	3.63	2.75	3 #1/0 AWG	35.80	—	10	92	64205
LL6CA	2"	10.06	4.44	3.63	3 #4/0 AWG	69.70	—	5	245	64206



TYPE LR1CA

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	MAX WIRE SIZE	VOL. CU.IN.	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
LR TYPE LR1CA	1/2"	4.31	2.06	1.63	N/A	4.35	10	50	23	64301
LR2CA	3/4"	5.06	2.25	1.88	3 #6 AWG	7.30	10	50	38	64302
LR3CA	1"	5.87	2.63	2.13	3 #4 AWG	12.20	5	25	49	64303
LR4CA	1-1/4"	7.81	3.63	2.75	3 #2 AWG	35.80	—	10	98	64304
LR5CA	1-1/2"	7.81	3.63	2.75	3 #1/0 AWG	35.80	—	10	94	64305
LR6CA	2"	10.06	4.44	3.63	3 #4/0 AWG	69.70	—	5	254	64306



ALUMINUM COMBINATION CONDUIT BODIES WITH COVER AND GASKET

FOR THREADED RIGID CONDUIT, IMC AND EMT

APPLICATION:

- Used with threaded rigid conduit, IMC and EMT for providing access to the interior of a conduit system for pulling, splicing, inspection and maintenance.

FEATURES:

- Assembled with slotted/Robertson combination screws.
- Assembled with neoprene gasket and stamped cover.
- Tapered threaded hubs (NPT).
- Die cast from high-strength, corrosion and weather resistant, copper-free aluminum alloy.
- Flat back design for easy mounting close to walls.
- Suitable for use in concrete.

STANDARD MATERIALS:

Die cast/Copper-free Aluminum


STANDARD FINISH:

Aluminum Enameled

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198259
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE T1CA

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	MAX WIRE SIZE	VOL. CU.IN.	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
T TYPE										
T1CA	1/2"	4.75	2.06	1.63	N/A	4.35	10	50	23	64501
T2CA	3/4"	5.56	2.25	1.88	3 #6 AWG	7.25	10	50	38	64502
T3CA	1"	6.44	2.63	2.13	3 #4 AWG	12.20	5	25	53	64503
T4CA	1-1/4"	8.25	3.56	2.75	3 #2 AWG	33.10	—	10	100	64504
T5CA	1-1/2"	8.38	3.56	2.75	3 #1/0 AWG	33.10	—	10	98	64505
T6CA	2"	10.69	4.38	3.63	3 #4/0 AWG	67.00	—	5	265	64506



CONDUIT BODY COVERS

STEEL AND ALUMINUM COVERS

APPLICATION:

- Used with conduit bodies to cover opening.

FEATURES:

- Assembled with captive zinc plated steel screws.

STANDARD MATERIALS:

Steel


STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198259
UL Standard: UL514B
NEMA FB-1
ASTM Rated

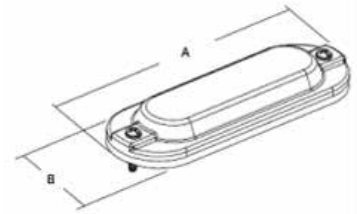

TYPE 02

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
STEEL COVERS							
01	1/2"	3.875	1.310	25	250	9	49017
02	3/4"	4.625	1.520	25	250	13	49027
03	1"	5.315	1.710	20	200	19	49037
04	1-1/4"-1-1/2"	7.240	2.510	25	100	31	49047
05	2"	9.484	3.110	—	50	50	49057
06	2-1/2"-3"	14.937	5.500	—	10	94	49067
07	3-1/2"-4"	15.000	6.000	—	10	138	49077

APPLICATION:

- Used with conduit bodies to cover opening.

FEATURES:

- Assembled with captive zinc plated steel screws.
- Stamped from high-strength aluminum, corrosion and weather resistant copper-free aluminum alloy.


STANDARD MATERIALS:

Stamped Aluminum

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198259
UL Standard: UL514B
NEMA FB-1
ASTM Rated

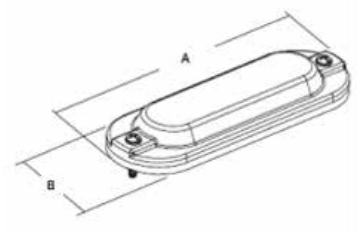

TYPE 02A

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
ALUMINUM COVERS							
01A	1/2"	3.90	1.37	25	250	6	49105
02A	3/4"	4.70	1.60	25	250	10	49205
03A	1"	5.40	1.78	20	200	14	49305
04A	1-1/4"-1-1/2"	7.25	2.52	25	100	18	49405
05A	2"	9.50	3.11	—	50	20	49505
06A	2-1/2"-3"	12.13	4.45	—	10	33	49605
07A	3-1/2"-4"	14.94	5.50	—	10	62	49705



MALLEABLE IRON CONDUIT BODY COVERS

APPLICATION:

- Used with conduit bodies to cover opening.

FEATURES:

- Supplied with Stainless Steel captive screws.
- Sizes 2-1/2"-4" with raised dome affords additional wiring room.

STANDARD MATERIALS:

Malleable Iron

STANDARD FINISH:

Zinc plated


CERTIFICATIONS AND COMPLIANCES



UL LISTED E198259
UL Standard: UL514B
NEMA FB-1
ASTM Rated

OPTIONAL FINISH:

For additional corrosion protection, specify Hot Dipped Galvanized. Add suffix "G" to Malleable Iron catalog number. Example 01MG. For more information, see page 16.



TYPE 01M

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
MALLEABLE IRON								
01M	1/2"	3.936	1.313	0.063	25	250	23	90131
02M	3/4"	4.625	1.500	0.063	25	250	31	90132
03M	1"	5.313	1.750	0.063	20	200	41	90133
04M	1-1/4"-1-1/2"	7.188	2.500	0.250	25	100	91	90134
05M	2"	9.500	3.188	0.313	—	25	208	90135
06M	2-1/2"-3"	12.125	4.313	1.063	—	10	358	90136
07M	3-1/2"-4"	14.875	5.625	1.125	—	10	550	90137

MALLEABLE IRON/**HOT DIPPED GALVANIZED** CONDUIT BODY COVERS

APPLICATION:

- Used with conduit bodies to cover opening.

FEATURES:

- Supplied with Stainless Steel captive screws.
- Sizes 2-1/2"-4" with raised dome affords additional wiring room.

STANDARD MATERIALS:

Malleable Iron

STANDARD FINISH:


Hot Dipped Galvanized/Zinc Plated



CERTIFICATIONS AND COMPLIANCES



UL LISTED E198259
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE 01MG

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
01MG	1/2"	3.936	1.313	0.063	25	250	23	70224
02MG	3/4"	4.625	1.500	0.063	25	250	31	70225
03MG	1"	5.313	1.750	0.063	20	200	41	70226
04MG	1-1/4"-1-1/2"	7.188	2.500	0.250	25	100	91	70227
05MG	2"	9.500	3.188	0.313	—	25	208	70228
06MG	2-1/2"-3"	12.125	4.313	1.063	—	10	358	70229
07MG	3-1/2"-4"	14.875	5.625	1.125	—	10	550	70230




NEOPRENE GASKETS

APPLICATION:

- Gasket used with conduit bodies for a raintight seal.

STANDARD FINISH:

Neoprene Rubber



TYPE 11

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	UNIT PACK	MASTER PACK	LBS./ 100 PCS	UPC #
NEOPRENE GASKETS							
10	1/2"	3.90	1.37	200	2000	3	49910
11	3/4"	4.60	1.56	100	1000	3	49911
12	1"	5.34	1.73	100	1000	3	49912
13	1-1/4"-1-1/2"	7.25	2.51	50	500	6	49913
14	2"	9.50	3.05	25	100	11	49914
15	2-1/2"-3"	12.13	4.39	—	10	13	49915
16	3-1/2"-4"	14.88	5.43	—	10	28	49916

FORM 7 CONDUIT BODY COVERS FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- Used with Form 7 conduit bodies to cover opening.

FEATURES:

- Covers with integral sealing gaskets are installed without the use of screws, reducing installation time and costs.
- Supplied with Stainless Steel captive screws.
- Easy installation.
- Easy removal.

STANDARD MATERIALS:

Steel/Stainless Steel Screws

STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198259
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE 270

Covers with Integral Sealing Gasket

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
170	1/2"	3.66	1.35	0.27	50	250	11	10500
270	3/4"	4.29	1.55	0.27	50	250	16	10501
370	1"	5.03	1.79	0.28	25	200	21	10502
470	1-1/4"	5.57	2.19	0.28	20	100	29	10503
570	1-1/2"	6.06	2.45	0.28	20	100	33	10504
670	2"	7.07	3.01	0.28	—	50	44	10505
870	2-1/2"-3"	9.06	4.25	0.50	—	10	113	10506
970	3-1/2"-4"	11.00	5.31	0.64	—	10	150	10507

STANDARD MATERIALS:

Gray Iron/Stainless Steel Screws


STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198259
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE 270G

Covers with Integral Sealing Gasket

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
170G	1/2"	3.66	1.35	0.37	50	250	31	10508
270G	3/4"	4.29	1.55	0.37	50	250	39	10509
370G	1"	5.03	1.79	0.47	25	200	58	10510
470G	1-1/4"	5.57	2.19	0.51	20	100	88	10511
570G	1-1/2"	6.06	2.45	0.57	20	100	108	10512
670G	2"	7.07	3.01	0.58	—	25	165	10513
870G	2-1/2"-3"	9.06	4.25	0.58	—	10	220	10514
970G	3-1/2"-4"	11.00	5.31	0.64	—	10	265	10515



FS AND FD DEVICE BOXES – SINGLE GANG FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- Accommodates wiring devices and provides opening to splice, tap or pull conductors.

FEATURES:

- Tapered threaded hubs (NPT) with integral bushing.
- Internal grounding screw.
- Suitable for use in wet locations when used with gasketed covers.
- Surface mounting lug.

STANDARD MATERIALS:

Malleable Iron

STANDARD FINISH:

Zinc Plated


CERTIFICATIONS AND COMPLIANCES



UL LISTED E198259
UL Standard: UL514B
NEMA FB-1
ASTM Rated


OPTIONAL FINISH:

For additional corrosion protection, specify Hot Dipped Galvanized. Add suffix "G" to Malleable Iron catalog number. Example FD-50G. See Page 17.



TYPE FD-50

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
FS-50	1/2"	5.250	2.938	2.125	1	5	221	90116
FS-75	3/4"	5.250	2.938	2.125	1	5	233	90117
FS-100	1"	5.250	2.938	2.125	1	5	242	90118
FD-50	1/2"	5.250	3.000	2.875	1	5	272	90119
FD-75	3/4"	5.250	3.000	2.875	1	5	278	90120
FD-100	1"	5.250	3.000	2.875	1	5	283	90121



TYPE FSC-50

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
FSC-50	1/2"	6.063	2.938	2.125	1	5	234	90122
FSC-75	3/4"	6.063	2.938	2.125	1	5	240	90123
FSC-100	1"	6.063	2.938	2.125	1	5	250	90124
FDC-50	1/2"	6.063	3.000	2.875	1	5	293	90125
FDC-75	3/4"	6.063	3.000	2.875	1	5	305	90126
FDC-100	1"	6.063	3.000	2.875	1	5	313	90127



MALLEABLE IRON/**HOT DIPPED GALVANIZED** FS AND FD DEVICE BOXES—SINGLE GANG FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- Accommodates wiring devices and provides opening to splice, tap or pull conductors.

FEATURES:

- Tapered threaded hubs (NPT) with integral bushing.
- Internal grounding screw.
- Suitable for use in wet locations when used with gasketed covers.
- Surface mounting lugs.

STANDARD FINISH:

Hot Dipped Galvanized/Zinc Plated



OPTIONAL FINISH:

For Malleable Iron/Zinc Plated, please remove the "G" suffix from Hot Dipped Galvanized catalog number and see page 72.

CERTIFICATIONS AND COMPLIANCES




UL LISTED E198259

UL Standard: UL514B


NEMA FB-1

ASTM Rated



TYPE FD-50G

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC#
FS-50G	1/2"	5.250	2.938	2.125	1	5	221	90168
FS-75G	3/4"	5.250	2.938	2.125	1	5	233	90170
FS-100G	1"	5.250	2.938	2.125	1	5	242	90172
FD-50G	1/2"	5.250	3.000	2.875	1	5	272	90174
FD-75G	3/4"	5.250	3.000	2.875	1	5	278	90176
FD-100G	1"	5.250	3.000	2.875	1	5	283	90178



TYPE FSC-50G

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC#
FSC-50G	1/2"	6.063	2.938	2.125	1	5	234	90218
FSC-75G	3/4"	6.063	2.938	2.125	1	5	240	90220
FSC-100G	1"	6.063	2.938	2.125	1	5	250	90222
FDC-50G	1/2"	6.063	3.000	2.875	1	5	293	90212
FDC-75G	3/4"	6.063	3.000	2.875	1	5	305	97214
FDC-100G	1"	6.063	3.000	2.875	1	5	313	97216



MALLEABLE IRON FDT AND FDCT DEVICE BOXES – SINGLE GANG

FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- Accommodates wiring devices and provides opening to splice, tap or pull conductors.

FEATURES:

- Tapered threaded hubs (NPT) with integral bushing.
- Internal grounding screw.
- Suitable for use in wet locations when used with gasketed covers.
- Surface mounting lugs.

STANDARD MATERIALS:

Malleable Iron

STANDARD FINISH:

Hot Dipped Galvanized


OPTIONAL FINISH:

For additional corrosion protection, specify Hot Dipped Galvanized. Add suffix "G" to Malleable Iron catalog number. Example FDT-50G. See page 18.

CERTIFICATIONS AND COMPLIANCES




UL LISTED E198259
UL Standard:
UL514B
NEMA FB-1
ASTM Rated

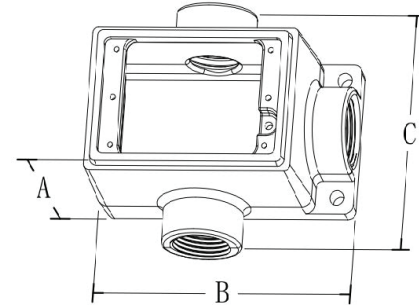

FDT-50

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
FDT-50	1/2"	2.90	5.31	4.59	1	10	300	89200
FDT-75	3/4"	2.90	5.31	4.59	1	10	310	89205
FDT-100	1"	2.90	5.31	4.59	1	10	310	89210

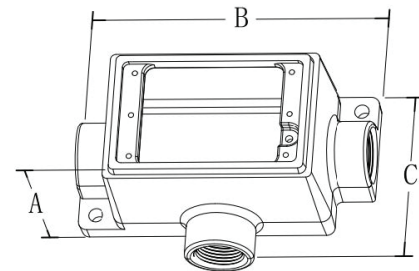

FDCT-50

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
FDCT-50	1/2"	2.90	6.12	3.78	1	10	300	89215
FDCT-75	3/4"	2.90	6.12	3.78	1	10	310	89220
FDCT-100	1"	2.90	6.12	3.78	1	10	310	89225



MALLEABLE IRON/**HOT DIPPED GALVANIZED** FDT AND FDCT DEVICE BOXES – SINGLE GANG FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- Accommodates wiring devices and provides opening to splice, tap or pull conductors.

FEATURES:

- Tapered threaded hubs (NPT) with integral bushing.
- Internal grounding screw.
- Suitable for use in wet locations when used with gasketed covers.
- Surface mounting lugs.

STANDARD MATERIALS:

Malleable Iron

STANDARD FINISH:

Hot Dipped Galvanized/Zinc Plated




OPTIONAL FINISH:

For Malleable Iron/Zinc Plated, please remove the "G" suffix from Hot Dipped Galvanized catalog number and see page 74.

CERTIFICATIONS AND COMPLIANCES




UL LISTED E198259
UL Standard:
UL514B
NEMA FB-1
ASTM Rated

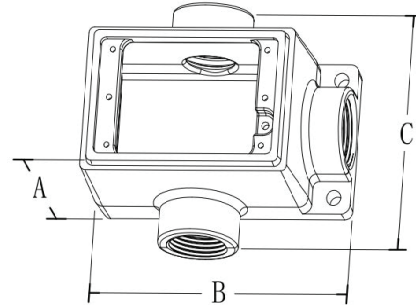

FDT-50G

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
FDT-50G	1/2"	2.90	5.31	4.59	1	10	300	89202
FDT-75G	3/4"	2.90	5.31	4.59	1	10	310	89207
FDT-100G	1"	2.90	5.31	4.59	1	10	310	89212

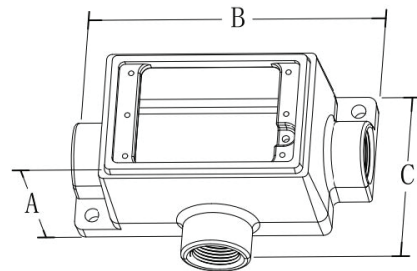

FDCT-50G

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
FDCT-50G	1/2"	2.90	6.12	3.78	1	10	300	89217
FDCT-75G	3/4"	2.90	6.12	3.78	1	10	310	89222
FDCT-100G	1"	2.90	6.12	3.78	1	10	310	89225



FS AND FD DEVICE BOX COVERS – SINGLE GANG

FEATURES:

- Blank cover with gasket for enclosing splices and taps where device is not used.
- For square handle general use snap or toggle switches guarded.
- For standard and 3-pole, 2 wire grounding type duplex convenience receptacles.
- Each cover individually bagged and supplied with screws.

STANDARD MATERIALS:

Steel

STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES




UL LISTED E198259

UL Standard:

UL514B

NEMA FB-1

ASTM Rated

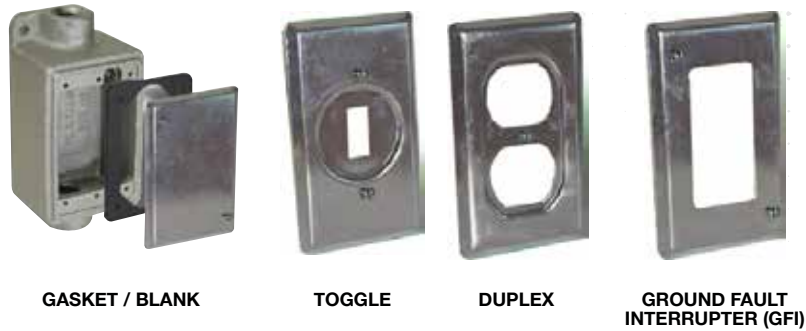

CATALOG NUMBER	TYPE	UNIT PACK	MASTER PACK	LBS./ 100 PCS	UPC #
FSFDCS1	Blank	5	50	18	10110
FSFDCS2	Toggle Switch	5	50	17	10111
FSFDCS3	Duplex Receptacle	5	50	14	10112
FSFDCS4	Ground Fault Interrupter (GFI)	5	50	13	10113

STANDARD MATERIALS:

Malleable Iron

STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198259

UL Standard:

UL514B

NEMA FB-1

ASTM Rated



CATALOG NUMBER	TYPE	UNIT PACK	MASTER PACK	LBS./ 100 PCS	UPC #
FSFDCM1	Blank	5	50	56	10114
FSFDCM2	Toggle Switch	5	50	63	10115
FSFDCM3	Duplex Receptacle	5	50	54	10116

OPTIONAL FINISH:

For additional corrosion protection, specify Hot Dipped Galvanized. Add suffix "G" to Malleable Iron catalog number. Example FSFDCM1G. See page 20.

STANDARD MATERIALS:

Neoprene Gasket

CATALOG NUMBER	TYPE	UNIT PACK	MASTER PACK	LBS./ 100 PCS	UPC #
FSFDCG	GASKET	10	100	3	10117



FS AND FD DEVICE BOXES – DOUBLE GANG FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- Accommodates wiring devices and provides opening to splice, tap or pull conductors.

FEATURES:

- Tapered threads (NPT) with integral bushings.
- 2 grounding screws located on top and bottom for easy access.
- Suitable for use in wet locations when used with FSFD2-CS1 and FSFD-CG.
- Malleable Iron is suitable for concrete use.

STANDARD MATERIALS:

Malleable Iron


STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198259
UL Standard: UL514B
NEMA FB-1
ASTM Rated




TYPE FD2-50

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
FS2-50	1/2"	5.125	5.625	2.063	1	10	297	54006
FS2-75	3/4"	5.125	5.625	2.063	1	10	300	54007
FS2-100	1"	5.125	5.625	2.063	1	10	317	54008
FD2-50	1/2"	5.125	5.625	2.875	1	10	369	54000
FD2-75	3/4"	5.125	5.625	2.875	1	10	375	54001
FD2-100	1"	5.125	5.625	2.875	1	10	376	54002

OPTIONAL FINISH:

For additional corrosion protection, specify Hot Dipped Galvanized. Add suffix "G" to Malleable Iron catalog number. Example: FD2-50G. See page 19.



TYPE FSC2-50

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
FSC2-50	1/2"	5.938	5.625	2.063	1	10	302	54009
FSC2-75	3/4"	5.938	5.625	2.063	1	10	315	54010
FSC2-100	1"	5.938	5.625	2.063	1	10	335	54011
FDC2-50	1/2"	5.938	5.625	2.875	1	10	405	54003
FDC2-75	3/4"	5.938	5.625	2.875	1	10	415	54004
FDC2-100	1"	5.938	5.625	2.875	1	10	418	54005



MALLEABLE IRON/**HOT DIPPED GALVANIZED** FS AND FD DOUBLE GANG DEVICE BOXES FOR THREADED RIGID CONDUIT AND IMC

**NEW
PRODUCT**
APPLICATION:

- Accommodates wiring devices and provides opening to splice, tap or pull conductors.

FEATURES:

- Tapered threaded hubs (NPT) with integral bushing.
- Two internal grounding screws.
- Suitable for use in wet locations when used with gasketed covers.
- Surface mounting lugs.

STANDARD MATERIALS:
Body: Malleable Iron

STANDARD FINISH:


Hot Dipped Galvanized/Zinc Plated


OPTIONAL FINISH:

For Malleable Iron/Zinc Plated, please remove the "G" suffix from Hot Dipped Galvanized catalog number and see page 77.

CERTIFICATIONS AND COMPLIANCES


UL LISTED E198259
UL Standard: UL514B
NEMA FB-1
ASTM Rated

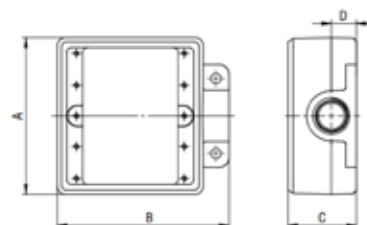

TYPE FS2-50G

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC#
FS2-50G	1/2"	5.125	5.625	2.063	1	10	297	54106
FS2-75G	3/4"	5.125	5.625	2.063	1	10	300	54107
FS2-100G	1"	5.125	5.625	2.063	1	10	317	54108
FD2-50G	1/2"	5.125	5.625	2.875	1	10	369	54100
FD2-75G	3/4"	5.125	5.625	2.875	1	10	375	54101
FD2-100G	1"	5.125	5.625	2.875	1	10	376	54102



TYPE FSC2-50G

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC#
FSC2-50G	1/2"	5.938	5.625	2.063	1	10	302	54109
FSC2-75G	3/4"	5.938	5.625	2.063	1	10	315	54110
FSC2-100G	1"	5.938	5.625	2.063	1	10	335	54111
FDC2-50G	1/2"	5.938	5.625	2.875	1	10	405	54103
FDC2-75G	3/4"	5.938	5.625	2.875	1	10	415	54104
FDC2-100G	1"	5.938	5.625	2.875	1	10	418	54105



FS AND FD DEVICE BOX COVERS — DOUBLE GANG

FOR THREADED RIGID CONDUIT AND IMC

FEATURES:

- Each cover comes with captive screws.
- FSFD-CS1 — Raintight if used with FSFD2-CG.

STANDARD MATERIALS:

Steel

STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198259
UL Standard: UL514B
NEMA FB-1
ASTM Rated



BLANK



UNGUARDED SQUARE
HANDLE SWITCH



DUPLEX
RECEPTACLE



GFI RECEPTACLE



UNGUARDED SQUARE
HANDLE SWITCH/
DUPLEX RECEPTACLE



UNGUARDED SQUARE
HANDLE SWITCH/
ROUND RECEPTACLE

CATALOG NUMBER	TYPE	UNIT PACK	MASTER PACK	LBS. / 100 PCS.	UPC #
FSFD2-CS1	Blank	—	5	40	50415
FSFD2-CS2	Unguarded Square Handle Switch	—	10	37	50418
FSFD2-CS3	Duplex Receptacle	—	10	30	50416
FSFD2-CS4	GFI Receptacle	—	5	26	50417
FSFD2-CS5	Unguarded Square Handle Switch/Duplex Receptacle	—	10	33	50420
FSFD2-CS6	Unguarded Square Handle Switch/Round Receptacle	—	10	35	50419

FEATURES:

- Each cover comes with captive screws.
- FSFD-CM1 — Raintight if used with FSFD2-CG.

STANDARD MATERIALS:

Gray Iron

STANDARD FINISH:

Zinc Plated

OPTIONAL FINISH:

Also available in Hot Dipped Galvanized finish upon request. Add suffix "G" to Malleable Iron catalog number.
Example: FSFD-CM1G. See page 20.

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198259
UL Standard: UL514B
NEMA FB-1
ASTM Rated



BLANK



GUARDED SQUARE
HANDLE SWITCH



GASKET

CATALOG NUMBER	TYPE	UNIT PACK	MASTER PACK	LBS. / 100 PCS.	UPC #
FSFD2-CM1	Blank	1	10	89	54013
FSFD2-CM2	Guarded Square Handle Switch	1	10	94	54014

CATALOG NUMBER	TYPE	UNIT PACK	MASTER PACK	LBS. / 100 PCS.	UPC #
FSFD2-CG	Gasket	—	20	4	54012



MALLEABLE IRON/**HOT DIPPED GALVANIZED** FS AND FD DEVICE BOX COVERS—SINGLE & DOUBLE GANG

FOR THREADED RIGID CONDUIT AND IMC



FEATURES:

- Blank cover with gasket for enclosing splices and taps where device is not used.
- For square handle general use snap or toggle switches guarded.
- Standard and 3-pole, 2 wire grounding type duplex convenience receptacles.
- Each cover individually bagged and supplied with screws.

STANDARD MATERIALS:

Body: Malleable Iron

STANDARD FINISH:

Hot Dipped Galvanized/Zinc Plated



OPTIONAL FINISH:

For Malleable Iron/Zinc Plated, please remove the "G" suffix from Hot Dipped Galvanized catalog number and see page 76.

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198259
UL Standard: UL514B
NEMA FB-1
ASTM Rated



BLANK



TOGGLE



DUPLEX

TYPE FSFDCM1G

CATALOG NUMBER	TYPE	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC#
FSFDCM1G	Blank	5	50	56	10213
FSFDCM2G	Toggle Switch	5	50	63	10214
FSFDCM3G	Duplex Receptacle	5	50	54	10215

FEATURES:

- Each cover comes with captive screws.
- FSFD2-CM1G—Raintight if used with FSFD2-CG.

STANDARD MATERIALS:

Covers: Malleable Iron
Gasket: Neoprene

STANDARD FINISH:

Hot Dipped Galvanized/Zinc Plated



OPTIONAL FINISH:

For Malleable Iron/Zinc Plated, please remove the "G" suffix from Hot Dipped Galvanized catalog number and see page 79.

CERTIFICATIONS AND COMPLIANCES




UL LISTED E198259
UL Standard: UL514B
NEMA FB-1
ASTM Rated



BLANK



GUARDED SQUARE
HANDLE SWITCH



GASKET

TYPE FSFD2-CM1G

CATALOG NUMBER	TYPE	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC#
FSFD2-CM1G	Blank	—	10	89	54030
FSFD2-CM2G	Guarded Square Handle Switch	—	5	94	54035

TYPE FSFDCG

CATALOG NUMBER	TYPE	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC#
FSFDCG	Gasket Single Gang	10	100	3	10117
FSFD2-CG	Gasket Double Gang	—	20	4	54012

MALLEABLE IRON INSULATED GROUNDING BUSHINGS

FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- Used with a locknut to terminate threaded rigid and IMC conduit to a box or enclosure and to provide a smooth pulling surface. Thermoplastic liner prevents damage to wire insulation. Liner rated at 150°C.

FEATURES:

- The plastic liner won't chip, crack, swell or shrink. It resists corrosion, chemicals and temperature extremes.
- Set-screw provided with each fitting locks bushing in any desired position.
- UL Listed for use with Copper or Aluminum Grounding Conductors.

STANDARD MATERIALS:

Malleable Iron/open side tin plated aluminum lug

STANDARD FINISH:

Zinc Plated

Optional Lug: Available with copper lug; use suffix "C" instead of "L." Example: 20BI4C. See page 82.


OPTIONAL FINISH:

For additional corrosion protection, specify Hot Dipped Galvanized. Add suffix "G" to Malleable Iron catalog number. Example 20BI4LG. For more information, see page 21.

CERTIFICATIONS AND COMPLIANCES



UL LISTED E93683
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE 25BI4L

CATALOG NUMBER	TRADE SIZE	GROUNDING LUG CAPACITY	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
THREADED 20BI4L	1/2"	#14 - #4	1.34	1.19	0.61	100	1000	7	20006
21BI4L	3/4"	#14 - #4	1.47	1.45	0.64	50	500	11	20013
22BI4L	1"	#14 - #4	1.63	1.76	0.72	25	250	15	20019
23BI4L	1-1/4"	#14 - #4	1.80	2.10	0.74	25	250	18	20025
24BI4L	1-1/2"	#14 - #4	2.11	2.33	0.80	25	250	23	20033
25BI4L	2"	#14 - #4	2.34	2.79	0.85	25	250	28	25011
25BIOL	2"	#14 - #1/0	2.55	2.79	0.85	25	250	32	25012
26BIOL	2-1/2"	#14 - #1/0	2.84	3.33	1.10	-	10	57	25017
26BI4OL	2-1/2"	#6 - #250MCM	3.47	3.33	1.10	-	10	70	25018
27BIOL	3"	#14 - #1/0	3.11	3.87	1.10	-	10	73	25029
27BI4OL	3"	#6 - #250MCM	3.74	3.87	1.10	-	10	85	25030
28BIOL	3-1/2"	#14 - #1/0	3.38	4.42	1.10	-	10	88	28043
28BI4OL	3-1/2"	#6 - #250MCM	4.02	4.42	1.10	-	10	90	28044
29BIOL	4"	#14 - #1/0	3.62	4.89	1.10	-	10	118	28055
29BI4OL	4"	#6 - #250MCM	4.25	4.89	1.10	-	10	121	28056
30BI4OL	5"	#6 - #250MCM	4.80	6.00	1.13	-	10	165	28067
31BI4OL	6"	#6 - #250MCM	5.46	7.31	1.13	-	10	203	28068



MALLEABLE IRON INSULATED GROUNDING BUSHINGS

FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- Used with a locknut to terminate threaded rigid and IMC conduit to a box or enclosure, and to provide a smooth pulling surface. Thermoplastic liner prevents damage to wire insulation. Liner rated at 150°C.

FEATURES:

- The plastic liner won't chip, crack, swell or shrink. It resists corrosion, chemicals and temperature extremes.
- Set-screw provided with each fitting locks bushing in any desired position.

STANDARD MATERIALS:

Malleable Iron/open side copper lug

STANDARD FINISH:

Zinc Plated

Optional Lug: Available with aluminum lug; use suffix "L" instead of "C."
Example: 20BI4L. See page 81.


OPTIONAL FINISH:

For additional corrosion protection, specify Hot Dipped Galvanized. Add suffix "G" to Malleable Iron Catalog Number. Example 20BI4CG.
For more information, see page 22.

CERTIFICATIONS AND COMPLIANCES



UL LISTED E93683
UL Standard: UL514B
NEMA FB-1
ASTM Rated

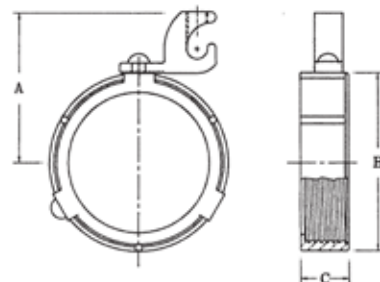

TYPE 25BI4C

CATALOG NUMBER	TRADE SIZE	GROUNDING LUG CAPACITY	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
20BI4C	1/2"	#14 - #4	1.34	1.19	0.61	100	1000	9.9	20004
21BI4C	3/4"	#14 - #4	1.47	1.45	0.64	50	500	13.2	20011
22BI4C	1"	#14 - #4	1.63	1.76	0.72	25	250	17.6	20017
23BI4C	1-1/4"	#14 - #4	1.80	2.10	0.74	25	250	20.9	20023
24BI4C	1-1/2"	#14 - #4	2.11	2.33	0.80	25	250	25.3	20029
24BIOC	1-1/2"	#14 - #1/0	2.32	2.33	0.80	25	250	26	20030
25BI4C	2"	#14 - #4	2.34	2.79	0.85	25	250	29.8	20039
25BIOC	2"	#14 - #1/0	2.55	2.79	0.85	25	250	41.3	20040
26BIOC	2-1/2"	#14 - #1/0	2.84	3.33	1.10	—	10	66.5	25013
26BI40C	2-1/2"	#6 - #250MCM	3.47	3.33	1.10	—	10	101	25014
27BIOC	3"	#14 - #1/0	3.11	3.87	1.10	—	10	82	25025
27BI40C	3"	#6 - #250MCM	3.74	3.87	1.10	—	10	116.4	25032
28BIOC	3-1/2"	#14 - #1/0	3.38	4.42	1.10	—	10	93	25037
28BI40C	3-1/2"	#6 - #250MCM	4.02	4.42	1.10	—	10	122	25038
29BIOC	4"	#14 - #1/0	3.62	4.89	1.10	—	10	120	28051
29BI40C	4"	#6 - #250MCM	4.25	4.89	1.10	—	10	152.8	28052
30BI40C	5"	#6 - #250MCM	4.87	6.00	1.10	—	10	196.9	28064
31BI40C	6"	#6 - #250MCM	5.46	7.31	1.10	—	10	234.4	28069



MALLEABLE IRON/HOT DIPPED GALVANIZED INSULATED GROUNDING BUSHINGS FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- Used with a locknut to terminate threaded rigid and IMC conduit to a box or enclosure, and to provide a smooth pulling surface. Thermoplastic liner prevents damage to wire insulation. Liner rated at 150°C.

FEATURES:

- The plastic liner won't chip, crack, swell or shrink. It resists corrosion, chemicals and temperature extremes.
- Set-screw provided with each fitting locks bushing in any desired position.
- UL Listed for use with Copper or Aluminum Grounding Conductors.

STANDARD MATERIALS:

Malleable Iron/open side tin plated aluminum lug

STANDARD FINISH:

Hot Dipped Galvanized/Zinc Plated



Optional Lug: Available with copper lug; use suffix "C" instead of "L." Example: 20BI4CG. See page 84.


OPTIONAL FINISH:

For Malleable Iron/Zinc Plated, please remove suffix "G" from Hot Dipped Galvanized Catalog Number and see page 81.

CERTIFICATIONS AND COMPLIANCES



UL LISTED E93683
UL Standard: UL514B
NEMA FB-1
ASTM Rated

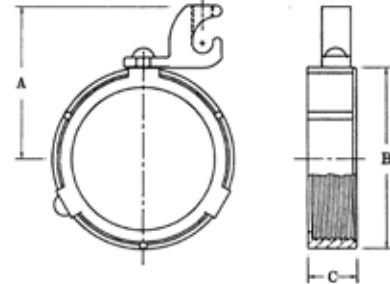

TYPE 25BI4LG

CATALOG NUMBER	TRADE SIZE	GROUNDING LUG CAPACITY	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
20BI4LG	1/2"	#14 - #4	1.34	1.19	0.61	100	1000	7	10021
21BI4LG	3/4"	#14 - #4	1.47	1.45	0.64	50	500	11	10022
22BI4LG	1"	#14 - #4	1.63	1.76	0.72	25	250	15	10023
23BI4LG	1-1/4"	#14 - #4	1.80	2.10	0.74	25	250	18	10024
24BI4LG	1-1/2"	#14 - #4	2.11	2.33	0.80	25	250	23	10025
25BI4LG	2"	#14 - #4	2.34	2.79	0.85	25	250	28	10026
25BIOLG	2"	#14 - #1/0	2.55	2.79	0.85	25	250	41	10129
26BIOLG	2-1/2"	#14 - #1/0	2.84	3.33	1.10	—	10	57	10027
26BI4OLG	2-1/2"	#6 - #250MCM	3.47	3.33	1.10	—	10	70	10028
27BIOLG	3"	#14 - #1/0	3.11	3.87	1.10	—	10	73	10029
27BI4OLG	3"	#6 - #250MCM	3.74	3.87	1.10	—	10	85	10030
28BIOLG	3-1/2"	#14 - #1/0	3.38	4.42	1.10	—	10	88	10031
28BI4OLG	3-1/2"	#6 - #250MCM	4.02	4.42	1.10	—	10	90	10032
29BIOLG	4"	#14 - #1/0	3.62	4.89	1.10	—	10	118	10033
29BI4OLG	4"	#6 - #250MCM	4.25	4.89	1.10	—	10	121	10034
30BI4OLG	5"	#6 - #250MCM	4.87	6.00	1.10	—	10	165	10036
31BI4OLG	6"	#6 - #250MCM	5.46	7.31	1.10	—	10	203	10038



MALLEABLE IRON/**HOT DIPPED GALVANIZED** INSULATED GROUNDING BUSHINGS

FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- Used with a locknut to terminate threaded rigid and IMC conduit to a box or enclosure, and to provide a smooth pulling surface. Thermoplastic liner prevents damage to wire insulation. Liner rated at 150°C.

FEATURES:

- The plastic liner won't chip, crack, swell or shrink. It resists corrosion, chemicals and temperature extremes.
- Set-screw provided with each fitting locks bushing in any desired position.

STANDARD MATERIALS:

Malleable Iron/open side copper lug

STANDARD FINISH:

Hot Dipped Galvanized/Zinc Plated



Optional Lug: Available with aluminum lug; use suffix "L" instead of "C."
Example: 20BI4LG. See page 83.


OPTIONAL FINISH:

For Malleable Iron/Zinc Plated, please remove suffix "G" from Hot Dipped Galvanized Catalog Number and see page 82.

CERTIFICATIONS AND COMPLIANCES



UL LISTED E93683
UL Standard: UL514B
NEMA FB-1
ASTM Rated

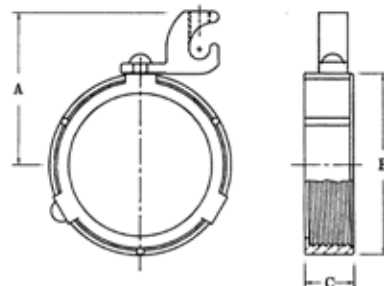

TYPE 25BI4CG

CATALOG NUMBER	TRADE SIZE	GROUNDING LUG CAPACITY	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
20BI4CG	1/2"	#14 - #4	1.34	1.19	0.61	100	1000	7	10119
21BI4CG	3/4"	#14 - #4	1.47	1.45	0.64	50	500	11	10120
22BI4CG	1"	#14 - #4	1.63	1.76	0.72	25	250	15	10121
23BI4CG	1-1/4"	#14 - #4	1.80	2.10	0.74	25	250	18	10122
24BI4CG	1-1/2"	#14 - #4	2.11	2.33	0.80	25	250	23	10123
24BIOCG	1-1/2"	#14 - #1/0	2.32	2.33	0.80	25	250	26	20031
25BI4CG	2"	#14 - #4	2.34	2.79	0.85	25	250	28	10124
25BIOCG	2"	#14 - #1/0	2.55	2.79	0.85	25	250	41	10125
25BI4OCG	2"	#6 - #250MCM	2.76	2.79	0.85	—	25	45	10126
26BIOCG	2-1/2"	#14 - #1/0	2.84	3.33	1.10	—	10	57	10127
26BI4OCG	2-1/2"	#6 - #250MCM	3.47	3.33	1.10	—	10	70	10128
27BIOCG	3"	#14 - #1/0	3.11	3.87	1.10	—	10	73	10130
27BI4OCG	3"	#6 - #250MCM	3.74	3.87	1.10	—	10	85	10131
28BIOCG	3-1/2"	#14 - #1/0	3.38	4.42	1.10	—	10	88	10133
28BI4OCG	3-1/2"	#6 - #250MCM	4.02	4.42	1.10	—	10	90	10134
29BIOCG	4"	#14 - #1/0	3.62	4.89	1.10	—	10	118	10136
29BI4OCG	4"	#6 - #250MCM	4.25	4.89	1.10	—	10	121	10137
30BI4OCG	5"	#6 - #250MCM	4.87	6.00	1.10	—	10	165	10140
31BI4OCG	6"	#6 - #250MCM	5.46	7.31	1.10	—	10	203	10143



MALLEABLE IRON THREADLESS INSULATED GROUNDING BUSHINGS

FOR THREADLESS RIGID CONDUIT AND IMC

APPLICATION

- Used with a locknut to terminate threadless rigid and IMC conduit to a box or enclosure, and to provide a smooth pulling surface. Thermoplastic liner prevents damage to wire insulation. Liner rated at 150°C.

FEATURES:

- The plastic liner won't chip, crack, swell or shrink. It resists corrosion, chemicals and temperature extremes.
- Set-screw provided with each fitting locks bushing in any desired position.
- UL Listed for use with Copper or Aluminum Grounding Conductors.

STANDARD MATERIALS:

Malleable Iron/open side tin plated aluminum lug

STANDARD FINISH:


Zinc plated

Available with copper lug; use suffix "C" instead of "L." Example: 20BI4CSS. See page 86.

CERTIFICATIONS AND COMPLIANCES



UL LISTED E93683
UL Standard: UL514B
NEMA FB-1
ASTM Rated

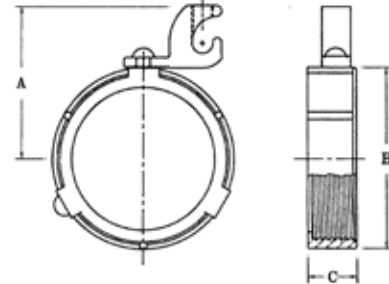

TYPE 25BI4LSS

CATALOG NUMBER	TRADE SIZE	GROUNDING LUG CAPACITY	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
20BI4LSS	1/2"	#14 - #4	1.34	1.19	0.61	100	1000	7	12700
21BI4LSS	3/4"	#14 - #4	1.47	1.45	0.64	50	500	11	12700
22BI4LSS	1"	#14 - #4	1.63	1.76	0.72	25	250	15	12702
23BI4LSS	1-1/4"	#14 - #4	1.80	2.10	0.74	25	250	18	12703
24BI4LSS	1-1/2"	#14 - #4	2.11	2.33	0.80	25	250	23	12704
25BI4LSS	2"	#14 - #4	2.34	2.79	0.85	25	250	28	29405
25BIOLSS	2"	#14 - #1/0	2.55	2.79	0.85	25	250	29	12705
26BIOLSS	2-1/2"	#14 - #1/0	2.84	3.33	1.10	—	10	57	12706
26BI4OLSS	2-1/2"	#6 - #250MCM	3.47	3.33	1.10	—	10	70	29406
27BIOLSS	3"	#14 - #1/0	3.11	3.87	1.10	—	10	73	12707
27BI4OLSS	3"	#6 - #250MCM	3.74	3.87	1.10	—	10	85	29407
28BIOLSS	3-1/2"	#14 - #1/0	3.38	4.42	1.10	—	10	88	12708
28BI4OLSS	3-1/2"	#6 - #250MCM	4.02	4.42	1.10	—	10	90	29408
29BIOLSS	4"	#14 - #1/0	3.62	4.89	1.10	—	10	118	12709
29BI4OLSS	4"	#6 - #250MCM	4.25	4.89	1.10	—	10	121	29409
30BI4OLSS	5"	#6 - #250MCM	4.87	6.00	1.10	—	10	165	29410
31BI4OLSS	6"	#6 - #250MCM	5.46	7.31	1.10	—	10	203	29411



MALLEABLE IRON THREADLESS INSULATED GROUNDING BUSHINGS

FOR THREADLESS RIGID CONDUIT AND IMC



APPLICATION

- Used with a locknut to terminate threadless rigid and IMC conduit to a box or enclosure, and to provide a smooth pulling surface. Thermoplastic liner prevents damage to wire insulation. Liner rated at 150°C.

FEATURES:

- The plastic liner won't chip, crack, swell or shrink. It resists corrosion, chemicals and temperature extremes.
- Set-screw provided with each fitting locks bushing in any desired position.


STANDARD MATERIALS:

Malleable Iron/open side copper lug

STANDARD FINISH:

Zinc Plated

Optional Lug: Available with aluminum lug; use suffix "L" instead of "C."
Example: 20BI4L. See page 85.

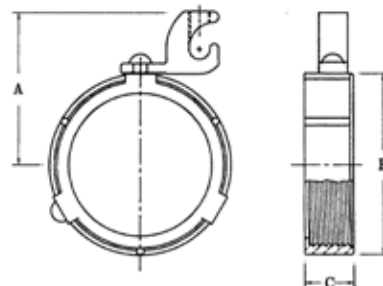

TYPE 25BI4CSS

CERTIFICATIONS AND COMPLIANCES



UL LISTED E93683
UL Standard: UL514B
NEMA FB-1
ASTM Rated

CATALOG NUMBER	TRADE SIZE	GROUNDING LUG CAPACITY	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
20BI4CSS	1/2"	#14 - #4	1.34	1.19	0.61	100	1000	7	90180
21BI4CSS	3/4"	#14 - #4	1.47	1.45	0.64	50	500	11	90182
22BI4CSS	1"	#14 - #4	1.63	1.76	0.72	25	250	15	90184
23BI4CSS	1-1/4"	#14 - #4	1.80	2.10	0.74	25	250	18	90186
24BI4CSS	1-1/2"	#14 - #4	2.11	2.33	0.80	25	250	23	90188
24BIOCSS	1-1/2"	#14 - #1/0	2.32	2.33	0.80	25	250	24	90144
25BI4CSS	2"	#14 - #4	2.34	2.79	0.85	25	250	28	90190
25BIOCSS	2"	#14 - #1/0	2.55	2.79	0.85	25	250	29	90192
26BIOCSS	2-1/2"	#14 - #1/0	2.84	3.33	1.10	—	10	57	90196
26BI4OCSS	2-1/2"	#6 - #250MCM	3.47	3.33	1.10	—	10	70	90194
27BIOCSS	3"	#14 - #1/0	3.11	3.87	1.10	—	10	73	90200
27BI4OCSS	3"	#6 - #250MCM	3.74	3.87	1.10	—	10	85	90198
28BIOCSS	3-1/2"	#14 - #1/0	3.38	4.42	1.10	—	10	88	90204
28BI4OCSS	3-1/2"	#6 - #250MCM	4.02	4.42	1.10	—	10	90	90202
29BIOCSS	4"	#14 - #1/0	3.62	4.89	1.10	—	10	118	90150
29BI4OCSS	4"	#6 - #250MCM	4.25	4.89	1.10	—	10	121	90206
30BI4OCSS	5"	#6 - #250MCM	4.87	6.00	1.10	—	10	165	90208
31BI4OCSS	6"	#6 - #250MCM	5.46	7.31	1.10	—	10	203	90210



ZINC INSULATED GROUNDING BUSHINGS FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- Used with a locknut to terminate threaded rigid and IMC conduit to a box or enclosure, and to provide a smooth pulling surface. Thermoplastic liner prevents damage to wire insulation. Liner rated at 150°C.

FEATURES:

- The plastic liner won't chip, crack, swell or shrink. It resists corrosion, chemicals and temperature extremes.
- Set-screw provided with each fitting locks bushing in any desired position.
- UL Listed for use with Copper or Aluminum Grounding Conductors.


STANDARD MATERIALS:

Zinc Die Cast/open side tin plated aluminum lug

CERTIFICATIONS AND COMPLIANCES



UL LISTED E93683
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE 25BIZ4L

CATALOG NUMBER	TRADE SIZE	GROUNDING LUG CAPACITY	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC#
20BIZ4L	1/2"	#14 - #4	1.313	1.063	0.500	100	1000	4	20009
21BIZ4L	3/4"	#14 - #4	1.406	1.281	0.500	50	500	6	20016
22BIZ4L	1"	#14 - #4	1.563	1.531	0.596	25	250	8	20022
23BIZ4L	1-1/4"	#14 - #4	1.750	1.875	0.625	25	250	14	20028
24BIZ4L	1-1/2"	#14 - #4	2.031	2.156	0.625	25	250	16	20038
25BIZ4L	2"	#14 - #4	2.281	2.625	0.625	25	250	23	25007
25BIZOL	2"	#14 - #1/0	2.500	2.625	0.625	25	250	26	25008
26BIZOL	2-1/2"	#14 - #1/0	2.875	3.219	0.875	—	10	39	25023
26BIZ4OL	2-1/2"	#6 - #250MCM	3.156	3.219	0.875	—	10	43	25024
27BIZOL	3"	#14 - #1/0	3.313	3.813	0.875	—	10	46	25035
27BIZ4OL	3"	#6 - #250MCM	3.625	3.813	0.875	—	10	51	25036
28BIZOL	3-1/2"	#14 - #1/0	3.718	4.344	0.875	—	10	50	28049
28BIZ4OL	3-1/2"	#6 - #250MCM	3.875	4.344	0.875	—	10	56	28050
29BIZOL	4"	#14 - #1/0	3.968	4.813	0.875	—	10	58	28061
29BIZ4OL	4"	#6 - #250MCM	4.125	4.813	0.875	—	10	65	28062

SPECIFICATION GRADE BRONZE INSULATED GROUNDING BUSHING FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- To protect insulated conductors from abrasion during pulling and from mechanical vibration.
- To provide voltage gradient between live conductors and ground at point of electrical and mechanical stress on conductor insulation.

FEATURES:

- Molded-on high impact phenolic thermosetting insulation.
- UL insulation temperature rating 150°C.
- Positive metallic conduit stop.
- For highly corrosive atmospheres.

STANDARD MATERIALS:

Bushing: Bronze
Lug: Copper
Screws: Stainless Steel



STANDARD FINISH:

Lug: Tin Plated

CERTIFICATIONS AND COMPLIANCES



UL LISTED E93683
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE BRLG-1504

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
BRLG-1504	1-1/2"	1.504	2.315	0.768	1.669	1/4" - 28UNF	#10-24UNC	—	25	35	10670
BRLG-2004	2"	2.000	2.752	0.768	1.900	1/4" - 28UNF	#10-24UNC	—	25	35	10675
BRLG-3104	3"	3.024	4.031	1.039	2.531	1/4" - 28UNF	#10-24UNC	—	10	85	10780
BRLG-4122	4"	4.000	5.000	1.130	3.000	1/4" - 28UNF	#10-24UNC	—	10	135	10685



MALLEABLE IRON INSULATED BUSHINGS FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- Used with a locknut to terminate threaded/threadless rigid and IMC conduit to a box or enclosure, and to provide a smooth pulling surface. Thermoplastic liner prevents damage to wire insulation. Liner rated at 150°C.

FEATURES:

- The plastic liner won't chip, crack, swell or shrink. It resists corrosion, chemicals and temperature extremes.

STANDARD MATERIALS:


Malleable Iron

STANDARD FINISH:

Zinc Plated

OPTIONAL FINISH:

For additional corrosion protection, specify Hot Dipped Galvanized. Add suffix "G" to Malleable Iron Catalog Number. Example 1206G. For more information, see page 23.



TYPE 1206

For Threaded Rigid Conduit and IMC

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198258
UL Standard: UL514B
NEMA FB-1
ASTM Rated

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
1206	1/2"	1.19	0.50	100	1000	6	12061
1207	3/4"	1.44	0.56	100	500	9	12071
1208	1"	1.75	0.63	50	500	13	12081
1209	1-1/4"	2.13	0.75	25	250	17	12091
1210	1-1/2"	2.31	0.88	25	250	21	12101
1211	2"	2.81	0.94	—	25	25	12111
1212	2-1/2"	3.38	1.00	—	25	51	12121
1213	3"	4.06	1.13	—	25	66	12131
1214	3-1/2"	4.50	1.19	—	25	72	12141
1215	4"	5.19	1.31	—	25	103	12151
1216	5"	6.06	1.31	—	10	147	12161
1217	6"	7.15	1.31	—	10	184	12171

Also available with lay-in lugs. See pages 81 and 82.



MALLEABLE IRON/**HOT DIPPED GALVANIZED** INSULATED BUSHINGS

FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- Used with a locknut to terminate threaded/threadless rigid and IMC conduit to a box or enclosure, and to provide a smooth pulling surface. Thermoplastic liner prevents damage to wire insulation. Liner rated at 150°C.

FEATURES:

- The plastic liner won't chip, crack, swell or shrink. It resists corrosion, chemicals and temperature extremes.

STANDARD MATERIALS:

Malleable Iron

STANDARD FINISH:

Hot Dipped Galvanized/Zinc Plated




OPTIONAL FINISH:

Remove the "G" for Zinc Plated. See page 88.

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198258
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE 1206G

For Threaded Rigid Conduit and IMC

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	UNIT PACK	MASTER PACK	LBS. / 100 PCS	UPC #
1206G	1/2"	1.19	0.50	100	1000	6	12063
1207G	3/4"	1.44	0.56	100	500	10	12073
1208G	1"	1.75	0.63	50	500	15	12083
1209G	1-1/4"	2.13	0.75	25	250	20	12093
1210G	1-1/2"	2.31	0.88	25	250	25	12103
1211G	2"	2.81	0.94	—	25	30	12113
1212G	2-1/2"	3.38	1.00	—	25	55	12123
1213G	3"	4.06	1.13	—	25	66	12133
1214G	3-1/2"	4.50	1.19	—	25	72	12143
1215G	4"	5.19	1.31	—	25	103	12153
1216G	5"	6.06	1.31	—	10	147	12163
1217G	6"	7.15	1.31	—	10	184	12173

Also available with lay-in lugs. See pages 83 and 84.



MALLEABLE IRON INSULATED BUSHINGS FOR THREADLESS RIGID CONDUIT AND IMC

APPLICATION:

- Used with a locknut to terminate threaded/threadless rigid and IMC conduit to a box or enclosure, and to provide a smooth pulling surface. Thermoplastic liner prevents damage to wire insulation. Liner rated at 150°C.

FEATURES:

- The plastic liner won't chip, crack, swell or shrink. It resists corrosion, chemicals and temperature extremes.

STANDARD MATERIALS:

Malleable Iron


STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198258
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE 1206SS

For Threadless Rigid Conduit and IMC


CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
1206SS	1/2"	1.19	0.50	100	1000	6	12206
1207SS	3/4"	1.44	0.56	100	500	9	12207
1208SS	1"	1.75	0.63	50	500	13	12208
1209SS	1-1/4"	2.13	0.75	25	250	17	12209
1210SS	1-1/2"	2.31	0.81	25	250	21	12210
1211SS	2"	2.81	0.88	—	25	25	12221
1212SS	2-1/2"	3.35	1.10	—	25	51	12222
1213SS	3"	4.06	1.10	—	25	66	12223
1214SS	3-1/2"	4.50	1.10	—	25	72	12224
1215SS	4"	5.19	1.10	—	25	103	12225
1216SS	5"	6.00	1.13	—	10	147	12226
1217SS	6"	7.18	1.13	—	10	184	12227

Also available with lay-in lugs. See pages 85 and 86.



CONDUIT CAPPED BUSHINGS

FOR THREADED RIGID CONDUIT AND IMC



FEATURES:

- Bushings are supplied with metal cap insert.

STANDARD MATERIALS:

Zinc Die Cast

CERTIFICATIONS AND COMPLIANCES



UL Standard: UL514B
NEMA FB-1
ASTM Rated

TYPE 820Z

Zinc Die Cast - Metal Capped

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	UNIT PACK	MASTER PACK	LBS./ 100 PCS	UPC #
820Z	1/2"	1.15	0.47	100	1000	2	18202
821Z	3/4"	1.41	0.47	100	1000	4	18212
822Z	1"	1.68	0.54	50	500	6	18222
823Z	1-1/4"	1.94	0.60	25	250	9	18232
824Z	1-1/2"	2.20	0.62	25	250	13	18241
825Z	2"	2.80	0.62	—	25	17	18252
838Z	2-1/2"	3.32	0.93	—	25	35	18382
839Z	3"	3.94	0.93	10	100	48	18392
840Z	3-1/2"	4.45	0.94	5	25	57	18402
841Z	4"	5.00	0.97	5	25	81	18412
*842MI	5"	6.13	1.13	—	25	130	90110
*843MI	6"	7.19	1.13	—	10	195	90111

* 5" & 6" Capped Bushings in Malleable Iron.

CONDUIT METAL PENNIES

FOR THREADED RIGID CONDUIT AND IMC



APPLICATION:

- Used to insert into zinc die cast or malleable iron bushing.

STANDARD MATERIALS:

Steel

CERTIFICATIONS AND COMPLIANCES



UL Standard: UL514B
NEMA FB-1
ASTM Rated

TYPE 535M

Metal Pennies

CATALOG NUMBER	TRADE SIZE	UNIT PACK	MASTER PACK	LBS./ 100 PCS	UPC #
533M	1-1/4"	—	100	2	15331
534M	1-1/2"	—	100	2	15341
535M	2"	—	50	3	15351
536M	2-1/2"	—	50	5	15361
537M	3"	—	50	6	15371
538M	3-1/2"	—	25	10	15381
539M	4"	—	25	12	15391
559M	5"	—	10	13	15591
569M	6"	—	10	15	15691



PHENOLIC INSULATING COUPLINGS


FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- The ICC Coupling is recommended for use where high strength or resistance to moisture or acid conditions is required.

FEATURES:

- Has a substantial center shoulder, which prevents butting of the conduits, to ensure a definite break in the metallic path.
- Will not melt, soften or burn.
- Temperature rating is 150°C.
- Dielectric strength of 220 V/mil.
- Tapered threads (NPT).



STANDARD MATERIALS:

Canvas base phenolic (black)

CERTIFICATIONS AND COMPLIANCES



UL Standard: UL514B
NEMA FB-1
ASTM Rated

TYPE ICC-400

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
ICC-400	4"	5.00	1.61	3.34	1	10	66	82345

MALLEABLE IRON SPLIT COUPLINGS

FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- A speed union for economically joining two threaded rigid metal conduits.

FEATURES:

- A neoprene gasket provides a concrete tight seal at the joint.
- Used where conduit runs are closely spaced.
- Used where conduit is tight against wall, ceiling or other obstruction.
- Used where conduit cannot be turned.



TYPE SCC-200

STANDARD MATERIALS:

Malleable Iron

STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198258
UL Standard: UL514B
NEMA FB-1
ASTM Rated

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
SCC-50	1/2"	2.000	1.250	1.250	10	100	34	70795
SCC-75	3/4"	2.313	1.250	1.500	10	100	40	70796
SCC-100	1"	2.625	1.625	1.813	10	40	60	70797
SCC-125	1-1/4"	3.063	1.625	2.188	5	20	75	70798
SCC-150	1-1/2"	3.313	1.938	2.438	5	20	113	70799
SCC-200	2"	3.813	2.000	2.875	5	20	113	70800
SCC-250	2-1/2"	4.625	3.063	3.563	2	20	275	70801
SCC-300	3"	5.313	3.125	4.125	2	20	300	70802
SCC-350	3-1/2"	6.063	3.250	4.813	1	5	425	70803
SCC-400	4"	6.563	3.438	5.375	1	5	500	70804
SCC-500	5"	8.063	3.875	6.563	—	1	900	70805
SCC-600	6"	9.250	4.188	7.625	—	1	1300	70806

1/2" and 3/4" furnished with one screw
1" through 6" furnished with two screws



PLASTIC BUSHINGS

FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- Threaded plastic bushings are used at the end of threaded conduit or conduit connector, to provide smooth well rounded bearing surface for wires or cables as required by the National Electrical Code.

FEATURES:

- Thermoplastic material-heat, impact and torque resistance.
- Meets UL and CSA specifications.


STANDARD MATERIALS:

Flame-Retardant
Polypropylene.
(Rated to 221° F, 105° C)

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198258
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE ST10

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	UNIT PACK	MASTER PACK	LBS. / 100 PCS	UPC #
ST10	1/2"	1.03	0.37	100	1000	1	51068
ST11	3/4"	1.28	0.39	100	1000	1	51168
ST12	1"	1.65	0.50	50	500	2	51268
ST13	1-1/4"	2.10	0.49	25	250	2	51368
ST14	1-1/2"	2.28	0.49	25	250	4	51468
ST15	2"	2.66	0.54	—	100	5	51568
ST16	2-1/2"	3.31	0.63	—	25	6	51668
ST17	3"	3.95	0.70	—	25	7	51768
ST18	3-1/2"	4.41	0.71	—	25	8	51868
ST19	4"	4.94	0.73	—	25	9	51968
ST20	5"	6.38	1.00	—	5	32	52068
ST21	6"	7.50	0.99	—	5	40	52168

OFFSET CONDUIT NIPPLES FOR RIGID CONDUIT AND IMC

APPLICATION:

- To offset the axis of raceways 3/4".


STANDARD MATERIALS:

Zinc Die Cast

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198258
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE C41

Zinc Die Cast

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	UNIT PACK	MASTER PACK	LBS./ 100 PCS	UPC #
C41	1/2"	2.440	0.940	10	100	12	13412
C42	3/4"	2.560	1.150	10	100	16	13422
C43	1"	2.750	1.420	10	100	22	13432
C44	1-1/4"	2.880	1.850	5	50	34	13442
C45	1-1/2"	3.060	2.070	5	50	46	13452
C46	2"	3.120	2.600	2	20	66	13462
C465	2-1/2"	3.500	2.980	—	2	97	13465
C466	3"	3.850	3.360	—	1	184	13475
C467	3-1/2"	5.000	4.477	—	1	200	13485
C468	4"	5.000	4.960	—	1	222	13495

STANDARD MATERIALS:

Malleable Iron


MATERIAL/FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198258
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE OSN50

Malleable Iron

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./ 100 PCS	UPC #
OSN50	1/2"	0.438	0.125	2.250	10	100	22	13991
OSN75	3/4"	0.500	0.125	2.438	10	100	30	13993
OSN100	1"	0.563	0.125	2.500	10	100	42	13995
OSN125	1-1/4"	0.625	0.125	2.625	5	50	70	13997



ZINC CONDUIT NIPPLES

FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- Used through knockout to connect box to conduit coupling. Used with a locknut to connect two boxes side by side or back to back. Used with a locknut to connect fixture housing to continuous runs.

FEATURES:

- Available with insulated throat.
- With rigid conduit threads (NPS).



STANDARD MATERIALS:

Zinc Die Cast

CERTIFICATIONS AND COMPLIANCES





UL LISTED E198258
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE 90Z

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
90Z	1/2"	1.02	0.68	100	1000	4	19002
91Z	3/4"	1.29	0.75	50	500	6	19102
92Z	1"	1.53	0.87	25	250	10	19202
93Z	1-1/4"	1.89	0.94	25	250	14	19302
94Z	1-1/2"	2.30	0.91	25	100	20	19402
95Z	2"	2.88	1.07	10	40	32	19502
96Z	2-1/2"	3.39	1.38	10	40	43	19602
97Z	3"	4.06	1.44	10	40	55	19702
98Z	3-1/2"	4.61	1.47	10	40	68	19802
99Z	4"	5.15	1.47	5	20	70	19902



TYPE 90ZT

Insulated Throat

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
90ZT	1/2"	1.02	0.68	100	1000	4	19004
91ZT	3/4"	1.29	0.75	50	500	6	19104
92ZT	1"	1.53	0.87	25	250	10	19204
93ZT	1-1/4"	1.89	0.94	25	250	14	19304
94ZT	1-1/2"	2.30	0.91	25	100	20	19404
95ZT	2"	2.88	1.07	10	40	32	19504
96ZT	2-1/2"	3.39	1.38	10	40	43	19604
97ZT	3"	4.06	1.44	10	40	55	19704
98ZT	3-1/2"	4.61	1.47	10	40	68	19804
99ZT	4"	5.15	1.47	5	20	70	19904



MALLEABLE IRON CONDUIT NIPPLES FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- Used through knockout to connect box to conduit coupling. Used with a locknut to connect two boxes side by side or back to back. Used with a locknut to connect fixture housing to continuous runs.

FEATURES:

- Available with insulated throat.
- With rigid conduit threads (NPS).

STANDARD MATERIALS:

Malleable Iron



STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES





UL LISTED E198258
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE 90

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
90	1/2"	1.050	0.585	100	1000	6	19001
91	3/4"	1.310	0.545	100	1000	8	19101
92	1"	1.640	0.710	50	500	15	19201
93	1-1/4"	2.095	0.840	25	250	24	19301
94	1-1/2"	2.410	0.835	—	25	28	19401
95	2"	2.945	0.900	—	25	38	19501
96	2-1/2"	3.955	1.200	—	15	71	19601
97	3"	4.390	1.490	—	10	124	19701
98	3-1/2"	4.925	1.395	—	10	163	19801
99	4"	5.420	1.395	—	10	199	19901
995	5"	6.950	1.800	—	5	331	19951
996	6"	8.370	2.165	—	5	441	19961



TYPE 90T

Insulated Throat

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
90T	1/2"	1.050	0.585	100	1000	6	19003
91T	3/4"	1.310	0.545	100	1000	8	19103
92T	1"	1.640	0.710	50	500	15	19203
93T	1-1/4"	2.095	0.840	25	250	24	19303
94T	1-1/2"	2.410	0.835	—	25	28	19403
95T	2"	2.945	0.900	—	25	38	19503
96T	2-1/2"	3.955	1.200	—	15	72	19603
97T	3"	4.390	1.490	—	10	125	19703
98T	3-1/2"	4.925	1.395	—	10	166	19803
99T	4"	5.420	1.395	—	10	202	19903
995T	5"	6.950	1.800	—	5	336	19953
996T	6"	8.370	2.165	—	5	448	19963



MALLEABLE IRON WATERTIGHT CONDUIT HUBS

FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- General purpose fitting.
- Insulated throat form with bonding screw.

FEATURES:

- Male thread type.
- Tapered female thread for rigid conduit and IMC.
- Recessed O-ring seal ensures watertight and dusttight connections.
- Insulated throat and bonding locknut is suitable for service entrance application.
- Suitable for use in hazardous locations as follows: Class I, Div. 2 Class II, Div. I, 2 Class III, Div. I, 2 Per NEC 501-4 (b), 502-4 (a), 503-3 (a).


MATERIAL/FINISH:

Malleable Iron/Zinc Plated

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198258
UL Standard: UL514B
NEMA FB-1
ASTM Rated

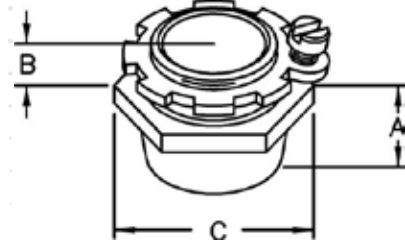

TYPE CHM50

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
CHM50	1/2"	0.813	0.625	1.500	25	250	18	70870
CHM75	3/4"	0.938	0.625	1.813	25	250	25	70871
CHM100	1"	1.063	0.750	2.063	10	100	39	70872
CHM125	1-1/4"	1.250	0.750	2.625	5	25	54	70873
CHM150	1-1/2"	1.250	0.813	3.125	2	20	64	70874
CHM200	2"	1.250	0.813	3.563	2	20	98	70875
CHM250	2-1/2"	1.625	1.188	4.125	—	10	196	70876
CHM300	3"	1.750	1.250	4.938	—	5	282	70877
CHM350	3-1/2"	1.813	1.313	5.750	—	5	351	70878
CHM400	4"	1.938	1.375	6.188	—	5	395	70879
CHM500	5"	2.063	1.438	7.625	—	1	717	70880
CHM600	6"	2.125	1.563	8.813	—	1	888	70881

MALLEABLE IRON/HOT DIPPED GALVANIZED WATERTIGHT CONDUIT HUBS

FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- General purpose fitting.
- Insulated throat form with bonding screw.

FEATURES:

- Male thread type.
- Tapered female thread for rigid conduit and IMC.
- Recessed O-ring seal ensures watertight and dusttight connections.
- Insulated throat and bonding locknut is suitable for service entrance application.
- Suitable for use in hazardous locations as follows: Class I, Div. 2 Class II, Div. I, 2 Class III, Div. I, 2 Per NEC 501-4 (b), 502-4 (a), 503-3 (a).

MATERIAL/FINISH:

Malleable Iron

STANDARD FINISH:


Hot Dipped Galvanized/Zinc Plated



CERTIFICATIONS AND COMPLIANCES



UL LISTED E198258
UL Standard: UL514B
NEMA FB-1
ASTM Rated

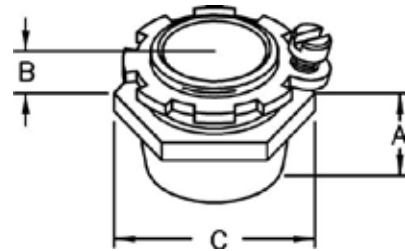

TYPE CHM50G

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
CHM50G	1/2"	0.813	0.625	1.500	25	250	18	70910
CHM75G	3/4"	0.938	0.625	1.813	25	250	25	70911
CHM100G	1"	1.063	0.750	2.063	10	100	39	70912
CHM125G	1-1/4"	1.250	0.750	2.625	5	25	54	70913
CHM150G	1-1/2"	1.250	0.813	3.125	2	20	64	70914
CHM200G	2"	1.250	0.813	3.563	2	20	98	70915
CHM250G	2-1/2"	1.625	1.188	4.125	—	10	196	70916
CHM300G	3"	1.750	1.250	4.938	—	5	282	70917
CHM350G	3-1/2"	1.813	1.313	5.750	—	5	351	70918
CHM400G	4"	1.938	1.375	6.188	—	5	395	70919
CHM500G	5"	2.063	1.438	7.625	—	1	717	70920
CHM600G	6"	2.125	1.563	8.813	—	1	888	70921



WATERTIGHT CONDUIT HUBS


FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- To secure threaded rigid service entrance conduit to box or enclosure. Insulated throat rated 105° C. BUNA-N sealing ring completely encircles knock-out to prevent contaminants from entering enclosure.

FEATURES:

- Assembled with 105°C rated flame retardant Lexan throat insulator and BUNA-N sealing ring.
- UL Listed and CSA Certified for use in wet locations.
- Meets NEMA sealing requirements for Type 2, 3, 3R, 4, 4X, 5, 12 and 13 enclosures.
- Certified for use in hazardous locations, Class II, Groups E, F, G and Class III.



STANDARD MATERIALS:

Zinc Die Cast

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198258
UL Standard: UL514B
NEMA FB-1
ASTM Rated



CSA CERTIFIED
C5F17

NOTE: Minimum wall thickness that can be accommodated is 1/32"

TYPE TWH20

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
TWH10	1/2"	1.450	1.210	25	250	16	70010
TWH20	3/4"	1.570	1.430	25	250	22	70020
TWH30	1"	1.865	1.850	10	100	41	70030
TWH40	1-1/4"	1.985	2.280	5	25	55	70040
TWH50	1-1/2"	2.040	2.555	2	20	68	70050
TWH60	2"	2.150	3.060	2	20	95	70060
TWH70	2-1/2"	2.550	3.580	—	10	165	70070
TWH80	3"	2.625	4.190	—	5	216	70080
TWH90	3-1/2"	2.655	4.780	—	5	260	70090
TWH100	4"	2.680	5.355	—	5	338	70100



STANDARD CONDUIT LOCKNUTS FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- Conduit locknuts for securing threaded conduit or connectors with tapered or straight thread, to a knockout or unthreaded slip hole.

STANDARD MATERIALS:

Steel


STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES




UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE 707

Standard Locknuts

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
706	1/2"	1.13	0.13	100	3000	1	17061
707	3/4"	1.40	0.13	100	1000	2	17071
708	1"	1.72	0.15	50	500	3	17081
709	1-1/4"	2.08	0.15	100	1000	4	17091
710	1-1/2"	2.40	0.16	100	1000	6	17101
711	2"	2.90	0.17	50	500	8	17111
712	2-1/2"	3.48	0.19	50	250	14	17121
713	3"	4.13	0.18	25	250	18	17131
714	3-1/2"	4.70	0.20	25	125	23	17141
715	4"	5.32	0.20	—	25	26	17151
716	5"	6.38	0.42	—	10	60	17161
717	6"	7.75	0.43	—	10	70	17171



TYPE 706P

Sealing Locknuts

APPLICATION:

- Sealing locknuts provide a raintight seal when securing threaded conduit or connectors with tapered or straight thread, to a knockout or unthreaded slip hole of a box or enclosure. Installed as per the National Electrical Code Article 345-Intermediate Metal Conduit and Article 346-Rigid Metal Conduit.

STANDARD MATERIALS:

Steel/Neoprene Gasket

STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198258
UL Standard: UL514B
NEMA FB-1
ASTM Rated

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
706P	1/2"	0.780	0.970	0.110	100	1000	1	17063
707P	3/4"	1.100	1.210	0.100	100	1000	2	17073
708P	1"	1.270	1.520	0.090	50	500	4	17083
709P	1-1/4"	1.550	1.860	0.110	—	100	6	17093
710P	1-1/2"	1.820	2.100	0.120	—	100	7	17103
711P	2"	2.300	2.610	0.120	—	50	10	17113
712P	2-1/2"	2.820	3.180	0.140	—	20	14	17123
713P	3"	3.450	3.870	0.200	—	10	19	17115
714P	3-1/2"	3.950	4.400	0.200	—	10	23	17116
715P	4"	4.450	4.930	0.210	—	10	27	17117
716P	5"	6.515	6.223	0.975	—	10	90	17118
717P	6"	7.785	7.225	1.100	—	10	100	17119



STANDARD CONDUIT LOCKNUTS

FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- Used with bushings to bond threaded rigid conduit and IMC to boxes, cabinets or other enclosures where locknut is exposed.

STANDARD MATERIALS:

Steel


STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES



UL LISTED E93683
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE GL75


Grounding Locknuts

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
GL70	1/2"	1.250	0.220	100	1000	3	17704
GL71	3/4"	1.450	0.260	100	1000	4	17714
GL72	1"	1.720	0.245	50	500	5	17724
GL73	1-1/4"	2.020	0.240	50	500	6	17734
GL74	1-1/2"	2.535	0.250	50	500	8	17744
GL75	2"	2.950	0.250	25	250	13	17754
GL76	2-1/2"	3.570	0.280	10	100	19	17764
GL77	3"	4.330	0.295	10	100	21	17774
GL78	3-1/2"	4.810	0.310	10	100	38	17784
GL79	4"	5.395	0.300	10	100	40	17794
GL80	5"	6.487	0.525	—	10	76	17804
GL81	6"	7.830	0.525	—	10	87	17814



MALLEABLE IRON 3-PIECE COUPLINGS

FOR THREADED RIGID CONDUIT AND IMC



APPLICATION:

- Used to join two lengths of threaded conduit.

FEATURES:

- Threaded (NPS) for rigid conduit and IMC.
- Concrete tight.

STANDARD MATERIALS:

Malleable Iron

STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198258
UL Standard: UL514B
NEMA FB-1
ASTM Rated


TYPE 1023

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
1022	1/2"	1.38	1.36	1.36	20	200	26	10221
1023	3/4"	1.63	1.58	1.58	10	100	37	10231
1024	1"	1.81	1.89	1.89	—	20	55	10241
1025	1-1/4"	2.19	2.38	2.38	—	20	111	10251
1026	1-1/2"	2.31	2.83	2.83	—	10	172	10261
1027	2"	2.44	3.29	3.29	—	10	203	10271
1028	2-1/2"	3.19	4.08	4.08	2	10	327	10281
1029	3"	3.31	4.67	4.67	2	10	442	10291
1030	3-1/2"	3.50	5.07	5.07	1	5	608	10301
1031	4"	3.75	5.75	5.75	1	5	718	10311
1005	5"	3.69	6.88	7.50	—	1	1050	10051
1006	6"	4.31	8.00	8.00	—	1	1250	10061

MALLEABLE IRON/HOT DIPPED GALVANIZED

3-PIECE COUPLINGS

FOR THREADED RIGID CONDUIT AND IMC



APPLICATION:

- Used to join two lengths of threaded conduit.

FEATURES:

- Threaded (NPS) for rigid conduit and IMC.
- Concrete tight.

STANDARD MATERIALS:

Malleable Iron

STANDARD FINISH:

Hot Dipped Galvanized/Zinc Plated



CERTIFICATIONS AND COMPLIANCES



UL LISTED E198258
UL Standard: UL514B
NEMA FB-1
ASTM Rated

TYPE 1023G

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
1022G	1/2"	1.38	1.36	1.36	20	200	26	10009
1023G	3/4"	1.63	1.58	1.58	10	100	37	10210
1024G	1"	1.81	1.89	1.89	—	20	55	10011
1025G	1-1/4"	2.19	2.38	2.38	—	20	111	10012
1026G	1-1/2"	2.31	2.83	2.83	—	10	172	10013
1027G	2"	2.44	3.29	3.29	—	10	203	10014
1028G	2-1/2"	3.19	4.08	4.08	2	10	327	10015
1029G	3"	3.31	4.67	4.67	2	10	442	10016
1030G	3-1/2"	3.50	5.07	5.07	1	5	608	10017
1031G	4"	3.75	5.75	5.75	1	5	718	10018
1005G	5"	3.69	6.88	7.50	—	1	1050	10019
1006G	6"	4.31	8.00	8.00	—	1	1250	10020



MALLEABLE IRON RIGID COMPRESSION CONNECTORS

FOR THREADLESS RIGID CONDUIT AND IMC

APPLICATION:

- To connect threadless rigid conduit to boxes and enclosures.

FEATURES:

- Concrete tight male hub threads.
- NPSM Thread 1/2" through 2".
- NPT Thread above 2".

STANDARD MATERIALS:

Malleable Iron


STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES




UL LISTED E198258
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE NTC-50

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./ 100 PCS	UPC #
NTC-50	1/2"	1.500	0.500	1.500	25	250	20	14213
NTC-75	3/4"	1.500	0.500	1.625	25	250	22	14223
NTC-100	1"	1.688	0.563	2.000	10	100	34	14233
NTC-125	1-1/4"	2.000	0.688	2.375	5	50	52	14243
NTC-150	1-1/2"	2.063	0.688	2.625	2	20	65	14253
NTC-200	2"	2.250	0.875	3.313	5	25	107	14263
NTC-250	2-1/2"	2.936	1.250	3.750	1	10	243	14273
NTC-300	3"	3.125	1.375	4.250	1	5	295	14283
NTC-350	3-1/2"	3.125	1.375	4.750	1	5	383	14293
NTC-400	4"	3.375	1.500	5.313	1	5	467	14294
NTC-500	5"	4.250	1.818	6.016	—	1	760	14295
NTC-600	6"	4.563	2.000	7.625	—	1	1100	14296



TYPE NTC-50T

Insulated Throat

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./ 100 PCS	UPC #
NTC-50T	1/2"	1.563	0.563	1.500	25	250	21	14214
NTC-75T	3/4"	1.563	0.563	1.625	25	250	23	14224
NTC-100T	1"	1.750	0.625	2.000	10	100	34	14234
NTC-125T	1-1/4"	2.000	0.688	2.375	5	50	53	14244
NTC-150T	1-1/2"	2.125	0.750	2.625	2	20	66	14254
NTC-200T	2"	2.313	0.813	3.313	5	25	114	14264
NTC-250T	2-1/2"	3.000	1.313	3.750	1	10	245	14265
NTC-300T	3"	3.125	1.438	4.250	1	5	298	14266
NTC-350T	3-1/2"	3.188	1.500	4.750	1	5	387	14267
NTC-400T	4"	3.438	1.563	5.313	1	5	472	14268
NTC-500T	5"	4.283	1.965	6.016	—	1	787	14269
NTC-600T	6"	4.613	2.125	7.625	—	1	1110	14270



MALLEABLE IRON RIGID COMPRESSION COUPLINGS

FOR THREADLESS RIGID CONDUIT AND IMC

APPLICATION:

- To couple sections of threadless rigid conduit together.

FEATURES:

- Concrete tight.

STANDARD MATERIALS:

Malleable Iron


STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198258
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE NTCC-50

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
NTCC-50	1/2"	1.813	0.500	1.500	25	250	30	14413
NTCC-75	3/4"	1.875	0.500	1.625	10	100	32	14414
NTCC-100	1"	2.188	0.563	2.000	5	50	44	14415
NTCC-125	1-1/4"	2.625	0.688	2.375	5	50	78	14416
NTCC-150	1-1/2"	2.688	0.750	2.625	2	20	93	14417
NTCC-200	2"	3.063	0.938	3.313	5	25	159	14418
NTCC-250	2-1/2"	4.500	2.000	3.750	1	10	277	14473
NTCC-300	3"	4.938	2.250	4.250	1	5	393	14483
NTCC-350	3-1/2"	5.000	2.250	4.750	1	5	547	14493
NTCC-400	4"	5.625	2.438	5.313	1	5	626	14494
NTCC-500	5"	6.250	2.713	6.016	—	1	1220	14423
NTCC-600	6"	6.875	2.975	7.625	—	1	1300	14424



MALLEABLE IRON RAIN TIGHT RIGID COMPRESSION CONNECTORS

FOR THREADLESS RIGID CONDUIT AND IMC



APPLICATION:

- To connect threadless rigid conduit to boxes and enclosures creating a raintight seal.

FEATURES:

- Raintight and concrete tight male hub threads.
- NPSM Thread 1/2" through 2".
- NPT Thread above 2".

STANDARD MATERIALS:

Malleable Iron


STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES




UL LISTED E198258
UL Standard: UL514B
NEMA FB-1
ASTM Rated
Raintight
Concrete tight



TYPE NTC-50RT

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./ 100 PCS	UPC #
NTC-50RT	1/2"	1.500	0.500	1.500	25	250	20	14215
NTC-75RT	3/4"	1.500	0.500	1.625	25	250	22	14225
NTC-100RT	1"	1.688	0.563	2.000	10	100	34	14235
NTC-125RT	1-1/4"	2.000	0.688	2.375	5	50	52	14245
NTC-150RT	1-1/2"	2.063	0.688	2.625	2	20	65	14255
NTC-200RT	2"	2.250	0.875	3.313	5	25	107	14274
NTC-250RT	2-1/2"	2.936	1.250	3.750	1	10	243	14276
NTC-300RT	3"	3.125	1.375	4.250	1	5	295	14284
NTC-350RT	3-1/2"	3.125	1.375	4.750	1	5	383	14289
NTC-400RT	4"	3.375	1.500	5.313	1	5	467	14286



TYPE NTC-50TRT

Insulated Throat

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./ 100 PCS	UPC #
NTC-50TRT	1/2"	1.563	0.563	1.500	25	250	21	14216
NTC-75TRT	3/4"	1.563	0.563	1.625	25	250	23	14226
NTC-100TRT	1"	1.750	0.625	2.000	10	100	34	14236
NTC-125TRT	1-1/4"	2.000	0.688	2.375	5	50	53	14246
NTC-150TRT	1-1/2"	2.125	0.750	2.625	2	20	66	14256
NTC-200TRT	2"	2.313	0.813	3.313	5	25	114	14275
NTC-250TRT	2-1/2"	3.000	1.313	3.750	1	10	245	14277
NTC-300TRT	3"	3.125	1.438	4.250	1	5	298	14285
NTC-350TRT	3-1/2"	3.188	1.500	4.750	1	5	387	14290
NTC-400TRT	4"	3.438	1.563	5.313	1	5	472	14287



MALLEABLE IRON RAIN-TIGHT RIGID COMPRESSION COUPLINGS

FOR THREADLESS RIGID CONDUIT AND IMC



APPLICATION:

- To couple sections of threadless rigid conduit together creating a raintight seal.

FEATURES:

- Concrete tight and raintight.

STANDARD MATERIALS:

Malleable Iron


STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198258
UL Standard: UL514B
NEMA FB-1
ASTM Rated
Raintight
Concrete tight



TYPE NTCC-50RT

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
NTCC-50RT	1/2"	1.813	0.500	1.500	25	250	30	14425
NTCC-75RT	3/4"	1.875	0.500	1.625	10	100	32	14426
NTCC-100RT	1"	2.188	0.563	2.000	5	50	44	14427
NTCC-125RT	1-1/4"	2.625	0.688	2.375	5	50	78	14428
NTCC-150RT	1-1/2"	2.688	0.750	2.625	2	20	93	14429
NTCC-200RT	2"	3.063	0.938	3.313	5	25	159	14430
NTCC-250RT	2-1/2"	4.500	2.000	3.750	1	10	277	14431
NTCC-300RT	3"	4.938	2.250	4.250	1	5	393	14432
NTCC-350RT	3-1/2"	5.000	2.250	4.750	1	5	547	14433
NTCC-400RT	4"	5.625	2.438	5.313	1	5	626	14434



MALLEABLE IRON RIGID SET-SCREW CONNECTORS

FOR THREADLESS RIGID CONDUIT AND IMC

APPLICATION:

- To connect threadless rigid conduit to boxes and enclosures.

FEATURES:

- Concrete tight.
- Available with insulated throat.
- Male hub thread (NPS).

STANDARD MATERIALS:

Malleable Iron


STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES




UL LISTED E198258
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE TRC-50

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
TRC-50	1/2"	1.375	0.438	1.313	25	250	13	70830
TRC-75	3/4"	1.688	0.500	1.563	25	100	21	70831
TRC-100	1"	1.938	0.563	1.875	5	25	38	70832
TRC-125	1-1/4"	2.188	0.625	2.188	5	25	44	70833
TRC-150	1-1/2"	2.313	0.625	2.500	5	20	67	70834
TRC-200	2"	2.438	0.625	2.938	2	10	105	70835
TRC-250	2-1/2"	3.188	0.750	3.625	2	10	190	70836
TRC-300	3"	3.813	0.875	4.250	1	5	272	70837
TRC-350	3-1/2"	4.313	0.938	4.688	1	5	367	70838
TRC-400	4"	4.625	0.938	5.188	1	5	427	70839
TRC-500	5"	4.750	1.375	6.500	—	1	695	70890
TRC-600	6"	4.938	1.500	7.500	—	1	911	70900



TYPE TRC-50T

Insulated Throat

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
TRC-50T	1/2"	1.375	0.500	1.313	25	250	14	70840
TRC-75T	3/4"	1.688	0.563	1.563	25	100	22	70841
TRC-100T	1"	1.938	0.625	1.875	5	25	39	70842
TRC-125T	1-1/4"	2.188	0.688	2.188	5	25	54	70843
TRC-150T	1-1/2"	2.313	0.688	2.500	5	20	70	70844
TRC-200T	2"	2.438	0.688	2.938	2	10	106	70845
TRC-250T	2-1/2"	3.188	0.813	3.625	2	10	191	70846
TRC-300T	3"	3.813	0.938	4.250	1	5	280	70847
TRC-350T	3-1/2"	4.313	1.000	4.688	1	5	380	70848
TRC-400T	4"	4.500	1.000	5.188	1	5	455	70849
TRC-500T	5"	4.688	1.438	6.500	—	1	701	70170
TRC-600T	6"	4.938	1.563	7.500	—	1	920	70180



MALLEABLE IRON RIGID SET-SCREW COUPLINGS

FOR THREADLESS RIGID CONDUIT AND IMC

APPLICATION:

- To couple sections of threadless rigid conduit together.

FEATURES:

- Concrete tight.

STANDARD MATERIALS:

Malleable Iron


STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198258
UL Standard: UL514B
NEMA FB-1
ASTM Rated




TYPE TRCC-75

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./ 100 PCS	UPC #
TRCC-50	1/2"	1.750	0.750	1.375	20	100	30	70820
TRCC-75	3/4"	2.000	0.875	1.563	20	100	32	70821
TRCC-100	1"	2.688	1.188	1.875	5	50	44	70822
TRCC-125	1-1/4"	2.750	1.250	2.188	5	25	78	70823
TRCC-150	1-1/2"	3.188	1.500	2.500	5	20	93	70824
TRCC-200	2"	3.375	1.563	3.000	2	10	159	70825
TRCC-250	2-1/2"	4.000	1.718	3.125	2	10	277	70826
TRCC-300	3"	4.250	1.938	3.750	1	5	393	70827
TRCC-350	3-1/2"	4.500	2.250	4.250	1	5	547	70828
TRCC-400	4"	4.750	2.625	4.750	1	5	626	70829
TRCC-500	5"	6.000	2.818	6.500	—	1	1220	70862
TRCC-600	6"	6.500	3.000	7.500	—	1	1300	70863



COMBINATION COUPLINGS

FOR RIGID CONDUIT, IMC AND EMT

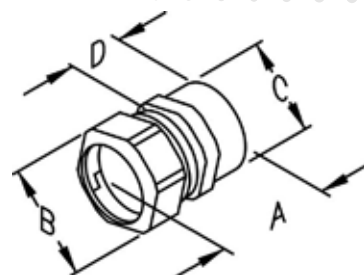
APPLICATION:

- To join EMT to Rigid or IMC.

FEATURES:

- Threaded rigid and IMC to compression EMT.
- Concrete tight.
- NPT female hub.

STANDARD MATERIALS:

Steel

STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES


UL LISTED E198258

UL Standard: UL514B


NEMA FB-1

ASTM Rated

TYPE ERC-23

For EMT Steel Compression to Threaded Rigid Couplings

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	DIM D	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
ERC-22	1/2"	1.313	1.125	0.875	0.688	25	250	14	47322
ERC-23	3/4"	1.438	1.375	1.125	0.750	25	250	25	47323
ERC-24	1"	1.500	1.688	1.375	0.813	25	250	34	47324

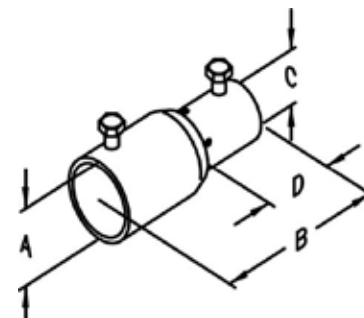
APPLICATION:

- A combination coupling to provide a transition from EMT to unthreaded rigid conduit or IMC.

FEATURES:

- Pre-set and staked Robertson head screws.
- Concrete tight when taped.

STANDARD MATERIALS:

Steel

STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES


UL LISTED E198258

UL Standard: UL514B

NEMA FB-1

ASTM Rated

TYPE S18ES

For EMT Steel Set-Screw to Rigid Set-Screw Couplings

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	DIM D	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
S16ES	1/2"	1.000	2.375	0.875	0.938	50	500	14	23016
S17ES	3/4"	1.250	2.813	1.125	1.125	25	250	28	23017
S18ES	1"	1.500	3.000	1.188	1.188	—	25	36	23018

COMBINATION COUPLINGS

FOR FLEX METAL CONDUIT TO RIGID OR IMC CONDUIT

APPLICATION:

- To connect flexible metal conduit to Rigid or IMC conduit.

FEATURES:

- Rigid conduit to flex.
- Female hub threads – NPT.

STANDARD MATERIALS:


Malleable Iron

STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES


UL LISTED E198258
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE 23E

Combination Couplings

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
23E	3/4"	1.38	1.75	1.88	20	200	19	55231
24E	1"	1.63	1.81	2.31	20	100	32	55241
25E	1-1/4"	2.00	2.31	2.62	—	20	36	55251

APPLICATION:


- Used as a raceway between two enclosures.

STANDARD MATERIALS:

Zinc Die Cast

CERTIFICATIONS AND COMPLIANCES


UL LISTED E198258
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE BS50

Box Spacers

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
BS50	1/2"	1.12	0.40	0.31	50	500	8	70504
BS75	3/4"	1.12	0.40	0.31	50	500	11	70354



MALLEABLE IRON 90° PULL ELBOWS FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- For connecting rigid conduit or IMC to rigid conduit or IMC to form 90° bend.

FEATURES:

- Raintight.
- Furnished with Neoprene gasketed steel cover.
- Threaded for rigid conduit and IMC (Female-NPT).

STANDARD MATERIALS:

Malleable Iron


STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198258
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE PEF75

Female to Female

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
PEF50	1/2"	2.188	2.188	10	100	36	13701
PEF75	3/4"	2.313	2.313	5	50	49	13703
PEF100	1"	3.125	3.125	—	25	94	13704
PEF125	1-1/4"	3.625	3.625	—	20	140	13705
PEF150	1-1/2"	4.125	4.125	—	10	200	13707
PEF200	2"	4.500	4.500	—	5	345	13708

APPLICATION:

- For connecting rigid conduit or IMC to box or enclosures to form 90° bend.

FEATURES:

- Raintight.
- Furnished with Neoprene gasketed steel cover.
- Furnished with steel locknut.
- Threaded for rigid conduit and IMC (Female-NPT, Male-NPSM).

STANDARD MATERIALS:

Malleable Iron


STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198258
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE PEM75

Male to Female

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
PEM50	1/2"	2.188	2.438	0.563	10	100	36	70887
PEM75	3/4"	2.313	2.625	0.625	5	50	49	70888
PEM100	1"	3.125	3.188	0.625	—	25	94	70882
PEM125	1-1/4"	3.625	4.125	0.750	—	20	140	70883
PEM150	1-1/2"	4.125	5.188	0.813	—	10	200	90142
PEM200	2"	4.500	5.688	0.875	—	5	345	90143

ZINC 90° PULL ELBOWS FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- For connecting rigid conduit or IMC to rigid conduit or IMC to form 90° bend.

FEATURES:

- Raintight.
- Furnished with Neoprene gasket.


STANDARD MATERIALS:

Zinc Die Cast

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198258
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE 1313

Female to Female

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	UNIT PACK	MASTER PACK	LBS. / 100 PCS	UPC #
1313	1/2"	1.31	1.09	10	100	28	13132
1314	3/4"	1.43	1.29	5	50	33	13142
1315	1"	1.95	1.59	—	25	62	13152
1316	1-1/4"	2.26	1.97	—	20	91	13162

APPLICATION:

- For connecting rigid conduit or IMC to box or enclosures to form 90° bend.

FEATURES:

- Removable aluminum cover and neoprene gasket facilitate wire pulling.
- Assembled with Zinc Die Cast Locknut.


STANDARD MATERIALS:

Zinc Die Cast

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198258
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE 1320

Male to Female

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	UNIT PACK	MASTER PACK	LBS. / 100 PCS	UPC #
1320	1/2"	1.31	1.09	10	100	36	13202
1321	3/4"	1.47	1.29	5	50	49	13212



MALLEABLE IRON ONE-HOLE STRAPS

FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- Click-on type one-hole straps for rigid conduit or IMC. Provides support for the conduits as required by the National Electrical Code.

FEATURES:

- Heavy-duty casting.

STANDARD MATERIALS:

Malleable Iron

STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198338


UL Standard: UL514B

NEMA FB-1

ASTM Rated

OPTIONAL FINISH:

For additional corrosion protection, specify Hot Dipped Galvanized. Add suffix "G" to Malleable Iron catalog number. Example 133G. For more information, see page 31.



TYPE 133

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
132	1/2"	1.437	0.625	0.312	100	1000	6	81321
133	3/4"	1.750	0.750	0.312	100	1000	8	81331
134	1"	2.125	0.937	0.312	50	500	9	81341
135	1-1/4"	2.375	1.062	0.437	—	100	22	81351
136	1-1/2"	2.750	1.062	0.500	—	50	32	81361
137	2"	3.937	1.250	0.562	—	50	44	81371
138	2-1/2"	3.937	1.250	0.562	—	25	66	81381
139	3"	5.187	1.750	0.562	—	10	159	81391
141	3-1/2"	5.562	2.125	0.750	—	10	185	81411
148	4"	6.500	2.250	0.750	—	10	221	81481
150	5"	10.040	2.750	0.750	—	5	369	81501
152	6"	12.500	3.130	0.750	—	5	631	81521

MALLEABLE IRON CLAMP BACK SPACERS

FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- Provides space between conduit and mounting surface, for use with malleable iron or aluminum straps.

FEATURES:

- Heavy-duty casting.
- Can be used with one-hole straps.

STANDARD MATERIALS:

Malleable Iron

STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198338


UL Standard: UL514B

NEMA FB-1

ASTM Rated

OPTIONAL FINISH:

For additional corrosion protection, specify Hot Dipped Galvanized. Add suffix "G" to Malleable Iron catalog number. Example 901G. For more information, see page 31.



TYPE 901

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	DIM D	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
900	1/2"	2.000	1.000	0.500	0.313	100	1000	8	89009
901	3/4"	2.300	1.060	0.500	0.313	100	500	12	89011
902	1"	2.320	1.250	0.560	0.375	50	500	16	89021
903	1-1/4"	3.430	1.870	0.750	0.438	50	250	22	89031
904	1-1/2"	3.810	1.870	0.810	0.438	—	25	35	89041
905	2"	4.750	1.920	1.000	0.563	—	25	51	89051
906	2-1/2"	5.750	2.410	1.000	0.563	—	25	81	89061
907	3"	6.780	2.620	1.000	0.563	—	25	83	89071
908	3-1/2"	7.120	2.870	1.060	0.750	—	20	148	89081
909	4"	8.830	3.060	1.060	0.750	—	10	199	89091
910	5"	10.125	3.750	1.188	0.750	—	10	344	89092
911	6"	12.188	4.000	1.500	0.750	—	10	419	89093



MALLEABLE IRON/HOT DIPPED GALVANIZED ONE-HOLE STRAPS

FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- Click-on type one-hole straps for rigid conduit or IMC. Provides support for the conduits as required by the National Electrical Code.

FEATURES:

- Heavy-duty casting.

STANDARD MATERIALS:

Malleable Iron

STANDARD FINISH:

Hot Dipped Galvanized/Zinc Plated




OPTIONAL FINISH:

For Malleable Iron/Zinc Plated, please remove suffix "G" from Hot Dipped Galvanized Catalog Number and see page 112.

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198338
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE 133G

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
132G	1/2"	1.437	0.625	0.312	100	1000	6	70200
133G	3/4"	1.750	0.750	0.312	100	1000	8	70201
134G	1"	2.125	0.937	0.312	50	500	9	70202
135G	1-1/4"	2.375	1.062	0.437	—	100	22	70203
136G	1-1/2"	2.750	1.062	0.500	—	50	32	70204
137G	2"	3.937	1.250	0.562	—	50	44	70205
138G	2-1/2"	3.937	1.250	0.562	—	25	66	70206
139G	3"	5.187	1.750	0.562	—	10	159	70207
141G	3-1/2"	5.562	2.125	0.750	—	10	185	70208
148G	4"	6.500	2.250	0.750	—	10	221	70209
150G	5"	10.040	2.750	0.750	—	5	369	70210
152G	6"	12.500	3.130	0.750	—	5	631	70211

MALLEABLE IRON/HOT DIPPED GALVANIZED CLAMP BACK SPACERS

FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- Provides space between conduit and mounting surface for use with malleable iron or aluminum straps.

FEATURES:

- Heavy-duty casting.
- Can be used with one-hole straps.

STANDARD MATERIALS:

Malleable Iron

STANDARD FINISH:

Hot Dipped Galvanized/Zinc Plated




OPTIONAL FINISH:

For Malleable Iron/Zinc Plated, please remove suffix "G" from Hot Dipped Galvanized Catalog Number and see page 112

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198338
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE 901G

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	DIM D	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
900G	1/2"	2.000	1.000	0.500	0.313	100	1000	8	70212
901G	3/4"	2.300	1.060	0.500	0.313	100	500	12	70213
902G	1"	2.320	1.250	0.560	0.375	50	500	16	70214
903G	1-1/4"	3.430	1.870	0.750	0.438	50	250	22	70215
904G	1-1/2"	3.810	1.870	0.810	0.438	—	25	35	70216
905G	2"	4.750	1.920	1.000	0.563	—	25	51	70217
906G	2-1/2"	5.750	2.410	1.000	0.563	—	25	81	70218
907G	3"	6.780	2.620	1.000	0.563	—	25	83	70219
908G	3-1/2"	7.120	2.870	1.060	0.750	—	20	148	70220
909G	4"	8.830	3.060	1.060	0.750	—	10	199	70221
910G	5"	10.125	3.750	1.188	0.750	—	10	344	70222
911G	6"	12.188	4.000	1.500	0.750	—	10	419	70223



STEEL ONE-HOLE STRAPS AND STEEL TWO-HOLE STRAPS

FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- Click-on type one-hole straps for rigid conduit or IMC. Provides support for the conduits as required by the National Electrical Code.

STANDARD MATERIALS:

Steel


STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198338
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE 133S

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F	DIM G	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
130S	1/4"	0.265	0.235	0.060	0.800	1.125	0.562	0.200	100	1000	2	81307
131S	3/8"	0.340	0.300	0.075	0.937	1.250	0.562	0.250	100	1000	3	81317
132S	1/2"	0.420	0.390	0.075	0.937	1.375	0.625	0.250	100	1000	3	81327
133S	3/4"	0.525	0.500	0.090	1.031	1.562	0.750	0.250	100	1000	3	81337
134S	1"	0.655	0.620	0.090	1.250	1.812	0.875	0.312	50	500	5	81347
135S	1-1/4"	0.830	0.800	0.100	1.500	2.000	0.875	0.375	50	500	7	81357
136S	1-1/2"	0.950	0.920	0.125	1.875	2.500	1.000	0.437	50	250	10	81367
137S	2"	1.185	1.150	0.125	2.125	2.750	1.125	0.562	—	50	17	81377
138S	2-1/2"	1.437	1.400	0.150	2.562	3.312	1.250	0.562	—	25	29	81387
139S	3"	1.750	1.700	0.150	2.875	3.625	1.250	0.562	—	25	50	81397
141S	3-1/2"	2.000	1.950	0.180	3.250	4.000	1.250	0.562	—	15	110	81471
148S	4"	2.250	2.200	0.180	3.500	4.250	1.250	0.562	—	10	120	81417

APPLICATION:

- Snap-on type two-hole straps for rigid conduit and IMC are used where higher load bearing supports are desired.

STANDARD MATERIALS:

Steel


STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198338
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE 2133S

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F	DIM G	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
2132S	1/2"	0.420	0.390	0.035	1.875	2.500	0.625	0.188	—	250	2	21327
2133S	3/4"	0.525	0.500	0.035	2.250	2.875	0.688	0.188	—	150	2	21337
2134S	1"	0.655	0.620	0.048	2.625	3.375	0.750	0.250	—	100	3	21347
2135S	1-1/4"	0.830	0.800	0.048	3.437	4.188	0.875	0.250	—	50	5	21357
2136S	1-1/2"	0.950	0.920	0.060	3.812	4.625	0.937	0.250	—	50	7	21367
2137S	2"	1.185	1.150	0.060	4.250	5.125	1.000	0.375	—	25	12	21377
2138S	2-1/2"	1.437	1.400	0.075	4.875	5.875	1.000	0.375	—	25	20	21387
2139S	3"	1.750	1.700	0.075	5.500	6.500	1.000	0.375	—	20	28	21397
2141S	3-1/2"	2.000	1.950	0.090	6.375	7.375	1.000	0.437	—	15	31	21417
2148S	4"	2.250	2.200	0.090	7.000	8.000	1.000	0.437	—	10	36	21487
2150S	5"	2.560	2.560	0.125	8.250	9.000	1.000	0.437	—	10	49	21507
2152S	6"	3.125	3.125	0.125	8.500	9.250	1.000	0.437	—	10	55	21527



CONDUIT REDUCER BUSHINGS FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- To reduce the trade size of a tapered entry on a conduit fitting.

FEATURES:

- Threaded for rigid conduit and IMC.
- Made with rolled edge, protects wire insulation.

STANDARD MATERIALS:

Steel


STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198258
UL Standard: UL514B
NEMA FB-1
ASTM Rated

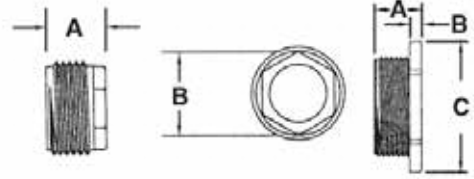

TYPE CR1

Flush Type

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
CR0	1/2" x 3/8"	0.638	0.908	—	—	200	3	80007
CR1	3/4" x 1/2"	0.650	0.930	—	—	200	4	80017
CR2	1" x 1/2"	0.715	1.125	—	—	100	13	80027
CR3	1" x 3/4"	0.715	1.125	—	—	100	8	80037
CR4	1-1/4" x 1/2"	0.820	1.470	—	—	50	29	80047
CR5	1-1/4" x 3/4"	0.820	1.470	—	—	50	22	80057
CR6	1-1/4" x 1"	0.810	1.470	—	—	50	14	80067
CR7	1-1/2" x 1/2"	0.850	1.700	—	—	50	38	80077
CR8	1-1/2" x 3/4"	0.850	1.700	—	—	50	32	80087
CR9	1-1/2" x 1"	0.850	1.700	—	—	50	24	80097
CR10	1-1/2" x 1-1/4"	0.850	1.700	—	—	50	12	80107
CR11	2" x 1/2"	0.970	2.230	—	—	25	45	80117
CR12	2" x 3/4"	0.970	2.230	—	—	25	68	80127
CR13	2" x 1"	0.970	2.230	—	—	25	54	80137
CR14	2" x 1-1/4"	0.970	2.230	—	—	25	44	80147
CR15	2" x 1-1/2"	0.970	2.230	—	—	25	31	80157



CONDUIT HEX REDUCER BUSHINGS FOR THREADED RIGID CONDUIT AND IMC

FEATURES:

- Threaded for rigid conduit and IMC.
- Provided with hex shoulder.

STANDARD MATERIALS:

Malleable Iron


STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES



UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE HCR1

Hex Type

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	DIM D	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
HCR1	3/4" x 1/2"	0.63	0.53	1.15	0.22	—	100	8	80011
HCR2	1" x 1/2"	0.75	0.43	1.42	0.25	—	100	15	80021
HCR3	1" x 3/4"	0.75	0.50	1.42	0.25	—	100	12	80031
HCR4	1-1/4" x 1/2"	0.80	0.43	1.34	0.34	—	50	30	80041
HCR5	1-1/4" x 3/4"	0.80	0.50	1.76	0.28	—	50	50	80051
HCR6	1-1/4" x 1"	0.80	0.58	1.76	0.28	—	50	21	80061
HCR7	1-1/2" x 1/2"	0.83	0.43	1.34	0.37	—	50	48	80071
HCR8	1-1/2" x 3/4"	0.83	0.50	1.63	0.37	—	50	43	80081
HCR9	1-1/2" x 1"	0.83	0.58	2.00	0.31	—	50	40	80091
HCR10	1-1/2" x 1-1/4"	0.83	0.71	2.00	0.31	—	50	26	80101
HCR11	2" x 1/2"	0.88	0.43	1.34	0.41	—	25	85	80111
HCR12	2" x 3/4"	0.88	0.50	1.63	0.41	—	25	81	80121
HCR13	2" x 1"	0.88	0.58	1.95	0.41	—	25	73	80131
HCR14	2" x 1-1/4"	0.88	0.67	2.48	0.34	—	25	64	80141
HCR15	2" x 1-1/2"	0.88	0.70	2.48	0.34	—	25	55	80151
HCR16	2-1/2" x 1/2"	1.07	0.43	1.34	0.44	—	10	83	80161
HCR17	2-1/2" x 3/4"	1.07	0.50	1.63	0.44	—	10	80	80171
HCR18	2-1/2" x 1"	1.07	0.58	1.95	0.44	—	10	79	80181
HCR19	2-1/2" x 1-1/4"	1.07	0.67	2.39	0.44	—	10	74	80191
HCR20	2-1/2" x 1-1/2"	1.07	0.70	2.68	0.40	—	10	73	80201
HCR21	2-1/2" x 2"	1.07	0.75	2.98	0.37	—	10	76	80211
HCR22	3" x 1/2"	1.13	0.43	1.34	0.48	—	10	150	80221
HCR23	3" x 3/4"	1.13	0.50	1.63	0.48	—	10	120	80231
HCR24	3" x 1"	1.13	0.58	1.95	0.48	—	10	110	80241
HCR25	3" x 1-1/4"	1.13	0.67	2.39	0.48	—	10	100	80251
HCR26	3" x 1-1/2"	1.13	0.70	2.68	0.48	—	10	158	80261
HCR27	3" x 2"	1.13	0.75	3.28	0.48	—	10	188	80271
HCR28	3" x 2-1/2"	1.13	0.92	3.86	0.40	—	10	150	80281
HCR29	3-1/2" x 1/2"	1.18	0.43	1.85	0.52	—	10	160	80291
HCR30	3-1/2" x 3/4"	1.18	0.50	1.95	0.52	—	10	151	80301
HCR31	3-1/2" x 1"	1.18	0.58	1.95	0.52	—	10	144	80311
HCR32	3-1/2" x 1-1/4"	1.18	0.67	2.39	0.52	—	10	135	80321
HCR33	3-1/2" x 1-1/2"	1.18	0.70	3.28	0.52	—	10	130	80331
HCR34	3-1/2" x 2"	1.18	0.75	3.28	0.52	—	10	165	80341
HCR35	3-1/2" x 2-1/2"	1.18	0.92	3.86	0.52	—	10	172	80351
HCR36	3-1/2" x 3"	1.18	0.98	4.62	0.43	—	10	166	80361
HCR37	4" x 1/2"	1.22	0.50	1.95	0.60	—	5	215	80371
HCR38	4" x 3/4"	1.22	0.56	1.95	0.60	—	5	185	80381
HCR39	4" x 1"	1.22	0.58	1.95	0.60	—	5	175	80391
HCR40	4" x 1-1/4"	1.22	0.67	2.39	0.60	—	5	160	80401
HCR41	4" x 1-1/2"	1.22	0.70	2.68	0.60	—	5	153	80411
HCR42	4" x 2"	1.22	0.75	3.28	0.60	—	5	177	80421
HCR43	4" x 2-1/2"	1.22	0.92	3.86	0.60	—	5	225	80431
HCR44	4" x 3"	1.22	0.98	4.62	0.50	—	5	310	80441
HCR45	4" x 3-1/2"	1.22	1.03	5.20	0.50	—	5	218	80451
HCR46	5" x 4"	1.50	1.03	5.20	0.50	—	5	438	80461
HCR47	6" x 5"	2.83	1.03	6.56	0.50	—	5	463	80462



CONDUIT REDUCING WASHERS FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- Reduce knockout size on sheet metal box, enclosure or cabinet.

Note: Two reducing washers are required for each knockout.


STANDARD MATERIALS:

Galvanized Steel

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198257
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE CW32

Recess Type

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
CW19	1/2" x 1/4"	0.830	1.382	0.035	—	500	1	81197
CW20	1/2" x 3/8"	0.830	1.382	0.035	—	500	1	81207
CW21	3/4" x 1/2"	0.870	1.420	0.035	250	2500	1	81217
CW31	1" x 1/2"	0.870	1.710	0.035	250	2500	2	81506
CW32	1" x 3/4"	1.060	1.710	0.035	250	2500	2	81507
CW41	1-1/4" x 1/2"	0.870	2.080	0.035	100	1000	3	81508
CW42	1-1/4" x 3/4"	1.125	2.080	0.035	100	1000	3	81510
CW43	1-1/4" x 1"	1.380	2.080	0.035	100	1000	3	81512
CW51	1-1/2" x 1/2"	0.870	2.635	0.035	100	1000	6	81517
CW52	1-1/2" x 3/4"	1.060	2.635	0.035	100	1000	5	81527
CW53	1-1/2" x 1"	1.335	2.635	0.035	100	1000	4	81537
CW54	1-1/2" x 1-1/4"	1.690	2.635	0.035	100	1000	3	81547
CW61	2" x 1/2"	0.870	3.265	0.035	50	500	9	81617
CW62	2" x 3/4"	1.060	3.265	0.035	50	500	9	81627
CW63	2" x 1"	1.335	3.265	0.035	50	500	8	81637
CW64	2" x 1-1/4"	1.690	3.265	0.035	50	500	7	81647
CW65	2" x 1-1/2"	1.935	3.265	0.035	50	500	6	81657
CW71	2-1/2" x 1/2"	0.870	3.265	0.035	50	500	8	81717
CW72	2-1/2" x 3/4"	1.060	3.265	0.035	50	500	8	81727
CW73	2-1/2" x 1"	1.370	3.265	0.035	50	500	7	81737
CW74	2-1/2" x 1-1/4"	1.750	3.265	0.035	50	500	6	81747
CW75	2-1/2" x 1-1/2"	1.995	3.265	0.035	50	500	5	81757
CW76	2"-1/2" x 2"	2.425	3.265	0.035	50	500	4	81767
CW81	3" x 1/2"	0.870	4.490	0.040	25	250	17	81817
CW82	3" x 3/4"	1.060	4.490	0.040	25	250	17	81827
CW83	3" x 1"	1.360	4.490	0.040	25	250	19	81837
CW84	3" x 1-1/4"	1.750	4.490	0.040	25	250	18	81847
CW85	3" x 1-1/2"	1.995	4.490	0.040	25	250	15	81857
CW86	3" x 2"	2.100	4.490	0.040	25	250	13	81867
CW87	3" x 2-1/2"	2.840	4.490	0.040	25	250	12	81877
CW91	3-1/2" x 1/2"	0.870	5.000	0.060	10	100	32	81917
CW92	3-1/2" x 3/4"	1.060	5.000	0.060	10	100	33	81927
CW93	3-1/2" x 1"	1.380	5.000	0.060	10	100	31	81937
CW94	3-1/2" x 1-1/4"	1.710	5.000	0.060	10	100	29	81947
CW95	3-1/2" x 1-1/2"	1.950	5.000	0.060	10	100	58	81957
CW96	3-1/2" x 2"	2.435	5.000	0.060	10	100	30	81967
CW97	3-1/2" x 2-1/2"	2.920	5.000	0.060	10	100	25	81977
CW98	3-1/2" x 3"	3.560	5.000	0.060	10	100	19	81987
CW101	4" x 1/2"	0.870	5.500	0.065	10	100	40	81017
CW102	4" x 3/4"	1.060	5.500	0.065	10	100	37	81027
CW103	4" x 1"	1.380	5.500	0.065	10	100	38	81037
CW104	4" x 1-1/4"	1.715	5.500	0.065	10	100	36	81047
CW105	4" x 1-1/2"	1.970	5.500	0.065	10	100	35	81057
CW106	4" x 2"	2.435	5.500	0.065	10	100	37	81067
CW107	4" x 2-1/2"	2.920	5.500	0.065	10	100	33	81077
CW108	4" x 3"	3.560	5.500	0.065	10	100	24	81087
CW109	4" x 3-1/2"	4.050	5.500	0.065	10	100	22	81097



PIPE PLUGS

FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- To close up a taped hole or hub.

FEATURES:

- Threaded (NPT).

STANDARD MATERIALS:



Malleable Iron

STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES

UL Standard: UL514B
NEMA FB-1
ASTM Rated

**TYPE P10****Pipe Plugs**

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
P10	1/2"	0.560	0.160	0.382	—	100	7	14101
P11	3/4"	0.630	0.180	0.508	—	100	12	14111
P12	1"	0.750	0.200	0.508	—	100	21	14121
P13	1-1/4"	0.800	0.759	0.220	—	100	33	14131
P14	1-1/2"	0.830	0.759	0.240	—	25	45	14141
P15	2"	0.880	0.884	0.260	—	25	78	14151
P16	2-1/2"	1.070	1.137	0.290	—	10	148	14161
P17	3"	1.130	1.391	0.310	—	10	219	14171
P18	3-1/2"	1.180	1.518	0.340	—	5	336	14181
P19	4"	1.220	2.022	0.370	—	5	378	14191
P20	5"	1.310	2.275	0.400	—	5	540	14201
P21	6"	1.375	2.530	0.437	—	5	780	14211



FLOOR FLANGES AND ENLARGERS

APPLICATION:

- Used to support rigid conduit or IMC to the floor.

FEATURES:

- Heavy-duty casting.

STANDARD MATERIALS:

Malleable Iron

STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES



UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE 2F

Malleable Iron Floor Flanges, Threaded Insert

CATALOG NUMBER	TRADE SIZE	BASE DIM	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
1F	1/2"	3.00	—	25	47	12311
2F	3/4"	3.38	—	25	50	12321
3F	1"	3.38	—	25	86	12331
4F	1-1/4"	4.00	—	25	79	12341
5F	1-1/2"	4.38	—	25	130	12351
6F	2"	4.88	—	25	216	12361

APPLICATION:

- Enlarges a threaded hub in an enclosure or conduit fittings.

STANDARD MATERIALS:

Malleable Iron


STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES



UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE E35

Malleable Iron Enlargers Male-Female

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
E35	1/2" M - 3/4" F	0.56	0.19	1.38	25	250	20	14351
E36	3/4" M - 1" F	0.56	0.94	1.75	10	100	45	14361
E37	1" M - 1-1/4" F	0.56	1.06	2.25	10	100	65	14371
E38	1-1/4" M - 1-1/2" F	0.63	1.25	2.38	10	100	87	14381







SCAN ME

TO VIEW
PRODUCT SECTION

EMT FITTINGS



ALUMINUM SET-SCREW CONDUIT BODIES FOR EMT CONDUIT

APPLICATION:

- To provide access to conductors for pulling, splicing and maintenance. Used for thinwall conduit.

FEATURES:

- Die cast from high-strength, corrosion and weather resistant, copper-free aluminum alloy.
- Flat back design for easy mounting close to walls.

STANDARD MATERIALS:

1/2"–2"
Die Cast/Copper-Free
Aluminum

2-1/2"–4"
Sand-Cast Copper-Free
Aluminum


STANDARD FINISH:

Aluminum Enameled

CERTIFICATIONS AND COMPLIANCES




UL LISTED E198259
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE C1AT

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	MAX WIRE SIZE	VOL. CU.IN.	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
C TYPE										
C1AT	1/2"	4.69	1.38	1.31	N/A	4.35	10	50	21	49015
C2AT	3/4"	5.50	1.56	1.63	3 #6 AWG	7.30	10	50	33	49025
C3AT	1"	6.48	1.88	1.88	3 #4 AWG	12.20	5	25	46	49035
C4AT	1-1/4"	8.31	2.50	2.50	3 #2 AWG	33.50	—	10	82	49045
C5AT	1-1/2"	8.38	2.50	2.50	3 #1/0 AWG	33.50	—	10	85	49055
C6AT	2"	10.31	3.38	3.38	3 #4/0 AWG	69.50	—	5	188	49065
C7AT	2-1/2"	13.12	4.50	4.00	3 #250 MCM	69.50	—	1	325	49075
C8AT	3"	13.19	4.56	4.56	3 #250 MCM	188.00	—	1	399	49085
C9AT	3-1/2"	16.12	5.69	5.63	3 #300 MCM	307.00	—	1	975	49095
C10AT	4"	16.12	5.69	5.63	3 #300 MCM	309.00	—	1	875	49005



TYPE LB1AT

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	MAX WIRE SIZE	VOL. CU.IN.	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
LB TYPE										
LB1AT	1/2"	4.31	1.31	2.19	N/A	4.35	10	50	24	45015
LB2AT	3/4"	5.06	1.56	2.44	3 #6 AWG	7.25	10	50	37	45025
LB3AT	1"	5.87	1.75	2.75	3 #4 AWG	12.20	5	25	46	45035
LB4AT	1-1/4"	7.81	2.50	3.44	3 #2 AWG	32.30	—	10	98	45045
LB5AT	1-1/2"	7.81	2.50	3.44	3 #2 AWG	33.80	—	10	91	45055
LB6AT	2"	10.06	3.12	4.31	3 #4/0 AWG	71.20	—	5	222	45065
LB7AT	2-1/2"	12.81	4.50	5.31	3 #4/0 AWG	71.20	—	1	366	45075
LB8AT	3"	12.81	4.50	5.94	3 #4/0 AWG	183.50	—	1	430	45085
LB9AT	3-1/2"	15.62	5.56	7.06	3 #400 MCM	304.90	—	1	937	45095
LB10AT	4"	15.62	5.56	7.06	3 #400 MCM	308.00	—	1	851	45105



ALUMINUM SET-SCREW CONDUIT BODIES FOR EMT CONDUIT

APPLICATION:

- To provide access to conductors for pulling, splicing and maintenance. Used for thinwall conduit.

FEATURES:

- Die cast from high-strength, corrosion and weather resistant, copper-free aluminum alloy.
- Flat back design for easy mounting close to walls.

STANDARD MATERIALS:

- 1/2"–2"
Die Cast/Copper-Free
Aluminum
- 2-1/2"–4"
Sand-Cast Copper-Free
Aluminum


STANDARD FINISH:

- Aluminum Enameled

CERTIFICATIONS AND COMPLIANCES




UL LISTED E198259
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE LL1AT

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	MAX WIRE SIZE	VOL. CU.IN.	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
LL TYPE										
LL1AT	1/2"	4.31	2.06	1.38	N/A	4.35	10	50	25	46015
LL2AT	3/4"	5.06	2.25	1.63	3 #6 AWG	7.30	10	50	37	46025
LL3AT	1"	5.87	2.63	1.88	3 #4 AWG	12.20	5	25	45	46035
LL4AT	1-1/4"	7.81	3.63	2.50	3 #2 AWG	35.80	—	10	98	46045
LL5AT	1-1/2"	7.81	3.63	2.50	3 #1/0 AWG	35.80	—	10	92	46055
LL6AT	2"	10.06	4.44	3.38	3 #4/0 AWG	69.70	—	5	245	46065
LL7AT	2-1/2"	12.81	5.75	4.00	3 #300 MCM	69.70	—	1	388	46066
LL8AT	3"	12.81	5.75	4.50	3 #350 MCM	186.00	—	1	439	46067
LL9AT	3-1/2"	15.62	11.69	5.63	3 #350 MCM	306.00	—	1	924	46068
LL10AT	4"	15.62	11.69	5.63	3 #350 MCM	308.00	—	1	882	46069



TYPE LR1AT

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	MAX WIRE SIZE	VOL. CU.IN.	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
LR TYPE										
LR1AT	1/2"	4.31	2.06	1.38	N/A	4.35	10	50	23	47015
LR2AT	3/4"	5.06	2.25	1.63	3 #6 AWG	7.30	10	50	38	47025
LR3AT	1"	5.87	2.63	1.88	3 #4 AWG	12.20	5	25	49	47035
LR4AT	1-1/4"	7.81	3.63	2.50	3 #2 AWG	35.80	—	10	98	47045
LR5AT	1-1/2"	7.81	3.63	2.50	3 #1/0 AWG	35.80	—	10	94	47055
LR6AT	2"	10.06	4.44	3.38	3 #4/0 AWG	69.70	—	5	254	47065
LR7AT	2-1/2"	12.81	5.75	4.00	3 #300 MCM	69.70	—	1	366	47066
LR8AT	3"	12.81	5.75	4.50	3 #350 MCM	186.00	—	1	406	47067
LR9AT	3-1/2"	15.62	11.69	5.63	3 #350 MCM	306.00	—	1	928	47068
LR10AT	4"	15.62	11.69	5.63	3 #350 MCM	308.00	—	1	902	47069



ALUMINUM SET-SCREW CONDUIT BODIES FOR EMT CONDUIT

APPLICATION:

- To provide access to conductors for pulling, splicing and maintenance. Used for thinwall conduit.

FEATURES:

- Die cast from high-strength, corrosion and weather resistant, copper-free aluminum alloy.
- Flat back design for easy mounting close to walls.

STANDARD MATERIALS:

1/2"-2"
Die Cast/Copper-Free
Aluminum

2-1/2"-4"
Sand-Cast Copper-Free
Aluminum


STANDARD FINISH:

Aluminum Enameled

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198259
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE T1AT

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	MAX WIRE SIZE	VOL. CU.IN.	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
T TYPE										
T1AT	1/2"	4.75	2.06	1.38	N/A	4.35	10	50	23	48015
T2AT	3/4"	5.56	2.25	1.63	3 #6 AWG	7.25	10	50	38	48025
T3AT	1"	6.44	2.63	1.88	3 #4 AWG	12.20	5	25	53	48035
T4AT	1-1/4"	8.25	3.56	2.50	3 #2 AWG	33.10	—	10	100	48045
T5AT	1-1/2"	8.38	3.56	2.50	3 #1/0 AWG	33.10	—	10	98	48055
T6AT	2"	10.69	4.38	3.13	3 #4/0 AWG	67.00	—	5	265	48065
T7AT	2-1/2"	13.25	5.75	4.00	3 #4/0 AWG	67.00	—	1	375	48066
T8AT	3"	13.25	5.75	4.50	3 #4/0 AWG	175.00	—	1	444	48067
T9AT	3-1/2"	16.13	7.69	5.63	3 #400 MCM	298.00	—	1	1146	48068
T10AT	4"	16.13	7.69	5.63	3 #400 MCM	300.00	—	1	1079	48069



ALUMINUM SET-SCREW CONDUIT BODIES WITH COVER AND GASKET

FOR EMT CONDUIT

APPLICATION:

- To provide access to conductors for pulling, splicing and maintenance. Used for thinwall conduit.

FEATURES:

- Die cast from high-strength, corrosion and weather resistant, copper-free aluminum alloy.
- Flat back design for easy mounting close to walls.
- Assembled with neoprene gasket and stamped cover.

STANDARD MATERIALS:

- 1/2"–2" Die Cast/Copper-Free Aluminum
- 2-1/2"–4" Sand-Cast Copper-Free Aluminum


STANDARD FINISH:

- Aluminum Enameled

CERTIFICATIONS AND COMPLIANCES




UL LISTED E198259
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE C1ATCG

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	MAX WIRE SIZE	VOL. CU.IN.	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
C TYPE										
C1ATCG	1/2"	4.69	1.38	1.31	N/A	4.35	10	50	21	10400
C2ATCG	3/4"	5.50	1.56	1.63	3 #6 AWG	7.30	10	50	33	10401
C3ATCG	1"	6.48	1.88	1.88	3 #4 AWG	12.20	5	25	46	10402
C4ATCG	1-1/4"	8.31	2.50	2.50	3 #2 AWG	33.50	—	10	82	10403
C5ATCG	1-1/2"	8.38	2.50	2.50	3 #1/0 AWG	33.50	—	10	85	10404
C6ATCG	2"	10.31	3.38	3.38	3 #4/0 AWG	69.50	—	5	188	10405
C7ATCG	2-1/2"	13.12	4.50	4.00	3 #250 MCM	69.50	—	1	325	10406
C8ATCG	3"	13.19	4.56	4.56	3 #250 MCM	188.00	—	1	399	10407
C9ATCG	3-1/2"	16.12	5.69	5.63	3 #300 MCM	307.00	—	1	975	10408
C10ATCG	4"	16.12	5.69	5.63	3 #300 MCM	309.00	—	1	875	10409



TYPE LB1ATCG

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	MAX WIRE SIZE	VOL. CU.IN.	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
LB TYPE										
LB1ATCG	1/2"	4.31	1.31	2.19	N/A	4.35	10	50	24	10410
LB2ATCG	3/4"	5.06	1.56	2.44	3 #6 AWG	7.25	10	50	37	10411
LB3ATCG	1"	5.87	1.75	2.75	3 #4 AWG	12.20	5	25	46	10412
LB4ATCG	1-1/4"	7.81	2.50	3.44	3 #2 AWG	32.30	—	10	98	10413
LB5ATCG	1-1/2"	7.81	2.50	3.44	3 #2 AWG	33.80	—	10	91	10414
LB6ATCG	2"	10.06	3.12	4.31	3 #4/0 AWG	71.20	—	5	222	10415
LB7ATCG	2-1/2"	12.81	4.50	5.31	3 #4/0 AWG	71.20	—	1	366	10416
LB8ATCG	3"	12.81	4.50	5.94	3 #4/0 AWG	183.50	—	1	430	10417
LB9ATCG	3-1/2"	15.62	5.56	7.06	3 #400 MCM	304.90	—	1	937	10418
LB10ATCG	4"	15.62	5.56	7.06	3 #400 MCM	308.00	—	1	851	10419



ALUMINUM SET-SCREW CONDUIT BODIES WITH COVER AND GASKET

FOR EMT CONDUIT

APPLICATION:

- To provide access to conductors for pulling, splicing and maintenance. Used for thinwall conduit.

FEATURES:

- Die cast from high-strength, corrosion and weather resistant, copper-free aluminum alloy.
- Flat back design for easy mounting close to walls.
- Assembled with neoprene gasket and stamped cover.

STANDARD MATERIALS:

- 1/2"-2"
Die Cast/Copper-Free Aluminum
- 2-1/2"-4"
Sand-Cast Copper-Free Aluminum


STANDARD FINISH:

- Aluminum Enameled

CERTIFICATIONS AND COMPLIANCES




UL LISTED E198259
UL Standard: UL514B
NEMA FB-1
ASTM Rated

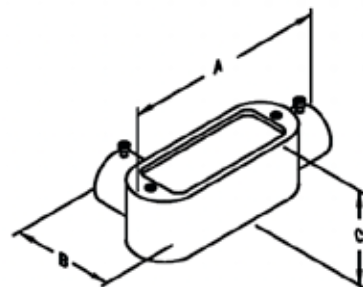

TYPE LL1ATCG

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	MAX WIRE SIZE	VOL. CU.IN.	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
LL TYPE										
LL1ATCG	1/2"	4.31	2.06	1.38	N/A	4.35	10	50	25	10440
LL2ATCG	3/4"	5.06	2.25	1.63	3 #6 AWG	7.30	10	50	37	10441
LL3ATCG	1"	5.87	2.63	1.88	3 #4 AWG	12.20	5	25	45	10442
LL4ATCG	1-1/4"	7.81	3.63	2.50	3 #2 AWG	35.80	—	10	98	10443
LL5ATCG	1-1/2"	7.81	3.63	2.50	3 #1/0 AWG	35.80	—	10	92	10444
LL6ATCG	2"	10.06	4.44	3.38	3 #4/0 AWG	69.70	—	5	245	10445
LL7ATCG	2-1/2"	12.81	5.75	4.00	3 #300 MCM	69.70	—	1	388	10446
LL8ATCG	3"	12.81	5.75	4.50	3 #350 MCM	186.00	—	1	439	10447
LL9ATCG	3-1/2"	15.62	11.69	5.63	3 #350 MCM	306.00	—	1	924	10448
LL10ATCG	4"	15.62	11.69	5.63	3 #350 MCM	308.00	—	1	882	10449



TYPE LR1ATCG

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	MAX WIRE SIZE	VOL. CU.IN.	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
LR TYPE										
LR1ATCG	1/2"	4.31	2.06	1.38	N/A	4.35	10	50	23	10430
LR2ATCG	3/4"	5.06	2.25	1.63	3 #6 AWG	7.30	10	50	38	10431
LR3ATCG	1"	5.87	2.63	1.88	3 #4 AWG	12.20	5	25	49	10432
LR4ATCG	1-1/4"	7.81	3.63	2.50	3 #2 AWG	35.80	—	10	98	10433
LR5ATCG	1-1/2"	7.81	3.63	2.50	3 #1/0 AWG	35.80	—	10	94	10434
LR6ATCG	2"	10.06	4.44	3.38	3 #4/0 AWG	69.70	—	5	254	10435
LR7ATCG	2-1/2"	12.81	5.75	4.00	3 #300 MCM	69.70	—	1	366	10436
LR8ATCG	3"	12.81	5.75	4.50	3 #350 MCM	186.00	—	1	406	10437
LR9ATCG	3-1/2"	15.62	11.69	5.63	3 #350 MCM	306.00	—	1	928	10438
LR10ATCG	4"	15.62	11.69	5.63	3 #350 MCM	308.00	—	1	902	10439



ALUMINUM SET-SCREW CONDUIT BODIES WITH COVER AND GASKET

FOR EMT CONDUIT

APPLICATION:

- To provide access to conductors for pulling, splicing and maintenance. Used for thinwall conduit.

FEATURES:

- Die cast from high-strength, corrosion and weather resistant, copper-free aluminum alloy.
- Flat back design for easy mounting close to walls.
- Assembled with neoprene gasket and stamped cover.

STANDARD MATERIALS:

- 1/2"–2"
Die Cast/Copper-Free Aluminum
- 2-1/2"–4"
Sand-Cast Copper-Free Aluminum


STANDARD FINISH:

- Aluminum Enameled

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198259
UL Standard: UL514B
NEMA FB-1
ASTM Rated

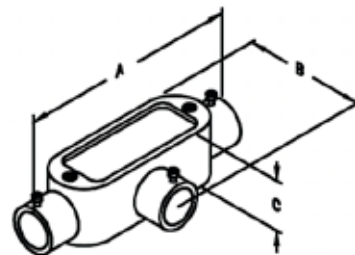

TYPE T1ATCG

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	MAX WIRE SIZE	VOL. CU.IN.	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
T TYPE										
T1ATCG	1/2"	4.75	2.06	1.38	N/A	4.35	10	50	23	10420
T2ATCG	3/4"	5.56	2.25	1.63	3 #6 AWG	7.25	10	50	38	10421
T3ATCG	1"	6.44	2.63	1.88	3 #4 AWG	12.20	5	25	53	10422
T4ATCG	1-1/4"	8.25	3.56	2.50	3 #2 AWG	33.10	—	10	100	10423
T5ATCG	1-1/2"	8.38	3.56	2.50	3 #1/0 AWG	33.10	—	10	98	10424
T6ATCG	2"	10.69	4.38	3.13	3 #4/0 AWG	67.00	—	5	265	10425
T7ATCG	2-1/2"	13.25	5.75	4.00	3 #4/0 AWG	67.00	—	1	375	10426
T8ATCG	3"	13.25	5.75	4.50	3 #4/0 AWG	175.00	—	1	444	10427
T9ATCG	3-1/2"	16.13	7.69	5.63	3 #400 MCM	298.00	—	1	1146	10428
T10ATCG	4"	16.13	7.69	5.63	3 #400 MCM	300.00	—	1	1079	10429



ALUMINUM COMBINATION CONDUIT BODIES WITH COVER AND GASKET

FOR THREADED RIGID CONDUIT, IMC AND EMT

APPLICATION:

- Used with threaded rigid conduit, IMC and EMT for providing access to the interior of conduit system for pulling, splicing, inspection and maintenance.

FEATURES:

- Assembled with slotted/Robertson combination screws.
- Assembled with neoprene gasket and stamped cover.
- Tapered threaded hubs (NPT).
- Die cast from high-strength, corrosion and weather resistant, copper-free aluminum alloy.
- Flat back design for easy mounting close to walls.
- Suitable for use in concrete.

STANDARD MATERIALS:

Die cast/Copper-free Aluminum


STANDARD FINISH:

Aluminum Enameled

CERTIFICATIONS AND COMPLIANCES




UL LISTED E198259
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE C1CA

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	MAX WIRE SIZE	VOL. CU.IN.	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
C TYPE										
C1CA	1/2"	4.69	1.38	1.56	N/A	4.35	10	50	28	64401
C2CA	3/4"	5.50	1.56	1.75	3 #6 AWG	7.30	10	50	41	64402
C3CA	1"	6.48	1.88	2.13	3 #4 AWG	12.20	5	25	56	64403
C4CA	1-1/4"	8.31	2.50	2.75	3 #2 AWG	33.50	—	10	101	64404
C5CA	1-1/2"	8.38	2.50	2.75	3 #1/0 AWG	33.50	—	10	104	64405
C6CA	2"	10.31	3.38	3.63	3 #4/0 AWG	69.50	—	5	220	64406



TYPE LB1CA

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	MAX WIRE SIZE	VOL. CU.IN.	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
LB TYPE										
LB1CA	1/2"	4.31	1.31	2.44	N/A	4.35	10	50	24	64101
LB2CA	3/4"	5.06	1.56	2.69	3 #6 AWG	7.25	10	50	37	64102
LB3CA	1"	5.87	1.75	3.00	3 #4 AWG	12.20	5	25	46	64103
LB4CA	1-1/4"	7.81	2.50	3.69	3 #2 AWG	32.30	—	10	98	64104
LB5CA	1-1/2"	7.81	2.50	3.69	3 #2 AWG	33.80	—	10	91	64105
LB6CA	2"	10.06	3.12	4.56	3 #4/0 AWG	71.20	—	5	222	64106



ALUMINUM COMBINATION CONDUIT BODIES WITH COVER AND GASKET

FOR THREADED RIGID CONDUIT, IMC AND EMT

APPLICATION:

- Used with threaded rigid conduit, IMC and EMT for providing access to the interior of conduit system for pulling, splicing, inspection and maintenance.

FEATURES:

- Assembled with slotted/Robertson combination screws.
- Assembled with neoprene gasket and stamped cover.
- Tapered threaded hubs (NPT).
- Die cast from high-strength, corrosion and weather resistant, copper-free aluminum alloy.
- Flat back design for easy mounting close to walls.
- Suitable for use in concrete.

STANDARD MATERIALS:

Die cast/Copper-free Aluminum


STANDARD FINISH:

Aluminum Enameled

CERTIFICATIONS AND COMPLIANCES




UL LISTED E198259
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE LL1CA

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	MAX WIRE SIZE	VOL. CU.IN.	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
LL TYPE										
LL1CA	1/2"	4.31	2.06	1.63	N/A	4.35	10	50	25	64201
LL2CA	3/4"	5.06	2.25	1.88	3 #6 AWG	7.30	10	50	37	64202
LL3CA	1"	5.87	2.63	2.13	3 #4 AWG	12.20	5	25	45	64203
LL4CA	1-1/4"	7.81	3.63	2.75	3 #2 AWG	35.80	—	10	98	64204
LL5CA	1-1/2"	7.81	3.63	2.75	3 #1/0 AWG	35.80	—	10	92	64205
LL6CA	2"	10.06	4.44	3.63	3 #4/0 AWG	69.70	—	5	245	64206



TYPE LR1CA

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	MAX WIRE SIZE	VOL. CU.IN.	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
LR TYPE										
LR1CA	1/2"	4.31	2.06	1.63	N/A	4.35	10	50	23	64301
LR2CA	3/4"	5.06	2.25	1.88	3 #6 AWG	7.30	10	50	38	64302
LR3CA	1"	5.87	2.63	2.13	3 #4 AWG	12.20	5	25	49	64303
LR4CA	1-1/4"	7.81	3.63	2.75	3 #2 AWG	35.80	—	10	98	64304
LR5CA	1-1/2"	7.81	3.63	2.75	3 #1/0 AWG	35.80	—	10	94	64305
LR6CA	2"	10.06	4.44	3.63	3 #4/0 AWG	69.70	—	5	254	64306



ALUMINUM COMBINATION CONDUIT BODIES WITH COVER AND GASKET

FOR THREADED RIGID CONDUIT, IMC AND EMT

APPLICATION:

- Used with threaded rigid conduit, IMC and EMT for providing access to the interior of conduit system for pulling, splicing, inspection and maintenance.

FEATURES:

- Assembled with slotted/Robertson combination screws.
- Assembled with neoprene gasket and stamped cover.
- Tapered threaded hubs (NPT).
- Die cast from high-strength, corrosion and weather resistant, copper-free aluminum alloy.
- Flat back design for easy mounting close to walls.
- Suitable for use in concrete.

STANDARD MATERIALS:

Die cast/Copper-free Aluminum


STANDARD FINISH:

Aluminum Enameled

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198259
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE T1CA

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	MAX WIRE SIZE	VOL. CU.IN.	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
T TYPE										
T1CA	1/2"	4.75	2.06	1.63	N/A	4.35	10	50	23	64501
T2CA	3/4"	5.56	2.25	1.88	3 #6 AWG	7.25	10	50	38	64502
T3CA	1"	6.44	2.63	2.13	3 #4 AWG	12.20	5	25	53	64503
T4CA	1-1/4"	8.25	3.56	2.75	3 #2 AWG	33.10	—	10	100	64504
T5CA	1-1/2"	8.38	3.56	2.75	3 #1/0 AWG	33.10	—	10	98	64505
T6CA	2"	10.69	4.38	3.63	3 #4/0 AWG	67.00	—	5	265	64506

CONDUIT BODY COVERS

STEEL AND ALUMINUM COVERS

APPLICATION:

- Used with conduit bodies to cover opening.

FEATURES:

- Assembled with captive zinc plated steel screws.

STANDARD MATERIALS:

Steel


STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198259
UL Standard: UL514B
NEMA FB-1
ASTM Rated

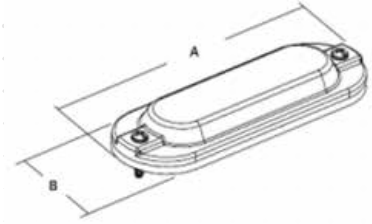

TYPE 02

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
Steel Covers							
01	1/2"	3.875	1.310	25	250	9	49017
02	3/4"	4.625	1.520	25	250	13	49027
03	1"	5.315	1.710	20	200	19	49037
04	1-1/4" – 1-1/2"	7.240	2.510	25	100	31	49047
05	2"	9.484	3.110	—	50	50	49057
06	2-1/2" – 3"	14.937	5.500	—	10	94	49067
07	3-1/2" – 4"	15.000	6.000	—	10	138	49077

APPLICATION:

- Used with conduit bodies to cover opening.

FEATURES:

- Assembled with captive zinc plated steel screws.
- Stamped from high-strength aluminum, corrosion and weather resistant copperfree aluminum alloy.


STANDARD MATERIALS:

Stamped Aluminum

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198259
UL Standard: UL514B
NEMA FB-1
ASTM Rated

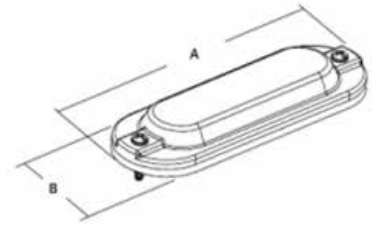

TYPE 02A

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
Aluminum Covers							
01A	1/2"	3.90	1.37	25	250	6	49105
02A	3/4"	4.70	1.60	25	250	10	49205
03A	1"	5.40	1.78	20	200	14	49305
04A	1-1/4" – 1-1/2"	7.25	2.52	25	100	18	49405
05A	2"	9.50	3.11	—	50	20	49505
06A	2-1/2" – 3"	12.13	4.45	—	10	33	49605
07A	3-1/2" – 4"	14.94	5.50	—	10	62	49705




NEOPRENE GASKETS

APPLICATION:

- Gasket used with conduit bodies for a raintight seal.

STANDARD FINISH:

Neoprene Rubber



TYPE 11

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	UNIT PACK	MASTER PACK	LBS./ 100 PCS	UPC #
NEOPRENE GASKETS							
10	1/2"	3.90	1.37	200	2000	3	49910
11	3/4"	4.60	1.56	100	1000	3	49911
12	1"	5.34	1.73	100	1000	3	49912
13	1-1/4"-1-1/2"	7.25	2.51	50	500	6	49913
14	2"	9.50	3.05	25	100	11	49914
15	2-1/2"-3"	12.13	4.39	—	10	13	49915
16	3-1/2"-4"	14.88	5.43	—	10	28	49916

STEEL EMT SET-SCREW CONNECTORS FOR EMT CONDUIT

APPLICATION:

- To ground and secure EMT raceways to boxes and enclosures.

FEATURES:

- Heavy steel walls.
- Concrete tight.
- Pre-set/pre-staked set screws.
- Male hub threads NPS.
- Three-way combination screws.

STANDARD MATERIALS:

Steel


STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES




UL LISTED E308075
UL Standard: UL514B
NEMA FB-1
ASTM Rated
Concrete tight

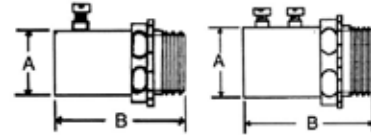

TYPE S1111

CATALOG NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
S1110	1/2"	1/2"	0.87	1.53	50	500	9	62007
S1111	3/4"	3/4"	1.10	1.58	25	250	13	62017
S1112	1"	1"	1.36	1.83	50	200	20	62027
*S1112A	1-1/4"	1-1/4"	1.73	2.34	25	100	36	62037
*S1112B	1-1/2"	1-1/2"	1.97	2.27	10	40	45	62047
*S1112C	2"	2"	2.45	2.40	5	20	64	62057
*S1112D	2-1/2"	2-1/2"	3.10	3.18	—	12	130	62067
*S1112E	3"	3"	3.72	3.81	—	12	140	62077
*S1112E1	3-1/2"	3-1/2"	4.24	4.31	—	6	180	62087
*S1112F	4"	4"	4.74	4.87	—	6	225	62097

* Furnished with two set-screws

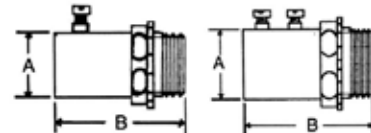

TYPE S4067

Insulated Throat

CATALOG NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
S4066	1/2"	1/2"	0.87	1.53	50	500	9	62003
S4067	3/4"	3/4"	1.10	1.58	25	250	13	62013
S4068	1"	1"	1.36	1.83	50	200	20	62023
*S4069	1-1/4"	1-1/4"	1.73	2.34	25	100	36	62033
*S4070	1-1/2"	1-1/2"	1.97	2.27	10	40	45	62043
*S4071	2"	2"	2.45	2.40	5	20	64	62053
*S4072	2-1/2"	2-1/2"	3.10	3.18	—	12	130	62063
*S4073	3"	3"	3.72	3.81	—	12	140	62073
*S4074	3-1/2"	3-1/2"	4.24	4.31	—	6	180	62083
*S4075	4"	4"	4.74	4.87	—	6	225	62093

* Furnished with two set-screws



STEEL EMT SET-SCREW COUPLINGS

FOR EMT CONDUIT

APPLICATION:

- To ground and secure EMT raceway sections together.

FEATURES:

- Heavy steel walls.
- Concrete tight.
- Pre-set/pre-staked set screws.
- Three-way combination screws.

STANDARD MATERIALS:

Steel


STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES



UL LISTED E308075
UL Standard: UL514B
NEMA FB-1
ASTM Rated
Concrete tight

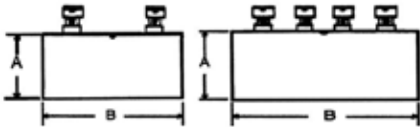

TYPE S1113

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	UNIT PACK	MASTER PACK	LBS./ 100 PCS	UPC #
S1113	1/2"	0.87	1.63	50	500	8	62107
S1114	3/4"	1.10	1.86	25	250	13	62117
S1115	1"	1.36	2.31	50	200	20	62127
*S1115A	1-1/4"	1.73	2.76	25	100	40	62137
*S1115B	1-1/2"	1.97	3.00	10	40	58	62147
*S1115C	2"	2.45	3.27	5	20	65	62157
*S1115D	2-1/2"	3.10	4.00	—	12	130	62167
*S1115E	3"	3.72	4.25	—	12	140	62177
*S1115E1	3-1/2"	4.24	4.50	—	6	217	62187
*S1115F	4"	4.74	4.75	—	6	250	62197

* Furnished with four set-screws



STEEL EMT COMPRESSION CONNECTORS FOR EMT CONDUIT

APPLICATION:

- To ground and secure EMT raceways to boxes and enclosures.

FEATURES:

- Male hub threads NPS.
- Concrete tight.
- Heavy steel walls.

STANDARD MATERIALS:

Steel


STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES




UL LISTED E308075
UL Standard: UL514B
NEMA FB-1
ASTM Rated
Concrete tight



TYPE S1011

CATALOG NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
S1010	1/2"	1/2"	1.040	0.034	1.120	50	500	11	61007
S1011	3/4"	3/4"	1.040	0.043	1.390	25	250	17	61017
S1012	1"	1"	1.050	0.052	1.700	50	200	23	61027
S1013	1-1/4"	1-1/4"	1.270	0.062	2.050	25	100	41	61037
S1014	1-1/2"	1-1/2"	1.400	0.064	2.250	10	40	50	61047
S1015	2"	2"	1.520	0.066	2.780	5	20	67	61057
S1015D	2-1/2"	2-1/2"	2.510	0.083	3.600	—	12	177	61067
S1015E	3"	3"	2.540	0.083	4.260	—	12	234	61077
S1015E1	3-1/2"	3-1/2"	2.720	0.087	4.710	—	6	288	60187
S1015F	4"	4"	2.890	0.090	5.210	—	6	343	61097



TYPE S4061

Insulated Throat

CATALOG NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
S4060	1/2"	1/2"	1.040	0.034	1.120	50	500	11	61003
S4061	3/4"	3/4"	1.040	0.043	1.390	25	250	17	61013
S4062	1"	1"	1.050	0.052	1.700	50	200	23	61023
S4063	1-1/4"	1-1/4"	1.270	0.062	2.050	25	100	41	61033
S4064	1-1/2"	1-1/2"	1.400	0.064	2.250	10	40	50	61043
S4065	2"	2"	1.520	0.066	2.780	5	20	67	61053
S4065D	2-1/2"	2-1/2"	2.510	0.083	3.600	—	12	177	61063
S4065E	3"	3"	2.540	0.083	4.200	—	12	234	61073
S4065E1	3-1/2"	3-1/2"	2.720	0.087	4.710	—	6	288	61083
S4065F	4"	4"	2.890	0.090	5.210	—	6	343	61093



STEEL EMT COMPRESSION COUPLINGS FOR EMT CONDUIT

APPLICATION:

- To ground and secure EMT raceway sections together.

FEATURES:

- Concrete tight.
- Heavy steel walls.

STANDARD MATERIALS:


Steel

STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES


UL LISTED E308075
UL Standard: UL514B
NEMA FB-1
ASTM Rated
Concrete tight



TYPE S1017

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
S1016	1/2"	1.60	1.12	50	500	8	61107
S1017	3/4"	1.60	1.39	25	250	13	61117
S1018	1"	1.71	1.68	50	200	20	61127
S1019	1-1/4"	2.08	2.06	25	100	40	61137
S1020	1-1/2"	2.36	2.25	10	40	58	61147
S1021	2"	2.40	2.78	5	20	65	61157
S1021D	2-1/2"	3.89	3.65	—	12	130	61167
S1021E	3"	4.25	4.31	—	12	140	61177
S1021E1	3-1/2"	4.65	4.75	—	6	217	61187
S1021F	4"	4.90	5.27	—	6	250	61197



STEEL RAINLIGHT EMT COMPRESSION CONNECTORS FOR EMT CONDUIT

APPLICATION:

- Compression-style connector with internal sealing ring and knockout gasket to create a raintight seal when connecting EMT to box or enclosure.
- The design prevents water seepage into conduit, box or enclosure.

FEATURES:

- The only steel compression fitting, UL Listed Raintight.
- All steel construction with zinc plated finish for corrosion resistance.
- Distinct blue gland nut provides quick raintight identification.
- Unique raised bump design affords fast, positive locking of compression nuts.
- Gasket on male hub NPSM threads of box connector seals installation for raintight connection between the box and the connector.
- Angled teeth on steel locknut for secure bite into enclosure.
- Heavy steel walls.
- Raintight.
- Concrete tight.

STANDARD MATERIALS:

Steel


STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES




PATENTED
UL LISTED E308075
UL Standard: UL514B
NEMA FB-1
ASTM Rated
Raintight
Concrete tight

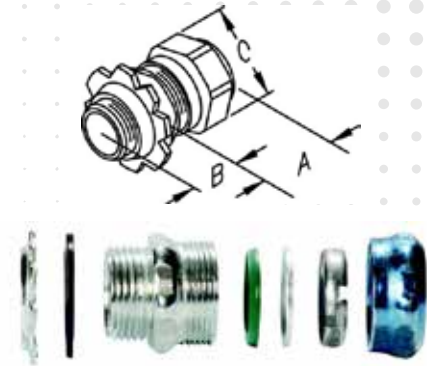

TYPE S1011RT

CATALOG NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./ 100 PCS	UPC #
S1010RT	1/2"	1/2"	1.040	0.034	1.120	50	500	11	62201
S1011RT	3/4"	3/4"	1.040	0.043	1.390	25	250	17	62202
S1012RT	1"	1"	1.050	0.052	1.700	50	200	23	62203
S1013RT	1-1/4"	1-1/4"	1.270	0.062	2.050	25	100	41	62204
S1014RT	1-1/2"	1-1/2"	1.400	0.064	2.250	10	40	50	62205
S1015RT	2"	2"	1.520	0.066	2.780	5	20	67	62206
S1015DRT	2-1/2"	2-1/2"	2.510	0.083	3.600	—	12	177	62311
S1015ERT	3"	3"	2.540	0.083	4.260	—	12	234	62312
S1015E1RT	3-1/2"	3-1/2"	2.720	0.087	4.710	—	6	288	62313
S1015FRT	4"	4"	2.890	0.090	5.210	—	6	343	62314

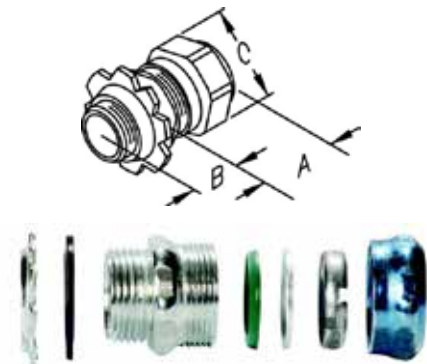

TYPE S4061RT

CATALOG NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./ 100 PCS	UPC #
S4060RT	1/2"	1/2"	1.040	0.034	1.120	50	500	11	62301
S4061RT	3/4"	3/4"	1.040	0.043	1.390	25	250	17	62302
S4062RT	1"	1"	1.050	0.052	1.700	50	200	23	62303
S4063RT	1-1/4"	1-1/4"	1.270	0.062	2.050	25	100	41	62304
S4064RT	1-1/2"	1-1/2"	1.400	0.064	2.250	10	40	50	62305
S4065RT	2"	2"	1.520	0.066	2.780	5	20	67	62306
S4065DRT	2-1/2"	2-1/2"	2.510	0.083	3.600	—	12	177	62307
S4065ERT	3"	3"	2.540	0.083	4.260	—	12	234	62308
S4065E1RT	3-1/2"	3-1/2"	2.720	0.087	4.710	—	6	288	62309
S4065FRT	4"	4"	2.890	0.090	5.210	—	6	343	62310

Insulated Throat



STEEL RAIN TIGHT EMT COMPRESSION COUPLINGS

FOR EMT CONDUIT

APPLICATION:

- Compression-style coupling used to join two lengths of EMT. Internal sealing rings create a raintight seal.
- The design prevents water seepage into conduit.

FEATURES:

- The only steel compression fitting, UL Listed Raintight.
- All steel construction with zinc plated finish for corrosion resistance.
- Distinct blue gland nut provides quick raintight identification.
- Unique raised bump design affords fast, positive locking of compression nuts.
- Heavy steel walls.
- Raintight.
- Concrete tight.

STANDARD MATERIALS:

Steel


STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES



PATENTED
UL LISTED E308075
 UL Standard: UL514B
 NEMA FB-1
 ASTM Rated
 Raintight
 Concrete tight



TYPE S1017RT

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
S1016RT	1/2"	1.60	1.12	50	500	8	62401
S1017RT	3/4"	1.60	1.39	25	250	13	62402
S1018RT	1"	1.71	1.68	50	200	20	62403
S1019RT	1-1/4"	2.08	2.06	25	100	40	62404
S1020RT	1-1/2"	2.36	2.25	10	40	58	62405
S1021RT	2"	2.40	2.78	5	20	65	62406
S1021DRT	2-1/2"	3.89	3.65	—	12	130	62407
S1021ERT	3"	4.25	4.31	—	12	140	62408
S1021E1RT	3-1/2"	4.65	4.75	—	6	217	62409
S1021FRT	4"	4.90	5.27	—	6	250	62410



COMBINATION COUPLINGS FOR RIGID CONDUIT, IMC AND EMT

APPLICATION:

- To join EMT to rigid or IMC.

FEATURES:

- Threaded rigid and IMC to compression EMT.
- Concrete tight.
- NPT female hub.

STANDARD MATERIALS:

Steel


STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198258
UL Standard: UL514B
NEMA FB-1
ASTM Rated
Concrete tight



TYPE ERC-23

**For EMT Steel Compression to
Threaded Rigid Couplings**

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	DIM D	UNIT PACK	MASTER PACK	LBS./ 100 PCS	UPC #
ERC-22	1/2"	1.313	1.125	0.875	0.688	25	250	14	47322
ERC-23	3/4"	1.438	1.375	1.125	0.750	25	250	25	47323
ERC-24	1"	1.500	1.688	1.375	0.813	25	250	34	47324

APPLICATION:

- A combination coupling to provide a transition from EMT to unthreaded rigid conduit or IMC.

FEATURES:

- Pre-set and staked Robertson head screws.
- Concrete tight when taped.

STANDARD MATERIALS:

Steel


STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198258
UL Standard: UL514B
NEMA FB-1
ASTM Rated
Concrete tight when taped



TYPE S18ES

**For EMT Steel Set-Screw to
Rigid Set-Screw Couplings**

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	DIM D	UNIT PACK	MASTER PACK	LBS./ 100 PCS	UPC #
S16ES	1/2"	1.000	2.375	0.875	0.938	50	500	14	23016
S17ES	3/4"	1.250	2.813	1.125	1.125	25	250	28	23017
S18ES	1"	1.500	3.000	1.188	1.188	—	25	36	23018



ZINC 90° PULL ELBOWS FOR EMT CONDUIT

APPLICATION:

- 90° corner pulling elbows are used to facilitate pulling conductors through a sharp bend in a run of EMT. The removable cover gives ample access so that wire pulling can be achieved without any obstructions.

FEATURES:

- Removable aluminum cover.

STANDARD MATERIALS:

Zinc Die Cast

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198258
CSA File No. LR57925
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE 1326

Female to Female

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	UNIT PACK	MASTER PACK	LBS./ 100 PCS	UPC #
1326	1/2"	1.31	0.94	10	100	24	13262
1327	3/4"	1.59	1.22	5	50	37	13272
1328	1"	1.94	1.59	—	25	68	13282
1329	1-1/4"	2.36	1.97	—	20	102	13292

APPLICATION:

- Used to connect EMT conduit to a metal box enclosure at a 90° bend.

FEATURES:

- Removable aluminum cover.
- Assembled with zinc die cast locknut.


STANDARD MATERIALS:

Zinc Die Cast

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198258
CSA File No. LR57925
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE 1332

Male to Female

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	UNIT PACK	MASTER PACK	LBS./ 100 PCS	UPC #
1332	1/2"	1.31	0.93	10	100	22	13322
1333	3/4"	1.47	1.22	5	50	35	13332

ZINC OFFSET CONNECTORS FOR EMT CONDUIT

APPLICATION:

- Used to connect EMT conduit to a metal outlet box or enclosure where an offset is desired.

FEATURES:

- Set-screw type.
- Concrete tight.
- Assembled with zinc die cast locknut.


STANDARD MATERIALS:

Zinc Die Cast

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198256
CSA File No. LR57925
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE 1250

Set-Screw

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./ 100 PCS	UPC #
1250	1/2"	2.090	0.940	0.375	10	100	12	61250
1251	3/4"	2.980	1.160	0.750	10	100	19	61251

APPLICATION:

- Used to connect EMT conduit to a metal outlet box or enclosure where an offset is desired.

FEATURES:

- Compression type.
- Raintight and concrete tight.
- Assembled with zinc die cast locknut.


STANDARD MATERIALS:

Zinc Die Cast

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198256
CSA File No. LR57925
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE 1260

Compression

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./ 100 PCS	UPC #
1260	1/2"	2.130	1.000	0.375	20	200	13	13761
1261	3/4"	2.900	1.190	0.750	10	100	21	13702

EMT STRAPS FOR EMT CONDUIT

APPLICATION:

- Click-on type one-hole straps for EMT. Provides support for the conduits, as required by the National Electrical Code.

STANDARD MATERIALS:

Steel


STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198338
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE 143S

One-Hole

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	DIM D	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
142S	1/2"	1.720	0.700	0.550	0.312	100	1000	2	81427
143S	3/4"	1.980	0.975	0.630	0.312	100	1000	3	81437
144S	1"	2.210	1.090	0.750	0.312	50	500	4	81447
145S	1-1/4"	2.880	1.540	0.880	0.355	50	500	10	81457
146S	1-1/2"	3.140	1.750	0.990	0.335	—	50	16	81467
147S	2"	3.890	2.150	1.110	0.450	—	50	22	81477
158S	2-1/2"	4.925	2.825	1.245	0.550	—	25	62	81587
159S	3"	5.540	3.430	1.250	0.550	—	25	76	81597
160S	3-1/2"	6.260	3.900	1.250	0.575	—	10	120	81607
161S	4"	6.830	4.390	1.240	0.575	—	10	125	81613

APPLICATION:

- Snap-on type two-hole straps for EMT are used where higher load bearing supports are desired.

STANDARD MATERIALS:

Steel


STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198338
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE 2143S

Two-Hole

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	DIM D	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
2142S	1/2"	2.200	0.790	0.560	0.200	—	250	1	21427
2143S	3/4"	2.700	0.980	0.620	0.200	—	200	2	21437
2144S	1"	2.975	1.185	0.690	0.200	—	100	4	21447
2145S	1-1/4"	3.650	1.535	0.750	0.275	—	50	5	21457
2146S	1-1/2"	4.250	1.765	0.870	0.275	—	50	8	21467
2147S	2"	4.730	2.300	0.995	0.325	—	25	13	21477
2158S	2-1/2"	6.025	2.855	0.985	0.345	—	25	20	21533
2159S	3"	6.460	3.425	0.995	0.345	—	20	25	21597
2160S	3-1/2"	7.300	3.925	0.990	0.345	—	10	33	21535
2161S	4"	7.895	4.435	0.995	0.345	—	10	36	21617



ZINC COMBINATION COUPLINGS

FOR EMT CONDUIT AND FLEXIBLE METALLIC CONDUIT

APPLICATION:

- A combination coupling to provide a transition from EMT to flexible metallic conduit.

FEATURES:

- Assembled with tri-combo screws.


STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198256
CSA File No. LR57925
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE 170C

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
*170C	1/2" E.M.T. – 3/8" Flex	1.280	1.140	50	500	8	51702
171C	1/2" E.M.T. – 1/2" Flex	1.645	1.340	25	250	10	51703
172C	3/4" E.M.T. – 3/4" Flex	1.975	1.535	20	200	15	51704
173C	1" E.M.T. – 1" Flex	2.285	1.700	10	100	26	51705

*EMT to NM Cable

APPLICATION:

- A combination coupling to provide a transition from EMT to flexible metallic conduit.

FEATURES:

- Assembled with tri-combo screws.


STANDARD FINISH:

Zinc Die Cast

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198256
CSA File No. LR57925
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE 171

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
171	1/2" E.M.T. – 1/2" FMC	1.645	1.340	25	250	10	51712
172	3/4" E.M.T. – 3/4" FMC	1.975	1.535	20	200	15	51722







SCAN ME

TO VIEW
PRODUCT SECTION

LIQUIDTIGHT FITTINGS



MALLEABLE IRON STRAIGHT LIQUIDTIGHT CONNECTORS

FOR LIQUIDTIGHT FLEXIBLE METALLIC CONDUIT

APPLICATION:

- To secure, ground and seal liquidtight flexible metal conduit to boxes and enclosures.

FEATURES:

- Tapered threaded male hub NPT.
- Compact, slim diameter with small turning radius.
- Furnished with an insulated throat with steel locknut and sealing ring.
- Suitable for wet locations.
- Long ferrule prevents pullout and tight bend conduit "pop-out."

STANDARD MATERIALS:

Malleable Iron/Steel Ferrule

STANDARD FINISH:

Zinc Plated

OPTIONAL FINISH:

For additional corrosion protection, specify Hot Dipped Galvanized. Add suffix "MG" to Malleable Iron catalog number. Example SLT27TMG. For more information, see page 25.

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198258


UL Standard: UL514B

NEMA FB-1

ASTM Rated

Liquidtight/Raintight/Concrete tight/Oiltight

UL Listed liquidtight flexible metal conduit fittings are suitable for use in the following Hazardous Locations under NEC 501-4(b), 502-(a)(2); Class I, Div. 2; Class II, Div. 1 and 2; and Class III, Div. 1 and 2 and are suitable for grounding in sizes 3/8" through 1-1/2" under NEC 351-1



TYPE SLT27T

All Furnished with Insulated Throats

CATALOG NUMBER	TRADE SIZE	KO SIZE	I.D.	O.D.	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
SLT47T	3/8"	1/2"	0.590	0.793	1.140	0.500	1.150	25	250	16	14419
SLT27T	1/2"	1/2"	0.590	0.793	1.250	0.500	1.280	25	250	18	14630
SLT28T	3/4"	3/4"	0.785	1.020	1.280	0.520	1.550	10	100	29	14640
SLT29T	1"	1"	0.980	1.261	1.430	0.650	1.800	5	50	40	14650
SLT30T	1-1/4"	1-1/4"	1.330	1.605	1.500	0.660	2.250	5	50	56	14309
SLT31T	1-1/2"	1-1/2"	1.530	1.844	1.610	0.730	2.440	10	50	71	14319
SLT32T	2"	2"	1.995	2.337	1.760	0.750	2.970	5	25	100	14329
SLT33T	2-1/2"	2-1/2"	2.341	2.797	2.180	1.010	4.010	1	10	367	14339
SLT34T	3"	3"	2.939	3.418	2.500	1.150	4.180	1	10	461	14349
SLT60T	3-1/2"	3-1/2"	3.406	3.915	2.610	1.180	5.250	1	10	675	14609
SLT61T	4"	4"	3.882	4.411	2.740	1.250	5.780	1	5	797	14619
SLT62T	5"	5"	391.77	460.78	3.125	1.500	6.063	—	1	1047	78062
SLT63T	6"	6"	484.65	570.18	3.375	1.563	7.500	—	1	1381	60001



STEELELECTRIC
PRODUCTS

718.259.6100

1.800.626.1223

FAX. 1.718.331.1874

MALLEABLE IRON 90° LIQUIDTIGHT CONNECTORS

FOR LIQUIDTIGHT FLEXIBLE METALLIC CONDUIT

APPLICATION:

- To secure, ground and seal liquidtight flexible metal conduit to boxes and enclosures.

FEATURES:

- Tapered threaded male hub NPT.
- Compact, slim diameter with small turning radius.
- Furnished with an insulated throat with steel locknut and sealing ring.
- Suitable for wet locations.
- Long ferrule prevents pullout and tight bend conduit "pop-out."

STANDARD MATERIALS:

Malleable Iron/Steel Ferrule

STANDARD FINISH:

Zinc Plated

OPTIONAL FINISH:


For additional corrosion protection, specify Hot Dipped Galvanized. Add suffix "MG" to Malleable Iron catalog number. Example SLT35TMG. For more information, see page 26.

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198258
UL Standard: UL514B
NEMA FB-1
ASTM Rated
Liquidtight/Raintight/Concrete tight/Oiltight

UL Listed liquidtight flexible metal conduit fittings are suitable for use in the following Hazardous Locations under NEC 501-4(b), 502-(a)(2); Class I, Div. 2; Class II, Div. 1 and 2; and Class III, Div. 1 and 2 and are suitable for grounding in sizes 3/8" through 1-1/2" under NEC 351-I



TYPE SLT35T

All Furnished with Insulated Throats

CATALOG NUMBER	TRADE SIZE	KO SIZE	I.D.	O.D.	DIM A	DIM B	DIM C	DIM D	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
SLT25T	3/8"	1/2"	0.590	0.793	1.31	0.50	1.15	1.37	10	100	28	14259
SLT35T	1/2"	1/2"	0.590	0.793	1.43	0.50	1.28	1.37	10	100	31	14690
SLT36T	3/4"	3/4"	0.785	1.020	1.62	0.52	1.55	1.50	10	100	46	14700
SLT37T	1"	1"	0.980	1.261	1.93	0.65	1.80	1.81	5	50	77	14710
SLT38T	1-1/4"	1-1/4"	1.330	1.605	2.37	0.66	2.25	1.94	—	10	98	14389
SLT39T	1-1/2"	1-1/2"	1.530	1.844	2.68	0.73	2.44	2.40	—	10	124	14399
SLT40T	2"	2"	1.995	2.337	3.18	0.75	2.97	2.64	—	5	179	14409
SLT65T	2-1/2"	2-1/2"	2.341	2.797	8.31	1.01	4.01	7.81	—	1	847	14659
SLT66T	3"	3"	2.939	3.418	9.80	1.15	4.18	9.15	—	1	1243	14669
SLT67T	3-1/2"	3-1/2"	3.406	3.915	11.18	1.18	5.25	11.22	—	1	1914	14679
SLT68T	4"	4"	3.882	4.411	12.98	1.25	5.78	12.54	—	1	2399	14689



MALLEABLE IRON 45° LIQUIDTIGHT CONNECTORS

FOR LIQUIDTIGHT FLEXIBLE METALLIC CONDUIT

APPLICATION:

- To secure, ground and seal liquidtight flexible metal conduit to boxes and enclosures.

FEATURES:

- Tapered threaded male hub NPT.
- Compact, slim diameter with small turning radius.
- Furnished with an insulated throat with steel locknut and sealing ring.
- Suitable for wet locations.
- Long ferrule prevents pullout and tight bend conduit "pop-out."

STANDARD MATERIALS:

Malleable Iron/Steel Ferrule

STANDARD FINISH:

Zinc Plated

OPTIONAL FINISH:

For additional corrosion protection, specify Hot Dipped Galvanized. Add suffix "MG" to Malleable Iron catalog number. Example SLT35-45TMG. For more information, see page 27.

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198258


UL Standard: UL514B

NEMA FB-1

ASTM Rated

Liquidtight/Raintight/Concrete tight/Oiltight

UL Listed liquidtight flexible metal conduit fittings are suitable for use in the following Hazardous Locations under NEC 501-4(b), 502-(a)(2); Class I, Div. 2; Class II, Div. 1 and 2; and Class III, Div. 1 and 2 and are suitable for grounding in sizes 3/8" through 1-1/2" under NEC 351-I



TYPE SLT35-45T

All Furnished with Insulated Throats

CATALOG NUMBER	TRADE SIZE	KO SIZE	I.D.	O.D.	DIM A	DIM B	DIM C	DIM D	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
SLT25-45T	3/8"	1/2"	0.590	0.793	1.62	0.50	1.15	1.48	10	100	29	14825
SLT35-45T	1/2"	1/2"	0.590	0.793	1.64	0.50	1.28	1.51	10	100	29	14835
SLT36-45T	3/4"	3/4"	0.785	1.020	1.68	0.52	1.55	1.54	10	100	42	14836
SLT37-45T	1"	1"	0.980	1.261	2.16	0.65	1.80	1.81	5	50	66	14837
SLT38-45T	1-1/4"	1-1/4"	1.330	1.605	2.50	0.66	2.25	2.16	—	10	90	14838
SLT39-45T	1-1/2"	1-1/2"	1.530	1.844	3.10	0.73	2.44	2.43	—	10	112	14839
SLT40-45T	2"	2"	1.995	2.337	3.28	0.75	2.97	2.82	—	5	179	14840
SLT65-45T	2-1/2"	2-1/2"	2.341	2.797	6.67	1.01	4.01	4.41	—	1	582	14865
SLT66-45T	3"	3"	2.939	3.418	8.01	1.15	4.18	5.50	—	1	869	14866
SLT67-45T	3-1/2"	3-1/2"	3.406	3.915	9.55	1.18	5.25	5.93	—	1	1296	14867
SLT68-45T	4"	4"	3.882	4.411	10.64	1.25	5.78	8.34	—	1	1539	14868



MALLEABLE IRON STRAIGHT LIQUIDTIGHT CONNECTORS

WITH ALUMINUM LUGS FOR LIQUIDTIGHT FLEXIBLE METALLIC CONDUIT

APPLICATION:

- Connects conduit and terminates bonding conductor run externally across liquidtight conduit.

FEATURES:

- Tapered threaded male hub NPT.
- Compact, slim diameter with small turning radius.
- Furnished with insulated throat, steel locknut and sealing ring.
- Suitable for grounding and wet locations.
- Long ferrule prevents pullout and tight bend conduit "pop-out."

STANDARD MATERIALS:

Malleable Iron/Steel Ferrule/
Aluminum Grounding Lug

STANDARD FINISH:


Zinc Plated

CERTIFICATIONS AND COMPLIANCES



UL LISTED E93683
UL Standard: UL514B
NEMA FB-1
ASTM Rated
Liquidtight/Raintight/Concrete tight/Oiltight

UL Listed liquidtight flexible metal conduit fittings are suitable for use in the following Hazardous Locations under NEC 501-4(b), 502-(a)(2); Class I, Div. 2; Class II, Div. 1 and 2; and Class III, Div. 1 and 2 and are suitable for grounding in sizes 3/8" through 1-1/2" under NEC 351-I



TYPE SLT27ALT

All Furnished with Insulated Throats

CATALOG NUMBER	TRADE SIZE	LUG SIZE	I.D.	O.D.	DIM A	DIM B	DIM C	DIM D	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
SLT47ALT	3/8"	#4-#14	0.590	0.793	1.14	0.50	1.15	0.75	25	250	18	50000
SLT27ALT	1/2"	#4-#14	0.590	0.793	1.25	0.50	1.28	0.75	25	250	20	50001
SLT28ALT	3/4"	#4-#14	0.785	1.020	1.28	0.52	1.55	0.75	10	100	31	50002
SLT29ALT	1"	#4-#14	0.980	1.261	1.43	0.65	1.80	0.75	5	50	42	50003
SLT30ALT	1-1/4"	#4-#14	1.330	1.605	1.50	0.66	2.25	0.75	5	50	57	50004
SLT31ALT	1-1/2"	#4-#14	1.530	1.844	1.61	0.73	2.44	0.75	10	50	73	50005
SLT32ALT	2"	#4-#14	1.995	2.337	1.76	0.75	2.97	0.75	5	25	101	50006
SLT33ALT	2-1/2"	#1/0-#8	2.341	2.797	2.18	1.01	4.01	1.13	1	10	373	50007
SLT34ALT	3"	#1/0-#8	2.939	3.418	2.50	1.15	4.18	1.13	1	10	465	50008
SLT60ALT	3-1/2"	#6-#250MCM	3.406	3.915	2.61	1.18	5.25	1.50	1	10	686	50009
SLT61ALT	4"	#6-#250MCM	3.882	4.411	2.74	1.25	5.78	1.50	1	5	807	50010
SLT62ALT	5"	#6-#250MCM	3.917	4.607	3.13	1.50	6.06	1.69	—	1	1058	50011
SLT63ALT	6"	#6-#250MCM	4.846	5.701	3.13	1.56	7.50	1.69	—	1	1395	50012

Also available with copper lugs. See page 152.



MALLEABLE IRON 90° LIQUIDTIGHT CONNECTORS

WITH ALUMINUM LUGS FOR LIQUIDTIGHT FLEXIBLE METALLIC CONDUIT

APPLICATION:

- Connects conduit and terminates bonding conductor run externally across liquidtight conduit.

FEATURES:

- Tapered threaded male hub NPT.
- Compact, slim diameter with small turning radius.
- Furnished with insulated throat, steel locknut and sealing ring.
- Suitable for grounding and wet locations.
- Long ferrule prevents pullout and tight bend conduit "pop-out."

STANDARD MATERIALS:

Malleable Iron/Steel Ferrule/
Aluminum Grounding Lug

STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES



UL LISTED E93683


UL Standard: UL514B

NEMA FB-1

ASTM Rated

Liquidtight/Raintight/Concrete tight/Oiltight

UL Listed liquidtight flexible metal conduit fittings are suitable for use in the following Hazardous Locations under NEC 501-4(b), 502-(a)(2); Class I, Div. 2; Class II, Div. 1 and 2; and Class III, Div. 1 and 2 and are suitable for grounding in sizes 3/8" through 1-1/2" under NEC 351-I



TYPE SLT35ALT

All Furnished with Insulated Throats

CATALOG NUMBER	TRADE SIZE	LUG SIZE	I.D.	O.D.	DIM A	DIM B	DIM C	DIM D	DIM E	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
SLT25ALT	3/8"	#4-#14	0.590	0.793	1.31	0.50	1.15	1.37	0.75	10	100	18	50013
SLT35ALT	1/2"	#4-#14	0.590	0.793	1.43	0.50	1.28	1.37	0.75	10	100	20	50014
SLT36ALT	3/4"	#4-#14	0.785	1.020	1.62	0.52	1.55	1.50	0.75	10	100	31	50015
SLT37ALT	1"	#4-#14	0.980	1.261	1.93	0.65	1.80	1.81	0.75	5	50	42	50016
SLT38ALT	1-1/4"	#4-#14	1.330	1.605	2.37	0.66	2.25	1.94	0.75	—	10	57	50017
SLT39ALT	1-1/2"	#4-#14	1.530	1.844	2.68	0.73	2.44	2.40	0.75	—	10	73	50018
SLT40ALT	2"	#4-#14	1.995	2.337	3.18	0.75	2.97	2.64	0.75	—	5	101	50019
SLT65ALT	2-1/2"	#1/0-#8	2.341	2.797	8.31	1.01	4.01	7.81	1.13	—	1	373	50020
SLT66ALT	3"	#1/0-#8	2.939	3.418	9.80	1.15	4.18	9.15	1.13	—	1	465	50021
SLT67ALT	3-1/2"	#6-#250MCM	3.406	3.915	11.18	1.18	5.25	11.22	1.50	—	1	686	50022
SLT68ALT	4"	#6-#250MCM	3.882	4.411	12.93	1.25	5.78	12.54	1.50	—	1	807	50023

Also available with copper lugs. See page 153.



MALLEABLE IRON 45° LIQUIDTIGHT CONNECTORS

WITH ALUMINUM LUGS FOR LIQUIDTIGHT FLEXIBLE METALLIC CONDUIT

APPLICATION:

- Connects conduit and terminates bonding conductor run externally across liquidtight conduit.

FEATURES:

- Tapered threaded male hub NPT.
- Compact, slim diameter with small turning radius.
- Furnished with insulated throat, steel locknut and sealing ring.
- Suitable for grounding.
- Long ferrule prevents pull-out and tight bend conduit "pop-out."

STANDARD MATERIALS:

Malleable Iron/Steel Ferrule/
Aluminum Grounding Lug

STANDARD FINISH:


Zinc Plated

CERTIFICATIONS AND COMPLIANCES



UL LISTED E93683
UL Standard: UL514B
NEMA FB-1
ASTM Rated
Liquidtight/Raintight/Concrete tight/Oiltight

UL Listed liquidtight flexible metal conduit fittings are suitable for use in the following Hazardous Locations under NEC 501-4(b), 502-(a)(2); Class I, Div. 2; Class II, Div. 1 and 2; and Class III, Div. 1 and 2 and are suitable for grounding in sizes 3/8" through 1-1/2" under NEC 351-I



TYPE SLT35-45ALT

All Furnished with Insulated Throats

CATALOG NUMBER	TRADE SIZE	LUG SIZE	I.D.	O.D.	DIM A	DIM B	DIM C	DIM D	DIM E	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
SLT25-45ALT	3/8"	#4-#14	0.590	0.793	1.62	0.50	1.15	1.48	0.75	10	100	18	50024
SLT35-45ALT	1/2"	#4-#14	0.590	0.793	1.64	0.50	1.28	1.51	0.75	10	100	20	50025
SLT36-45ALT	3/4"	#4-#14	0.785	1.020	1.68	0.52	1.55	1.54	0.75	10	100	31	50026
SLT37-45ALT	1"	#4-#14	0.980	1.261	2.16	0.65	1.80	1.81	0.75	5	50	42	50027
SLT38-45ALT	1-1/4"	#4-#14	1.330	1.605	2.50	0.66	2.25	2.16	0.75	—	10	57	50028
SLT39-45ALT	1-1/2"	#4-#14	1.530	1.844	3.10	0.73	2.44	2.43	0.75	—	10	73	50029
SLT40-45ALT	2"	#4-#14	1.995	2.337	3.28	0.75	2.97	2.82	0.75	—	5	101	50030
SLT65-45ALT	2-1/2"	#1/0-#8	2.341	2.797	6.67	1.01	4.01	4.41	1.13	—	1	373	50031
SLT66-45ALT	3"	#1/0-#8	2.939	3.418	8.01	1.15	4.18	5.50	1.13	—	1	465	50032
SLT67-45ALT	3-1/2"	#6-#250MCM	3.406	3.915	9.55	1.18	5.25	5.93	1.50	—	1	686	50033
SLT68-45ALT	4"	#6-#250MCM	3.882	4.411	10.64	1.25	5.78	8.34	1.50	—	1	807	50034

Also available with copper lugs. See page 154.



MALLEABLE IRON STRAIGHT LIQUIDTIGHT CONNECTORS

WITH COPPER LUGS FOR LIQUIDTIGHT FLEXIBLE METALLIC CONDUIT

APPLICATION:

- Connects conduit and terminates bonding conductor run externally across liquidtight conduit.

FEATURES:

- Tapered threaded male hub NPT.
- Compact, slim diameter with small turning radius.
- Furnished with insulated throat, steel locknut and sealing ring.
- Suitable for grounding and wet locations.
- Long ferrule prevents pullout and tight bend conduit "pop-out."

STANDARD MATERIALS:

Malleable Iron/Steel Ferrule/
Copper Grounding Lug

STANDARD FINISH:

Zinc Plated/Natural

OPTIONAL FINISH:

For additional corrosion protection, specify Hot Dipped Galvanized. Add suffix "MG" to Malleable Iron catalog number. Example SLT27CLTMG. For more information, see page 28.

CERTIFICATIONS AND COMPLIANCES



UL LISTED E93683


UL Standard: UL514B

NEMA FB-1

ASTM Rated

Liquidtight/Raintight/Concrete tight/Oiltight

UL Listed liquidtight flexible metal conduit fittings are suitable for use in the following Hazardous Locations under NEC 501-4(b), 502-(a)(2); Class I, Div. 2; Class II, Div. 1 and 2; and Class III, Div. 1 and 2 and are suitable for grounding in sizes 3/8" through 1-1/2" under NEC 351-I



TYPE SLT27CLT

All Furnished with Insulated Throats

CATALOG NUMBER	TRADE SIZE	LUG SIZE	I.D.	O.D.	DIM A	DIM B	DIM C	DIM D	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
SLT47CLT	3/8"	#4-#14	0.590	0.793	1.14	0.50	1.15	0.75	25	250	18	50000
SLT27CLT	1/2"	#4-#14	0.590	0.793	1.25	0.50	1.28	0.75	25	250	20	50001
SLT28CLT	3/4"	#4-#14	0.785	1.020	1.28	0.52	1.55	0.75	10	100	31	50002
SLT29CLT	1"	#4-#14	0.980	1.261	1.43	0.65	1.80	0.75	5	50	42	50003
SLT30CLT	1-1/4"	#4-#14	1.330	1.605	1.50	0.66	2.25	0.75	5	50	57	50004
SLT31CLT	1-1/2"	#4-#14	1.530	1.844	1.61	0.73	2.44	0.75	10	50	73	50005
SLT32CLT	2"	#4-#14	1.995	2.337	1.76	0.75	2.97	0.75	5	25	101	50006
SLT33CLT	2-1/2"	#1/0-#8	2.341	2.797	2.18	1.01	4.01	1.13	1	10	373	50007
SLT34CLT	3"	#1/0-#8	2.939	3.418	2.50	1.15	4.18	1.13	1	10	465	50008
SLT60CLT	3-1/2"	#6-#250MCM	3.406	3.915	2.61	1.18	5.25	1.50	1	10	686	50009
SLT61CLT	4"	#6-#250MCM	3.882	4.411	2.74	1.25	5.78	1.50	1	5	807	50010
SLT62CLT	5"	#6-#250MCM	391.77	460.78	3.13	1.50	6.06	1.69	—	1	1058	50011
SLT63CLT	6"	#6-#250MCM	484.65	570.18	3.13	1.56	7.50	1.69	—	1	1395	50012

Also available with aluminum lugs. See page 149.



MALLEABLE IRON 90° LIQUIDTIGHT CONNECTORS

WITH COPPER LUGS FOR LIQUIDTIGHT FLEXIBLE METALLIC CONDUIT

APPLICATION:

- Connects conduit and terminates bonding conductor run externally across liquidtight conduit.

FEATURES:

- Tapered threaded male hub NPT.
- Compact, slim diameter with small turning radius.
- Furnished with insulated throat, steel locknut and sealing ring.
- Suitable for grounding and wet locations.
- Long ferrule prevents pullout and tight bend conduit "pop-out."

STANDARD MATERIALS:

Malleable Iron/Steel Ferrule/
Copper Grounding Lug

STANDARD FINISH:

Zinc Plated/Natural

OPTIONAL FINISH:

For additional corrosion protection, specify Hot Dipped Galvanized. Add suffix "MG" to Malleable Iron catalog number. Example SLT35CLTMG. For more information, see page 29.

CERTIFICATIONS AND COMPLIANCES



UL LISTED E93683


UL Standard: UL514B

NEMA FB-1

ASTM Rated

Liquidtight/Raintight/Concrete tight/Oiltight

UL Listed liquidtight flexible metal conduit fittings are suitable for use in the following Hazardous Locations under NEC 501-4(b), 502-(a)(2); Class I, Div. 2; Class II, Div. 1 and 2; and Class III, Div. 1 and 2 and are suitable for grounding in sizes 3/8" through 1-1/2" under NEC 351-I



TYPE SLT35CLT

All Furnished with Insulated Throats

CATALOG NUMBER	TRADE SIZE	LUG SIZE	I.D.	O.D.	DIM A	DIM B	DIM C	DIM D	DIM E	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
SLT25CLT	3/8"	#4-#14	0.590	0.793	1.31	0.50	1.15	1.37	0.75	10	100	18	50013
SLT35CLT	1/2"	#4-#14	0.590	0.793	1.43	0.50	1.28	1.37	0.75	10	100	20	50014
SLT36CLT	3/4"	#4-#14	0.785	1.020	1.62	0.52	1.55	1.50	0.75	10	100	31	50015
SLT37CLT	1"	#4-#14	0.980	1.261	1.93	0.65	1.80	1.81	0.75	5	50	42	50016
SLT38CLT	1-1/4"	#4-#14	1.330	1.605	2.37	0.66	2.25	1.94	0.75	—	10	57	50017
SLT39CLT	1-1/2"	#4-#14	1.530	1.844	2.68	0.73	2.44	2.40	0.75	—	10	73	50018
SLT40CLT	2"	#4-#14	1.995	2.337	3.18	0.75	2.97	2.64	0.75	—	5	101	50019
SLT65CLT	2-1/2"	#1/0-#8	2.341	2.797	8.31	1.01	4.01	7.81	1.13	—	1	373	50020
SLT66CLT	3"	#1/0-#8	2.939	3.418	9.80	1.15	4.18	9.15	1.13	—	1	465	50021
SLT67CLT	3-1/2"	#6-#250MCM	3.406	3.915	11.18	1.18	5.25	11.22	1.50	—	1	686	50022
SLT68CLT	4"	#6-#250MCM	3.882	4.411	12.93	1.25	5.78	12.54	1.50	—	1	807	50023

Also available with aluminum lugs. See page 150.



MALLEABLE IRON 45° LIQUIDTIGHT CONNECTORS

WITH COPPER LUGS FOR LIQUIDTIGHT FLEXIBLE METALLIC CONDUIT

APPLICATION:

- Connects conduit and terminates bonding conductor run externally across liquidtight conduit.

FEATURES:

- Tapered threaded male hub NPT.
- Compact, slim diameter with small turning radius.
- Furnished with insulated throat, steel locknut and sealing ring.
- Suitable for grounding.
- Long ferrule prevents pull-out and tight bend conduit "pop-out."

STANDARD MATERIALS:

Malleable Iron/Steel Ferrule/
Copper Grounding Lug

STANDARD FINISH:

Zinc Plated/Natural

OPTIONAL FINISH:

For additional corrosion protection, specify Hot Dipped Galvanized. Add suffix "MG" to Malleable Iron catalog number. Example SLT35-45CLTMG. For more information, see page 30.

CERTIFICATIONS AND COMPLIANCES



UL LISTED E93683


UL Standard: UL514B

NEMA FB-1

ASTM Rated

Liquidtight/Raintight/Concrete tight/Oiltight

UL Listed liquidtight flexible metal conduit fittings are suitable for use in the following Hazardous Locations under NEC 501-4(b), 502-(a)(2); Class I, Div. 2; Class II, Div. 1 and 2; and Class III, Div. 1 and 2 and are suitable for grounding in sizes 3/8" through 1-1/2" under NEC 351-I



TYPE SLT35-45CLT

All Furnished with Insulated Throats

CATALOG NUMBER	TRADE SIZE	LUG SIZE	I.D.	O.D.	DIM A	DIM B	DIM C	DIM D	DIM E	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
SLT25-45CLT	3/8"	#4-#14	0.590	0.793	1.62	0.50	1.15	1.48	0.75	10	100	18	50024
SLT35-45CLT	1/2"	#4-#14	0.590	0.793	1.64	0.50	1.28	1.51	0.75	10	100	20	50025
SLT36-45CLT	3/4"	#4-#14	0.785	1.020	1.68	0.52	1.55	1.54	0.75	10	100	31	50026
SLT37-45CLT	1"	#4-#14	0.980	1.261	2.16	0.65	1.80	1.81	0.75	5	50	42	50027
SLT38-45CLT	1-1/4"	#4-#14	1.330	1.605	2.50	0.66	2.25	2.16	0.75	—	10	57	50028
SLT39-45CLT	1-1/2"	#4-#14	1.530	1.844	3.10	0.73	2.44	2.43	0.75	—	10	73	50029
SLT40-45CLT	2"	#4-#14	1.995	2.337	3.28	0.75	2.97	2.82	0.75	—	5	101	50030
SLT65-45CLT	2-1/2"	#1/0-#8	2.341	2.797	6.67	1.01	4.01	4.41	1.13	—	1	373	50031
SLT66-45CLT	3"	#1/0-#8	2.939	3.418	8.01	1.15	4.18	5.50	1.13	—	1	465	50032
SLT67-45CLT	3-1/2"	#6-#250MCM	3.406	3.915	9.55	1.18	5.25	5.93	1.50	—	1	686	50033
SLT68-45CLT	4"	#6-#250MCM	3.882	4.411	10.64	1.25	5.78	8.34	1.50	—	1	807	50034

Also available with aluminum lugs. See page 151.



MALLEABLE IRON/**HOT DIPPED GALVANIZED** STRAIGHT LIQUIDTIGHT CONNECTORS FOR LIQUIDTIGHT FLEXIBLE METALLIC CONDUIT

APPLICATION:

- To secure, ground and seal Liquidtight Flexible Metal conduit to boxes and enclosures.

FEATURES:

- Tapered threaded male hub NPT.
- Compact, slim diameter with small turning radius.
- Furnished with an insulated throat with steel locknut and sealing ring.
- Liquidtight/Raintight/Oiltight.
- Suitable for wet locations.
- Long ferrule prevents pullout and tight bend conduit "pop-out."

STANDARD MATERIALS:

Malleable Iron/Steel Ferrule

STANDARD FINISH:

Hot Dipped Galvanized/Zinc Plated



OPTIONAL FINISH:


For Malleable Iron/Zinc Plated, please remove suffix "MG" from Hot Dipped Galvanized Catalog Number and see page 146.

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198258
UL Standard: UL514B
NEMA FB-1
ASTM Rated
Liquidtight/Raintight/Concrete tight/Oiltight

UL Listed liquidtight flexible metal conduit fittings are suitable for use in the following Hazardous Locations under NEC 501-4(b), 502-4(a)(2); Class I, Div.2; Class II, Div. 1 and 2; and Class III, Div. 1 and 2 and are suitable for grounding in sizes 3/8" through 1-1/2" under NEC 351-I



TYPE SLT27TMG

All Furnished with Insulated Throats

CATALOG NUMBER	TRADE SIZE	KO SIZE	I.D.	O.D.	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
SLT27TMG	1/2"	1/2"	0.590	0.793	1.250	0.500	1.280	25	250	18	16305
SLT28TMG	3/4"	3/4"	0.785	1.020	1.280	0.520	1.550	10	100	29	16310
SLT29TMG	1"	1"	0.980	1.261	1.430	0.650	1.800	5	50	40	16315
SLT30TMG	1-1/4"	1-1/4"	1.330	1.605	1.500	0.660	2.250	5	50	56	16320
SLT31TMG	1-1/2"	1-1/2"	1.530	1.844	1.610	0.730	2.440	10	50	71	16325
SLT32TMG	2"	2"	1.995	2.337	1.760	0.750	2.970	5	25	100	16330
SLT33TMG	2-1/2"	2-1/2"	2.341	2.797	2.180	1.010	4.010	1	10	367	16335
SLT34TMG	3"	3"	2.939	3.418	2.500	1.150	4.180	1	10	461	16340
SLT60TMG	3-1/2"	3-1/2"	3.406	3.915	2.610	1.180	5.250	1	10	675	16345
SLT61TMG	4"	4"	3.882	4.411	2.740	1.250	5.780	1	5	797	16350
SLT62TG	5"	5"	391.77	460.78	3.125	1.500	6.063	—	1	1047	16355
SLT63TG	6"	6"	484.65	570.18	3.375	1.563	7.500	—	1	1381	16360




MALLEABLE IRON/**HOT DIPPED GALVANIZED** 90° LIQUIDTIGHT CONNECTORS FOR LIQUIDTIGHT FLEXIBLE METALLIC CONDUIT

APPLICATION:

- To secure, ground seal Liquidtight Flexible Metal conduit to boxes and enclosures.

FEATURES:

- Tapered threaded male hub NPT.
- Compact, slim diameter with small turning radius.
- Furnished with an insulated throat with steel locknut and sealing ring.
- Liquid tight/Raintight/Oiltight.
- Suitable for wet locations.
- Long ferrule prevents pullout and tight bend conduit "pop-out."



STANDARD MATERIALS:

Malleable Iron/Steel Ferrule

STANDARD FINISH:

Hot Dipped Galvanized/Zinc Plated



OPTIONAL FINISH:

For Malleable Iron/Zinc Plated, please remove suffix "MG" from Hot Dipped Galvanized Catalog Number and see page 147.

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198258

UL Standard: UL514B
NEMA FB-1

ASTM Rated
Liquidtight/Raintight/Concrete tight/Oiltight

UL Listed liquidtight flexible metal conduit fittings are suitable for use in the following Hazardous Locations under NEC 501-4(b), 502-4(a)(2); Class I, Div.2; Class II, Div. 1 and 2; and Class III, Div. 1 and 2 and are suitable for grounding in sizes 3/8" through 1-1/2" under NEC 351-1

TYPE SLT35TMG

All Furnished with Insulated Throats

CATALOG NUMBER	TRADE SIZE	K.O. SIZE	I.D.	O.D.	DIM A	DIM B	DIM C	DIM D	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC#
SLT35TMG	1/2"	1/2"	0.590	0.793	1.43	0.50	1.28	1.37	10	100	31	16405
SLT36TMG	3/4"	3/4"	0.785	1.020	1.62	0.52	1.55	1.50	10	100	46	16410
SLT37TMG	1"	1"	0.980	1.261	1.93	0.65	1.80	1.81	5	50	77	16415
SLT38TMG	1-1/4"	1-1/4"	1.330	1.605	2.37	0.66	2.25	1.94	—	10	98	16420
SLT39TMG	1-1/2"	1-1/2"	1.530	1.844	2.68	0.73	2.44	2.40	—	10	124	16425
SLT40TMG	2"	2"	1.995	2.337	3.18	0.75	2.97	2.64	—	5	179	16430
SLT65TG	2-1/2"	2-1/2"	2.341	2.797	8.31	1.01	4.01	7.81	—	1	847	16435
SLT66TG	3"	3"	2.939	3.418	9.80	1.15	4.18	9.15	—	1	1243	16440
SLT67TG	3-1/2"	3-1/2"	3.406	3.915	11.18	1.18	5.25	11.22	—	1	1914	16445
SLT68TG	4"	4"	3.882	4.411	12.98	1.25	5.78	12.54	—	1	2399	16450




MALLEABLE IRON/**HOT DIPPED GALVANIZED** 45° LIQUIDTIGHT CONNECTORS FOR LIQUIDTIGHT FLEXIBLE METALLIC CONDUIT

APPLICATION:

- To secure, ground and seal Liquidtight Flexible Metal conduit to boxes and enclosures.

FEATURES:

- Tapered threaded male hub NPT.
- Compact, slim diameter with small turning radius.
- Furnished with an insulated throat with steel locknut and sealing ring.
- Liquidtight/Raintight/Oiltight.
- Suitable for wet locations.
- Long ferrule prevents pullout and tight bend conduit "pop-out."



STANDARD MATERIALS:

Malleable Iron/Steel Ferrule

STANDARD FINISH:

Hot Dipped Galvanized/Zinc Plated



OPTIONAL FINISH:

For Malleable Iron/Zinc Plated, please remove suffix "MG" from Hot Dipped Galvanized Catalog Number and see page 148.

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198258
UL Standard: UL514B
NEMA FB-1
ASTM Rated
Liquidtight/Raintight/Concrete tight/Oiltight

UL Listed liquidtight flexible metal conduit fittings are suitable for use in the following Hazardous Locations under NEC 501-4(b), 502-4(a)(2); Class I, Div.2; Class II, Div. 1 and 2; and Class III, Div. 1 and 2 and are suitable for grounding in sizes 3/8" through 1-1/2" under NEC 351-I

TYPE SLT35-45TMG

All Furnished with Insulated Throats

CATALOG NUMBER	TRADE SIZE	K.O. SIZE	I.D.	O.D.	DIM A	DIM B	DIM C	DIM D	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
SLT35-45TMG	1/2"	1/2"	0.590	0.793	1.64	0.50	1.28	1.51	10	100	29	16407
SLT36-45TMG	3/4"	3/4"	0.785	1.020	1.68	0.52	1.55	1.54	10	100	42	16412
SLT37-45TMG	1"	1"	0.980	1.261	2.16	0.65	1.80	1.81	5	50	66	16417
SLT38-45TMG	1-1/4"	1-1/4"	1.330	1.605	2.50	0.66	2.25	2.16	—	10	90	16422
SLT39-45TMG	1-1/2"	1-1/2"	1.530	1.844	3.10	0.73	2.44	2.43	—	10	112	16427
SLT40-45TMG	2"	2"	1.995	2.337	3.28	0.75	2.97	2.82	—	5	179	16432
SLT65-45TG	2-1/2"	2-1/2"	2.341	2.797	6.67	1.01	4.01	4.41	—	1	582	16437
SLT66-45TG	3"	3"	2.939	3.418	8.01	1.15	4.18	5.50	—	1	869	16442
SLT67-45TG	3-1/2"	3-1/2"	3.406	3.915	9.55	1.18	5.25	5.93	—	1	1296	16447
SLT68-45TG	4"	4"	3.882	4.411	10.64	1.25	5.78	8.34	—	1	1539	16452



MALLEABLE IRON/**HOT DIPPED GALVANIZED** STRAIGHT LIQUIDTIGHT CONNECTORS


WITH COPPER LUGS FOR LIQUIDTIGHT FLEXIBLE METALLIC CONDUIT

APPLICATION:

- Connects conduit and terminates bonding conductor run externally across liquidtight conduit.

FEATURES:

- Tapered threaded male hub NPT.
- Compact, slim diameter with small turning radius.
- Furnished with Insulated throat, steel locknut and sealing ring.
- Liquidtight/Raintight/Oiltight.
- Suitable for grounding & wet locations.
- Long ferrule prevents pullout and tight bend conduit "pop-out."



STANDARD MATERIALS:

Malleable Iron/Steel Ferrule/Copper Grounding Lug

STANDARD FINISH:

Hot Dipped Galvanized/Zinc Plated



OPTIONAL FINISH:

For Malleable Iron/Zinc Plated, please remove suffix "MG" from Hot Dipped Galvanized Catalog Number and see page 152.

CERTIFICATIONS AND COMPLIANCES



UL LISTED E93683

UL Standard: UL514B

NEMA FB-1

ASTM Rated

Liquidtight/Raintight/Concrete tight/Oiltight

UL Listed liquidtight flexible metal conduit fittings are suitable for use in the following Hazardous Locations under NEC 501-4(b), 502-4(a)(2); Class I, Div. 2; Class II, Div. 1 and 2; and Class III, Div. 1 and 2 and are suitable for grounding in sizes 3/8" through 1-1/2" under NEC 351-I

TYPE SLT27CLTMG

All Furnished with Insulated Throats

CATALOG NUMBER	TRADE SIZE	LUG SIZE	I.D.	O.D.	DIM A	DIM B	DIM C	DIM D	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
SLT27CLTMG	1/2"	#4-#14	0.590	0.793	1.25	0.50	1.28	0.75	25	250	20	50503
SLT28CLTMG	3/4"	#4-#14	0.785	1.020	1.28	0.52	1.55	0.75	10	100	31	50506
SLT29CLTMG	1"	#4-#14	0.980	1.261	1.43	0.65	1.80	0.75	5	50	42	50509
SLT30CLTMG	1-1/4"	#4-#14	1.330	1.605	1.50	0.66	2.25	0.75	5	50	57	50512
SLT31CLTMG	1-1/2"	#4-#14	1.530	1.844	1.61	0.73	2.44	0.75	10	50	73	50515
SLT32CLTMG	2"	#4-#14	1.995	2.337	1.76	0.75	2.97	0.75	5	25	101	50518
SLT33CLTMG	2-1/2"	#1/0-#8	2.341	2.797	2.18	1.01	4.01	1.13	1	10	373	50521
SLT34CLTMG	3"	#1/0-#8	2.939	3.418	2.50	1.15	4.18	1.13	1	10	465	50524
SLT60CLTMG	3-1/2"	#6-#250 MCM	3.406	3.915	2.61	1.18	5.25	1.50	1	10	686	50527
SLT61CLTMG	4"	#6-#250 MCM	3.882	4.411	2.74	1.25	5.78	1.50	1	5	807	50530
SLT62CLTG	5"	#6-#250 MCM	391.77	460.78	3.13	1.50	6.06	1.69	—	1	1058	50531
SLT63CLTG	6"	#6-#250 MCM	484.65	570.18	3.13	1.56	7.50	1.69	—	1	1395	50532




MALLEABLE IRON/**HOT DIPPED GALVANIZED** 90° LIQUIDTIGHT CONNECTORS WITH COPPER LUGS FOR LIQUIDTIGHT FLEXIBLE METALLIC CONDUIT

APPLICATION:

- Connects conduit and terminates bonding conductor run externally across liquidtight conduit.

FEATURES:

- Tapered threaded male hub NPT.
- Compact, slim diameter with small turning radius.
- Furnished with Insulated throat, steel locknut and sealing ring.
- Liquidtight/Raintight/Oiltight.
- Suitable for grounding and wet locations.
- Long ferrule prevents pullout and tight bend conduit "pop-out."



STANDARD MATERIALS:

Malleable Iron/Steel Ferrule/Copper Grounding Lug

STANDARD FINISH:

Hot Dipped Galvanized/Zinc Plated



OPTIONAL FINISH:

For Malleable Iron/Zinc Plated, please remove suffix "MG" from Hot Dipped Galvanized Catalog Number and see page 153.

CERTIFICATIONS AND COMPLIANCES



UL LISTED E93683
UL Standard: UL514B
NEMA FB-1
ASTM Rated
Liquidtight/Raintight/Concrete tight/Oiltight

UL Listed liquidtight flexible metal conduit fittings are suitable for use in the following Hazardous Locations under NEC 501-4(b), 502-4(a)(2); Class I, Div.2; Class II, Div. 1 and 2; and Class III, Div. 1 and 2 and are suitable for grounding in sizes 3/8" through 1-1/2" under NEC 351-I

TYPE SLT35CLTMG

All Furnished with Insulated Throats

CATALOG NUMBER	TRADE SIZE	LUG SIZE	I.D.	O.D.	DIM A	DIM B	DIM C	DIM D	DIM E	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
SLT35CLTMG	1/2"	#4-#14	0.590	0.793	1.43	0.50	1.28	1.37	0.75	10	100	20	16405
SLT36CLTMG	3/4"	#4-#14	0.785	1.020	1.62	0.52	1.55	1.54	0.75	10	100	31	16410
SLT37CLTMG	1"	#4-#14	0.980	1.261	1.93	0.65	1.80	1.81	0.75	5	50	42	16415
SLT38CLTMG	1-1/4"	#4-#14	1.330	1.605	2.37	0.66	2.25	1.94	0.75	—	10	57	16420
SLT39CLTMG	1-1/2"	#4-#14	1.530	1.844	2.68	0.73	2.44	2.40	0.75	—	10	73	16425
SLT40CLTMG	2"	#4-#14	1.995	2.337	3.18	0.75	2.97	2.64	0.75	—	5	101	16430
SLT65CLTG	2-1/2"	#1/0-#8	2.341	2.797	8.31	1.01	4.01	7.81	1.13	—	1	373	16435
SLT66CLTG	3"	#1/0-#8	2.939	3.418	9.80	1.15	4.18	9.15	1.13	—	1	465	16440
SLT67CLTG	3-1/2"	#6-#250 MCM	3.406	3.915	11.18	1.18	5.25	11.22	1.50	—	1	686	16445
SLT68CLTG	4"	#6-#250 MCM	3.882	4.411	12.93	1.25	5.78	12.54	1.50	—	1	1539	16452



MALLEABLE IRON/**HOT DIPPED GALVANIZED** 45° LIQUIDTIGHT CONNECTORS

WITH COPPER LUGS FOR LIQUIDTIGHT FLEXIBLE METALLIC CONDUIT

APPLICATION:

- Connects conduit and terminates bonding conductor run externally across liquidtight conduit.

FEATURES:

- Tapered threaded male hub NPT.
- Compact, slim diameter with small turning radius.
- Furnished with Insulated throat, steel locknut, and sealing ring.
- Liquidtight/Raintight/Oiltight.
- Suitable for grounding and wet locations.
- Long ferrule prevents pullout and tight bend conduit "pop-out."

STANDARD MATERIALS:

Malleable Iron/Steel Ferrule/Copper Grounding Lug

STANDARD FINISH:

Hot Dipped Galvanized/Zinc Plated

**OPTIONAL FINISH:**

For Malleable Iron/Zinc Plated, please remove suffix "MG" from Hot Dipped Galvanized Catalog Number and see page 154.

CERTIFICATIONS AND COMPLIANCES

UL LISTED E93683


UL Standard: UL514B

NEMA FB-1

ASTM Rated

Liquidtight/Raintight/Concrete tight/Oiltight

UL Listed liquidtight flexible metal conduit fittings are suitable for use in the following Hazardous Locations under NEC 501-4(b), 502-4(a)(2); Class I, Div.2; Class II, Div. 1 and 2; and Class III, Div. 1 and 2 and are suitable for grounding in sizes 3/8" through 1-1/2" under NEC 351-I

**TYPE SLT35-45CLTMG**

All Furnished with Insulated Throats

CATALOG NUMBER	TRADE SIZE	LUG SIZE	I.D.	O.D.	DIM A	DIM B	DIM C	DIM D	DIM E	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
SLT35-45CLTMG	1/2"	#4-#14	0.590	0.793	1.64	0.50	1.28	1.51	0.75	10	100	20	50569
SLT36-45CLTMG	3/4"	#4-#14	0.785	1.020	1.68	0.52	1.55	1.54	0.75	10	100	31	50572
SLT37-45CLTMG	1"	#4-#14	0.980	1.261	2.16	0.65	1.80	1.81	0.75	5	50	42	50575
SLT38-45CLTMG	1-1/4"	#4-#14	1.330	1.605	2.50	0.66	2.25	2.16	0.75	—	10	57	50578
SLT39-45CLTMG	1-1/2"	#4-#14	1.530	1.844	3.10	0.73	2.44	2.43	0.75	—	10	73	50581
SLT40-45CLTMG	2"	#4-#14	1.995	2.337	3.28	0.75	2.97	2.82	0.75	—	5	101	50584
SLT65-45CLTG	2-1/2"	#1/0-#8	2.341	2.797	6.67	1.01	4.01	4.41	1.13	—	1	373	50587
SLT66-45CLTG	3"	#1/0-#8	2.939	3.418	8.01	1.15	4.18	5.50	1.13	—	1	465	50590
SLT67-45CLTG	3-1/2"	#6-#250 MCM	3.406	3.915	9.55	1.18	5.25	5.93	1.50	—	1	686	50593
SLT68-45CLTG	4"	#6-#250 MCM	3.882	4.411	10.64	1.25	5.78	8.34	1.50	—	1	1539	50596



ZINC STRAIGHT LIQUIDTIGHT CONNECTORS FOR LIQUIDTIGHT FLEXIBLE METALLIC CONDUIT

APPLICATION:

- Terminate and seal liquidtight flexible metal conduit to either oiltight, liquidtight or raintight box or enclosure. Connectors can be used with tapered thread female entry or unthreaded knockout using the provided sealing washer and locknut.

FEATURES:

- Furnished with zinc die cast locknut and sealing ring.
- Suitable for grounding (through 1-1/4").
- Suitable for wet locations.


STANDARD MATERIALS:

Zinc Die Cast

CERTIFICATIONS AND COMPLIANCES




UL LISTED E198258
UL Standard: UL514B
NEMA FB-1
ASTM Rated
Liquidtight/Raintight/Oiltight



TYPE LT27

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
LT47	3/8"	1.440	0.400	1.260	25	250	16	14472
LT27	1/2"	1.500	0.420	1.385	25	250	20	14272
LT28	3/4"	1.600	0.420	1.720	10	100	28	14282
LT29	1"	1.785	0.550	1.900	5	50	44	14292
LT30	1-1/4"	1.900	0.546	2.290	5	50	64	14302
LT31	1-1/2"	2.737	0.520	2.633	—	10	87	14312
LT32	2"	2.080	0.585	3.156	—	5	121	14322
LT33	2-1/2"	3.025	0.775	4.205	—	1	250	14332
LT34	3"	3.530	0.920	4.910	—	1	355	14342
LT60	3-1/2"	3.660	0.920	5.470	—	1	480	14602
LT61	4"	3.875	0.987	5.925	—	1	570	14612



TYPE LT27T

Insulated Throat

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
LT47T	3/8"	1.530	0.490	1.260	25	250	16	14478
LT27T	1/2"	1.590	0.510	1.385	25	250	20	14278
LT28T	3/4"	1.690	0.510	1.720	10	100	28	14288
LT29T	1"	1.875	0.530	1.900	5	50	44	14298
LT30T	1-1/4"	1.990	0.636	2.290	5	50	64	14308
LT31T	1-1/2"	2.207	0.610	2.633	—	10	87	14318
LT32T	2"	2.170	0.675	3.156	—	5	121	14328
LT33T	2-1/2"	3.025	0.775	4.205	—	1	250	14338
LT34T	3"	3.530	0.920	4.910	—	1	355	14348
LT60T	3-1/2"	3.660	0.920	5.470	—	1	480	14608
LT61T	4"	3.875	0.987	5.925	—	1	570	14618



ZINC 90° LIQUIDTIGHT CONNECTORS

FOR LIQUIDTIGHT FLEXIBLE METALLIC CONDUIT

APPLICATION:

- Terminate and seal liquidtight flexible metal conduit, at 90° angle, to either oiltight, liquidtight or raintight box or enclosure.

FEATURES:

- Furnished with zinc die cast locknut and sealing ring.
- Suitable for grounding (through 1-1/4").
- Suitable for wet locations.

STANDARD MATERIALS:

Zinc Die Cast

CERTIFICATIONS AND COMPLIANCES




UL LISTED E198258

UL Standard: UL514B

NEMA FB-1


ASTM Rated

Liquidtight/Raintight/Oiltight



TYPE LT35

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
LT25	3/8"	2.062	0.520	2.340	10	100	23	14252
LT35	1/2"	2.220	0.525	2.340	10	100	27	14352
LT36	3/4"	2.550	0.680	3.550	10	100	48	14362
LT37	1"	2.820	0.675	3.785	5	50	76	14372
LT38	1-1/4"	3.362	0.700	3.960	—	10	112	14382
LT39	1-1/2"	3.450	0.700	4.130	—	10	147	14392
LT40	2"	4.036	0.575	4.700	—	5	196	14402
LT65	2-1/2"	5.215	0.770	5.375	—	1	400	14652
LT66	3"	6.100	1.100	6.500	—	1	550	14662
LT67	3-1/2"	6.715	1.100	7.450	—	1	740	14672
LT68	4"	6.780	1.100	8.000	—	1	970	14682



TYPE LT35T

Insulated Throat

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
LT25T	3/8"	2.152	0.610	2.340	10	100	23	14258
LT35T	1/2"	2.310	0.615	2.340	10	100	27	14358
LT36T	3/4"	2.640	0.770	3.550	10	100	48	14368
LT37T	1"	2.910	0.765	3.785	5	50	76	14378
LT38T	1-1/4"	3.452	0.790	3.960	—	10	112	14388
LT39T	1-1/2"	3.540	0.790	4.130	—	10	147	14398
LT40T	2"	4.126	0.665	4.700	—	5	196	14408
LT65T	2-1/2"	5.215	0.860	5.375	—	1	400	14658
LT66T	3"	6.100	1.100	6.500	—	1	550	14668
LT67T	3-1/2"	6.715	1.100	7.450	—	1	740	14678
LT68T	4"	6.780	1.100	8.000	—	1	970	14688







SCAN ME

TO VIEW
PRODUCT SECTION

AC-MC-FLEX FITTINGS



BIG BITE SADDLE-TYPE CONNECTORS WITH INSULATED THROAT

FOR ARMORED CABLE, METAL CLAD AND FLEXIBLE METALLIC CONDUIT

APPLICATION:

- To connect Flex, AC and MC cables to a box or an enclosure.

FEATURES:

- One-piece tubular construction affording extra strength.
- Dual-gripping saddle clamps.
- Saddle clamp rides up and down on screw for ease of installation.
- Robertson head screws.
- Furnished with insulated throat.

STANDARD MATERIALS:

Tubular Steel/Steel Locknut

STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES



UL LISTED


E309514 3/8" thru 1"

E198258 1 1/4" thru 4"

UL Standard: UL514B

NEMA FB-1

ASTM Rated



TYPE DB50-IC

CATALOG NUMBER	TRADE SIZE	CABLE OPENING MAX	CABLE OPENING MIN	KO SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
*DB38-IC	3/8"	0.656	0.437	1/2"	1.188	1.250	0.500	50	500	15	31800
*DB50-IC	1/2"	0.937	0.750	1/2"	1.375	1.250	0.438	25	100	16	31801
*DB75-IC	3/4"	1.125	0.906	3/4"	1.375	1.438	0.438	10	100	17	31802
*DB100-IC	1"	1.468	1.250	1"	1.563	1.813	0.500	5	50	31	31803
DB125-IC	1-1/4"	1.500	1.312	1-1/4"	2.188	2.125	0.625	5	10	53	31804
DB150-IC	1-1/2"	1.750	1.562	1-1/2"	2.438	2.500	0.625	5	10	63	31805
DB200-IC	2"	2.031	1.812	2"	2.563	3.000	0.625	5	10	87	31806
DB250-IC	2-1/2"	3.062	2.812	2-1/2"	2.688	3.625	0.813	1	5	163	31807
DB300-IC	3"	3.562	3.312	3"	2.813	4.250	0.938	1	5	192	31808
DB350-IC	3-1/2"	4.060	3.620	3-1/2"	2.938	4.750	1.000	—	1	225	31809
DB400-IC	4"	4.560	4.120	4"	3.000	5.813	1.031	—	1	263	31810

*Suitable for use on Steel C US or Aluminum Cables.

Please see Cable Chart for Double Bite Connectors on page 169.

90° BIG BITE SADDLE-TYPE CONNECTORS WITH INSULATED THROAT

APPLICATION:

- To connect Flex, AC and MC cables to a box or an enclosure.

FEATURES:

- Male hub threads – NPSM.
- One-piece malleable construction affording extra strength.
- Dual-gripping saddle clamps.
- Saddle clamp rides up and down on screw for ease of installation.
- Robertson head screws.
- Furnished with insulated throat.

STANDARD MATERIALS:

Malleable Iron/Steel Locknuts/Steel Clamps

STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES




UL LISTED E309514

UL Standard: UL514B

NEMA FB-1

ASTM Rated



TYPE DB5090-IC

CATALOG NUMBER	TRADE SIZE	CABLE OPENING MAX	CABLE OPENING MIN	KO SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
DB3890-IC	3/8"	0.656	0.437	1/2"	1.750	2.063	1.000	50	500	15	99916
DB5090-IC	1/2"	0.937	0.750	1/2"	2.125	2.250	1.250	25	100	16	99917
DB7590-IC	3/4"	1.125	0.906	3/4"	2.500	2.500	1.375	10	100	17	99918
DB10090-IC	1"	1.468	1.250	1"	2.813	2.875	1.688	5	50	31	99919

Please see Cable Chart for Double Bite Connectors on page 169.



45° BIG BITE SADDLE-TYPE CONNECTORS WITH INSULATED THROAT

FOR ARMORED CABLE, METAL CLAD AND FLEXIBLE METALLIC CONDUIT

APPLICATION:

- To connect Flex, AC and MC cables to a box or an enclosure.

FEATURES:

- Male hub threads – NPSM.
- One-piece malleable construction affording extra strength.
- Dual-gripping saddle clamps.
- Saddle clamp rides up and down on screw for ease of installation.
- Robertson head screws.
- Furnished with insulated throat.

STANDARD MATERIALS:

Malleable Iron/Steel Locknuts/
Steel Clamps


STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES



UL LISTED E309514
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE DB5045-IC

CATALOG NUMBER	TRADE SIZE	CABLE OPENING		KO SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
DB3845-IC	3/8"	0.656	0.437	1/2"	1.813	1.750	0.938	50	250	16	99913
DB5045-IC	1/2"	0.937	0.750	1/2"	2.125	2.125	1.250	25	100	26	99914
DB7545-IC	3/4"	1.125	0.906	3/4"	2.375	2.313	1.438	10	100	29	99915

Please see Cable Chart for Double Bite Connectors on page 169.

BIG BITE SADDLE-TYPE COMBINATION COUPLINGS

FOR ARMORED CABLE, METAL CLAD AND FLEXIBLE METALLIC CONDUIT

APPLICATION:

- To connect Flex, AC and MCI cables to EMT conduit.

FEATURES:

- One-piece tubular construction affording extra strength.
- Dual-gripping saddle clamps.
- Saddle clamp rides up and down on screw for ease installation.
- Robertson head screws.

STANDARD MATERIALS:

Tubular Steel/ Steel Locknuts/Steel Compression Nut/Steel Gland Ring


STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES



UL LISTED
E198258 1/2" thru 3/4"
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE DBC-50

Compression

CATALOG NUMBER	TRADE SIZE	CABLE OPENING MAX	MIN	KO SIZE	DIM A	DIM B	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
DBC-38	3/8"	0.640	0.280	1/2"	1.375	1.250	50	500	18	99910
DBC-50	1/2"	0.930	0.635	1/2"	1.563	1.250	25	100	19	99911
DBC-75	3/4"	1.125	0.810	3/4"	1.563	1.438	10	100	20	99912

APPLICATION:

- To connect Flex, AC and MCI cables to EMT conduit.

FEATURES:

- One-piece tubular construction affording extra strength.
- Dual-gripping saddle clamps.
- Saddle clamp rides up and down on screw for ease installation.
- Robertson head screws.

STANDARD MATERIALS:

Tubular Steel


STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES



UL LISTED
E198258 1/2" thru 3/4"
UL Standard: UL514B
NEMA FB-1
ASTM Rated

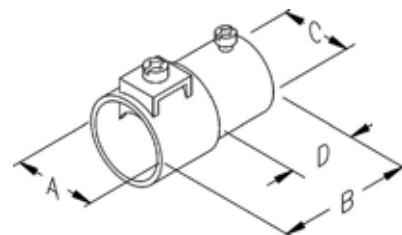

TYPE DBS-50

Set-Screw

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	DIM D	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
DBS-38	3/8"	0.750	1.563	0.875	0.625	50	500	18	90128
DBS-50	1/2"	1.063	2.000	0.875	0.625	25	100	19	90129
DBS-75	3/4"	1.250	2.125	1.125	0.813	10	100	20	90130



CABLE CHART FOR DOUBLE BITE CONNECTORS

Cable Type

CATALOG NUMBER	AC STEEL	AC STEEL HCF	AC ALUMINUM	AC ALUM HCF	MCI STEEL	MCI ALUM	MCI-A	MCI-A HCF	FLEX CONDUIT
DB38-IC, DB3845-IC, DB3890-IC	14/2, 14/3, 14/4, 12/2, 12/3, 12/4, 10/2 (.450-.660 Dia)	(.450-.660 Dia)	14/2, 14/3, 14/4, 12/2, 12/3, 12/4, 10/2 (.450-.660 Dia)	(.450-.660 Dia)	14/2, 14/3, 14/4, 12/2, 12/3, 12/4, 10/2 (.450-.660 Dia)	14/2, 14/3, 14/4, 12/2, 12/3, 12/4, 10/2 (.450-.660 Dia)	14/2, 14/3, 14/4, 12/2, 12/3, 12/4, 10/2, 10/3 (.400-.590 Dia)	(.400-.590 Dia)	3/8"
DB50-IC, DB5045-IC, DB5090-IC	12/4, 10/2, 10/3, 10/4, 8/2, 8/3, 8/4, 6/2, 6/3 (.550-.920 Dia)	(.550-.920 Dia)	12/4, 10/2, 10/3, 10/4, 8/2, 8/3, 8/4, 6/2, 6/3 (.550-.920 Dia)	(.550-.920 Dia)	10/4, 8/2, 8/3 (.640-.920 Dia)	10/4, 8/2, 8/3 (.640-.920 Dia)	12/4, 10/3, 8/4 (.520-.770 Dia)	(.520-.770 Dia)	1/2"
DB75-IC, DB7545-IC, DB7590-IC	6/4, 4/2, 4/3 (.930-1.075 Dia)	(.930-1.075 Dia)	8/3, 6/3, 6/4, 4/3 (.680-1.075 Dia)	(.680-1.075 Dia)	8/3, 8/4, 6/3, 6/4, 4/3 (.730-1.075 Dia)	6/4, 4/3 (.930-1.075 Dia)	8/4, 6/4 (.770-1.110 Dia)	(.770-1.110 Dia)	3/4"
DB100-IC, DB10090-IC	6/4, 4/4, 4/3 3/3, 3/2, 2/4, 2/3, 1/3 (.930-1.375 Dia)	(.930-1.375 Dia)	6/4, 4/4, 4/3 3/3, 3/2, 2/4, 2/3, 1/3 (.930-1.375 Dia)	(.930-1.375 Dia)	3/4 (.960-1.375 Dia)	6/4, 4/3, 3/4 (.960-1.375 Dia)	(.880-1.110 Dia)	(.880-1.110 Dia)	1"
DB125-IC	—	—	(1.150-1.335 Dia)	—	—	(1.200-1.635 Dia)	—	—	1-1/4"
DB150-IC	—	—	—	—	—	(1.490-1.820 Dia)	—	—	1-1/2"
DB200-IC	—	—	—	—	—	(1.765-2.25 Dia)	—	—	2"
DB250-IC	—	—	—	—	—	(2.270-2.950 Dia)	—	—	2-1/2"
DB300-IC	—	—	—	—	—	(3.160-3.480 Dia)	—	—	3"
DB350-IC	—	—	—	—	—	—	—	—	3-1/2"
DB400-IC	—	—	—	—	—	—	—	—	4"



QUICKLOCK-TYPE CONNECTORS WITH INSULATED THROAT

FOR ARMORED CABLE, METAL CLAD AND FLEXIBLE METALLIC CONDUIT

APPLICATION:

- Used to connect MC, AC and Flex cable to box or enclosure.

FEATURES:

- No locknut required
- Single-unit or duplex construction with captive clamp.
- Connects 50 MC, AC and Flex RW cable sizes with just three fittings.
- Easy to install. Just tilt, insert and snap down.
- Single-unit construction eliminates loose component parts; integral green plastic insulated throat bushing provides maximum protection for wire installation.
- Concrete tight when taped and used with PVC jacketed cord.
- Accepts 2 cables of each size listed.

STANDARD MATERIALS:

Tubular Steel

STANDARD FINISH:

Zinc Plated


CERTIFICATIONS AND COMPLIANCES




UL LISTED E309514
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE QL-50



TYPE QL-50D



CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./ 100 PCS	UPC #
QL-50	1/2" SINGLE	1.438	0.438	0.438	50	500	8	90001
QL-75	3/4" SINGLE	1.313	0.563	0.563	25	125	14	90002
QL-50D	1/2" DUPLEX	1.688	0.563	0.563	25	125	10	90003

Please see Cable Chart for Cable Connectors on page 182.

MALLEABLE IRON STRAIGHT CABLE CONNECTORS

FOR ARMORED CABLE AND FLEXIBLE METALLIC CONDUIT

APPLICATION:

- Used with locknut to terminate steel or aluminum flexible metal conduit to enclosure.

FEATURES:

- Male hub threads – NPS.
- Provided with steel locknut.

STANDARD MATERIALS:

Malleable Iron/Steel Locknuts


STANDARD FINISH:

Zinc Plated


CERTIFICATIONS AND COMPLIANCES




UL LISTED E198258
UL Standard: UL514B
NEMA FB-1
ASTM Rated



Sizes 3/8"–1-1/4" are manufactured as shown above



Sizes 1-1/2"–3" are manufactured as shown above




Sizes 3-1/2"–4" are manufactured as shown above

TYPE C34


Squeeze Type

CATALOG NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
C27	1/2"	1/2"	1.00	0.45	1.60	25	250	13	32701
C28	3/4"	3/4"	1.10	0.48	1.78	25	250	17	32801
C29	1"	1"	1.10	0.57	2.15	10	100	26	32901
C30	1-1/4"	1-1/4"	1.19	0.57	2.18	10	100	40	33001
C31	1-1/2"	1-1/2"	1.85	0.64	2.25	—	10	63	33101
C32	2"	2"	2.00	0.75	2.70	—	10	107	33201
C33	2-1/2"	2-1/2"	2.05	0.90	3.31	—	10	172	33301
C34	3"	3"	2.15	1.05	3.90	—	5	203	33401
C60	3-1/2"	3-1/2"	3.75	1.31	6.50	—	2	442	36001
C61	4"	4"	4.10	1.50	7.25	—	1	663	36101


Please see Cable Chart for Cable Connectors on page 182.



Sizes 3/8"–1-1/4" are manufactured as shown above



Sizes 1-1/2"–3" are manufactured as shown above



Sizes 3-1/2"–4" are manufactured as shown above

TYPE C34T

Squeeze Type – Insulated Throat

CATALOG NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
C47AT	3/8"	1/2"	1.00	0.45	1.60	25	250	6	34718
C27T	1/2"	1/2"	1.00	0.45	1.60	25	250	13	32703
C28T	3/4"	3/4"	1.10	0.48	1.78	25	250	17	32803
C29T	1"	1"	1.10	0.57	2.15	10	100	26	32903
C30T	1-1/4"	1-1/4"	1.19	0.57	2.18	10	100	40	33003
C31T	1-1/2"	1-1/2"	1.85	0.64	2.25	—	10	64	33103
C32T	2"	2"	2.00	0.75	2.70	—	10	108	33203
C33T	2-1/2"	2-1/2"	2.05	0.90	3.31	—	10	174	33303
C34T	3"	3"	2.15	1.05	3.90	—	5	205	33403
C60T	3-1/2"	3-1/2"	3.75	1.31	6.50	—	2	446	36003
C61T	4"	4"	4.10	1.50	7.25	—	1	670	36103

Please see Cable Chart for Cable Connectors on page 182.



MALLEABLE IRON 90° CABLE CONNECTORS

FOR ARMORED CABLE AND FLEXIBLE METALLIC CONDUIT

APPLICATION:

- Used with locknut to terminate steel or aluminum flexible metal conduit to enclosure to form a 90° bend.

FEATURES:

- Male hub threads – NPS.
- Provided with steel locknut.

STANDARD MATERIALS:

Malleable Iron/Steel Locknuts

STANDARD FINISH:

Zinc Plated


CERTIFICATIONS AND COMPLIANCES




UL LISTED E198258
UL Standard: UL514B
NEMA FB-1
ASTM Rated




TYPE C40



Sizes 3/8"-1-1/4"
are manufactured as
shown above



Sizes 1"-3" are
manufactured as
shown above



Sizes 3-1/2"-4" are
manufactured as
shown above


90° Squeeze Type

CATALOG NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	DIM C	DIM D	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
C35	1/2"	1/2"	1.63	0.41	0.85	0.51	25	250	20	33511
C36	3/4"	3/4"	1.81	0.50	1.10	0.62	10	100	25	33611
C37	1"	1"	2.10	0.50	1.31	0.81	5	50	62	33711
C38	1-1/4"	1-1/4"	2.75	0.65	1.83	1.12	—	10	120	33811
C39	1-1/2"	1-1/2"	3.37	0.65	1.83	1.50	—	10	149	33911
C40	2"	2"	5.00	0.81	2.75	1.70	—	5	309	34011
C65	2-1/2"	2-1/2"	5.50	1.00	4.12	2.00	—	2	352	36511
C66	3"	3"	6.62	1.00	4.50	2.25	—	1	553	36611
C67	3-1/2"	3-1/2"	8.25	1.30	5.56	3.15	—	1	1216	36711
C68	4"	4"	9.30	1.50	7.00	3.45	—	1	1437	36811


Please see Cable Chart for Cable Connectors on page 182.




TYPE C40T



Sizes 3/8"-1-1/4"
are manufactured as
shown above



Sizes 1"-3" are
manufactured as
shown above



Sizes 3-1/2"-4" are
manufactured as
shown above

90° Squeeze Type – Insulated Throat

CATALOG NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	DIM C	DIM D	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
C25T	3/8"	1/2"	1.63	0.41	0.85	0.51	50	500	9	38125
C35T	1/2"	1/2"	1.63	0.41	0.85	0.51	25	250	20	33513
C36T	3/4"	3/4"	1.81	0.50	1.10	0.62	10	100	25	33613
C37T	1"	1"	2.10	0.50	1.31	0.81	5	50	62	33713
C38T	1-1/4"	1-1/4"	2.75	0.65	1.83	1.12	—	10	120	33813
C39T	1-1/2"	1-1/2"	3.37	0.65	1.83	1.50	—	10	149	33913
C40T	2"	2"	5.00	0.81	2.75	1.70	—	5	309	34013
C65T	2-1/2"	2-1/2"	5.50	1.00	4.12	2.00	—	2	352	36513
C66T	3"	3"	6.62	1.00	4.50	2.25	—	1	553	36613
C67T	3-1/2"	3-1/2"	8.25	1.30	5.56	3.15	—	1	1216	36713
C68T	4"	4"	9.30	1.50	7.00	3.45	—	1	1437	36813

Please see Cable Chart for Cable Connectors on page 182.



ZINC STRAIGHT CABLE CONNECTORS

FOR ARMORED CABLE AND FLEXIBLE METALLIC CONDUIT

APPLICATION:

- Used with a locknut to terminate steel or aluminum flexible metal conduit and armored cable to enclosure.

FEATURES:

- Assembled with die cast locknut and tri-combo screws.


STANDARD MATERIALS:

Zinc Die Cast

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198258
CSA File No. LR57925
UL Standard: UL514B
NEMA FB-1
ASTM Rated




TYPE C27Z

Squeeze Type

CATALOG NUMBER	TRADE SIZE	DIM A MIN	DIM A MAX	DIM B	UNIT PACK	MASTER PACK	LBS./ 100 PCS	UPC #
C47Z	3/8"	0.530	0.620	0.982	50	500	7	24708
C27Z	1/2"	0.850	0.914	1.470	25	250	10	32708
C28Z	3/4"	1.100	1.135	1.580	25	250	13	32808
C29Z	1"	1.255	1.375	1.750	10	100	20	32908
C30Z	1-1/4"	1.550	1.610	1.910	10	100	29	33008
C31Z	1-1/2"	1.810	1.895	2.090	5	50	39	33108
C32Z	2"	2.260	2.485	2.340	10	40	46	33208

Please see Cable Chart for Cable Connectors on page 182.



TYPE C27ZT

Squeeze Type – Insulated Throat

CATALOG NUMBER	TRADE SIZE	DIM A MIN	DIM A MAX	DIM B	UNIT PACK	MASTER PACK	LBS./ 100 PCS	UPC #
C47ZT	3/8"	0.530	0.620	0.982	50	500	7	32646
C27ZT	1/2"	0.850	0.914	1.470	25	250	10	32757
C28ZT	3/4"	1.100	1.135	1.580	25	250	13	32867
C29ZT	1"	1.255	1.375	1.750	10	100	20	32967
C30ZT	1-1/4"	1.550	1.610	1.910	10	100	29	33067
C31ZT	1-1/2"	1.810	1.895	2.090	5	50	39	33167
C32ZT	2"	2.260	2.485	2.340	10	40	46	33267

Please see Cable Chart for Cable Connectors on page 182.



ZINC 90° CABLE CONNECTORS

FOR ARMORED CABLE AND FLEXIBLE METALLIC CONDUIT

APPLICATION:

- Used with a locknut to terminate steel or aluminum flexible metal conduit and armored cable to enclosure to form a 90° bend.

FEATURES:

- Assembled with die cast locknut and tri-combo screws.


STANDARD MATERIALS:

Zinc Die Cast

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198258
CSA File No. LR57925
UL Standard: UL514B
NEMA FB-1
ASTM Rated




TYPE C40Z

Squeeze Type

CATALOG NUMBER	TRADE SIZE	DIM A MIN	DIM A MAX	DIM B	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
C25Z	3/8"	0.440	0.750	0.180	50	500	7	32252
C35Z	1/2"	0.635	1.085	2.140	25	250	10	33516
C36Z	3/4"	0.830	1.380	2.380	10	100	13	33616
C37Z	1"	1.330	1.570	2.800	5	50	20	33716
C38Z	1-1/4"	1.625	1.940	3.930	10	40	29	33816
C39Z	1-1/2"	1.400	2.400	6.050	—	10	39	33916
C40Z	2"	1.400	2.400	6.050	—	5	46	34016

Please see Cable Chart for Cable Connectors on page 182.



TYPE C40ZT

Squeeze Type – Insulated Throat

CATALOG NUMBER	TRADE SIZE	DIM A MIN	DIM A MAX	DIM B	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
C25ZT	3/8"	0.440	0.750	0.180	50	500	7	32567
C35ZT	1/2"	0.635	1.085	2.140	25	250	10	33567
C36ZT	3/4"	0.830	1.380	2.380	10	100	13	33667
C37ZT	1"	1.330	1.570	2.800	5	50	20	33767
C38ZT	1-1/4"	1.625	1.940	3.930	10	40	29	33867
C39ZT	1-1/2"	1.400	2.400	6.050	—	10	39	33967
C40ZT	2"	1.400	2.400	6.050	—	5	46	34067

Please see Cable Chart for Cable Connectors on page 182.



ZINC TWO-SCREW TAKE-ALL CONNECTORS

FOR ARMORED CABLE, METAL CLAD, FLEXIBLE METALLIC CONDUIT AND NON-METAL SHEATHED CABLE

APPLICATION:

- Used with locknut to terminate service entrance cable to enclosure.

FEATURES:

- Take-all type.

STANDARD MATERIALS:

Zinc Die Cast

CERTIFICATIONS AND COMPLIANCES



UL LISTED E309514
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE C50Z

CATALOG NUMBER	TRADE SIZE	DIM A MIN	DIM A MAX	DIM B	UNIT PACK	MASTER PACK	LBS./ 100 PCS	UPC #
C48Z	1/2"	0.40	0.95	1.87	25	250	10	32482
C49Z	3/4"	0.50	1.10	1.84	20	200	12	32492
C50Z	1"	0.62	1.14	2.00	10	100	15	32502
C51Z	1-1/4"	0.50	1.38	2.28	10	100	25	32512
C52Z	1-1/2"	0.75	1.61	2.49	10	100	38	32522
C53Z	2"	0.90	2.04	3.35	5	50	50	32632

Please see Cable Chart for Cable Connectors on page 182.



TYPE C50ZT

Insulated

CATALOG NUMBER	TRADE SIZE	DIM A MIN	DIM A MAX	DIM B	UNIT PACK	MASTER PACK	LBS./ 100 PCS	UPC #
C48ZT	1/2"	0.40	0.95	1.87	25	250	10	34867
C49ZT	3/4"	0.50	1.10	1.84	20	200	12	34967
C50ZT	1"	0.62	1.14	2.00	10	100	15	35067
C51ZT	1-1/4"	0.50	1.38	2.28	10	100	25	35167
C52ZT	1-1/2"	0.75	1.61	2.49	10	100	38	35267
C53ZT	2"	0.90	2.04	3.35	5	50	50	35367

Please see Cable Chart for Cable Connectors on page 182.



MALLEABLE IRON CABLE CONNECTORS

FOR ARMORED CABLE, METAL CLAD AND FLEXIBLE METALLIC CONDUIT

APPLICATION:

- Strap-type fitting used to connect flexible metal conduit or armored cable to box or enclosure.

FEATURES:

- UL Listed flexible metal conduit fittings are suitable for use in Hazardous Locations under NEC 501-4(b) Class I Div. II, and suitable as a grounding means under NEC 350-5.
- Male hub threads – NPSM.
- Provided with steel locknuts.
- Stamped steel covers.

STANDARD MATERIALS:

Malleable Iron/Steel Locknuts


STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES



UL LISTED E309514
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE C270M

Duplex

CATALOG NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
C270M	3/8"	1/2"	1.688	0.438	1.625	20	200	14	52802

Please see Cable Chart for Cable Connectors on page 182.

MALLEABLE IRON CABLE CONNECTORS

FOR ARMORED CABLE, METAL CLAD AND FLEXIBLE METALLIC CONDUIT

APPLICATION:

- To make a 90° termination of flexible metal conduit or cable to a knockout or unthreaded slip hole in a dry location box or enclosure.

FEATURES:

- Male hub threads – NPSM.
- Provided with steel locknuts.
- Stamped steel covers.

STANDARD MATERIALS:

Malleable Iron/Steel Locknuts


STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES



UL LISTED E309514
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE C271

90° Duplex

CATALOG NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
C271	3/8"	1/2"	1.188	0.438	0.875	25	250	14	52713

Please see Cable Chart for Cable Connectors on page 182.

APPLICATION:

- Connects conduit and terminates bonding conductor.

FEATURES:

- Male hub threads – NPSM.
- Provided with steel locknuts.
- Stamped steel covers.

STANDARD MATERIALS:

Malleable Iron/Steel Locknuts


STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES



UL LISTED
E309514 3/8" and 3/4"
E198258 1/2"
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE 315M

45° Angle

CATALOG NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
315M	3/8"	1/2"	1.750	0.438	1.125	25	250	10	31502
316M	1/2"	1/2"	1.938	0.438	1.750	25	250	12	70885
317M	3/4"	3/4"	1.938	0.500	2.000	25	250	15	70886



ZINC CABLE AND CONDUIT CONNECTORS

FOR ARMORED CABLE, METAL CLAD AND FLEXIBLE METALLIC CONDUIT

APPLICATION:

- For use with flexible metal conduit and reduced wall flexible metal conduit, metal clad and armored cable. They are used to connect two, Trade Size 3/8 (12) flexible metal conduits, two armored cable of appropriate size marked, or two metal clad cable of appropriate size marked to an enclosure through a Trade Size 1/2 (16) knockout.

FEATURES:

- UL Listed locknut.
- Male hub NPS.
- Tri-combo head screws.


STANDARD MATERIALS:

Zinc Die Cast

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198258
CSA File No. LR57925
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE C270A

Duplex Single-Screw Clamp Type

CATALOG NUMBER	TRADE SIZE	DIM A MIN	DIM A MAX	DIM B	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
C270A	3/8"	0.438	1.688	1.625	25	250	13	52712

Please see Cable Chart for Cable Connectors on page 182.

APPLICATION:

- Strap-type fitting used to connect flexible metal conduit or armored cable to box or enclosure.

FEATURES:

- UL Listed locknut.
- Male Hub NPS.
- Tri-combo head screws.


STANDARD MATERIALS:

Zinc Die Cast

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198258
CSA File No. LR57925
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE C270

Duplex Two-Screw Clamp Type

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
C270	3/8"	1.688	0.438	1.625	20	200	12	52702



STEELELECTRIC
PRODUCTS

718.259.6100

1.800.626.1223

FAX. 1.718.331.1874

ZINC CABLE AND CONDUIT CONNECTORS

FOR ARMORED CABLE, METAL CLAD AND FLEXIBLE METALLIC CONDUIT

APPLICATION:

- Used to connect steel armored cable and flexible metallic conduit to a box or enclosure.

FEATURES:

- UL Listed locknut.
- End stopped.


STANDARD MATERIALS:

Zinc Die Cast

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198258
CSA File No. LR57925
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE C22

Set-Screw for Armored Cable and Flexible Metallic Conduit

CATALOG NUMBER	TRADE SIZE	DIM A MIN	DIM A MAX	DIM B	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
C22	3/8"	0.38	0.63	0.84	100	1000	5	31222

Please see Cable Chart for Cable Connectors on page 182.

APPLICATION:

- To terminate regular wall steel or aluminum flexible conduit to a 1/2" knockout in a dry box enclosure.

FEATURES:

- UL Listed locknut.
- End stopped.
- Male hub NPS.
- Combination head screw.


STANDARD MATERIALS:

Zinc Die Cast

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198258
CSA File No. LR57925
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE C23C

Two Screw for Armored Cable, Metal Clad and Flexible Metallic Conduit

CATALOG NUMBER	TRADE SIZE	DIM A MIN	DIM A MAX	DIM B	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
C23C	3/8"	0.63	0.18	1.20	100	1000	6	32232



ZINC CABLE AND CONDUIT CONNECTORS

FOR ARMORED CABLE, METAL CLAD AND FLEXIBLE METALLIC CONDUIT

APPLICATION:

- To terminate armored cable in a 1/2" knockout in a dry location box or enclosure.

FEATURES:

- Furnished with die cast locknuts.
- Tri-combo head screws.



STANDARD MATERIALS:

Zinc Die Cast

CERTIFICATIONS AND COMPLIANCES



UL LISTED E309514
CSA File No. LR57925
UL Standard: UL514B
NEMA FB-1
ASTM Rated

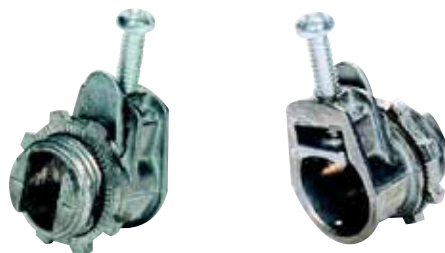

TYPE C920

Saddle Type

CATALOG NUMBER	TRADE SIZE	DIM A MIN	DIM A MAX	DIM B	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
C920	3/8"	0.12	0.63	0.98	50	500	8	13512

Please see Cable Chart for Cable Connectors on page 182.

COMBINATION COUPLINGS

FOR FLEX METAL CONDUIT TO RIGID OR IMC CONDUIT

APPLICATION:

- To connect flexible metal conduit to rigid or IMC conduit.

FEATURES:

- Rigid conduit to Flex.
- Female hub threads – NPT.

STANDARD MATERIALS:

Malleable Iron


STANDARD FINISH:

Zinc Plated

CERTIFICATION AND COMPLIANCES



UL LISTED E198258
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE 23E

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
23E	3/4"	1.38	1.75	1.88	20	200	19	55231
24E	1"	1.63	1.81	2.31	20	100	32	55241
25E	1-1/4"	2.00	2.31	2.62	—	20	36	55251



ZINC COMBINATION COUPLINGS

FOR EMT CONDUIT AND FLEXIBLE METALLIC CONDUIT

APPLICATION:

- A combination coupling to provide a transition from EMT to flexible metallic conduit.

FEATURES:

- Assembled with tri-combo screws.


STANDARD MATERIALS:

Zinc Die Cast

CERTIFICATIONS AND COMPLIANCES TYPE 170C




UL LISTED E198258
CSA File No. LR57925
UL Standard: UL514B
NEMA FB-1
ASTM Rated



CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
*170C	1/2" EMT-3/8" Flex	1.280	1.140	50	500	8	51702
171C	1/2" EMT-1/2" Flex	1.645	1.340	25	250	10	51703
172C	3/4" EMT-3/4" Flex	1.975	1.535	20	200	15	51704
173C	1" EMT-1" Flex	2.285	1.700	10	100	26	51705

*EMT TO NM CABLE
Please see Cable Chart for Cable Connectors on page 182.



TYPE 171

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
171	1/2" EMT-1/2" FMC	1.645	1.340	25	250	10	51712
172	3/4" EMT-3/4" FMC	1.975	1.535	20	200	15	51722

Please see Cable Chart for Cable Connectors on page 182.



CABLE CHART FOR CABLE CONNECTORS

SEP/CO NUMBERS	K.O. TRADE SIZE	AC CABLE RANGE		MCI CABLE RANGE		MCI-A CABLE RANGE		HCF MCI-A CABLE RANGE	
		STEEL	ALUMINUM	STEEL	ALUMINUM	STEEL	ALUMINUM	STEEL	ALUMINUM
171C	1/2"	8/2-6/3 0.630"-0.850"	8/2-6/3 0.630"-0.835"	8/3-6/2 0.690"-0.850"	8/3-6/3 0.690"-0.850"	—	8/3-6/3 0.675"-0.785"	—	—
173C	1"	2/4-1/0-3 1.151"-1.250"	2/4-1/0-3 1.151"-1.250"	1/3-1/0-3 1.145"-1.250"	1/3-1/0-3 1.145"-1.250"	—	1/3-1/0-3 1.145"-1.250"	—	—
315M	1/2"	14/2-12/4 0.470"-0.550"	14/2-12/4 0.470"-0.550"	14/2-8/2 0.470"-0.640"	14/4-8/2 0.500"-0.630"	—	14/2-8/2 0.400"-0.630"	—	—
316M	1/2"	—	—	—	—	—	—	—	—
317M	3/4"	4/3 0.980"-1.010"	4/3 0.980"-1.010"	6/4-4/3 0.950"-1.020"	6/4-4/3 0.950"-1.020"	—	6/4 1.050"-1.110"	—	1.050"-1.110"
C22	1/2"	14/2-10/2 0.460"-0.598"	—	14/2-10/3 0.469"-0.600"	—	—	—	—	—
C23C	1/2"	14/2-10/2 0.463"-0.590"	14/2-10/2 0.470"-0.552"	14/2-10/3 0.460"-0.550"	14/2-10/3 0.465"-0.585"	—	12/2-10/2 0.435"-0.518"	—	12/2-10/2 0.418"-0.495"
C25T	3/8"	14/2-10/3 0.460"-0.575"	14/2-10/3 0.480"-0.600"	14/2-10/3 0.469"-0.600"	14/2-10/3 0.470"-0.610"	—	—	—	—
C25Z	1/2"	14/2-10/3 0.460"-0.575"	14/2-10/3 0.480"-0.600"	14/2-10/3 0.469"-0.600"	14/2-10/3 0.470"-0.610"	—	10/3-10/4 0.495"-0.538"	—	10/2-10/4 0.495"-0.584"
C25ZT	1/2"	14/2-10/3 0.460"-0.575"	14/2-10/3 0.48"-0.60"	14/2-10/3 0.469"-0.60"	14/2-10/3 0.470"-0.610"	—	10/3-10/4 0.495"-0.538"	—	10/2-10/4 0.495"-0.584"
C27	1/2"	—	—	—	—	—	—	—	—
C270	1/2"	14/2-10/3 0.460"-0.500"	14/2-10/3 0.480"-0.580"	14/2-10/3 0.470"-0.600"	14/2-10/3 0.435"-0.500"	—	—	—	—
C271	1/2"	14/2-10/3 0.470"-0.530"	14/2-10/3 0.460"-0.625"	14/2-10/2 0.485"-0.545"	14/2-12/4 0.468"-0.61"	—	14/2-8/2 0.400"-0.610"	—	0.400"-0.610"
C270A	1/2"	14/2-10/3 0.460"-0.500"	14/2-10/3 0.480"-0.580"	14/2-10/3 0.470"-0.600"	14/2-10/3 0.468"-0.610"	—	14/2-10/3 0.370"-0.495"	—	12/2-10/2 0.418"-0.495"
C270M	1/2"	14/2-12/4 0.470"-0.560"	14/2-12/4 0.470"-0.560"	14/2-12/2 0.470"-0.500"	14/2-10/3 0.468"-0.610"	—	14/2-8/2 0.400"-0.610"	—	0.400"-0.610"
C27T	1/2"	—	—	—	—	—	—	—	—
C27Z	1/2"	6/3 0.885"	6/3 0.880"	6/3 0.860"	6/3 0.865"	—	—	—	—
C27ZT	1/2"	6/3 0.885"	6/3 0.880"	6/3 0.860"	6/3 0.865"	—	—	—	—
C28	3/4"	—	—	—	—	—	—	—	—
C28T	3/4"	—	—	—	—	—	—	—	—
C28Z	3/4"	—	—	—	—	—	—	—	—
C28ZT	3/4"	—	—	—	—	—	—	—	—
C29	1"	—	—	—	—	—	—	—	—
C29T	1"	—	—	—	—	—	—	—	—
C29Z	1"	—	—	—	—	—	—	—	—
C29ZT	1"	—	—	—	—	—	—	—	—
C30	1-1/4"	—	—	—	—	—	—	—	—
C30T	1-1/4"	—	—	—	—	—	—	—	—
C30Z	1-1/4"	—	—	—	—	—	—	—	—
C30ZT	1-1/4"	—	—	—	—	—	—	—	—
C31	1-1/2"	—	—	—	—	—	—	—	—



CABLE CHART FOR CABLE CONNECTORS

SEPCO NUMBERS	FMC TRADE SIZE		RWFMC TRADE SIZE		NM CABLE RANGE	FLEX CORD DIA. RANGE	SE OVAL CABLE RANGE	SER ROUND CABLE DIA. RANGE
	STEEL	ALUMINUM	STEEL	ALUMINUM				
171C	1/2"	1/2"	1/2"	1/2"	14/2 - 12/3 0.162" x 0.360" -0.347"	—	—	8/3 0.488"
173C	1"	1"	1"	1"	14/2 - 12/3 0.162" x 0.360" -0.347"	—	—	8/3 - 4/3 0.488" - 0.736"
315M	3/8"	3/8"	3/8"	3/8"	—	—	—	—
316M	1/2"	1/2"	1/2"	1/2"	—	—	—	—
317M	3/4"	3/4"	3/4"	3/4"	—	—	—	—
C22	—	—	—	—	—	—	—	—
C23C	3/8"	3/8"	—	—	—	—	—	—
C25T	3/8"	3/8"	—	—	—	—	—	—
C25Z	3/8"	3/8"	3/8"	3/8"	—	—	—	—
C25ZT	3/8"	3/8"	3/8"	3/8"	—	—	—	—
C27	1/2"	1/2"	1/2"	1/2"	—	—	—	—
C270	3/8"	3/8"	3/8"	3/8"	—	—	—	—
C271	3/8"	3/8"	3/8"	3/8"	—	—	—	—
C270A	3/8"	3/8"	3/8"	3/8"	—	—	—	—
C270M	3/8"	3/8"	3/8"	3/8"	—	—	—	—
C27T	1/2"	1/2"	1/2"	1/2"	—	—	—	—
C27Z	1/2"	1/2"	1/2"	1/2"	—	—	—	—
C27ZT	1/2"	1/2"	1/2"	1/2"	—	—	—	—
C28	3/4"	3/4"	3/4"	3/4"	—	—	—	—
C28T	3/4"	3/4"	3/4"	3/4"	—	—	—	—
C28Z	3/4"	—	3/4"	—	—	—	—	—
C28ZT	3/4"	—	3/4"	—	—	—	—	—
C29	1"	1"	1"	1"	—	—	—	—
C29T	1"	1"	1"	1"	—	—	—	—
C29Z	1"	—	1"	—	—	—	—	—
C29ZT	1"	—	1"	—	—	—	—	—
C30	1-1/4"	1-1/4"	1-1/4"	1-1/4"	—	—	—	—
C30T	1-1/4"	1-1/4"	1-1/4"	1-1/4"	—	—	—	—
C30Z	1-1/4"	1-1/4"	1-1/4"	1-1/4"	—	—	—	—
C30ZT	1-1/4"	1-1/4"	1-1/4"	1-1/4"	—	—	—	—
C31	1-1/2"	1-1/2"	1-1/2"	1-1/2"	—	—	—	—

CABLE CHART FOR CABLE CONNECTORS

SEP/CO NUMBERS	K.O. TRADE SIZE	AC CABLE RANGE		MCI CABLE RANGE		MCI-A CABLE RANGE		HCF MCI-A CABLE RANGE	
		STEEL	ALUMINUM	STEEL	ALUMINUM	STEEL	ALUMINUM	STEEL	ALUMINUM
C31T	1-1/2"	—	—	—	—	—	—	—	—
C31Z	1-1/2"	—	—	—	—	—	—	—	—
C31ZT	1-1/2"	—	—	—	—	—	—	—	—
C32	2"	—	—	—	—	—	—	—	—
C32T	2"	—	—	—	—	—	—	—	—
C32Z	2"	—	—	—	—	—	—	—	—
C32ZT	2"	—	—	—	—	—	—	—	—
C33	2-1/2"	—	—	—	—	—	—	—	—
C33T	2-1/2"	—	—	—	—	—	—	—	—
C34	3"	—	—	—	—	—	—	—	—
C34T	3"	—	—	—	—	—	—	—	—
C35	1/2"	8/2-8/3	8/2-8/3	8/2-8/3	8/2-8/3	—	—	—	—
C35T	1/2"	8/2-8/3	8/2-8/3	8/2-8/3	8/2-8/3	—	—	—	—
C35Z	1/2"	8/2-8/3	8/2-8/3	8/2-8/3	8/2-8/3	—	—	—	—
C35ZT	1/2"	8/2-8/3	8/2-8/3	8/2-8/3	8/2-8/3	—	—	—	—
C36	3/4"	—	—	—	—	—	—	—	—
C36T	3/4"	—	—	—	—	—	—	—	—
C36Z	3/4"	—	—	—	—	—	—	—	—
C36ZT	3/4"	—	—	—	—	—	—	—	—
C37	1"	—	—	—	—	—	—	—	—
C37T	1"	—	—	—	—	—	—	—	—
C37Z	1"	—	—	—	—	—	—	—	—
C37ZT	1"	—	—	—	—	—	—	—	—
C38	1-1/4"	—	—	—	—	—	—	—	—
C38T	1-1/4"	—	—	—	—	—	—	—	—
C38Z	1-1/4"	—	—	—	—	—	—	—	—
C38ZT	1-1/4"	—	—	—	—	—	—	—	—
C39	1-1/2"	—	—	—	—	—	—	—	—
C39T	1-1/2"	—	—	—	—	—	—	—	—
C39Z	1-1/2"	—	—	—	—	—	—	—	—
C39ZT	1-1/2"	—	—	—	—	—	—	—	—
C40	2"	—	—	—	—	—	—	—	—
C40T	2"	—	—	—	—	—	—	—	—
C40Z	2"	—	—	—	—	—	—	—	—
C40ZT	2"	—	—	—	—	—	—	—	—
C47AT	3/8"	10/3 0.575"	10/3 0.600"	10/3 0.600"	—	—	—	—	—
C47Z	3/8"	12/2-10/3 0.525"-0.575"	—	—	—	—	—	—	—
C48Z	1/2"	8/2-6/3 0.630"-0.850"	8/2-6/3 0.630"-0.835"	8/3-6/2 0.690"-0.850"	8/3-6/3 0.690"-0.850"	—	8/3-6/3 0.675"-0.785"	—	—



CABLE CHART FOR CABLE CONNECTORS

SEPCO NUMBERS	FMC TRADE SIZE		RWFMC TRADE SIZE		NM CABLE RANGE	FLEX CORD DIA. RANGE	SE OVAL CABLE RANGE	SER ROUND CABLE DIA. RANGE
	STEEL	ALUMINUM	STEEL	ALUMINUM				
C31T	1-1/2"	1-1/2"	1-1/2"	1-1/2"	—	—	—	—
C31Z	1-1/2"	1-1/2"	1-1/2"	1-1/2"	—	—	—	—
C31ZT	1-1/2"	1-1/2"	1-1/2"	1-1/2"	—	—	—	—
C32	2"	2"	2"	2"	—	—	—	—
C32T	2"	2"	2"	2"	—	—	—	—
C32Z	2"	2"	2"	2"	—	—	—	—
C32ZT	2"	2"	2"	2"	—	—	—	—
C33	2-1/2"	2-1/2"	2-1/2"	2-1/2"	—	—	—	—
C33T	2-1/2"	2-1/2"	2-1/2"	2-1/2"	—	—	—	—
C34	3"	3"	3"	3"	—	—	—	—
C34T	3"	3"	3"	3"	—	—	—	—
C35	1/2"	1/2"	—	—	—	—	—	—
C35T	1/2"	1/2"	—	—	—	—	—	—
C35Z	1/2"	1/2"	1/2"	1/2"	—	—	—	—
C35ZT	1/2"	1/2"	1/2"	1/2"	—	—	—	—
C36	3/4"	3/4"	3/4"	3/4"	—	—	—	—
C36T	3/4"	3/4"	3/4"	3/4"	—	—	—	—
C36Z	3/4"	3/4"	3/4"	3/4"	—	—	—	—
C36ZT	3/4"	3/4"	3/4"	3/4"	—	—	—	—
C37	1"	1"	1"	1"	—	—	—	—
C37T	1"	1"	1"	1"	—	—	—	—
C37Z	1"	1"	1"	1"	—	—	—	—
C37ZT	1"	1"	1"	1"	—	—	—	—
C38	1-1/4"	1-1/4"	1-1/4"	1-1/4"	—	—	—	—
C38T	1-1/4"	1-1/4"	1-1/4"	1-1/4"	—	—	—	—
C38Z	1-1/4"	1-1/4"	1-1/4"	1-1/4"	—	—	—	—
C38ZT	1-1/4"	1-1/4"	1-1/4"	1-1/4"	—	—	—	—
C39	1-1/2"	1-1/2"	1-1/2"	1-1/2"	—	—	—	—
C39T	1-1/2"	1-1/2"	1-1/2"	1-1/2"	—	—	—	—
C39Z	1-1/2"	1-1/2"	1-1/2"	1-1/2"	—	—	—	—
C39ZT	1-1/2"	1-1/2"	1-1/2"	1-1/2"	—	—	—	—
C40	2"	2"	2"	2"	—	—	—	—
C40T	2"	2"	2"	2"	—	—	—	—
C40Z	2"	2"	2"	2"	—	—	—	—
C40ZT	2"	2"	2"	2"	—	—	—	—
C47AT	—	—	3/8"	3/8"	—	—	—	—
C47Z	3/8"	3/8"	—	—	—	—	—	—
C48Z	1/2"	1/2"	1/2"	1/2"	14/2 - 12/3	—	—	8/3 0.612"

CABLE CHART FOR CABLE CONNECTORS

SEP/CO NUMBERS	K.O. TRADE SIZE	AC CABLE RANGE		MCI CABLE RANGE		MCI-A CABLE RANGE		HCF MCI-A CABLE RANGE	
		STEEL	ALUMINUM	STEEL	ALUMINUM	STEEL	ALUMINUM	STEEL	ALUMINUM
C48ZT	1/2"	8/2-6/3 0.630"-0.850"	8/2-6/3 0.630"-0.835"	8/3-6/2 0.690"-0.850"	8/3-6/3 0.690"-0.850"	—	8/3-6/3 0.675"-0.785"	—	—
C49Z	3/4"	6/3-4/2 0.850"-1.035"	4/3 1.095"	4/3-2/3 0.940"-1.080"	4/3-2/3 0.940"-1.070"	—	—	—	—
C49ZT	3/4"	6/3-4/2 0.850"-1.035"	4/3 1.095"	4/3-2/3 0.940"-1.080"	4/3-2/3 0.940"-1.070"	—	—	—	—
C50Z	1"	—	—	1/3-1/0-3 1.165"-1.220"	1/3-1/0-3 1.145"-1.250"	—	—	—	—
C50ZT	1"	—	—	1/3-1/0-3 1.165"-1.220"	1/3-1/0-3 1.145"-1.250"	—	—	—	—
C51Z	1 1/4"	—	—	1/0-4-2/0-4 1.340"-1.450"	—	—	—	—	—
C51ZT	1 1/4"	—	—	1/0-4-2/0-4 1.340"-1.450"	—	—	—	—	—
C52Z	1 1/2"	—	—	4/0-4-250-4 1.700"-1.845"	—	—	—	—	—
C52ZT	1 1/2"	—	—	4/0-4-250-4 1.700"-1.845"	—	—	—	—	—
C53Z	2"	—	—	350-4-400-4 2.070"-2.180"	—	—	—	—	—
C53ZT	2"	—	—	350-4-400-4 2.070"-2.180"	—	—	—	—	—
C65T	2-1/2"	—	—	—	—	—	—	—	—
C66	3"	—	—	—	—	—	—	—	—
C66T	3"	—	—	—	—	—	—	—	—
C67	3-1/2"	—	—	—	—	—	—	—	—
C67T	3-1/2"	—	—	—	—	—	—	—	—
C68	4"	—	—	—	—	—	—	—	—
C68T	4"	—	—	—	—	—	—	—	—
C920	1/2"	14/2-10/3 0.410"-0.610"	14/2-10/3 0.410"-0.610"	0.475"-0.600"	0.468"-0.600"	—	0.452"-0.584"	—	0.452"-0.584"
QL-50	1/2"	14/2-10/3 0.470"-0.630"	14/2-10/2 0.480"-0.580"	14/2-10/3 0.410"-0.610"	14/2-10/3 0.410"-0.610"	—	12/4-10/4 0.500"-0.610"	—	0.500"-0.610"
QL-50D**	1/2"	14/2-12/4 0.470"-0.575"	14/2-10/2 0.480"-0.580"	14/2-10/3 0.410"-0.610"	14/2-10/3 0.410"-0.610"	—	14/3-8/2 0.410"-0.610"	—	0.410"-0.610"
QL-75	3/4"	10/4-6/3 0.635"-0.870"	10/4-8/4 0.655"-0.810"	10/3-8/3 0.562"-0.725"	10/3-8/3 0.572"-0.730"	—	8/2-8/4 0.610"-0.760"	—	0.610"-0.760"

**Accepts 2 cables of each listed size



STEELELECTRIC
PRODUCTS

718.259.6100

1.800.626.1223

FAX. 1.718.331.1874

CABLE CHART FOR CABLE CONNECTORS

SEPCO NUMBERS	FMC TRADE SIZE		RWFMF TRADE SIZE		NM CABLE RANGE	FLEX CORD DIA. RANGE	SE OVAL CABLE RANGE	SER ROUND CABLE DIA. RANGE
	STEEL	ALUMINUM	STEEL	ALUMINUM				
C48ZT	1/2"	1/2"	1/2"	1/2"	14/2-12/3	—	—	8/3 0.612"
C49Z	3/4"	3/4"	3/4"	3/4"	14/3-8/3	—	—	8/3-6/3 0.612"-0.717"
C49ZT	3/4"	3/4"	3/4"	3/4"	14/3-8/3	—	—	8/3-6/3 0.612"-0.717"
C50Z	1" 1.300"-1.380"	1" 1.300"-1.380"	1" 1.300"-1.380"	1" 1.300"-1.380"	10/3-6/3 0.360"-0.650	—	4/3 0.499"-0.800"	—
C50ZT	1" 1.300"-1.380"	1" 1.300"-1.380"	1" 1.300"-1.380"	1" 1.300"-1.380"	10/3-6/3 0.360"-0.650	—	4/3 0.499"-0.800"	—
C51Z	1-1/4"	1-1/4"	1-1/4"	1-1/4"	8/3-2/3	—	—	—
C51ZT	1-1/4"	1-1/4"	1-1/4"	1-1/4"	8/3-2/3	—	—	—
C52Z	1-1/2"	1-1/2"	1-1/2"	1-1/2"	2/3	—	—	—
C52ZT	1-1/2"	1-1/2"	1-1/2"	1-1/2"	2/3	—	—	—
C53Z	2"	2"	2"	2"	—	—	—	—
C53ZT	2"	2"	2"	2"	—	—	—	—
C65T	2-1/2"	2-1/2"	2-1/2"	2-1/2"	—	—	—	—
C66	3"	3"	3"	3"	—	—	—	—
C66T	3"	3"	3"	3"	—	—	—	—
C67	3-1/2"	3-1/2"	3-1/2"	3-1/2"	—	—	—	—
C67T	3-1/2"	3-1/2"	3-1/2"	3-1/2"	—	—	—	—
C68	4"	4"	4"	4"	—	—	—	—
C68T	4"	4"	4"	4"	—	—	—	—
C920	3/8"	3/8"	3/8"	3/8"	14/2-10/2 0.485"-0.545"	—	—	—
QL-50	3/8"	3/8"	3/8"	3/8"	—	—	—	—
QL-50D**	3/8"	3/8"	3/8"	3/8"	—	—	—	—
QL-75	1/2"	1/2"	1/2"	1/2"	—	—	—	—

**Accepts 2 cables of each listed size





SCAN ME

TO VIEW
PRODUCT SECTION

NM CABLE FITTINGS



ZINC CABLE AND CONDUIT CONNECTORS FOR NON-METALLIC SHEATHED CABLE

APPLICATION:

- Used to connect non-metallic sheath cable and flexible cord from 0.290" to 0.450" in diameter to outlet boxes, enclosures or raceway systems in dry locations.

FEATURES:

- Assembled with die cast locknut and tri-combo screws.

STANDARD MATERIALS:

Zinc Die Cast

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198258
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE C23

Romex Connector

CATALOG NUMBER	TRADE SIZE	DIM A MIN.	DIM A MAX.	DIM B	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
C23	3/8"	0.64	0.18	1.21	100	1000	5	31232

One or two non-metallic cable 14-2 to 12-2 or 0.29" to 0.45" diameter flexible cord
Please see Cable Chart for Cable Connectors on Page 194.

APPLICATION:

- Non-watertight. To make a termination of non-metallic sheathed cable and service entrance.

FEATURES:

- Assembled with die cast locknut and tri-combo screws.



STANDARD MATERIALS:

Zinc Die Cast

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198258
UL Standard: UL514B
NEMA FB-1
ASTM Rated

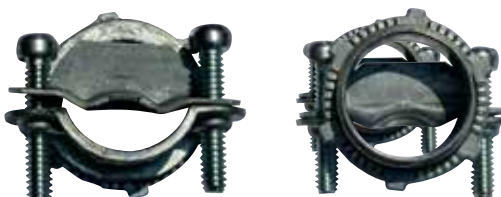

TYPE SC1

Service Entrance Connector

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
SC1	3/4"	0.450	1.031	1.220	25	250	10	32012
SC2	1"	0.645	1.190	1.500	20	200	16	32022
SC3	1-1/4"	0.660	1.330	1.900	10	100	25	32031
SC4	1-1/2"	0.740	1.470	2.115	10	100	36	32042
SC5	2"	0.750	1.620	2.640	5	50	50	32052

Please see Cable Chart for Cable Connectors on Page 194.

CATALOG NUMBER	SE/OVAL DIAMETER IN.	SER/ROUND DIAMETER IN.
SC1 Non-Metallic Cable 10-3 through 8-2	(.52 by .61) and (.51 by .80)	(.57) and (.69)
SC2 Non-Metallic Cable 10-3 through 4-3	(.51 by .80) and (.62 by .975)	(.69) and (.92)
SC3	(1.065 by 0.635) and (1.250 by 0.740)	-
SC4	(1.065 by 0.635) and (1.250 by 0.740)	-
SC5	(1.405 by 0.875) and (1.450 by 0.875)	-



ZINC NON-WATERTIGHT SHORT BODY CONNECTORS

FOR NON-METALLIC SHEATHED CABLE AND SERVICE ENTRANCE CABLE

APPLICATION:

- Used with locknut to terminate service entrance cable to enclosure.

FEATURES:

- Assembled with die cast locknut and tri-combo screws.
- For round cable.

STANDARD MATERIALS:

Zinc Die Cast

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198258
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE C50S

CATALOG NUMBER	TRADE SIZE	DIM A MIN.	DIM A MAX.	DIM B	UNIT PACK	MASTER PACK	LBS./ 100 PCS	UPC #
C50S	1"	0.620	1.140	1.500	10	100	15	64601
C51S	1-1/4"	0.700	1.380	1.900	10	100	24	64602
C52S	1-1/2"	0.750	1.610	2.115	10	100	34	64603
C53S	2"	0.900	2.040	2.640	5	50	46	64604

Please see Cable Chart for Cable Connectors on Page 194.



TYPE C50ST

Insulated

CATALOG NUMBER	TRADE SIZE	DIM A MIN.	DIM A MAX.	DIM B	UNIT PACK	MASTER PACK	LBS./ 100 PCS	UPC #
C50ST	1"	0.620	1.140	1.500	10	100	15	90138
C51ST	1-1/4"	0.700	1.380	1.900	10	100	24	90139
C52ST	1-1/2"	0.750	1.610	2.115	10	100	34	90140
C53ST	2"	0.900	2.040	2.640	5	50	46	90141

Please see Cable Chart for Cable Connectors on Page 194.

CATALOG NUMBER	SE/OVAL DIAMETER IN.	SER/ROUND DIAMETER IN.
C50S and C50ST Non-Metallic Cable 10-3 through 4-3	(.51 by .80) and (.62 by .975)	(.69) and (.92)
C51S and C51ST Non-Metallic Cable 4-3 through 2-3	(.67 by 1.06) and (.73 by 1.235)	1.19
C52S and C52ST	(1.15 by 0.73) and (1.41 by 0.89)	1.48
C53S and C53ST	(1.405 by 0.875) and (1.450 by 0.875)	—



ZINC TWO SCREW TAKE-ALL CONNECTORS

FOR ARMORED CABLE, METAL CLAD, FLEXIBLE METALLIC CONDUIT AND NON-METAL SHEATHED CABLE

APPLICATION:

- Used with locknut to terminate service entrance cable to enclosure.

FEATURES:

- Take-all type.


STANDARD MATERIALS:

Zinc Die Cast

CERTIFICATIONS AND COMPLIANCES




UL LISTED E309514
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE C50Z

CATALOG NUMBER	TRADE SIZE	DIM A MIN.	DIM A MAX.	DIM B	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
C48Z	1/2"	0.40	0.95	1.87	25	250	10	32482
C49Z	3/4"	0.50	1.10	1.84	20	200	12	32492
C50Z	1"	0.62	1.14	2.00	10	100	15	32502
C51Z	1-1/4"	0.50	1.38	2.28	10	100	25	32512
C52Z	1-1/2"	0.75	1.61	2.49	10	100	38	32522
C53Z	2"	0.90	2.04	3.35	5	50	50	32632

Please see Cable Chart for Cable Connectors on Page 194.



TYPE C50ZT

Insulated

CATALOG NUMBER	TRADE SIZE	DIM A MIN.	DIM A MAX.	DIM B	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
C48ZT	1/2"	0.40	0.95	1.87	25	250	10	34867
C49ZT	3/4"	0.50	1.10	1.84	20	200	12	34967
C50ZT	1"	0.62	1.14	2.00	10	100	15	35067
C51ZT	1-1/4"	0.50	1.38	2.28	10	100	25	35167
C52ZT	1-1/2"	0.75	1.61	2.49	10	100	38	35267
C53ZT	2"	0.90	2.04	3.35	5	50	50	35367

Please see Cable Chart for Cable Connectors on Page 194.



ZINC CABLE AND CONDUIT FITTINGS FOR NON-METALLIC SHEATHED CABLE

APPLICATION:

- Used to join 1/2" steel EMT to 12-2 non-metallic sheathed cable.

FEATURES:

- Assembled with tri-combo screws.


STANDARD MATERIALS:

Zinc Die Cast

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198258
UL Standard: UL514B
NEMA FB-1
ASTM Rated
Concrete tight when taped



TYPE 170C

Combination Couplings

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	UNIT PACK	MASTER PACK	LBS./ 100 PCS	UPC #
*170C	1/2" EMT - 3/8" Flex	1.28	1.14	50	500	8	51702

* EMT to NM Cable
Please see Cable Chart for Cable Connectors on Page 194.

APPLICATION:

- Used to connect underground feeder cables to enclosures in wet locations.

FEATURES:

- Assembled with a rubber grommet and steel washer.


STANDARD MATERIALS:

Zinc Die Cast

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198258
UL Standard: UL514B
NEMA FB-1
ASTM Rated
Concrete tight when taped



TYPE UF10

Underground Feeder Connectors (UF) for Service Entrance Cable and Non-Metallic Sheathed Cable

CATALOG NUMBER	TRADE SIZE	TYPE	MINIMUM WIRE SIZE		MAX. WIRE SIZE GROM. OPENING		UNIT PACK	MASTER PACK	LBS./ 100 PCS	UPC #
			A	B	A	B				
UF10	1/2"	12-2	0.100	0.475	0.220	0.440	25	250	17	49899
UF20	3/4"	12-3	0.175	0.800	0.220	0.660	25	250	26	49900

Please see Cable Chart for Cable Connectors on Page 194.



CABLE CHART FOR CABLE CONNECTORS

SEP/CO NUMBERS	K.O. TRADE SIZE	AC CABLE RANGE		MCI CABLE RANGE		MCI-A CABLE RANGE		HCF MCI-A CABLE RANGE	
		STEEL	ALUMINUM	STEEL	ALUMINUM	STEEL	ALUMINUM	STEEL	ALUMINUM
C23	3/8"	—	—	—	—	—	—	—	—
C50S	1"	—	—	—	—	—	—	—	—
C50ST	1"	—	—	—	—	—	—	—	—
C51S	1-1/4"	—	—	—	—	—	—	—	—
C51ST	1-1/4"	—	—	—	—	—	—	—	—
C52S	1-1/2"	—	—	—	—	—	—	—	—
C52ST	1-1/2"	—	—	—	—	—	—	—	—
C53S	2"	—	—	—	—	—	—	—	—
C53ST	2"	—	—	—	—	—	—	—	—
C48Z	1/2"	8/2-6/3 0.630"-0.850"	8/2-6/3 0.630"-0.835"	8/3-6/2 0.690"-0.850"	8/3-6/3 0.690"-0.850"	—	8/3-6/3 0.675"-0.785"	—	—
C48ZT	1/2"	8/2-6/3 0.630"-0.850"	8/2-6/3 0.630"-0.835"	8/3-6/2 0.690"-0.850"	8/3-6/3 0.690"-0.850"	—	8/3-6/3 0.675"-0.785"	—	—
C49Z	3/4"	6/3-4/2 0.850"-1.035"	4/3 1.095"	4/3-2/3 0.940"-1.080"	4/3-2/3 0.940"-1.070"	—	—	—	—
C49ZT	3/4"	6/3-4/2 0.850"-1.035"	4/3 1.095"	4/3-2/3 0.940"-1.080"	4/3-2/3 0.940"-1.070"	—	—	—	—
C50Z	1"	—	—	1/3-1/0-3 1.165"-1.220"	1/3-1/0-3 1.145"-1.250"	—	—	—	—
C50ZT	1"	—	—	1/3-1/0-3 1.165"-1.220"	1/3-1/0-3 1.145"-1.250"	—	—	—	—
C51Z	1-1/4"	—	—	1/0-4-2/0-4 1.340"-1.450"	—	—	—	—	—
C51ZT	1-1/4"	—	—	1/0-4-2/0-4 1.340"-1.450"	—	—	—	—	—
C52Z	1-1/2"	—	—	4/0-4-250-4 1.700"-1.845"	—	—	—	—	—
C52ZT	1-1/2"	—	—	4/0-4-250-4 1.700"-1.845"	—	—	—	—	—
C53Z	2"	—	—	350-4-400-4 2.070"-2.180"	—	—	—	—	—
C53ZT	2"	—	—	350-4-400-4 2.070"-2.180"	—	—	—	—	—
SC1	3/4"	—	—	1/0-4-2/0-4 1.340"-1.450"	—	—	—	—	—
SC2	1"	—	—	1/0-4-2/0-4 1.340"-1.450"	—	—	—	—	—
SC3	1-1/4"	—	—	1/0-4-2/0-4 1.340"-1.450"	—	—	—	—	—
SC4	1-1/2"	—	—	1/0-4-2/0-4 1.340"-1.450"	—	—	—	—	—
SC5	2"	—	—	1/0-4-2/0-4 1.340"-1.450"	—	—	—	—	—



CABLE CHART FOR CABLE CONNECTORS

SEPCO NUMBERS	FMC TRADE SIZE		RWFMC TRADE SIZE		NM CABLE RANGE	FLEX CORD DIA. RANGE	SE OVAL CABLE RANGE	SER ROUND CABLE DIA. RANGE
	STEEL	ALUMINUM	STEEL	ALUMINUM				
C23	—	—	—	—	(1) 14/2-12/2 (2) 14/2	0.209"-0.450"	—	—
C50S	—	—	—	—	10/3-4/3	—	0.510" x 0.800" 0.620" x 0.975"	0.690"-0.920"
C50ST	—	—	—	—	10/3-4/3	—	0.510" x 0.800" 0.620" x 0.975"	0.690"-0.920"
C51S	—	—	—	—	4/3-2/3	—	0.670" x 0.1.060" 0.730" x 1.235	1.190"
C51ST	—	—	—	—	4/3-2/3	—	0.670" x 0.1.060" 0.730" x 1.235	1.190"
C52S	—	—	—	—	—	—	0.730" x 1.150" 0.890" x 1.410"	1.480"
C52ST	—	—	—	—	—	—	0.730" x 1.150" 0.890" x 1.410"	1.480"
C53S	—	—	—	—	—	—	0.875" x 1.405" 0.875" x 1.450"	—
C53ST	—	—	—	—	—	—	0.875" x 1.405" 0.875" x 1.450"	—
C48Z	1/2"	1/2"	1/2"	1/2"	14/2-12/3	—	—	8/3 0.612"
C48ZT	1/2"	1/2"	1/2"	1/2"	14/2-12/3	—	—	8/3 0.612"
C49Z	3/4"	3/4"	3/4"	3/4"	14/3-8/3	—	—	8/3-6/3 0.612"-0.717"
C49ZT	3/4"	3/4"	3/4"	3/4"	14/3-8/3	—	—	8/3-6/3 0.612"-0.717"
C50Z	1" 1.300"-1.380"	1" 1.300"-1.380"	1" 1.300"-1.380"	1" 1.300"-1.380"	10/3-6/3 0.360"-0.650	—	4/3 0.499"-0.800"	—
C50ZT	1" 1.300"-1.380"	1" 1.300"-1.380"	1" 1.300"-1.380"	1" 1.300"-1.380"	10/3-6/3 0.360"-0.650	—	4/3 0.499"-0.800"	—
C51Z	1-1/4"	1-1/4"	1-1/4"	1-1/4"	8/3-2/3	—	—	—
C51ZT	1-1/4"	1-1/4"	1-1/4"	1-1/4"	8/3-2/3	—	—	—
C52Z	1-1/2"	1-1/2"	1-1/2"	1-1/2"	2/3	—	—	—
C52ZT	1-1/2"	1-1/2"	1-1/2"	1-1/2"	2/3	—	—	—
C53Z	2"	2"	2"	2"	—	—	—	—
C53ZT	2"	2"	2"	2"	—	—	—	—
SC1	—	—	—	—	10/3-8/2	—	0.520" x 0.610" 0.510" x 0.800"	0.57"-0.69"
SC2	—	—	—	—	10/3-4/3	—	0.510" x 0.800" 0.620" x 0.965"	0.69"-0.92"
SC3	—	—	—	—	—	—	0.635" x 1.065 0.740" x 1.250"	—
SC4	—	—	—	—	—	—	0.635" x 1.065 0.740" x 1.250"	—
SC5	—	—	—	—	—	—	0.875" x 1.405" 0.875" x 1.450"	—








SCAN ME

TO VIEW
PRODUCT SECTION

GROUNDING FITTINGS

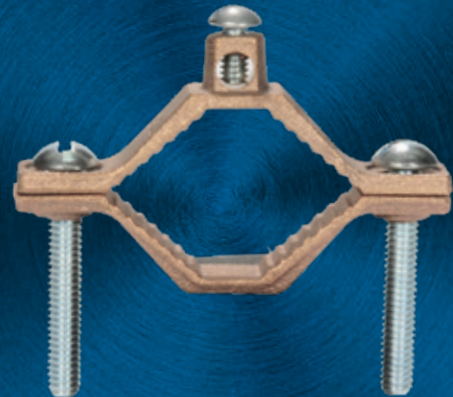

GROUND CLAMPS FOR BARE WIRE

APPLICATION:

- Used to connect bare copper wire to water pipe, rebar, ground rod or copper water tubing for grounding.


STANDARD MATERIALS:

Bronze with Steel Screws

CERTIFICATIONS AND COMPLIANCES



UL LISTED E93683
CSA file No. LR57925
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE 34B

With Steel Screws

CATALOG NUMBER	TRADE SIZE	WIRE SIZE		DIM A	MIN	MAX	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
10B	1/2" - 1"	10 SOL.	2 STR.	2.430	0.500	1.380	25	250	19	41054
34B	1-1/4" - 2"	10 SOL.	2 STR.	2.275	0.675	1.850	—	50	40	43414
35A	2-1/2" - 4"	10 SOL.	2 STR.	6.350	2.700	5.900	—	10	135	43514
36A	4" - 6"	10 SOL.	2 STR.	8.000	4.000	7.900	—	5	160	43614

APPLICATION:

- Used to connect bare copper wire to water pipe, rebar, ground rod or copper water tubing for grounding.


STANDARD MATERIALS:

Bronze with Steel Screws

CERTIFICATIONS AND COMPLIANCES



UL LISTED E93683
CSA file No. LR57925
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE 10BR

With Bronze Screws for Direct Burial

CATALOG NUMBER	TRADE SIZE	WIRE SIZE		DIM A	MIN	MAX	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
10BR	1/2" - 1"	10 SOL.	2 STR.	3.600	1.065	2.680	25	250	21	41084



GROUND CLAMPS FOR BARE WIRE

APPLICATION:

- Used to connect bare copper wire to water pipe, ground rod or copper water tubing for grounding.


STANDARD MATERIALS:

Zinc Die Cast with Steel Screws

CERTIFICATIONS AND COMPLIANCES



UL LISTED E93683
CSA file No. LR57925
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE 10BG

Zinc Die Cast

CATALOG NUMBER	TRADE SIZE	WIRE SIZE		DIM A	MIN	MAX	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
10BG	1/2" - 1"	8 SOL.	2 STR.	2.220	0.545	1.575	25	250	17	41074

GROUND CLAMPS FOR ARMORED CABLE

APPLICATION:

- Used to connect armored cable to water pipe for grounding.

FEATURES:

- Special pressure bar grips armored cable insulation to decrease chances of grounding conductor being pulled out.


STANDARD MATERIALS:

Solid Brass with Steel Screws

CERTIFICATIONS AND COMPLIANCES



UL LISTED E93683
CSA file No. LR57925
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE 35B

With Steel Screws

CATALOG NUMBER	TRADE SIZE	WIRE SIZE		DIM A	MIN	MAX	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
35B	2-1/2" - 4"	8 SOL.	4 STR.	6.350	2.700	5.900	—	10	150	43524



GROUND CLAMPS FOR ARMORED CABLE

APPLICATION:

- Integral cast, lay-in lug style direct burial ground clamps are for making connection with #10AWG solid to #2 AWG stranded copper wire to 1/2" to 1" ground water pipe or 3/8" to 1" rebar. Clamps meet both UL and NEC requirements for burial in earth or embedment in concrete. Typical installations include swimming pool and service grounding.

FEATURES:

- Combines FOUR clamps into ONE.
- It eliminates, rebar clamp, clamp with steel screws, clamp with brass screws and direct burial clamp.
- Configure any job in 1/3 the time by presetting clamps with lay-in feature.


STANDARD MATERIALS:

Bronze Alloy with Stainless Steel Screws

CERTIFICATIONS AND COMPLIANCES



Patent Pending
UL LISTED E93683
UL Standard: UL514B
NEMA FB-1
ASTM Rated
CSA file No. LR57925
Listed for Direct Burial in Earth & Concrete



TYPE RBC-50

Patent Pending Direct Burial – Ground Clamp for Rebar

CATALOG NUMBER	PIPE RANGE	REBAR RANGE	GROUND ROD RANGE	WIRE RANGE	MECHANICAL CONNECTION/SPLICE	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
RBC-50	1/2" – 1"	3/8" – 1"	1/4" – 1"	#10 SOL – #2 STR	TWO #8 SOL	25	250	21	66101

GROUND CLAMPS, ROD CLAMPS AND HUBS FOR RIGID CONDUIT

APPLICATION:

- Used to connect grounding conductor in rigid conduit to water pipe for grounding.


STANDARD MATERIALS:

Solid Brass with Steel Screws

CERTIFICATIONS AND COMPLIANCES



UL LISTED E93683
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE 307

CATALOG NUMBER	TRADE SIZE	HUB SIZE	DIM A	MIN.	MAX.	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
301	1/2" – 1"	1/2"	2.250	0.550	1.795	10	100	25	43014
302	1/2" – 1"	3/4"	2.250	0.550	1.795	10	100	30	43024
310	1/2" – 1"	1"	2.250	0.550	1.795	10	50	35	43104
307	1-1/4" – 2"	1/2"	3.600	1.390	3.000	10	50	75	43074
308	1-1/4" – 2"	3/4"	3.600	1.390	3.000	10	50	80	43084
309	1-1/4" – 2"	1"	3.600	1.390	3.600	—	25	85	43094
35C	2-1/2" – 4"	1/2"	2.430	0.500	1.380	—	10	140	43534
36C	4" – 6"	1/2"	8.000	4.000	7.900	—	2	175	43634
35D	2-1/2" – 4"	3/4"	2.430	0.500	1.380	—	10	185	43544
36D	4" – 6"	3/4"	8.000	4.000	7.900	—	2	215	43644
35E	2-1/2" – 4"	1"	2.430	0.500	1.380	—	10	225	43554
36E	4" – 6"	1"	8.000	4.000	7.900	—	2	280	43654



GROUND CLAMPS, ROD CLAMPS AND HUBS FOR RIGID CONDUIT

APPLICATION:

- Used to connect a grounding conductor to a drive.

FEATURES:

- Approved for direct burial in ground and concrete
- Assembled with bronze hexagon headed bolt.


STANDARD MATERIALS:

Copper Alloy with Bronze Bolt

THIRD PARTY CERTIFICATION



UL LISTED E93683
CSA File No. LR57925
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE 201

Ground Rod Clamps – Listed for Direct Burial

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
200	1/2"	1.250	0.875	—	100	13	52004
201	5/8"	1.275	0.690	—	100	18	52014
202	3/4"	1.445	1.030	—	50	25	52024

APPLICATION:

- Used with ground pipe clamp to connect rigid conduit to water pipe for grounding.

STANDARD MATERIALS:

Copper Alloy

THIRD PARTY CERTIFICATION



UL LISTED E93683
CSA File No. LR57925
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE 311

Conduit Hubs

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
311	1/2"	1.000	1.500	25	100	9	43114
312	3/4"	1.250	1.880	25	100	17	43124
313	1"	1.500	2.136	25	100	20	43134







SCAN ME

TO VIEW
PRODUCT SECTION

CLAMP & HANGER FITTINGS



CONDUIT HANGERS

FOR THREADED RIGID CONDUIT, IMC, EMT CONDUIT OR PVC CONDUIT

APPLICATION:

- Secure and suspend rigid conduit, IMC, EMT or PVC conduit overhead supports.

FEATURES:

- Supplied with bolts and nuts.

STANDARD MATERIALS:

Steel


STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198338
UL Standard: UL514B
NEMA FB-1
ASTM Rated

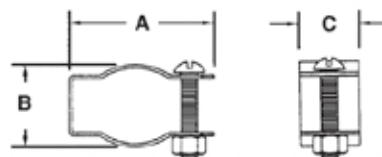

TYPE 10CS

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
10CS	3/8" - 1/2"	1.875	0.900	0.780	100	500	10	11072
11CS	3/4"	2.175	1.260	0.875	—	100	11	11172
12CS	1"	2.370	1.295	0.875	—	100	12	11272
13CS (Rigid)	1-1/4"	3.255	1.875	0.830	—	100	12	11372
13CSA (EMT)	1-1/4"	3.175	1.965	0.850	—	100	12	11069
14CS	1-1/2"	3.780	2.220	1.065	—	100	21	11472
15CS	2"	4.100	2.450	1.210	—	50	27	11572
16CS	2-1/2"	4.800	3.180	1.240	—	50	30	11672
17CS	3"	5.375	3.750	1.220	—	50	40	11772
18CS	3-1/2"	6.187	4.187	1.270	—	25	42	11872
19CS	4"	6.240	4.430	1.250	—	25	42	11972

APPLICATION:

- Ball-type swivel fixture covers for mounting pendant or fluorescent lighting fixtures to box. Furnished with 3/4" x 1/2" steel reducing bushing.

FEATURES:

- For use with 1/2" x 3/4" fixture conduit stems.
- Available for use with octagonal or square boxes.
- Easily attached by 2 screws.
- Suitable for damp locations.
- Vertical max slope angles 25°.

STANDARD MATERIALS:

Steel/Malleable Iron


STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198259
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE SWV-4R

Swivel Fixture Hangers

CATALOG NUMBER	TRADE SIZE	DIM A	DIM A	DIM B	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
SWV-4R	3/4"	4.125	X	2.813	—	25	78	95001
SWV-4S	3/4"	X	4.125	2.813	—	25	78	95002

Loading Capacity 50 pounds



CONDUIT CLAMPS

FOR THREADED RIGID CONDUIT, IMC AND EMT CONDUIT

APPLICATION:

- Used to secure conduit or EMT across, parallel or perpendicular to beam, channel and angle supports.

FEATURES:

- Easily Installed.
- Capable of withstanding heavy loads.
- A Hot Dipped Galvanized finish provides a plating thickness equivalent to hot dip process meeting ASTM A-153 performance criteria.

STANDARD MATERIALS:

Malleable Iron with Steel U-Bolts and Nuts

STANDARD FINISH:

Hot Dip Galvanized


CERTIFICATIONS AND COMPLIANCES



UL LISTED E198338
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE RA75




Right Angle-Type Conduit Clamps

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	DIM D	DIM E	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
RA50	1/2"	1.000	1.250	2.500	1.813	2.063	—	50	34	74050
RA75	3/4"	1.125	1.375	2.813	1.813	2.250	—	50	38	74075
RA100	1"	1.375	1.625	3.063	1.813	2.563	—	50	45	74100
RA125	1-1/4"	1.750	2.000	3.188	1.813	2.875	—	25	49	74125
RA150	1-1/2"	2.000	2.375	3.500	1.813	3.250	—	25	54	74150
RA200	2"	2.500	2.500	4.500	2.625	4.063	—	25	71	74200
RA250	2-1/2"	3.000	3.250	4.875	2.625	4.500	—	10	90	74250
RA300	3"	3.625	3.875	5.375	2.625	5.125	—	10	101	74300
RA350	3-1/2"	4.063	4.563	5.875	2.625	5.625	—	10	110	74350
RA400	4"	4.688	5.063	6.688	2.625	6.125	—	10	128	74400



TYPE PAR50



Parallel-Type Conduit Clamps

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
PAR50	1/2"	2.875	1.438	—	50	54	75550
PAR75	3/4"	3.063	1.688	—	50	61	75551
PAR100	1"	3.250	2.000	—	50	62	75552
PAR125	1-1/4"	3.625	2.125	—	25	82	75553
PAR150	1-1/2"	3.875	2.188	—	25	85	75554
PAR200	2"	4.625	2.875	—	25	103	75556
PAR250	2-1/2"	5.250	3.250	—	10	127	75557
PAR300	3"	5.875	3.875	—	10	154	75558
PAR350	3-1/2"	6.313	4.313	—	10	163	75559
PAR400	4"	6.813	4.813	—	10	180	75560



CONDUIT CLAMPS

FOR THREADED RIGID CONDUIT, IMC AND EMT CONDUIT

APPLICATION:

- Used to secure conduit or EMT across, parallel or perpendicular to beam, channel and angle supports.

FEATURES:

- Easily Installed.
- Capable of withstanding heavy loads.
- A Hot Dipped Galvanized finish provides a plating thickness equivalent to hot dip process, meeting ASTM A-153 performance criteria.

STANDARD MATERIALS:

Malleable Iron/Steel U-Bolts and Nuts


STANDARD FINISH:

Hot Dip Galvanized

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198338
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE EDG75

Edge Type Conduit Clamps

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
EDG50	1/2"	2.813	2.125	—	50	10	30750
EDG75	3/4"	2.938	2.375	—	50	11	37075
EDG100	1"	3.063	2.625	—	50	12	37100
EDG125	1-1/4"	3.063	3.063	—	25	12	37125
EDG150	1-1/2"	3.938	3.250	—	25	12	37150
EDG200	2"	4.500	4.063	—	25	21	37200
EDG250	2-1/2"	5.125	4.625	—	10	27	37250
EDG300	3"	5.750	5.250	—	10	30	37300



CONDUIT BEAM CLAMPS FOR THREADED RIGID CONDUIT

APPLICATION:

- Provides support for conduit hanging systems.

FEATURES:

- Steel bolt – case hardened
- Standard Sizes: 1"–2-1/2".
Jaw Opening: 3/4"–1-1/4".

STANDARD MATERIALS:

Malleable Iron/Steel
Bolt-Case Hardened


STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198338
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE 620

CATALOG NUMBER	TRADE SIZE	TAP SIZE	JAW OPENING	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
620	1"	1/4" – 20"	0.750	1.125	1.400	1.385	25	250	22	16201
621	1"	3/8" – 16"	0.750	1.125	1.400	1.385	25	250	22	16211
625	2"	3/8" – 16"	0.875	1.990	1.755	1.885	—	50	90	16251
626	2"	1/2" – 13"	0.875	1.990	1.755	1.885	—	25	90	16261
627	2-1/2"	1/2" – 13"	1.250	2.530	2.140	2.500	—	25	160	16271

Loading Capacity

CATALOG NUMBER	TRADE SIZE	WORKING LOAD	TEST LOAD FOR 5 MIN.
620	1"	250 LBS	750 LBS
621	1"	250 LBS	750 LBS
625	2"	500 LBS	1500 LBS
626	2"	500 LBS	1500 LBS
627	2-1/2"	500 LBS	1500 LBS

APPLICATION:

- Clamp on to structure member to provide mounting means for the attachment of conduit hangers either directly or by means of threaded rod.

STANDARD MATERIALS:

Steel


STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES



UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE S620

Insulator Supports

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
S620	1/4" – 20"	0.920	1.400	1.625	25	250	15	16207








SCAN ME

TO VIEW
PRODUCT SECTION

SERVICE ENTRANCE FITTINGS



ZINC WATERTIGHT CONNECTORS FOR SERVICE ENTRANCE CABLE



APPLICATION:

- Used to connect service entrance cable to a service enclosure in wet locations.

FEATURES:

- 2 insulating connectors, 1 bare.
- U-flat style.
- Assembled with rubber grommet and steel washer.

STANDARD MATERIALS:

Zinc Die Cast

STANDARD FINISH:

Zinc Die Cast

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198257
UL Standard: UL514B
NEMA FB-1
ASTM Rated

TYPE 1069C

CATALOG NUMBER	TRADE SIZE	WIRE SIZE	MINIMUM WIRE SIZE		MAX. WIRE SIZE GROM OPENING		UNIT PACK	MASTER PACK	LBS./ 100 PCS	UPC #
			A	B	A	B				
1060	1"	3 #6	0.310	0.585	0.460	0.715	10	100	34	13642
1060A	1"	3 #4	0.355	0.680	0.530	0.850	10	100	34	13652
1064	1-1/4"	3 #3	0.455	0.815	0.550	0.910	10	100	52	13662
1066	1-1/4"	3 #2	0.480	0.845	0.580	0.960	10	100	52	13672
1066A	1-1/4"	3 #1	0.525	0.955	0.660	1.120	10	100	52	10660
1068	1-1/2"	3 #1/0	0.555	1.095	0.705	1.195	5	50	65	13682
1068A	1-1/2"	3 #2/0	0.595	1.125	0.740	1.235	5	50	65	13683
1069	2"	3 #1/0	0.585	1.085	0.750	1.195	5	50	87	13692
1069A	2"	3 #2/0	0.635	1.165	0.740	1.235	5	50	87	13693
1069B	2"	3 #3/0	0.685	1.285	0.830	1.415	5	50	87	1369420
1069C	2"	3 #4/0	0.655	1.275	0.890	1.540	5	50	87	13695
1069D	2"	3 #4/0	0.705	1.385	0.995	1.580	5	50	87	13696



ALUMINUM SERVICE ENTRANCE HEADS FOR THREADED RIGID CONDUIT

APPLICATION:

- Threaded-type head used with threaded rigid conduit and IMC for pulling service drop conductors.

FEATURES:



- Weather resistant.
- Assembled with electrical grade phenolic insulator with multiple holes.

STANDARD MATERIALS:

Aluminum
Phenolic Insulator

CERTIFICATIONS AND COMPLIANCES

UL **US** **SP**
UL LISTED E198257
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE 400

Threaded

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	NPSM THREAD "C" SIZE	HOOD + YOKE SCREW "D" (2NOS.)	INSULATOR "E" CAP SIZE	UNIT PACK	MASTER PACK	LBS./ 100 PCS	UPC #
400	1/2"	2.7462	1.3435	1/2 - 14	10-24 x 1/2	ECI-050	10	50	25	40050
401	3/4"	3.1244	1.4342	3/4 - 14	10-24 x 1/2	ECI-075	10	50	32	40150
402	1"	3.4475	1.7139	1 - 11.5	10-24 x 1/2	ECI-100	10	50	48	40250
403	1-1/4"	4.1567	1.8835	1-1/4 - 11.5	10-24 x 1/2	ECI-125	—	25	53	40350
404	1-1/2"	5.2087	2.1670	1-1/2 - 11.5	10-24 x 1/2	ECI-150	—	10	112	40450
405	2"	6.6744	2.6950	2 - 11.5	10-24 x 1/2	ECI-200	—	5	130	40550
406	2-1/2"	9.3142	3.3057	2-1/2 - 8	5/16 - 18 x 25/32	ECI-250	—	2	416	40650
407	3"	12.2731	4.1252	3 - 8	5/16 - 18 x 25/32	ECI-250	—	1	418	40750
408	3-1/2"	12.7656	4.5940	3-1/2 - 8	5/16 - 18 x 25/32	ECI-300-7	—	1	810	40850
409	4"	12.7656	5.0787	4 - 8	5/16 - 18 x 25/32	ECI-300-6	—	1	835	40950

ALUMINUM SERVICE ENTRANCE HEADS FOR THREADED RIGID CONDUIT, IMC AND EMT CONDUIT

APPLICATION:

- Clamp-on type head used with rigid conduit, IMC or EMT for pulling service drop conductors.

FEATURES:



- Bar-type clamp.
- Heavy pressure clamp-on body.
- Screw does not bear directly on conduit.
- Weather resistant.
- Assembled with electrical grade phenolic insulator with multiple holes.

STANDARD MATERIALS:

Aluminum
Phenolic Insulator

CERTIFICATIONS AND COMPLIANCES

UL **US** **SP**
UL LISTED E198257
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE 425

Clamp-On Type

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	HOOD + YOKE SCREW "D" (2NOS.)	CLAMP + YOKE SCREW "E" (2NOS.)	INSULATOR "E" CAP SIZE	UNIT PACK	MASTER PACK	LBS./ 100 PCS	UPC #
425	1/2"	2.7462	1.1584	2.2694	10-24 x 1/2	10-24 x 1	ECI-050	10	50	30	42250
426	3/4"	3.1244	1.3711	2.4743	10-24 x 1/2	10-24 x 1	ECI-075	5	25	39	42650
427	1"	3.4475	1.6233	2.7580	10-24 x 1/2	10-24 x 1	ECI-100	5	25	54	42750
428	1-1/4"	4.1567	2.0015	3.1205	10-24 x 1/2	10-24 x 1-1/4	ECI-125	5	25	56	42850
429	1-1/2"	5.2087	2.2694	3.7509	10-24 x 1/2	10-24 x 1-1/4	ECI-150	—	10	88	42950
430	2"	6.6744	2.6634	4.3340	10-24 x 1/2	10-24 x 1-1/4	ECI-200	—	5	135	43000
431	2-1/2"	9.3142	3.6406	5.6421	5/16-18 x 25/32	5/16-18 x 2	ECI-250	—	2	445	43150
432	3"	9.3142	3.9400	6.3670	5/16-18 x 25/32	5/16-18 x 2	ECI-250	—	1	448	43250
433	3-1/2"	12.7656	4.8186	6.9226	5/16-18 x 25/32	5/16-18 x 2	ECI-300-7	—	1	810	43350
434	4"	12.7656	5.2205	7.6239	5/16-18 x 25/32	5/16-18 x 2	ECI-300-7	—	1	875	43450



ALUMINUM SERVICE ENTRANCE HEADS

FOR THREADED RIGID CONDUIT, IMC AND EMT CONDUIT

APPLICATION:

- Combination entrance cap to fit 2 – 2-1/2" mast and has 1-1/4 – 2" cap.

FEATURES:

- Set-screw type.


STANDARD MATERIALS:

Aluminum
Phenolic Insulator

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198257
UL Standard: UL514B
NEMA FB-1
ASTM Rated

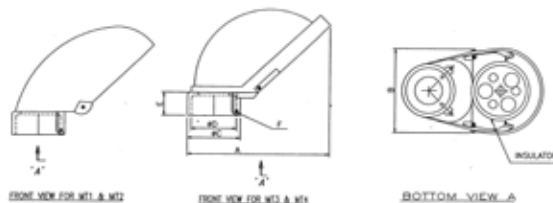

TYPE 3032

Mast Type

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	DIM D	DIM E	SET SCREW "F" (2 NOS.)	CONDUIT SIZE	INSULATOR CAP SIZE	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
3032	2"	4.7595	3.4396	2.6713	2.4586	1.4026	1/4-20 x 5/8	2	1-1/4	—	10	80	30325
3033	2-1/2"	5.3032	3.4120	3.2150	2.9708	1.5602	1/4-20 x 1/2	2-1/2	1-1/4	—	10	90	30335
3035	2-1/2"	6.5995	4.6256	3.1441	2.9471	1.1820	1/4-20 x 5/8	2-1/2	2	—	5	155	30355

ALUMINUM SERVICE ENTRANCE ELLS WITH COVER AND GASKET

FOR THREADED RIGID CONDUIT AND IMC

APPLICATION:

- To provide access to the inside of a service raceway, for wire pulling, where the raceway changes direction. Material finish is metallic gray.

FEATURES:

- Assembled with fiber gasket and aluminum die cast cover.


STANDARD MATERIALS:

Aluminum

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198257
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE 412

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
412	1/2"	3.79	1.76	10	50	26	41250
413	3/4"	4.02	1.99	10	50	31	41350
414	1"	4.94	2.50	5	25	54	41450
415	1-1/4"	5.60	2.72	—	10	105	41550
415XL*	1-1/4"	7.91	2.75	—	10	140	41551
416	1-1/2"	6.79	3.10	—	10	130	41650
417	2"	7.74	3.88	—	5	170	41750

*Extra Long



ENTRANCE HEADS

FOR THREADED RIGID CONDUIT, IMC, PVC AND EMT CONDUIT

APPLICATION:

- For outlet boxes and hubs.

FEATURES:

- Water-resistant design.


STANDARD MATERIALS:

PVC

CERTIFICATIONS AND COMPLIANCES



UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE NS11

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
NS9	3-#8,6,4,2	2.75	2.50	—	50	28	34096
NS11	3-#3/0 - 4/0	4.25	4.81	—	10	70	34116

APPLICATION:

- Used with Type U service entrance cable.

FEATURES:

- Removable cap and two-piece insulator make wire pulling and assembly easy.


STANDARD MATERIALS:

Aluminum

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198257
UL Standard: UL514B
NEMA FB-1
ASTM Rated

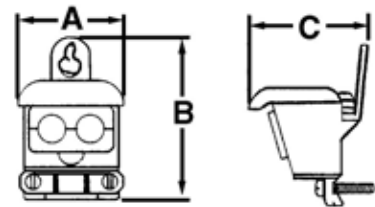

TYPE NS7A

Service Entrance Heads

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
NS2	3-#8 to 3-#1	2.06	2.97	2.26	—	50	26	34025
NS7A	1/0 - 4/0	3.18	4.52	3.60	—	10	31	34175



ZINC CABLE AND CONDUIT CONNECTORS

FOR NON-METALLIC SHEATHED CABLE AND SERVICE ENTRANCE CABLE

APPLICATION:

- Non-watertight. To make a termination of non-metallic sheathed cable and service entrance.

FEATURES:

- Assembled with die cast locknut and tri-combo screws.


STANDARD MATERIALS:

Zinc Die Cast

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198258
UL Standard: UL514B
NEMA FB-1
ASTM Rated

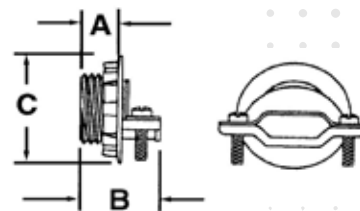

TYPE SC1

Service Entrance Connector

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
SC1	3/4"	0.450	1.031	1.220	25	250	10	32012
SC2	1"	0.645	1.190	1.500	20	200	16	32022
SC3	1-1/4"	0.660	1.330	1.900	10	100	25	32031
SC4	1-1/2"	0.740	1.470	2.115	10	100	36	32042
SC5	2"	0.750	1.620	2.640	5	50	50	32052

Please see Cable Chart for Cable Connectors on page 218.

CATALOG NUMBER	SE/OVAL DIAMETER IN.	SER/ROUND DIAMETER IN.
SC1 Non-Metallic Cable 10-3 through 8-2	(.52 by .61) and (.51 by .80)	(.59) and (.69)
SC2 Non-Metallic Cable 10-3 through 4-3	(.51 by .80) and (.62 by .975)	(.69) and (.92)
SC3	(1.065 by 0.635) and (1.250 by 0.740)	—
SC4	(1.065 by 0.635) and (1.250 by 0.740)	—
SC5	(1.405 by 0.875) and (1.450 by 0.875)	—



ZINC NON-WATERTIGHT SHORT BODY CONNECTORS

FOR NON-METALLIC SHEATHED CABLE AND SERVICE ENTRANCE CABLE

APPLICATION:

- Used with locknut to terminate service entrance cable to enclosure.

FEATURES:

- Assembled with die cast locknut and tri-combo screws.
- For round cable.


STANDARD MATERIALS:

Zinc Die Cast

CERTIFICATIONS AND COMPLIANCES




UL LISTED E198258
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE C50S

CATALOG NUMBER	TRADE SIZE	DIM. A MIN.	DIM. A MAX.	DIM B	UNIT PACK	MASTER PACK	LBS./ 100 PCS	UPC #
C50S	1"	0.620	1.140	1.500	10	100	15	64601
C51S	1-1/4"	0.700	1.380	1.900	10	100	24	64602
C52S	1-1/2"	0.750	1.610	2.115	10	100	34	64603
C53S	2"	0.900	2.040	2.640	5	50	46	64604

Please see Cable Chart for Cable Connectors on page 218.



TYPE C50ST

Insulated

CATALOG NUMBER	TRADE SIZE	DIM. A MIN.	DIM. A MAX.	DIM B	UNIT PACK	MASTER PACK	LBS./ 100 PCS	UPC #
C50ST	1"	0.620	1.140	1.500	10	100	15	90138
C51ST	1-1/4"	0.700	1.380	1.900	25	250	24	90139
C52ST	1-1/2"	0.750	1.610	2.115	25	250	34	90140
C53ST	2"	0.900	2.040	2.640	10	100	46	90141

Please see Cable Chart for Cable Connectors on page 218.

CATALOG NUMBER	SE/OVAL DIAMETER IN.	SER/ROUND DIAMETER IN.
C50S and C50ST Non-Metallic Cable 10-3 through 4-3	(.51 by .80) and (.62 by .975)	(.69) and (.92)
C50S and C50ST Non-Metallic Cable 4-3 through 2-3	(.67 by 1.06) and (.73 by 1.235)	1.19
C52S and C52ST	(1.15 by 0.73) and (1.41 by 0.89)	1.48
C52S and C52ST	(1.405 by 0.875) and (1.450 by 0.875)	—



ZINC TWO-SCREW TAKE-ALL CONNECTORS

FOR ARMORED CABLE, METAL CLAD, FLEXIBLE METALLIC CONDUIT AND NON-METAL SHEATHED CABLE

APPLICATION:

- Used with locknut to terminate service entrance cable to enclosure.

FEATURES:


- Take-all type.

STANDARD MATERIALS:

Zinc Die Cast


CERTIFICATIONS AND COMPLIANCES

UL LISTED E309514
UL Standard: UL514B
NEMA FB-1
ASTM Rated

**TYPE C50Z**

CATALOG NUMBER	TRADE SIZE	DIM. A MIN.	DIM. A MAX.	DIM B	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
C48Z	1/2"	0.40	0.95	1.87	25	250	10	32482
C49Z	3/4"	0.50	1.10	1.84	20	200	12	32492
C50Z	1"	0.62	1.14	2.00	10	100	15	32502
C51Z	1-1/4"	0.50	1.38	2.28	10	100	25	32512
C52Z	1-1/2"	0.75	1.61	2.49	10	100	38	32522
C53Z	2"	0.90	2.04	3.35	5	50	50	32632

Please see Cable Chart for Cable Connectors on page 218.

**TYPE C50ZT**

Insulated

CATALOG NUMBER	TRADE SIZE	DIM. A MIN.	DIM. A MAX.	DIM B	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
C48ZT	1/2"	0.40	0.95	1.87	25	250	10	34867
C49ZT	3/4"	0.50	1.10	1.84	20	200	12	34967
C50ZT	1"	0.62	1.14	2.00	10	100	15	35067
C51ZT	1-1/4"	0.50	1.38	2.28	10	100	25	35167
C52ZT	1-1/2"	0.75	1.61	2.49	10	100	38	35267
C53ZT	2"	0.90	2.04	3.35	5	50	50	35367

Please see Cable Chart for Cable Connectors on page 218.



SERVICE ENTRANCE SILL PLATES

FOR SERVICE ENTRANCE CABLE

APPLICATION:

- Prevents water from entering structure when used with sealing compound.

FEATURES:

- Aluminum.

CERTIFICATIONS AND COMPLIANCES


UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE 260L

Aluminum Sill Plates

CATALOG NUMBER	TRADE SIZE	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
260L	3/0-4/0"	-	10	70	10010

CABLE CHART FOR CABLE CONNECTORS

SEP/CO NUMBERS	K.O. TRADE SIZE	AC CABLE RANGE		MCI CABLE RANGE		MCI-A CABLE RANGE		HCF MCI-A CABLE RANGE	
		STEEL	ALUMINUM	STEEL	ALUMINUM	STEEL	ALUMINUM	STEEL	ALUMINUM
C50S	1"	—	—	—	—	—	—	—	—
C50ST	1"	—	—	—	—	—	—	—	—
C51S	1-1/4"	—	—	—	—	—	—	—	—
C51ST	1-1/4"	—	—	—	—	—	—	—	—
C52S	1-1/2"	—	—	—	—	—	—	—	—
C52ST	1-1/2"	—	—	—	—	—	—	—	—
C53S	2"	—	—	—	—	—	—	—	—
C53ST	2"	—	—	—	—	—	—	—	—
C48Z	1/2"	8/2-6/3 0.630"-0.850"	8/2-6/3 0.630"-0.835"	8/3-6/2 0.690"-0.850"	8/3-6/3 0.690"-0.850"	—	8/3-6/3 0.675"-0.785"	—	—
C48ZT	1/2"	8/2-6/3 0.630"-0.850"	8/2-6/3 0.630"-0.835"	8/3-6/2 0.690"-0.850"	8/3-6/3 0.690"-0.850"	—	8/3-6/3 0.675"-0.785"	—	—
C49Z	3/4"	6/3-4/2 0.850"-1.035"	4/3 1.095"	4/3-2/3 0.940"-1.080"	4/3-2/3 0.940"-1.070"	—	—	—	—
C49ZT	3/4"	6/3-4/2 0.850"-1.035"	4/3 1.095"	4/3-2/3 0.940"-1.080"	4/3-2/3 0.940"-1.070"	—	—	—	—
C50Z	1"	—	—	1/3-1/0-3 1.165"-1.220"	1/3-1/0-3 1.145"-1.250"	—	—	—	—
C50ZT	1"	—	—	1/3-1/0-3 1.165"-1.220"	1/3-1/0-3 1.145"-1.250"	—	—	—	—
C51Z	1-1/4"	—	—	1/0-4-2/0-4 1.340"-1.450"	—	—	—	—	—
C51ZT	1-1/4"	—	—	1/0-4-2/0-4 1.340"-1.450"	—	—	—	—	—
C52Z	1-1/2"	—	—	4/0-4-250-4 1.700"-1.845"	—	—	—	—	—
C52ZT	1-1/2"	—	—	4/0-4-250-4 1.700"-1.845"	—	—	—	—	—
C53Z	2"	—	—	350-4-400-4 2.070"-2.180"	—	—	—	—	—
C53ZT	2"	—	—	350-4-400-4 2.070"-2.180"	—	—	—	—	—
SC1	3/4"	—	—	1/0-4-2/0-4 1.340"-1.450"	—	—	—	—	—
SC2	1"	—	—	1/0-4-2/0-4 1.340"-1.450"	—	—	—	—	—
SC3	1-1/4"	—	—	1/0-4-2/0-4 1.340"-1.450"	—	—	—	—	—
SC4	1-1/2"	—	—	1/0-4-2/0-4 1.340"-1.450"	—	—	—	—	—
SC5	2"	—	—	1/0-4-2/0-4 1.340"-1.450"	—	—	—	—	—



CABLE CHART FOR CABLE CONNECTORS

SEPCO NUMBERS	FMC TRADE SIZE		RWFCM TRADE SIZE		NM CABLE RANGE	FLEX CORD DIA. RANGE	SE OVAL CABLE RANGE	SER ROUND CABLE DIA. RANGE
	STEEL	ALUMINUM	STEEL	ALUMINUM				
C50S	—	—	—	—	10/3-4/3	—	0.510" x 0.800" 0.620" x 0.975"	0.690"-0.920"
C50ST	—	—	—	—	10/3-4/3	—	0.510" x 0.800" 0.620" x 0.975"	0.690"-0.920"
C51S	—	—	—	—	4/3-2/3	—	0.670" x 0.1.060" 0.730" x 1.235"	1.190"
C51ST	—	—	—	—	4/3-2/3	—	0.670" x 0.1.060" 0.730" x 1.235"	1.190"
C52S	—	—	—	—	—	—	0.730" x 1.150" 0.890" x 1.410"	1.480"
C52ST	—	—	—	—	—	—	0.730" x 1.150" 0.890" x 1.410"	1.480"
C53S	—	—	—	—	—	—	0.875" x 1.405" 0.875" x 1.450"	—
C53ST	—	—	—	—	—	—	0.875" x 1.405" 0.875" x 1.450"	—
C48Z	1/2"	1/2"	1/2"	1/2"	14/2-12/3	—	—	8/3 0.612"
C48ZT	1/2"	1/2"	1/2"	1/2"	14/2-12/3	—	—	8/3 0.612"
C49Z	3/4"	3/4"	3/4"	3/4"	14/3-8/3	—	—	8/3-6/3 0.612"-0.717"
C49ZT	3/4"	3/4"	3/4"	3/4"	14/3-8/3	—	—	8/3-6/3 0.612"-0.717"
C50Z	1" 1.300"-1.380"	1" 1.300"-1.380"	1" 1.300"-1.380"	1" 1.300"-1.380"	10/3-6/3 0.360"-0.650"	—	4/3 0.499"-0.800"	—
C50ZT	1" 1.300"-1.380"	1" 1.300"-1.380"	1" 1.300"-1.380"	1" 1.300"-1.380"	10/3-6/3 0.360"-0.650"	—	4/3 0.499"-0.800"	—
C51Z	1-1/4"	1-1/4"	1-1/4"	1-1/4"	8/3-2/3	—	—	—
C51ZT	1-1/4"	1-1/4"	1-1/4"	1-1/4"	8/3-2/3	—	—	—
C52Z	1-1/2"	1-1/2"	1-1/2"	1-1/2"	2/3	—	—	—
C52ZT	1-1/2"	1-1/2"	1-1/2"	1-1/2"	2/3	—	—	—
C53Z	2"	2"	2"	2"	—	—	—	—
C53ZT	2"	2"	2"	2"	—	—	—	—
SC1	—	—	—	—	10/3-8/2	—	0.520" x 0.610" 0.510" x 0.800"	0.57"-0.69"
SC2	—	—	—	—	10/3-4/3	—	0.510" x 0.800" 0.620" x 0.965"	0.69"-0.92"
SC3	—	—	—	—	—	—	0.635" x 1.065 0.740" x 1.250"	—
SC4	—	—	—	—	—	—	0.635" x 1.065 0.740" x 1.250"	—
SC5	—	—	—	—	—	—	0.875" x 1.405" 0.875" x 1.450"	—







SCAN ME

TO VIEW
PRODUCT SECTION

MISCELLANEOUS FITTINGS



STEEL STRAIGHT CORD GRIP STRAIN RELIEF CONNECTORS

COLOR CODED — STRAIGHT

APPLICATION:

- To secure and seal cords or cables entering enclosures or raceways.

FEATURES:

- Neoprene grommet for a moisture-proof seal.
- Simple installation, cord can be installed without disassembly of the fitting.
- Male tapered thread NPT.
- Colored gripper allows for easy identification.

STANDARD MATERIALS:

Steel Body/Steel Gland Nut
Neoprene Grommet

STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198257
UL Standard: UL514B
NEMA FB-1
ASTM Rated
Liquidtight/Oiltight/Raintight
Suitable for NEMA 4 enclosures
and other wet locations.

Suitable for use in Hazardous Locations
under NEC501-4(b), 502-4(a), and
503-3(a). For Class I, Div. 2, Class II,
Div. 1 & 2, and Class III, Div. 1 & 2.



TYPE CG50-250

CATALOG NUMBER	TRADE SIZE	COLOR	CABLE RANGE		UNIT PACK	MASTER PACK	LBS./ 100 PCS	UPC #
			MIN	MAX				
1/2"								
CG50-250	1/2"	Red	0.15	0.25	25	100	10	85001
CG50-350	1/2"	White	0.25	0.35	25	100	10	85002
CG50-450	1/2"	Blue	0.34	0.45	25	100	10	85003
CG50-560	1/2"	Green	0.45	0.56	25	100	10	85004
CG50-650	1/2"	Brown	0.55	0.65	25	100	10	85005
3/4"								
CG75-250	3/4"	Red	0.15	0.25	10	50	14	85101
CG75-350	3/4"	White	0.25	0.35	10	50	14	85102
CG75-450	3/4"	Blue	0.35	0.45	10	50	14	85103
CG75-560	3/4"	Green	0.45	0.56	10	50	14	85104
CG75-650	3/4"	Brown	0.55	0.65	10	50	14	85105
CG75-750	3/4"	Yellow	0.65	0.75	10	50	14	85106
CG75-850	3/4"	Purple	0.75	0.85	10	50	14	85107
1"								
CG100-560	1"	Green	0.45	0.56	5	25	20	85201
CG100-650	1"	Brown	0.50	0.65	5	25	20	85202
CG100-750	1"	Yellow	0.65	0.75	5	25	20	85203
CG100-850	1"	Purple	0.75	0.85	5	25	20	85204
CG100-950	1"	Grey	0.85	0.95	5	25	20	85205
CG100-1050	1"	Black	0.95	1.05	5	25	20	85206
1-1/4"								
CG125-850	1-1/4"	Purple	0.75	0.85	5	25	40	85301
CG125-950	1-1/4"	Grey	0.85	0.95	5	25	40	85302
CG125-1050	1-1/4"	Black	0.95	1.05	5	25	40	85303
CG125-1150	1-1/4"	Orange	1.05	1.15	5	25	40	85304
CG125-1250	1-1/4"	Red	1.15	1.25	5	25	40	85305
CG125-1375	1-1/4"	White	1.25	1.38	5	25	40	85306



KNOCK-OUT SEALS

APPLICATION:

- To close unused opening or knockout in sheet metal box, enclosure or cabinet.

STANDARD MATERIALS:

Steel

STANDARD FINISH:

Zinc Plated



TYPE SS50

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	UNIT PACK	MASTER PACK	LBS./ 100 PCS	UPC #
SS50	1/2"	1.070	0.365	200	2000	1	22507
SS52	3/4"	1.235	0.310	100	1000	2	22527
SS54	1"	1.480	0.335	100	1000	3	22547
SS56	1-1/4"	1.800	0.310	50	500	4	22567
SS58	1-1/2"	2.215	0.365	50	500	5	22587
SS60	2"	2.675	0.360	25	250	7	22607
*SS62	2-1/2"	2.975	0.410	10	100	15	22627
*SS64	3"	4.500	0.465	10	50	40	90147
*SS66	3-1/2"	5.000	0.487	10	50	50	90148
*SS68	4"	5.500	0.4962	10	50	50	90149

* Three-Piece Knock-Out Seals

ANTI-SHORT BUSHINGS AND ROD COUPLINGS THERMOPLASTIC

APPLICATION:


- These anti-short bushings are used in the terminations of flexible metal conduit and armored cables. Inserted into I.D. of each termination point to protect the conductors from the sharp edges of the raceway where cut.

FEATURES:

- Features high dielectric strength and ensures complete insulation on all sharp edges.

STANDARD MATERIALS:

Plastic



TYPE 0

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	FOR CABLE SIZES	PC. PER BAG	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
0	5/16"	0.57	0.64	14-2, 14-3, 12-2, Armored Cable; 5/169 Flexible Conduit	35	1 BAG	500 BAGS	3	55506
1	3/8"	0.67	0.66	14-4, 12-3, 6-1, 4-1, Armored Cable; 3/89 Flexible Conduit	35	1 BAG	400 BAGS	3	55516
2	7/16"	0.61	0.82	12-4, 10-2, 10-3, 2-1, Armored Cable; 7/169 Flexible Conduit	35	1 BAG	300 BAGS	7	55526
3	1/2"	0.67	0.94	10-4, 8-2, 8-3, 1-1, Armored Cable; 1/29 Flexible Conduit	20	1 BAG	200 BAGS	8	55536
4	3/4"	0.79	1.16	8-4, 6-2, 6-3, Armored Cable; 3/49 Flexible Conduit	16	1 BAG	150 BAGS	6	55546

STANDARD MATERIALS:

Steel

STANDARD FINISH:

Zinc Plated



TYPE 120R

Rod Couplings

CATALOG NUMBER	TRADE SIZE	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
118R	1/4" – 20"	100	1000	2	11187
120R	3/8" – 16"	100	1000	4	11207
121R	1/2" – 13"	100	1000	6	11217



SEALING GASKETS

SELF RETAINING PVC GASKET WITH STEEL RINGS

APPLICATION:

- To ensure raintight integrity for rigid conduit fittings.

FEATURES:

- PVC gasket.
- Steel retaining ring.

STANDARD MATERIALS:

PVC Gasket/Steel Rings


STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES



UL LISTED E198257
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE SR50

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
SR50	3/8"-1/2"	1.125	0.813	0.187	100	500	1	70850
SR75	3/4"	1.375	1.125	0.187	100	500	2	70851
SR100	1"	1.625	1.313	0.187	100	500	2	70852
SR125	1-1/4"	2.000	1.625	0.187	50	250	3	70853
SR150	1-1/2"	2.250	1.875	0.187	50	250	3	70854
SR200	2"	2.750	2.313	0.187	50	250	3	70855
SR250	2-1/2"	3.500	2.875	0.187	—	10	6	70856
SR300	3"	4.250	3.500	0.187	—	10	9	70857
SR350	3-1/2"	4.750	4.000	0.187	—	10	10	70858
SR400	4"	5.188	4.500	0.187	—	10	13	70859
SR500	5"	6.563	5.563	0.187	—	5	16	70860
SR600	6"	7.750	6.625	0.187	—	5	19	70861



KENNY CLAMPS®

BONDING AND GROUNDING CONNECTOR



APPLICATION:

- Clamp connector is for bonding and grounding of electrode conductors in panel boards, transformers, raceways and enclosures.

FEATURES:

- The Kenny Clamp is the ONLY UL Listed connector for bonding and grounding of electrode conductors.
- Ensures good metallic connection and low impedance path for grounding and bonding of electrical equipment.
- Tested and listed at 9000 amperes.
- Complies with 110.3 (B) 250.8 and 312.5 A NEC, using a listed grounding or bonding connector for the proper application.
- Meets UL 467 requirements for bonding and grounding and UL 468A standard for connectors.

STANDARD MATERIALS:

Brass

CERTIFICATIONS AND COMPLIANCES



PATENT PENDING
UL Standard: UL514B
NEMA FB-1
ASTM Rated

Complies with 110.3, (B) 250.8, and 312.5 A NEC, using a listed grounding or bonding connector for the proper application.

Meets UL 467 requirements for bonding and grounding and UL 468A standard for connectors.

TYPE KC1AST

CATALOG NUMBER	TRADE SIZE	UNIT PACK	MASTER PACK	LBS./100 PCS	UPC #
KC1AST	#1/0 AWG STRANDED	10	100	34	99900
KC2AST	#2/0 AWG STRANDED	10	100	34	99901
KC2ST	#2 AWG STRANDED	10	100	52	99902
KC3AST	#3/0 AWG STRANDED	10	100	52	99903
KC4AST	#4/0 AWG CONCENTRIC	10	100	65	99899
KC4SO	#4 AWG SOLID	10	100	52	99904
KC4ST	#4 AWG STRANDED	10	100	65	99905
KC6SO	#6 AWG SOLID	10	100	65	99906
KC6ST	#6 AWG STRANDED	10	100	87	99907
KC8SO	#8 AWG SOLID	10	100	87	99908
KC8ST	#8 AWG STRANDED	10	100	87	99909

LAY-IN GROUNDING LUGS

FEATURES:

- Each lug takes a range of cable sizes.
- Heavy-duty slotted or hex head screw.
- Both aluminum and copper lay-in lugs are suitable for use with copper or aluminum conductors.

STANDARD MATERIALS:

Aluminum


STANDARD FINISH:

Zinc Plated

CERTIFICATIONS AND COMPLIANCES



UL LISTED E93683
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE AL4

Aluminum

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./ 100 PCS	UPC #
AL4	4/14	1.063	0.375	0.750	—	100	2	10001
AL1/0	1/0 – 8	1.500	0.625	1.125	—	100	7	10002
AL250	250MCM – 6	2.188	0.813	1.688	—	50	19	10004

AL4 and AL1/0 are furnished with slotted screws. AL250 is furnished with hex-head screws.

STANDARD MATERIALS:

Copper


STANDARD FINISH:

Natural

CERTIFICATIONS AND COMPLIANCES



UL LISTED E93683
UL Standard: UL514B
NEMA FB-1
ASTM Rated



TYPE CL4

Copper

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS./ 100 PCS	UPC #
CL4	4/14	1.063	0.375	0.750	—	100	4	10005
CL1/0	1/0 – 8	1.500	0.625	1.125	—	100	16	10006
CL250	250MCM – 6	2.188	0.813	1.688	—	50	50	10008

CL4 and CL1/0 are furnished with slotted screws. CL250 is furnished with hex-head screws.



INDEX BY CATALOG NUMBER

Catalog #	Page	Catalog #	Page	Catalog #	Page	Catalog #	Page
0	224	1030	101	1214SS	90	138S	114
01	68, 131	1030G	24, 101	1215	88	139	112
01A	68, 131	1031	101	1215G	23, 89	139G	31, 113
01M	69	1031G	24, 101	1215SS	90	139S	114
01MG	16, 69	1060	210	1216	88	13CS	204
02	68, 131	1060A	210	1216G	23, 89	13CSA	204
02A	68, 131	1064	210	1216SS	90	14	70, 132
02M	69	1066	210	1217	88	141	112
02MG	16, 69	1066A	210	1217G	23, 89	141G	31, 113
03	68, 131	1068	210	1217SS	90	141S	114
03A	68, 131	1068A	210	121R	224	142S	142
03M	69	1069	210	1250	141	143S	142
03MG	16, 69	1069A	210	1251	141	144S	142
04	68, 131	1069B	210	1260	141	145S	142
04A	68, 131	1069C	210	1261	141	146S	142
04M	69	1069D	210	12CS	204	147S	142
04MG	16, 69	10B	198	13	70, 132	148	112
05	68, 131	10BG	199	130S	114	148G	31, 113
05A	68, 131	10BR	198	1313	111	148S	114
05M	69	10CS	204	1314	111	14CS	204
05MG	16, 69	11	70, 132	1315	111	15	70, 132
06	68, 131	118R	224	1316	111	150	112
06A	68, 131	11CS	204	131S	114	150G	31, 113
06M	69	12	70, 132	132	112	152	112
06MG	16, 69	1206	88	132G	31, 113	152G	31, 113
07	68, 131	1206G	23, 89	1320	111	158S	142
07A	68, 131	1206SS	90	1321	111	159S	142
07M	69	1207	88	1326	140	15CS	204
07MG	16, 69	1207G	23, 89	1327	140	16	70, 132
1	224	1207SS	90	1328	140	160S	142
10	70, 132	1208	88	1329	140	161S	142
1005	101	1208G	23, 89	1332	140	16CS	204
1005G	24, 101	1208SS	90	1333	140	170	71
1006	101	1209	88	132S	114	170C	143, 181, 193
1006G	24, 101	1209G	23, 89	133	112	170G	71
1022	101	1209SS	90	133G	31, 113	171	143, 181
1022G	24, 101	120R	224	133S	114	171C	143, 181
1023	101	1210	88	134	112	172	143, 181
1023G	24, 101	1210G	23, 89	134G	31, 113	172C	143, 181
1024	101	1210SS	90	134S	114	173C	143, 181
1024G	24, 101	1211	88	135	112	17CS	204
1025	101	1211G	23, 89	135G	31, 113	18CS	204
1025G	24, 101	1211SS	90	135S	114	19CS	204
1026	101	1212	88	136	112	1F	119
1026G	24, 101	1212G	23, 89	136G	31, 113	2	224
1027	101	1212SS	90	136S	114	200	201
1027G	24, 101	1213	88	137	112	201	201
1028	101	1213G	23, 89	137G	31, 113	202	201
1028G	24, 101	1213SS	90	137S	114	20BI4C	82
1029	101	1214	88	138	112	20BI4CG	22, 84
1029G	24, 101	1214G	23, 89	138G	31, 113	20BI4CSS	86



INDEX BY CATALOG NUMBER

Catalog #	Page	Catalog #	Page	Catalog #	Page	Catalog #	Page
20BI4L	81	24BI4L	81	27BIOLSS	85	315M	177
20BI4LG	21, 83	24BI4LG	21, 83	27BIZ4OL	87	316M	177
20BI4LSS	85	24BI4LSS	85	27BIZOL	87	317M	177
20BIZ4L	87	24BIOC	82	28BI4OC	82	31BI4OC	82
2132S	114	24BIOCG	22, 84	28BI4OCG	22, 84	31BI4OCG	22, 84
2133S	114	24BIZ4L	87	28BI4OCSS	86	31BI4OCSS	86
2134S	114	24E	109, 180	28BI4OL	81	31BI4OL	81
2135S	114	25BI4C	82	28BI4OLG	21, 83	31BI4OLG	21, 83
2136S	114	25BI4CG	22, 84	28BI4OLSS	85	31BI4OLSS	85
2137S	114	25BI4CSS	86	28BIOC	82	34B	198
2138S	114	25BI4L	81	28BIOCG	22, 84	35A	198
2139S	114	25BI4LG	21, 83	28BIOCSS	86	35B	199
2141S	114	25BI4LSS	85	28BIOL	81	35C	200
2142S	142	25BI4OCG	22, 84	28BIOLG	21, 83	35D	200
2143S	142	25BIOLSS	85	28BIOLSS	85	35E	200
2144S	142	25BIOC	82	28BIZ4OL	87	36A	198
2145S	142	25BIOCG	22, 84	28BIZOL	87	36C	200
2146S	142	25BIOCSS	86	29BI4OC	82	36D	200
2147S	142	25BIOL	81	29BI4OCG	22, 84	36E	200
2148S	114	25BIOLG	21, 83	29BI4OCSS	86	370	71
2150S	114	25BIZ4L	87	29BI4OL	81	370G	71
2152S	114	25BIZOL	87	29BI4OLG	21, 83	3F	119
2158S	142	25E	109, 180	29BI4OLSS	85	4	224
2159S	142	260L	217	29BIOC	82	400	211
2160S	142	26BI4OC	82	29BIOCG	22, 84	401	211
2161S	142	26BI4OCG	22, 84	29BIOCSS	86	402	211
21BI4C	82	26BI4OCSS	86	29BIOL	81	403	211
21BI4CG	22, 84	26BI4OL	81	29BIOLG	21, 83	404	211
21BI4CSS	86	26BI4OLG	21, 83	29BIOLSS	85	405	211
21BI4L	81	26BI4OLSS	85	29BIZ4OL	87	406	211
21BI4LG	21, 83	26BIOC	82	29BIZOL	87	407	211
21BI4LSS	85	26BIOCG	22, 84	2F	119	408	211
21BIZ4L	87	26BIOCSS	86	3	224	409	211
22BI4C	82	26BIOL	81	301	200	412	212
22BI4CG	22, 84	26BIOLG	21, 83	302	200	413	212
22BI4CSS	86	26BIOLSS	85	3032	212	414	212
22BI4L	81	26BIZ4OL	87	3033	212	415	212
22BI4LG	21, 83	26BIZOL	87	3035	212	415XL	212
22BI4LSS	85	270	71	307	200	416	212
22BIZ4L	87	270G	71	308	200	417	212
23BI4C	82	27BI4OC	82	309	200	425	211
23BI4CG	22, 84	27BI4OCG	22, 84	30BI4OC	82	426	211
23BI4CSS	86	27BI4OCSS	86	30BI4OCG	22, 84	427	211
23BI4L	81	27BI4OL	81	30BI4OCSS	86	428	211
23BI4LG	21, 83	27BI4OLG	21, 83	30BI4OL	81	429	211
23BI4LSS	85	27BI4OLSS	85	30BI4OLG	21, 83	430	211
23BIZ4L	87	27BIOC	82	30BI4OLSS	85	431	211
23E	109, 180	27BIOCG	22, 84	310	200	432	211
24BI4C	82	27BIOCSS	86	311	201	433	211
24BI4CG	22, 84	27BIOL	81	312	201	434	211
24BI4CSS	86	27BIOLG	21, 83	313	201	470	71



INDEX BY CATALOG NUMBER

Catalog #	Page	Catalog #	Page	Catalog #	Page	Catalog #	Page
470G	71	825Z	91	94Z	95	AX-8-350	6, 40
4F	119	838Z	91	94ZT	95	AX-8-400	6, 40
533M	91	839Z	91	95	96	BJ-5075	7, 41
534M	91	840Z	91	95T	96	BJ-5075-24	7, 41
535M	91	841Z	91	95Z	95	BJ-1012	7, 41
536M	91	842MI	91	95ZT	95	BJ-1012-24	7, 41
537M	91	843MI	91	96	96	BJ-1520	7, 41
538M	91	870	71	96T	96	BJ-1520-24	7, 41
539M	91	870G	71	96Z	95	BJ-2530	7, 41
559M	91	90	96	96ZT	95	BJ-2530-24	7, 41
569M	91	900	112	97	96	BJ-3540	7, 41
570	71	900G	31, 113	970	71	BJ-3540-24	7, 41
570G	71	901	112	970G	71	BJ-5060-24	7, 41
5F	119	901G	31, 113	97T	96	BRLG-1504	87
620	207	902	112	97Z	95	BRLG-2004	87
621	207	902G	31, 113	97ZT	95	BRLG-3104	87
625	207	903	112	98	96	BRLG-4122	87
626	207	903G	31, 113	98T	96	BS50	109
627	207	904	112	98Z	95	BS75	109
670	71	904G	31, 113	98ZT	95	C1	50
670G	71	905	112	99	96	C17F7	56
6F	119	905G	31, 113	995	96	C1A	59
706	99	906	112	995T	96	C1ACG	62
706P	99	906G	31, 113	996	96	C1AT	122
707	99	907	112	996T	96	C1ATCG	125
707P	99	907G	31, 113	99T	96	C1CA	65, 128
708	99	908	112	99Z	95	C1G	14, 53
708P	99	908G	31, 113	99ZT	95	C2	50
709	99	909	112	AL4	227	C22	179
709P	99	909G	31, 113	AL1/0	227	C23	190
710	99	910	112	AL3/0	227	C23C	179
710P	99	910G	31, 113	AL250	227	C25T	172
711	99	911	112	AX-50	6, 40	C25Z	174
711P	99	911G	31, 113	AX-75	6, 40	C25ZT	174
712	99	90T	96	AX-100	6, 40	C27	171
712P	99	90Z	95	AX-125	6, 40	C270	178
713	99	90ZT	95	AX-150	6, 40	C270A	178
713P	99	91	96	AX-200	6, 40	C270M	176
714	99	91T	96	AX-250	6, 40	C271	177
714P	99	91Z	95	AX-300	6, 40	C27F7	56
715	99	91ZT	95	AX-350	6, 40	C27T	171
715P	99	92	96	AX-400	6, 40	C27Z	173
716	99	92T	96	AX-500	6, 40	C27ZT	173
716P	99	92Z	95	AX-8-50	6, 40	C28	171
717	99	92ZT	95	AX-8-75	6, 40	C28T	171
717P	99	93	96	AX-8-100	6, 40	C28Z	173
820Z	91	93T	96	AX-8-125	6, 40	C28ZT	173
821Z	91	93Z	95	AX-8-150	6, 40	C29	171
822Z	91	93ZT	95	AX-8-200	6, 40	C29T	171
823Z	91	94	96	AX-8-250	6, 40	C29Z	173
824Z	91	94T	96	AX-8-300	6, 40	C29ZT	173



INDEX BY CATALOG NUMBER

Catalog #	Page	Catalog #	Page	Catalog #	Page	Catalog #	Page
C2A	59	C40	172	C5G	14, 53	CG100-650	222
C2ACG	62	C40T	172	C6	50	CG100-750	222
C2AT	122	C40Z	174	C60	171	CG100-850	222
C2ATCG	125	C40ZT	174	C60T	171	CG100-950	222
C2CA	65, 128	C41	94	C61	171	CG100-1050	222
C2G	14, 53	C42	94	C61T	171	CG125-850	222
C3	50	C43	94	C65	172	CG125-950	222
C30	171	C44	94	C65T	172	CG125-1050	222
C30T	171	C45	94	C66	172	CG125-1150	222
C30Z	173	C46	94	C66T	172	CG125-1250	222
C30ZT	173	C465	94	C67	172	CG125-1375	222
C31	171	C466	94	C67F7	56	CG150-1050	222
C31T	171	C467	94	C67T	172	CG150-1150	222
C31Z	173	C468	94	C68	172	CG150-1250	222
C31ZT	173	C47AT	171	C68T	172	CG150-1375	222
C32	171	C47F7	56	C6A	59	CG50-250	222
C32T	171	C47Z	173	C6ACG	62	CG50-350	222
C32Z	173	C47ZT	173	C6AT	122	CG50-450	222
C32ZT	173	C48Z	175, 192, 216	C6ATCG	125	CG50-560	222
C33	171	C48ZT	175, 192, 216	C6CA	65, 128	CG50-650	222
C33T	171	C49Z	175, 192, 216	C6G	14, 53	CG75-250	222
C34	171	C49ZT	175, 192, 216	C7	50	CG75-350	222
C34T	171	C4A	59	C77F7	56	CG75-450	222
C35	172	C4ACG	62	C7A	59	CG75-560	222
C35T	172	C4AT	122	C7ACG	62	CG75-650	222
C35Z	174	C4ATCG	125	C7AT	122	CG75-750	222
C35ZT	174	C4CA	65, 128	C7ATCG	125	CG75-850	222
C36	172	C4G	14, 53	C7G	14, 53	CHM100	97
C36T	172	C5	50	C8	50	CHM100G	24, 97
C36Z	174	C50S	191, 215	C87F7	56	CHM125	97
C36ZT	174	C50ST	191, 215	C8A	59	CHM125G	24, 97
C37	172	C50Z	175, 192, 216	C8ACG	62	CHM150	97
C37F7	56	C50ZT	175, 192, 216	C8AT	122	CHM150G	24, 97
C37T	172	C51S	191, 215	C8ATCG	125	CHM200	97
C37Z	174	C51ST	191, 215	C8G	14, 53	CHM200G	24, 97
C37ZT	174	C51Z	175, 192, 216	C9	50	CHM250	97
C38	172	C51ZT	175, 192, 216	C920	180	CHM250G	24, 97
C38T	172	C52S	191, 215	C97F7	56	CHM300	97
C38Z	174	C52ST	191, 215	C9A	59	CHM300G	24, 97
C38ZT	174	C52Z	175, 192, 216	C9ACG	62	CHM350	97
C39	172	C52ZT	175, 192, 216	C9AT	122	CHM350G	24, 97
C39T	172	C53S	191, 215	C9ATCG	125	CHM400	97
C39Z	174	C53ST	191, 215	C9G	14, 53	CHM400G	24, 97
C39ZT	174	C53Z	175, 192, 216	C10	50	CHM50	97
C3A	59	C53ZT	175, 192, 216	C107F7	56	CHM500	97
C3ACG	62	C57F7	56	C10A	59	CHM500G	24, 97
C3AT	122	C5A	59	C10ACG	62	CHM50G	24, 97
C3ATCG	125	C5ACG	62	C10AT	122	CHM600	97
C3CA	65, 128	C5AT	122	C10ATCG	125	CHM600G	24, 97
C3G	14, 53	C5ATCG	125	C10G	14, 53	CHM75	97
C4	50	C5CA	65, 128	CG100-560	222	CHM75G	24, 97



INDEX BY CATALOG NUMBER

Catalog #	Page	Catalog #	Page	Catalog #	Page	Catalog #	Page
CL4	227	CW92	117	EDG75	206	FS2-75G	19, 78
CL1/0	227	CW93	117	ERC-22	108, 139	FSC-100	72
CL3/0	227	CW94	117	ERC-23	108, 139	FSC-100G	17, 73
CL250	227	CW95	117	ERC-24	108, 139	FSC-50	72
CR0	115	CW96	117	FD-100	72	FSC-50G	17, 73
CR1	115	CW97	117	FD-100G	17, 73	FSC-75	72
CR2	115	CW98	117	FD-50	72	FSC-75G	17, 73
CR3	115	CW101	117	FD-50G	17, 73	FSC2-100	77
CR4	115	CW102	117	FD-75	72	FSC2-100G	19, 78
CR5	115	CW103	117	FD-75G	17, 73	FSC2-50	77
CR6	115	CW104	117	FD2-100	77	FSC2-50G	19, 78
CR7	115	CW105	117	FD2-100G	19, 78	FSC2-75	77
CR8	115	CW106	117	FD2-50	77	FSC2-75G	19, 78
CR9	115	CW107	117	FD2-50G	19, 78	FSFD2-CG	20, 79, 80
CR10	115	CW108	117	FD2-75	77	FSFD2-CM1	79
CR11	115	CW109	117	FD2-75G	19, 78	FSFD2-CM1G	20, 80
CR12	115	DB100-IC	166	FDC-100	72	FSFD2-CM2	79
CR13	115	DB10090-IC	166	FDC-100G	17, 73	FSFD2-CM2G	20, 80
CR14	115	DB125-IC	166	FDC-50	72	FSFD2-CS1	79
CR15	115	DB150-IC	166	FDC-50G	17, 73	FSFD2-CS2	79
CW19	117	DB200-IC	166	FDC-75	72	FSFD2-CS3	79
CW20	117	DB250-IC	166	FDC-75G	17, 73	FSFD2-CS4	79
CW21	117	DB300-IC	166	FDC2-100	77	FSFD2-CS5	79
CW31	117	DB350-IC	166	FDC2-100G	19, 78	FSFD2-CS6	79
CW32	117	DB38-IC	166	FDC2-50	77	FSFDCG	20, 76, 80
CW41	117	DB3845-IC	167	FDC2-50G	19, 78	FSFDCM1	76
CW42	117	DB3890-IC	166	FDC2-75	77	FSFDCM1G	20, 80
CW43	117	DB400-IC	166	FDC2-75G	19, 78	FSFDCM2	76
CW51	117	DB50-IC	166	FDCT-100	74	FSFDCM2G	20, 80
CW52	117	DB5045-IC	167	FDCT-100G	18, 75	FSFDCM3	76
CW53	117	DB5090-IC	166	FDCT-50	74	FSFDCM3G	20, 80
CW54	117	DB75-IC	166	FDCT-50G	18, 75	FSFDCS1	76
CW61	117	DB7545-IC	167	FDCT-75	74	FSFDCS2	76
CW62	117	DB7590-IC	166	FDCT-75G	18, 75	FSFDCS3	76
CW63	117	DBC-38	168	FDT-100	74	FSFDCS4	76
CW64	117	DBC-50	168	FDT-100G	18, 75	GL70	100
CW65	117	DBC-75	168	FDT-50	74	GL71	100
CW71	117	DBS-38	168	FDT-50G	18, 75	GL72	100
CW72	117	DBS-50	168	FDT-75	74	GL73	100
CW73	117	DBS-75	168	FDT-75G	18, 75	GL74	100
CW74	117	E35	119	FS-100	72	GL75	100
CW75	117	E36	119	FS-100G	17, 73	GL76	100
CW76	117	E37	119	FS-50	72	GL77	100
CW81	117	E38	119	FS-50G	17, 73	GL78	100
CW82	117	EDG100	206	FS-75	72	GL79	100
CW83	117	EDG125	206	FS-75G	17, 73	GL80	100
CW84	117	EDG150	206	FS2-100	77	GL81	100
CW85	117	EDG200	206	FS2-100G	19, 78	GUAB75	34, 38
CW86	117	EDG250	206	FS2-50	77	GUAC100	34, 38
CW87	117	EDG300	206	FS2-50G	19, 78	GUAC50	34, 38
CW91	117	EDG50	206	FS2-75	77	GUAC75	34, 38



INDEX BY CATALOG NUMBER

Catalog #	Page	Catalog #	Page	Catalog #	Page	Catalog #	Page
GUAL100	35, 39	HCR46	116	LB4AT	122	LL1ACG	63
GUAL50	35, 39	HCR47	116	LB4ATCG	125	LL1AT	123
GUAL75	35, 39	ICC-400	92	LB4CA	65, 128	LL1ATCG	126
GUAT100	35, 39	JBDX-100	42	LB4G	14, 53	LL1CA	66, 129
GUAT50	35, 39	JBDX-100G	8, 43	LB5	50	LL1G	15, 54
GUAT75	35, 39	JBDX-50	42	LB57F7	56	LL2	51
HCR1	116	JBDX-50G	8, 43	LB5A	59	LL27F7	57
HCR2	116	JBDX-75	42	LB5ACG	62	LL2A	60
HCR3	116	JBDX-75G	8, 43	LB5AT	122	LL2ACG	63
HCR4	116	JBDXG	8, 42, 43	LB5ATCG	125	LL2AT	123
HCR5	116	JBKB	42	LB5CA	65, 128	LL2ATCG	126
HCR6	116	JBKBG	8, 43	LB5G	14, 53	LL2CA	66, 129
HCR7	116	KC1AST	226	LB6	50	LL2G	15, 54
HCR8	116	KC2AST	226	LB67F7	56	LL3	51
HCR9	116	KC2ST	226	LB6A	59	LL37F7	57
HCR10	116	KC3AST	226	LB6ACG	62	LL3A	60
HCR11	116	KC4AST	226	LB6AT	122	LL3ACG	63
HCR12	116	KC4SO	226	LB6ATCG	125	LL3AT	123
HCR13	116	KC4ST	226	LB6CA	65, 128	LL3ATCG	126
HCR14	116	KC6SO	226	LB6G	14, 53	LL3CA	66, 129
HCR15	116	KC6ST	226	LB7	50	LL3G	15, 54
HCR16	116	KC8SO	226	LB77F7	56	LL4	51
HCR17	116	KC8ST	226	LB7A	59	LL47F7	57
HCR18	116	LB1	50	LB7ACG	62	LL4A	60
HCR19	116	LB1A	59	LB7AT	122	LL4ACG	63
HCR20	116	LB17F7	56	LB7ATCG	125	LL4AT	123
HCR21	116	LB1ACG	62	LB7G	14, 53	LL4ATCG	126
HCR22	116	LB1AT	122	LB8	50	LL4CA	66, 129
HCR23	116	LB1ATCG	125	LB87F7	56	LL4G	15, 54
HCR24	116	LB1CA	65, 128	LB8A	59	LL5	51
HCR25	116	LB1G	14, 53	LB8ACG	62	LL57F7	57
HCR26	116	LB2	50	LB8AT	122	LL5A	60
HCR27	116	LB27F7	56	LB8ATCG	125	LL5ACG	63
HCR28	116	LB2A	59	LB8G	14, 53	LL5AT	123
HCR29	116	LB2ACG	62	LB9	50	LL5ATCG	126
HCR30	116	LB2AT	122	LB97F7	56	LL5CA	66, 129
HCR31	116	LB2ATCG	125	LB9A	59	LL5G	15, 54
HCR32	116	LB2CA	65, 128	LB9ACG	62	LL6	51
HCR33	116	LB2G	14, 53	LB9AT	122	LL67F7	57
HCR34	116	LB3	50	LB9ATCG	125	LL6A	60
HCR35	116	LB37F7	56	LB9G	14, 53	LL6ACG	63
HCR36	116	LB3A	59	LB10	50	LL6AT	123
HCR37	116	LB3ACG	62	LB107F7	56	LL6ATCG	126
HCR38	116	LB3AT	122	LB10A	59	LL6CA	66, 129
HCR39	116	LB3ATCG	125	LB10ACG	62	LL6G	15, 54
HCR40	116	LB3CA	65, 128	LB10AT	122	LL7	51
HCR41	116	LB3G	14, 53	LB10ATCG	125	LL77F7	57
HCR42	116	LB4	50	LB10G	14, 53	LL7A	60
HCR43	116	LB47F7	56	LL1	51	LL7ACG	63
HCR44	116	LB4A	59	LL17F7	57	LL7AT	123
HCR45	116	LB4ACG	62	LL1A	60	LL7ATCG	126



INDEX BY CATALOG NUMBER

Catalog #	Page	Catalog #	Page	Catalog #	Page	Catalog #	Page
LL7G	15, 54	LR4ATCG	126	LT28	161	MLB150A	49
LL8	51	LR4CA	66, 129	LT28T	161	MLB150G	10, 45
LL87F7	57	LR4G	15, 54	LT29	161	MLB200A	49
LL8A	60	LR5	51	LT29T	161	MLB200G	10, 45
LL8ACG	63	LR57F7	57	LT30	161	MLB250A	49
LL8AT	123	LR5A	60	LT30T	161	MLB250G	10, 45
LL8ATCG	126	LR5ACG	63	LT31	161	MLB300A	49
LL8G	15, 54	LR5AT	123	LT31T	161	MLB300G	10, 45
LL9	51	LR5ATCG	126	LT32	161	MLB350A	49
LL97F7	57	LR5CA	66, 129	LT32T	161	MLB350G	10, 45
LL9A	60	LR5G	15, 54	LT33	161	MLB400A	49
LL9ACG	63	LR6	51	LT33T	161	MLB400G	10, 45
LL9AT	123	LR67F7	57	LT34	161	MLL100G	11, 46
LL9ATCG	126	LR6A	60	LT34T	161	MLL125G	11, 46
LL9G	15, 54	LR6ACG	63	LT35	162	MLL150G	11, 46
LL10	51	LR6AT	123	LT35T	162	MLL200G	11, 46
LL107F7	57	LR6ATCG	126	LT36	162	MLR100G	12, 47
LL10A	60	LR6CA	66, 129	LT36T	162	MLR125G	12, 47
LL10ACG	63	LR6G	15, 54	LT37	162	MLR150G	12, 47
LL10AT	123	LR7	51	LT37T	162	MLR200G	12, 47
LL10ATCG	126	LR77F7	57	LT38	162	MT100G	13, 48
LL10G	15, 54	LR7A	60	LT38T	162	MT125G	13, 48
LR1	51	LR7ACG	63	LT39	162	MT150G	13, 48
LR17F7	57	LR7AT	123	LT39T	162	MT200G	13, 48
LR1A	60	LR7ATCG	126	LT40	162	NS2	213
LR1ACG	63	LR7G	15, 54	LT40T	162	NS7A	213
LR1AT	123	LR8	51	LT47	161	NS9	213
LR1ATCG	126	LR87F7	57	LT47T	161	NS11	213
LR1CA	66, 129	LR8A	60	LT60	161	NTC-100	102
LR1G	15, 54	LR8ACG	63	LT60T	161	NTC-100RT	104
LR2	51	LR8AT	123	LT61	161	NTC-100T	102
LR27F7	57	LR8ATCG	126	LT61T	161	NTC-100TRT	104
LR2A	60	LR8G	15, 54	LT65	162	NTC-125	102
LR2ACG	63	LR9	51	LT65T	162	NTC-125RT	104
LR2AT	123	LR97F7	57	LT66	162	NTC-125T	102
LR2ATCG	126	LR9A	60	LT66T	162	NTC-125TRT	104
LR2CA	66, 129	LR9ACG	63	LT67	162	NTC-150	102
LR2G	15, 54	LR9AT	123	LT67T	162	NTC-150RT	104
LR3	51	LR9ATCG	126	LT68	162	NTC-150T	102
LR37F7	57	LR9G	15, 54	LT68T	162	NTC-150TRT	104
LR3A	60	LR10	51	MC100G	9, 44	NTC-200	102
LR3ACG	63	LR107F7	57	MC125G	9, 44	NTC-200RT	104
LR3AT	123	LR10A	60	MC150G	9, 44	NTC-200T	102
LR3ATCG	126	LR10ACG	63	MC200G	9, 44	NTC-200TRT	104
LR3CA	66, 129	LR10AT	123	MC250G	9, 44	NTC-250	102
LR3G	15, 54	LR10ATCG	126	MC300G	9, 44	NTC-250RT	104
LR4	51	LR10G	15, 54	MC350G	9, 44	NTC-250T	102
LR47F7	57	LT25	162	MC400G	9, 44	NTC-250TRT	104
LR4A	60	LT25T	162	MLB100G	10, 45	NTC-300	102
LR4ACG	63	LT27	161	MLB125A	49	NTC-300RT	104
LR4AT	123	LT27T	161	MLB125G	10, 45	NTC-300T	102



INDEX BY CATALOG NUMBER

Catalog #	Page	Catalog #	Page	Catalog #	Page	Catalog #	Page
NTC-300TRT	104	P16	118	S1014RT	137	S16ES	108, 139
NTC-350	102	P17	118	S1015	135	S17ES	108, 139
NTC-350RT	104	P18	118	S1015RT	137	S18ES	108, 139
NTC-350T	102	P19	118	S1015D	135	S4060	135
NTC-350TRT	104	P20	118	S1015DRT	137	S4060RT	137
NTC-400	102	P21	118	S1015E	135	S4061	135
NTC-400RT	104	PAR100	205	S1015ERT	137	S4061RT	137
NTC-400T	102	PAR125	205	S1015E1	135	S4062	135
NTC-400TRT	104	PAR150	205	S1015E1RT	137	S4062RT	137
NTC-50	102	PAR200	205	S1015F	135	S4063	135
NTC-500	102	PAR250	205	S1015FRT	137	S4063RT	137
NTC-50RT	104	PAR300	205	S1016	136	S4064	135
NTC-50T	102	PAR350	205	S1016RT	138	S4064RT	137
NTC-50TRT	104	PAR400	205	S1017	136	S4065	135
NTC-600	102	PAR50	205	S1017RT	138	S4065RT	137
NTC-75	102	PAR75	205	S1018	136	S4065D	135
NTC-75RT	104	PEF100	110	S1018RT	138	S4065DRT	137
NTC-75T	102	PEF125	110	S1019	136	S4065E	135
NTC-75TRT	104	PEF150	110	S1019RT	138	S4065ERT	137
NTCC-100	103	PEF200	110	S1020	136	S4065E1	135
NTCC-100RT	105	PEF50	110	S1020RT	138	S4065E1RT	137
NTCC-125	103	PEF75	110	S1021	136	S4065F	135
NTCC-125RT	105	PEM100	110	S1021RT	138	S4065FRT	137
NTCC-150	103	PEM125	110	S1021D	136	S4066	133
NTCC-150RT	105	PEM150	110	S1021DRT	138	S4067	133
NTCC-200	103	PEM200	110	S1021E	136	S4068	133
NTCC-200RT	105	PEM50	110	S1021ERT	138	S4069	133
NTCC-250	103	PEM75	110	S1021E1	136	S4070	133
NTCC-250RT	105	QL-50	170	S1021E1RT	138	S4071	133
NTCC-300	103	QL-50D	170	S1021F	136	S4072	133
NTCC-300RT	105	QL-75	170	S1021FRT	138	S4073	133
NTCC-350	103	RA100	205	S1110	133	S4074	133
NTCC-350RT	105	RA125	205	S1111	133	S4075	133
NTCC-400	103	RA150	205	S1112	133	S620	207
NTCC-400RT	105	RA200	205	S1112A	133	SC1	190, 214
NTCC-50	103	RA250	205	S1112B	133	SC2	190, 214
NTCC-500	103	RA300	205	S1112C	133	SC3	190, 214
NTCC-50RT	105	RA350	205	S1112D	133	SC4	190, 214
NTCC-600	103	RA400	205	S1112E	133	SC5	190, 214
NTCC-75	103	RA50	205	S1112E1	133	SCC-100	92
NTCC-75RT	105	RA75	205	S1112F	133	SCC-125	92
OSN100	94	RBC-50	200	S1113	134	SCC-150	92
OSN125	94	S1010	135	S1114	134	SCC-200	92
OSN50	94	S1010RT	137	S1115	134	SCC-250	92
OSN75	94	S1011	135	S1115A	134	SCC-300	92
P10	118	S1011RT	137	S1115B	134	SCC-350	92
P11	118	S1012	135	S1115C	134	SCC-400	92
P12	118	S1012RT	137	S1115D	134	SCC-50	92
P13	118	S1013	135	S1115E	134	SCC-500	92
P14	118	S1013RT	137	S1115E1	134	SCC-600	92
P15	118	S1014	135	S1115F	134	SCC-75	92

INDEX BY CATALOG NUMBER

Catalog #	Page	Catalog #	Page	Catalog #	Page	Catalog #	Page
SLT25-45T	148	SLT35-45TMG	27, 157	SLT40ALT	150	SLT67-45CLTG	30, 160
SLT25T	147	SLT35ALT	150	SLT40CLT	153	SLT67-45TG	27, 157
SLT25-45ALT	151	SLT35CLT	153	SLT40CLTMG	29, 159	SLT67ALT	150
SLT25-45CLT	154	SLT35CLTMG	29, 159	SLT40TMG	26, 156	SLT67CLT	153
SLT25ALT	150	SLT35TMG	26, 156	SLT47T	146	SLT67CLTG	29, 159
SLT25CLT	153	SLT36-45T	148	SLT47ALT	149	SLT67TG	26, 156
SLT27T	146	SLT36T	147	SLT47CLT	152	SLT68-45T	148
SLT27ALT	149	SLT36-45ALT	151	SLT60T	146	SLT68T	147
SLT27CLT	152	SLT36-45CLT	154	SLT60ALT	149	SLT68-45ALT	151
SLT27CLTMG	28, 158	SLT36-45CLTMG	30, 160	SLT60CLT	152	SLT68-45CLT	154
SLT27TMG	25, 155	SLT36-45TMG	27, 157	SLT60CLTMG	28, 158	SLT68-45CLTG	30, 160
SLT28T	146	SLT36ALT	150	SLT60TMG	25, 155	SLT68-45TG	27, 157
SLT28ALT	149	SLT36CLT	153	SLT61T	146	SLT68ALT	150
SLT28CLT	152	SLT36CLTMG	29, 159	SLT61ALT	149	SLT68CLT	153
SLT28CLTMG	28, 158	SLT36TMG	26, 156	SLT61CLT	152	SLT68CLTG	29, 159
SLT28TMG	25, 155	SLT37-45T	148	SLT61CLTMG	28, 158	SLT68TG	26, 156
SLT29T	146	SLT37T	147	SLT61TMG	25, 155	SR100	225
SLT29ALT	149	SLT37-45ALT	151	SLT62T	146	SR125	225
SLT29CLT	152	SLT37-45CLT	154	SLT62ALT	149	SR150	225
SLT29CLTMG	28, 158	SLT37-45CLTMG	30, 160	SLT62CLT	152	SR200	225
SLT29TMG	25, 155	SLT37-45TMG	27, 157	SLT62CLTG	28, 158	SR250	225
SLT30T	146	SLT37ALT	150	SLT62TG	25, 155	SR300	225
SLT30ALT	149	SLT37CLT	153	SLT63T	146	SR350	225
SLT30CLT	152	SLT37CLTMG	29, 159	SLT63ALT	149	SR400	225
SLT30CLTMG	28, 158	SLT37TMG	26, 156	SLT63CLT	152	SR50	225
SLT30TMG	25, 155	SLT38-45T	148	SLT63CLTG	28, 158	SR500	225
SLT31T	146	SLT38T	147	SLT63TG	25, 155	SR75	225
SLT31ALT	149	SLT38-45ALT	151	SLT65-45T	148	SR600	225
SLT31CLT	152	SLT38-45CLT	154	SLT65T	147	SS50	223
SLT31CLTMG	28, 158	SLT38-45CLTMG	30, 160	SLT65-45ALT	151	SS52	223
SLT31TMG	25, 155	SLT38-45TMG	27, 157	SLT65-45CLT	154	SS54	223
SLT32T	146	SLT38ALT	150	SLT65-45CLTG	30, 160	SS56	223
SLT32ALT	149	SLT38CLT	153	SLT65-45TG	27, 157	SS58	223
SLT32CLT	152	SLT38CLTMG	29, 159	SLT65ALT	150	SS60	223
SLT32CLTMG	28, 158	SLT38TMG	26, 156	SLT65CLT	153	SS62	223
SLT32TMG	25, 155	SLT39-45T	148	SLT65CLTG	29, 159	SS64	223
SLT33T	146	SLT39T	147	SLT65TG	26, 156	SS66	223
SLT33ALT	149	SLT39-45ALT	151	SLT66-45T	148	SS68	223
SLT33CLT	152	SLT39-45CLT	154	SLT66T	147	ST10	93
SLT33CLTMG	28, 158	SLT39-45CLTMG	30, 160	SLT66-45ALT	151	ST11	93
SLT33TMG	25, 155	SLT39-45TMG	27, 157	SLT66-45CLT	154	ST12	93
SLT34T	146	SLT39ALT	150	SLT66-45CLTG	30, 160	ST13	93
SLT34ALT	149	SLT39CLT	153	SLT66-45TG	27, 157	ST14	93
SLT34CLT	152	SLT39CLTMG	29, 159	SLT66ALT	150	ST15	93
SLT34CLTMG	28, 158	SLT39TMG	26, 156	SLT66CLT	153	ST16	93
SLT34TMG	25, 155	SLT40-45T	148	SLT66CLTG	29, 159	ST17	93
SLT35-45T	148	SLT40T	147	SLT66TG	26, 156	ST18	93
SLT35T	147	SLT40-45ALT	151	SLT67-45T	148	ST19	93
SLT35-45ALT	151	SLT40-45CLT	154	SLT67T	147	ST20	93
SLT35-45CLT	154	SLT40-45CLTMG	30, 160	SLT67-45ALT	151	ST21	93
SLT35-45CLTMG	30, 160	SLT40-45TMG	27, 157	SLT67-45CLT	154	SWV-4R	204



INDEX BY CATALOG NUMBER

Catalog #	Page	Catalog #	Page	Catalog #	Page
SWV-4S	204	T7A	61	TRC-50T	106
T1	52	T7ACG	64	TRC-600	106
T17F7	58	T7AT	124	TRC-600T	106
T1A	61	T7ATCG	127	TRC-75	106
T1ACG	64	T7G	16, 55	TRC-75T	106
T1AT	124	T8	52	TRCC-100	107
T1ATCG	127	T87F7	58	TRCC-125	107
T1CA	67, 130	T8A	61	TRCC-150	107
T1G	16, 55	T8ACG	64	TRCC-200	107
T2	52	T8AT	124	TRCC-250	107
T27F7	58	T8ATCG	127	TRCC-300	107
T2A	61	T8G	16, 55	TRCC-350	107
T2ACG	64	T9	52	TRCC-400	107
T2AT	124	T97F7	58	TRCC-50	107
T2ATCG	127	T9A	61	TRCC-500	107
T2CA	67, 130	T9ACG	64	TRCC-600	107
T2G	16, 55	T9AT	124	TRCC-75	107
T3	52	T9ATCG	127	TWH10	98
T37F7	58	T9G	16, 55	TWH20	98
T3A	61	T10	52	TWH30	98
T3ACG	64	T107F7	58	TWH40	98
T3AT	124	T10A	61	TWH50	98
T3ATCG	127	T10ACG	64	TWH60	98
T3CA	67, 130	T10AT	124	TWH70	98
T3G	16, 55	T10ATCG	127	TWH80	98
T4	52	T10G	16, 55	TWH90	98
T47F7	58	TB1	52	TWH100	98
T4A	61	TB2	52	UF10	193
T4ACG	64	TB3	52	UF20	193
T4AT	124	TB4	52		
T4ATCG	127	TB5	52		
T4CA	67, 130	TB6	52		
T4G	16, 55	TRC-100	106		
T5	52	TRC-100T	106		
T5A	61	TRC-125	106		
T57F7	58	TRC-125T	106		
T5ACG	64	TRC-150	106		
T5AT	124	TRC-150T	106		
T5ATCG	127	TRC-200	106		
T5CA	67, 130	TRC-200T	106		
T5G	16, 55	TRC-250	106		
T6	52	TRC-250T	106		
T67F7	58	TRC-300	106		
T6A	61	TRC-300T	106		
T6ACG	64	TRC-350	106		
T6AT	124	TRC-350T	106		
T6ATCG	127	TRC-400	106		
T6CA	67, 130	TRC-400T	106		
T6G	16, 55	TRC-50	106		
T7	52	TRC-500	106		
T77F7	58	TRC-500T	106		



[illegible]

HOT DIPPED GALVANIZED/ZINC PLATED DOUBLE COATE PROCESS



STANDARD FINISH:

Hot Dipped Galvanized/
Zinc Plated

All of SEPCO's Malleable Iron **Hot Dipped Galvanized** products are manufactured from Malleable Iron, then **Hot Dipped Galvanized** and then processed with an additional layer of zinc plating to produce a better finish "Double Coat." This process offers less corrosion over time and adds an additional layer of protection.

Our MI casting is a grade of 32-5-10. After casting, the item is **Hot Dipped Galvanized** to coat the iron by submerging in molten zinc at a temperature around 850° F. After that, an additional zinc plating is added for the "Double Coat." The difference between Zinc Plated and Hot Dip Galvanized is the mil thickness in the plating process. For the Zinc Plated, the thickness of coating is between 5–20 microns, while the **Hot Dipped Galvanized** thickness of coating is between 75 to 85 microns. The total amount of protective layering is roughly 80–105 microns for our "Double Coat." This supersedes any UL requirements.



TERMS & CONDITIONS & RMA POLICY

(SUBJECT TO CHANGE WITHOUT NOTICE)

- 1. ORDER ACCEPTANCE:** Purchaser agrees that all Purchase Orders and final contracts between the purchaser and SEPCO are subject to the terms and conditions indicated in this catalog. Any order containing different or additional terms to those set forth herein shall be deemed material alterations and are subject to specific approval by SEPCO.
- 2. MINIMUM ORDER:** A minimum charge of \$300.00 will be made for each invoice.
- 3. CASH DISCOUNT:** Upon approved credit, the following terms will apply; 2% Cash Discount, 10th prox. net 60 days. To earn this discount, invoices dated 1st through 25th inclusive are payable on 10th of the following month. Invoices dated 26th through 31st inclusive are considered for cash discount purposes only as being dated the first day of the following month and are payable as such. Invoices bear the date the order was shipped. Cash discount does not apply to transportation, special packaging, or other special preparation or handling charges.
- 4. CLAIMS:** All SEPCO shipments are made F.O.B. shipping location. Title to the goods and risk of loss passes to the purchaser on delivery to the common carrier at the shipping point. Any claim for loss or damage in transit should be filed by the Purchaser with the common carrier involved. SEPCO will not be responsible for any losses after having received "in good order" receipts from the transportation company. Claims for shortages must be reported in writing to SEPCO in Brooklyn, New York within 30 days after receiving shipments. Claims not reported within this time-period will not be allowed.
- 5. RETURNS GOODS POLICY:** SEPCO will accept items of its manufacture for return and material credit subject to the following conditions. Prior formal approval with an RMA number must be secured from the home office in Brooklyn, New York. This request may be initiated by the local SEPCO sales representative and must contain the following information: dates, catalogue number, quantities, invoice and order numbers and the reason for the return request.
 - All material to be returned must be currently catalogued items, in resaleable condition, in full SEPCO cartons & quantities. No broken cartons will be accepted.
 - Credits will be allowed only in quantities received by SEPCO and subject to SEPCO inspection.
 - A minimum restocking charge of 25% will be applied to all return materials.
 - Materials not allowed on RMA include the following: special goods not in the catalogue, discontinued goods, other customized goods, catalogue goods modified to customer specification, and goods deemed nonreturnable by seller. Other goods not allowed include goods shipped directly to a buyer's customer to goods being returned directly from the customer's stock.
 - Material purchased more than 12 months prior to the return request is not returnable.
 - Return shipments must be prepaid to the designated SEPCO warehouse accompanied by the authorized RMA.
 - Credits will be issued in the form of material credit only. Cash refunds will not be made.
 - Goods must be returned within 60 days of RMA issuance, or the RMA will be void.
 - All returns are subject to inspection and final credit approval.
- 6. LIMITED WARRANTY:** SEPCO fittings, if properly used, are guaranteed against mechanical, electrical and physical defects for a period of one year from the date of shipment from our factory. No other express warranties or guarantees are intended or implied and are expressly disclaimed. Our obligation under this guarantee shall be limited to furnishing new fittings in exchange for fittings inspected by us and found to be defective and any other direct or consequential costs are expressly excluded.
- 7. PRICES:** Subject to change without notice and are those in effect at the time of shipment. Any written quotations for specific quantities will be protected for 30 days unless otherwise noted in the original quote.
- 8. SPECIAL ORDERS:** Orders for special items not listed in our catalogue, which include items modified per customer specification or unusual quantities of a standard catalogue item produced especially for an order, are accepted only on a non-cancellable nonrefundable basis.
- 9. GENERAL NOTE:** SEPCO fittings meet the requirement of Federal Specifications:
 - W-F-406C Fittings for cable, power, electrical and conduit, metal flexible
 - W-F-408D Fittings used for conduit, metal, rigid (thick wall & thin wall EMT) type
 - Underwriters Laboratories listings UL-514B
 - Products are manufactured per Nema FB-1 to be utilized according to the National Electric Code
 - NAED/DCI # 78-5994
 - Product weights shown in our catalogue are approximate and are meant for shipping information only.



Driven by Value. Defined by Performance. Powered by Service.

At SEPCO, we don't just supply products — we deliver complete, end-to-end solutions that drive performance and reliability.

Powered by service, we deliver solutions. From our innovative new offerings to our streamlined shipping systems powered by advanced technology, we're committed to minimizing downtime and maximizing efficiency. Our real-time customer service ensures you're always connected, while our solution-based approach guarantees the right products and services — exactly when and where you need them.

SEPCO CUSTOMERS RECEIVE:

High-Quality Products

- One of the largest inventories of electrical fittings
- More than 2,250 SKU's each carrying the UL Listing
- Engineering that meets the highest-quality standards

Exceptional Service


- Personalized customer interaction
- Product delivery that is on time, every time

Superior Availability

- Unsurpassed inventory of fittings in trade sizes from 1/2" through 6"
- Rigid inventory control system ensures orders are filled completely and accurately

Outstanding Communication

- Product experts employ their thorough knowledge to meet — and surpass — each customer's needs and expectations




STEELELECTRIC
PRODUCTS



www.sepco-usa.com

Steel Electric Products Company, Inc.,
6301 New Utrecht Avenue, Brooklyn, New York 11219-5496
Telephone: 718.259.6100 • 1.800.626.1223 Fax: 718.331.1874

ESTABLISHED
1938

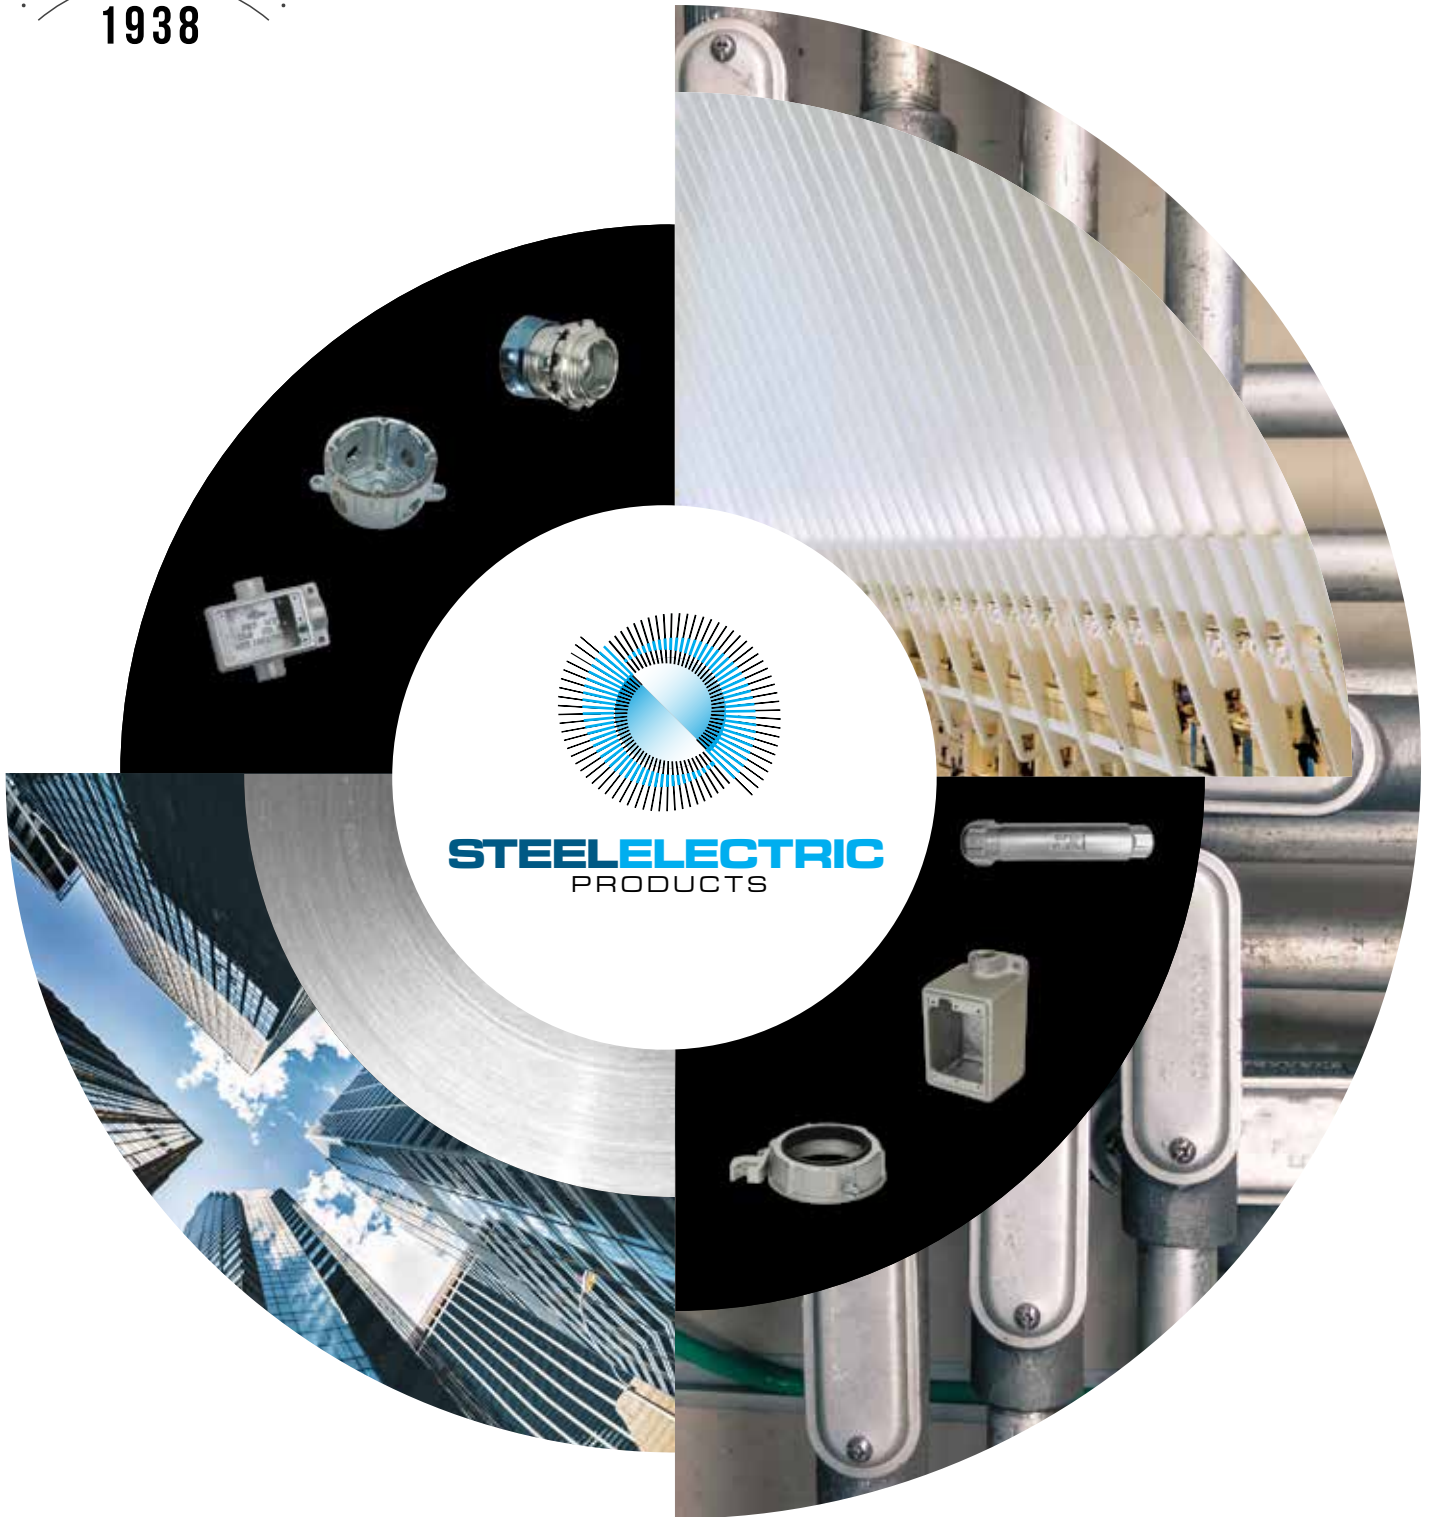

SEPCO-USA.COM

718.259.6100 1.800.626.1223 FAX.1.718.331.1874



SCAN ME