
3" INGROUND 120V

5032

WAC LANDSCAPE LIGHTING



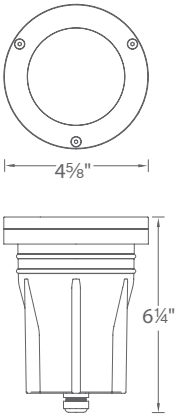

Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION

Landscape Wall Wash luminaire

FEATURES

- Adjustable beam angle
- Integral dimmer
- IP67 rated, protected from temporary immersion under water
- Drive over up to 4500lbs
- Solid diecast brass or corrosion resistant aluminum
- Available concrete pour kit
- 6' lead wire and wire nuts included
- Maintains constant lumen output against voltage drop
- UL 1598 listed for indoor and outdoor use
- Not suitable to use with external dimmers

SPECIFICATIONS

Input: 110V - 120VAC
Power: 3W to 11.5W (Use VA value for sizing the transformer and calculate voltage drop.)
Brightness: 65 lm to 515 lm
Beam Angle: 15° to 60°
CRI: 85
Rated Life: 45,000 hours

IEC safety Standard	Walk over	Drive over
Resistance to static load test	Yes (1125lbs)	Yes (4496lbs)
Resistance to torque and shear loads test	N/A	Yes

ORDERING NUMBER


		Color Temp		Finish	
5032	*3" Inground 120V*	**30**	*3000K*	**BZ** **BBR**	*Bronze on Aluminum* *Bronze on Brass*

5032-30____

Example: **5032-30BBR**

Module Replacement

3000K	**M5032LE-30BZ**



waclighting.com
Phone (800) 526.2588
Fax (800) 526.2585


Headquarters, East Manufacturing Facility
44 Harbor Park Drive
Port Washington, NY 11050

South East Manufacturing Facility
1600 Distribution Ct
Lithia Springs, GA 30122

Central Manufacturing Facility
1700 South J Elmer Freeway, Ste 100
Cedar Hill, TX 75104


West Manufacturing Facility
1750 S Archibald Ave
Ontario, CA 91761

WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement program.

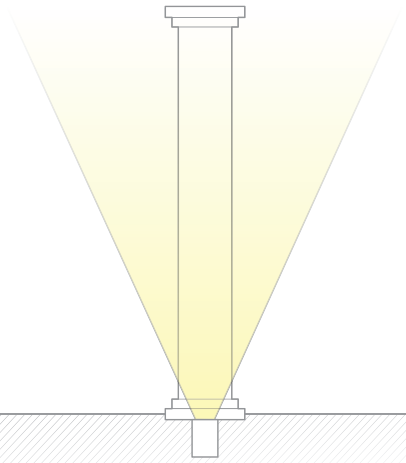


Typical Inground

Most light output goes into the air, causing light pollution



Adjust Beam Angles

Presets at
15°, 30°, 45°, 60°

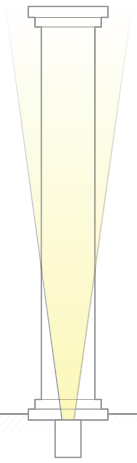


Adjustable WAC Inground

Adjust the light to where you need it





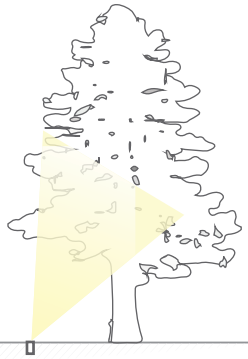

Control Brightness

Adjustable from 65lm to 515lm
Presets Comparable to
10W, 25W, 35W, 50W, 75W Halogen source

waclighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters, East Manufacturing Facility
44 Harbor Park Drive
Port Washington, NY 11050

South East Manufacturing Facility
1600 Distribution Ct
Lithia Springs, GA 30122

Central Manufacturing Facility
1700 South J Elmer Freeway, Ste 100
Cedar Hill, TX 75104

West Manufacturing Facility
1750 S Archibald Ave
Ontario, CA 91761

WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement program.

Rock Guard

Protects the fixture face



5030-GRD-BZ
Bronze on Aluminum

5030-GRD-BBR
Bronze on Brass

Anti-Glare Shroud

Reduce glare



5030-SHR-BZ
Bronze on Aluminum

5030-SHR-BBR
Bronze on Brass

Non-Slip Lens



5030-NSLEN-CL
Tempered Glass

Optics

Enhances saturation of florals and foliage



LENS-25-AMB
Amber

LENS-25-RED
Red

LENS-25-FR
Frosted

LENS-25-GRN
Green

LENS-25-BLU
Blue


LENS-25-HCL
Honeycomb Louver
Reduces glare

Concrete Pour Kit

For installation in concrete
Five ½" NPT threaded holes, PC



5030-PIP-PVC
Shown with temporary dense foam cap

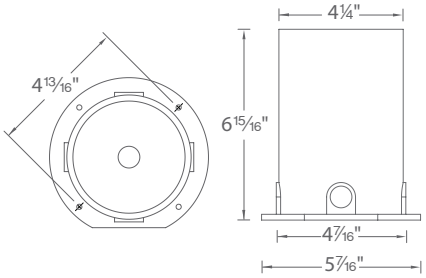

waclighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters, East Manufacturing Facility
44 Harbor Park Drive
Port Washington, NY 11050

South East Manufacturing Facility
1600 Distribution Ct
Lithia Springs, GA 30122

Central Manufacturing Facility
1700 South J Elmer Freeway, Ste 100
Cedar Hill, TX 75104

West Manufacturing Facility
1750 S Archibald Ave
Ontario, CA 91761