



dweLED

By WAC





## dweLED

LED Pendants + Chandeliers.....	2
LED Sconces + Bath.....	44
LED Sconces .....	58
LED Bedside + Swing Arms .....	70
LED Ceiling Mounts .....	82
LED Outdoor .....	90





# LED Pendants + Chandeliers

Providing an even layer of energy-efficient illumination for modern interiors and exteriors, dweLED debuts an innovative selection of LED pendants and chandeliers. From free-flowing silhouettes and solid drum profiles to multi-armed eclectic and geometric designs, these luminaires are ideal for mid-upscale homes, multi-family and assisted living residences, as well as hospitality applications.



# LACEY



PD-45316-BK/GO



PD-45322-BK/GO



## 16" & 22" LED PENDANT

- Three 12" and one 6" downrods included (additional downrods available)
- Spin-on round canopy with minimal hardware
- May be mounted on a sloped ceiling
- Thin canopy conceals a proprietary 120V/277V driver

Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 5% ELV, 100% - 10% TRIAC  
 Rated Life: 54,000 hours  
 Input: 120V/277V


**PD-45316:** Size: 16" Watt: 20W  
 LED Lumens: 884  
 Delivered Lumens: 633

**PD-45322:** Size: 22" Watt: 48W  
 LED Lumens: 2,958  
 Delivered Lumens: 1,003

### Finish

**BK/GO:**  
 Black/Gold

Example: **PD-45322-BK/GO**

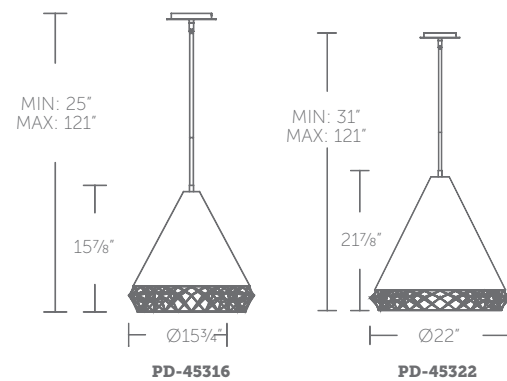

“Elegance edged in gold metalwork. A true revelation.”

PD-45322-BK/GO shown





“ A new definition of dark + light.  
A white shade peaks out from a bold  
black dome. Illuminating with grace. ”

PD-23316-BK shown



PD-23316-BK



## 16" LED PENDANT

- Downlight with acrylic shade
- Three 12" and one 6" downrods included (additional downrods available)
- Spin-on round canopy with minimal hardware
- May be mounted on a sloped ceiling
- Thin canopy conceals a proprietary 120V/277V driver


Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 5% ELV, 100% - 5% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V/277V

**PD-23316:** Size: 16" Watt: 29W  
 LED Lumens: 1090  
 Delivered Lumens: 781

### Finish



Example: **PD-23316-BK**

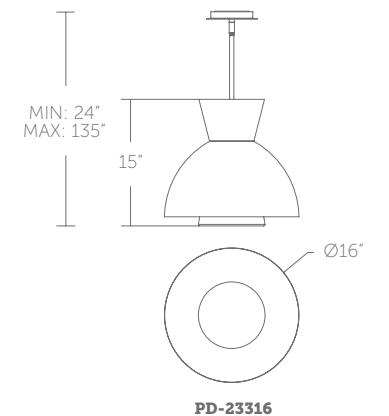



# STRUM



PD-35320-BK



## 20" LED PENDANT

- Downlight with 2 layer fabric shade and acrylic diffuser
- Three 12" and one 6" downrods included (additional downrods available)
- Spin-on round canopy with minimal hardware
- May be mounted on a sloped ceiling
- ACLED driverless technology


Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 5% ELV  
 Rated Life: 50,000 hours  
 Input: 120V

**PD-35320:** Size: 20" Watt: 24W  
 LED Lumens: 1,348  
 Delivered Lumens: 877

### Finish

**BK:**  
 Black

Example: **PD-35320-BK**

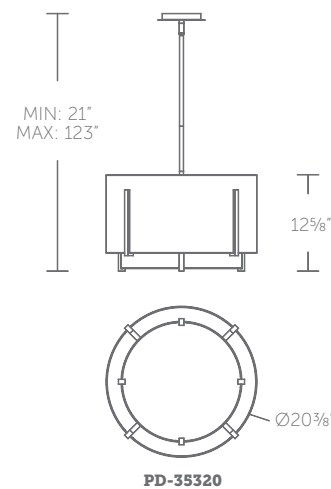

“ Double vision. Delivering visual elegance, two shades are better than one. ”

PD-35320-BK shown





“An inside-out design. Sleek lines encase soft fabric and glowing light.”

PD-33331-BK shown



PD-33331-AB



PD-33331-BK



## 31" LED CHANDELIER

- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Slide-on rectangular canopy with minimal hardware
- May be mounted on a sloped ceiling
- Thin canopy conceals a proprietary 120V/277V driver




Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 5% ELV, 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V/277V

### Finish

- AB:** Aged Brass
- BK:** Black

**PD-33331:** Size: 31" Watt: 29W  
 LED Lumens: 1,367 Delivered Lumens: 946

Example: **PD-33331-BK**

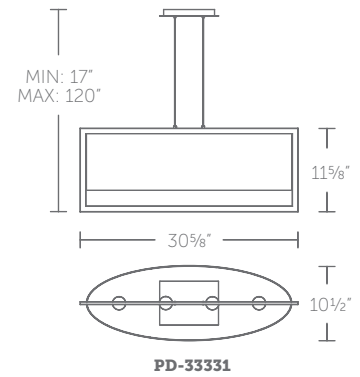

PD-33331



See complementary pieces on page 12-13.





PD-33312-BK



PD-33312-AB



## 12" LED MINI PENDANT

- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Slide-on square canopy with minimal hardware
- May be mounted on a sloped ceiling
- Thin canopy conceals a proprietary 120V/277V driver




Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V/277V

**PD-33312:** Size: 12" Watt: 8W  
 LED Lumens: 434 Delivered Lumens: 289

### Finish

- AB:** Aged Brass
- BK:** Black

Example: **PD-33312-AB**

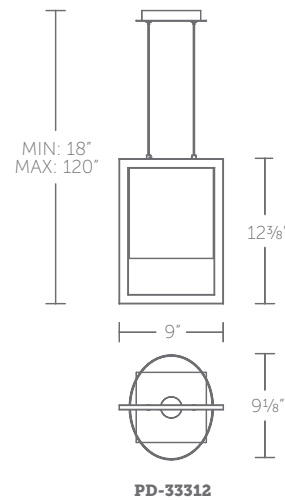

See complementary pieces on page 10-11.



“ An inside-out design. Sleek lines encase soft fabric and glowing light. ”

PD-33312-AB shown





“Mysterious as the moon. Opal glass casts a diaphanous glow through creamy decorative alabaster.”

PD-43310-BK shown



# MOONSTONE

## 10" LED MINI PENDANT



- Downlight with faux alabaster exterior and opal glass shade
- Faux alabaster. Like real stone, each piece is unique
- Three 12" and one 6" downrods included (additional downrods available)
- Spin-on round canopy with minimal hardware
- May be mounted on a sloped ceiling
- Thin canopy conceals a proprietary 120V/277V driver


Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 50,000 hours  
 Input: 120V/277V

**PD-43310:** Size: 10" Watt: 11W  
 LED Lumens: 815  
 Delivered Lumens: 641

### Finish

**BK:**  
 Black

Example: **PD-43310-BK**

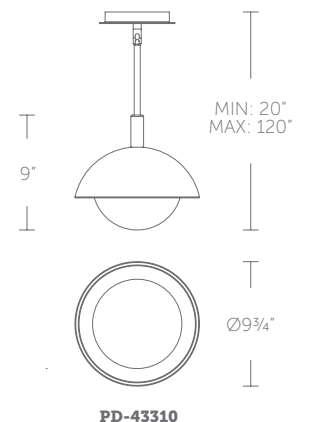





# CHANTILLY

## 14" LED PENDANT



- Downlight with faux alabaster interior and clear glass exterior
- Faux alabaster. Like real stone, each piece is unique
- Three 12" and one 6" downrods included (additional downrods available)
- Spin-on round canopy with minimal hardware
- Thin canopy conceals a proprietary 120V/277V driver


Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 5% ELV, 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V/277V

**PD-25314:** Size: 14" Watt: 15W  
 LED Lumens: 1,482  
 Delivered Lumens: 1,106

### Finish



Example: **PD-25314-BK**

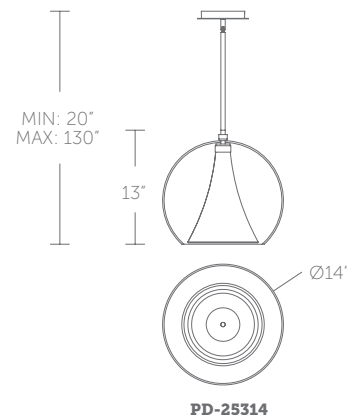

“ An unexpected first impression.  
 Glowing alabaster captured  
 within a clear crystal globe. ”

**PD-25314-BK** shown





“ Twisting in and around like a graceful knot. A play of light and shadow in an eternal flowing motion. ”

PD-19324-AB shown



PD-19324-BK



## 24" LED CHANDELIER

- Omnidirectional illumination
- Light source with etched acrylic tube exterior and silicone interior
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Spin-on round canopy with minimal hardware
- Thin canopy conceals a proprietary 120V/277V driver



Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 5% ELV, 100% - 10% TRIAC  
 Rated Life: 54,000 hours  
 Input: 120V/277V

**PD-19324:** Size: 24" Watt: 29W  
 LED Lumens: 5,075 Delivered Lumens: 2,462


### Finish

- AB:** Aged Brass
- BK:** Black

Example: **PD-19324-AB**



See complementary pieces on page 20-21.

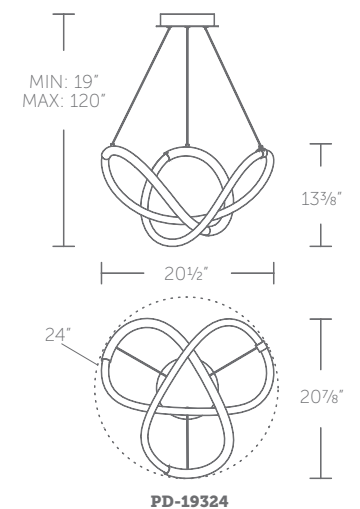





PD-19348-BK



48" LED CHANDELIER

- Omnidirectional illumination
- Light source with etched acrylic tube exterior and silicone interior
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Oval canopy
- Thin canopy conceals a proprietary 120V-220V-277V driver




Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 5% 0-10V,  
 100% - 10% TRIAC  
 Rated Life: 54,000 hours  
 Input: 120V-277V

Finish

- AB: Aged Brass
- BK: Black

Example: PD-19348-AB

PD-19348: Size: 48" Watt: 45W  
 LED Lumens: 6,685 Delivered Lumens: 3,243

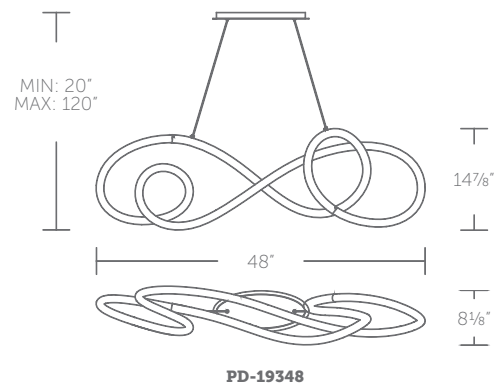

See complementary pieces on page 18-19.



“ Twisting in and around like a graceful knot, a play of light and shadow in an eternal flowing motion. ”

PD-19348-AB shown





“ Squaring the circle. LED infinity captured inside a clean, cubed architectural delight. ”

PD-57317-BK shown



PD-57327-BK



PD-57317-BK




## 17" & 26" LED PENDANT

- Omnidirectional illumination with silicone diffuser
- Three 12" and one 6" downrods included (additional downrods available)
- Spin-on round canopy with minimal hardware
- May be mounted on a sloped ceiling
- Thin canopy conceals a proprietary 120V/277V driver

Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 5% ELV, 100% - 5% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V/277V

**PD-57317:** Size: 17" Watt: 28W  
 LED Lumens: 2,149  
 Delivered Lumens: 1,092

**PD-57327:** Size: 26" Watt: 35W  
 LED Lumens: 2,715  
 Delivered Lumens: 1,380

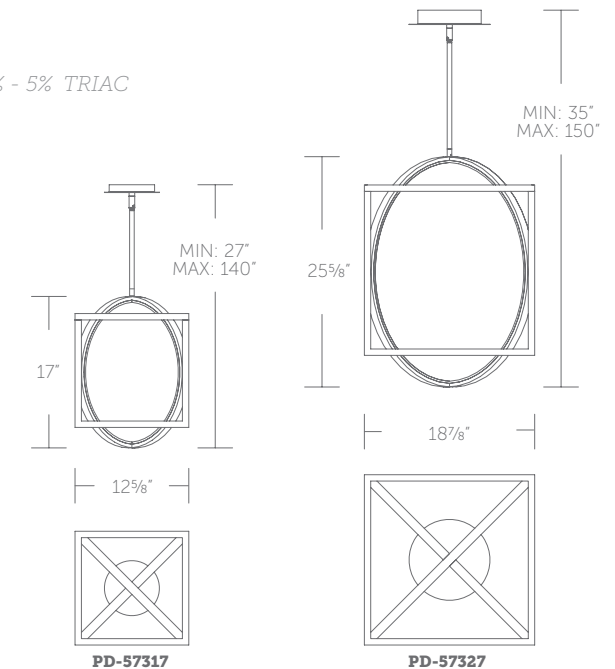

### Finish



Example: PD-57317-BK





# DOME

## 10" LED MINI PENDANT



- Downlight with black exterior and gold interior
- Layered acrylic shade with etched interior and clear exterior
- Low profile, adjustable powered aircraft cables for an ultra-clean look with matching color
- Spin-on round canopy with minimal hardware
- Thin canopy conceals a proprietary 120V/277V driver




Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V/277V

**PD-37310:** Size: 10" Watt: 8W  
 LED Lumens: 658  
 Delivered Lumens: 394

### Finish



Example: **PD-37310-BK/GO**

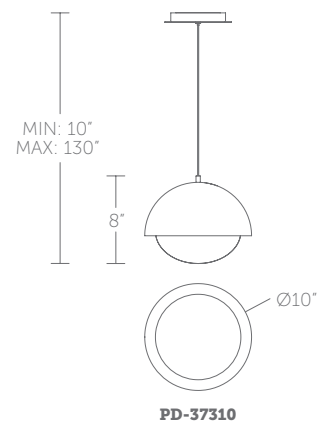

“Half dark, half bright. An opaque dome shade tops a glowing sphere of light.”

**PD-37310-BK/GO** shown



# RINGLET



“An upscale, luminous circle of soothing illumination.”

PD-27308-AB shown



PD-27308-AB



## 8" LED MINI PENDANT

- Seeded acrylic diffuser
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Spin-on round canopy with minimal hardware
- May be mounted on a sloped ceiling
- Thin canopy conceals a proprietary 120V/277V driver




Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 50,000 hours  
 Input: 120V/277V

**PD-27308:** Size: 8" Watt: 7W  
 LED Lumens: 285  
 Delivered Lumens: 226

### Finish

**AB:**  
 Aged Brass

Example: **PD-27308-AB**

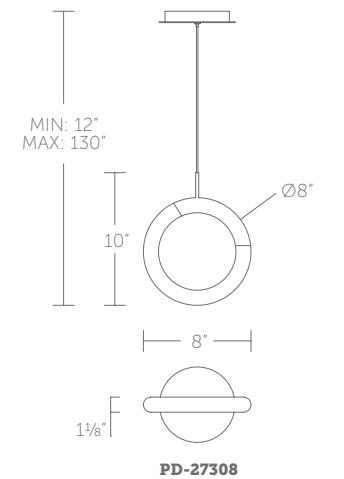





PD-29308-BN



PD-29308-BK

# ICE CUBE

## 8" LED MINI PENDANT



- K9 crystal
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Spin-on round canopy with minimal hardware
- May be mounted on a sloped ceiling
- Thin canopy conceals a proprietary 120V/277V driver




Color Temp: 3500K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 50,000 hours  
 Input: 120V/277V

**PD-29308:** Size: 8" Watt: 11W  
 LED Lumens: 550 Delivered Lumens: 440

### Finish



Example: **PD-29308-AB**

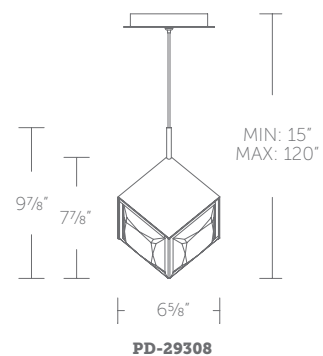

“ Faceted like a hand-cut jewel, adding a dash of chic to a room’s ensemble. ”


PD-29308-AB shown





“Clearly fascinating. Transparent tubes of LED light in a staggered arrangement of illumination.”

PD-51344-BK shown

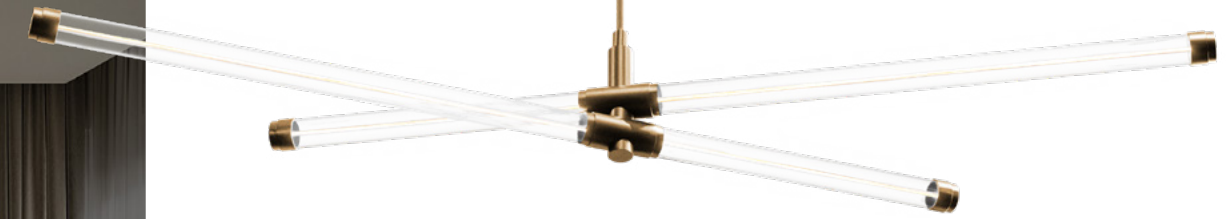

PD-51344-AB



## 44" LED CHANDELIER

- Engineered with new LED filament technology, each LED filament lamp replaceable with quick connector
- Rotatable arms for desired look
- Three 12" and one 6" downrods included (additional downrods available)
- Spin-on round canopy with minimal hardware
- Thin canopy conceals a proprietary 120V/277V driver



Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 50,000 hours  
 Input: 120V/277V

**PD-51344:** Size: 44" Watt: 28W  
 LED Lumens: 2,530  
 Delivered Lumens: 2,024

### Finish

- AB:** Aged Brass
- BK:** Black

Example: **PD-51344-AB**

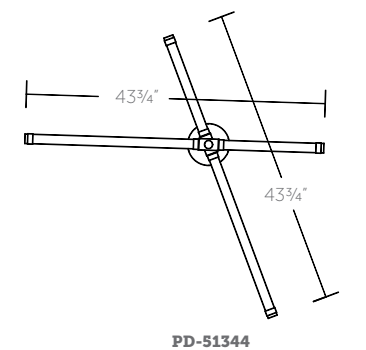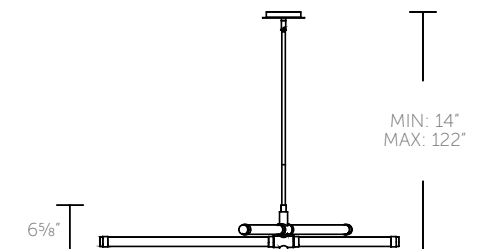

See complementary pieces on page 52-53.





## 15" & 22" LED MINI PENDANT


- Engineered with new LED filament technology
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Spin-on round canopy with minimal hardware
- May be mounted on a sloped ceiling
- Thin canopy conceals a proprietary 120V/277V driver



Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 50,000 hours  
 Input: 120V/277V

**PD-51315:** Size: 15" Watt: 7W  
 LED Lumens: 500  
 Delivered Lumens: 401

**PD-51322:** Size: 22" Watt: 9W  
 LED Lumens: 720  
 Delivered Lumens: 577

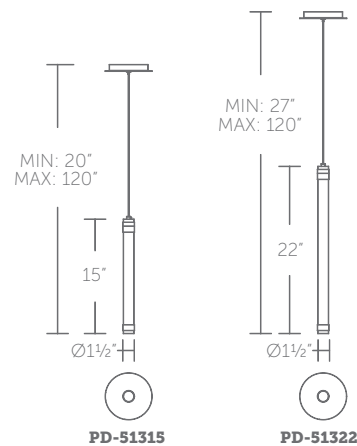

### Finish

- AB:** Aged Brass
- BK:** Black

Example: **PD-51322-BK**



See complementary pieces on page 52-53.



“ Clearly fascinating. A transparent tube of LED light providing dramatic illumination. ”

PD-51322-BK shown





“Clearly fascinating. Transparent tubes of LED light in a perfect arrangement of illumination.”

PD-51327-BK shown



PD-51327-AB

PD-51327-BK




## 27" LED CHANDELIER


- Engineered with new LED filament technology, each LED filament lamp replaceable with quick connector
- Rotatable arms for desired look
- Three 12" and one 6" downrods included (additional downrods available)
- Spin-on round canopy with minimal hardware
- Thin canopy conceals a proprietary 120V/277V driver



Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 50,000 hours  
 Input: 120V/277V

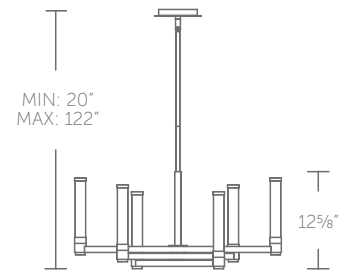

**PD-51327:** Size: 27" Watt: 20W  
 LED Lumens: 1,635  
 Delivered Lumens: 1,308

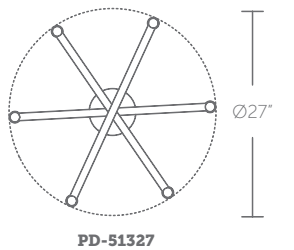

### Finish

- AB:** Aged Brass
- BK:** Black


Example: PD-51327-BK



See complementary pieces on page 64-65.



# PARALLAX

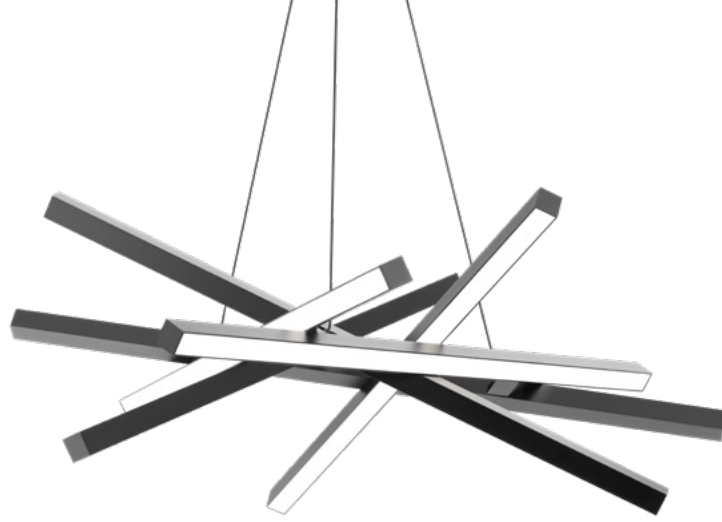

PD-73134-BK



## 34" LED CHANDELIER

- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Spin-on round canopy with minimal hardware
- May be mounted on a sloped ceiling
- Thin canopy conceals a proprietary 120V-220V-277V driver



Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 5% ELV, 100% - 5% 0-10V,  
 100% - 5% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V-277V

**PD-73134:** Size: 34" Watt: 42W  
 LED Lumens: 2,645  
 Delivered Lumens: 1,664

### Finish




**BK:**  
Black

Example: **PD-73134-BK**



See complementary  
sconce on page 48-49.

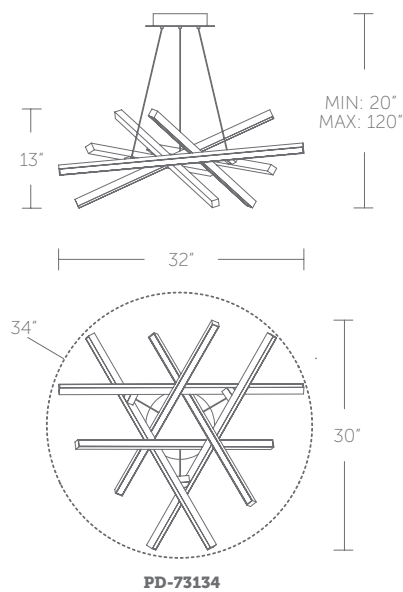

“ Effortlessly deliberate. A complex array of slender light bars create crisp lines, adding a sculptural feel to any space. ”

PD-73134-BK shown



# PARALLAX



“ Effortlessly deliberate. A complex array of slender light bars create crisp lines, adding a sculptural feel to any space. ”

PD-73128-BK shown



PD-73128-BK



## 28" LED PENDANT

- Rotatable arms for desired look
- Three 12" and one 6" downrods included (additional downrods available)
- Spin-on round canopy with minimal hardware
- May be mounted on a sloped ceiling
- Thin canopy conceals a proprietary 120V/277V driver

Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 5% ELV, 100% - 5% 0-10V, 100% - 5% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V/277V


**PD-73128:** Size: 28" Watt: 27W  
 LED Lumens: 1,758 Delivered Lumens: 1,106

### Finish

**BK:**  
 Black

Example: **PD-73128-BK**

 See complementary pieces on page 48-49.

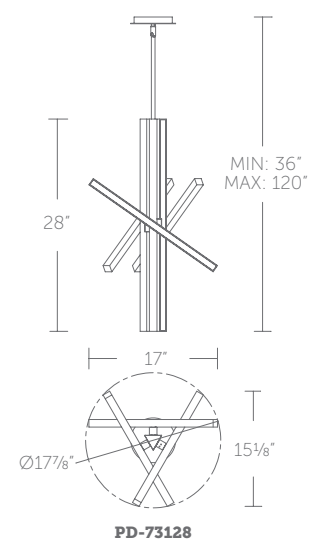





PD-21324-BK



## 24" LED CHANDELIER

- Omnidirectional illumination with silicone diffuser
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Spin-on round canopy with minimal hardware
- May be mounted on a sloped ceiling
- Thin canopy conceals a proprietary 120V-220V-277V driver



Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 5% ELV, 100% - 5% 0-10V,  
 100% - 10% TRIAC  
 Rated Life: 54,000 hours  
 Input: 120V-277V


**PD-21324:** Size: 24" Watt: 45W  
 LED Lumens: 4,175  
 Delivered Lumens: 2,024

### Finish

**AB:**  
Aged Brass

**BK:**  
Black

Example: **PD-21324-AB**

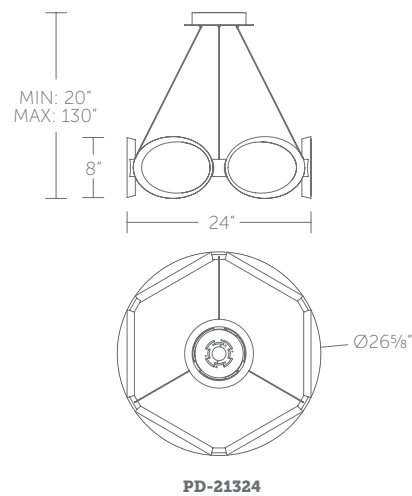

PD-21324



“ Interlaced rings united in a symbolic design, diffusing a fantastic feat of light. ”

PD-21324-AB shown





# VORNADO

20", 23" & 35" LED CHANDELIER



“ Bands of silver and light twist in and out like a Mobius strip. ”

- Omnidirectional diffused illumination
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- May be mounted on a sloped ceiling
- Canopy conceals a proprietary universal 120V-220V-277V driver

Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 5% 0-10V  
 Rated Life: 60,000 hours  
 Input: 120V-277V

**PD-87720:** Size: 20" Watt: 31W  
 LED Lumens: 2,825 Delivered Lumens: 2,075


**PD-87723:** Size: 23" Watt: 52W  
 LED Lumens: 5,106 Delivered Lumens: 3,110

**PD-87735:** Size: 35" Watt: 52W  
 LED Lumens: 5,278 Delivered Lumens: 3,550

## Finish



Example: **PD-87723-CH**

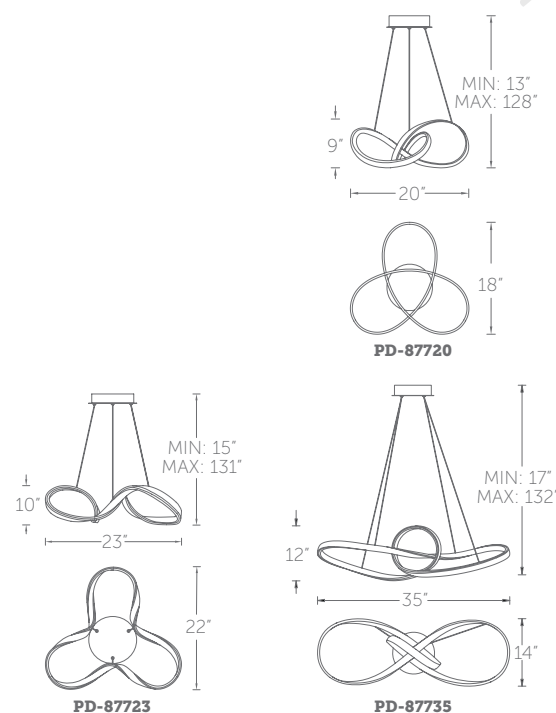

# INTERLACE

28" & 39" LED CHANDELIER



“ Delicate bands of light weave playfully in and out on this flowing modern design. ”

- Omnidirectional diffused illumination
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- May be mounted on a sloped ceiling
- Canopy conceals a proprietary universal 20V-220V-277V driver

Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 5% 0-10V  
 Rated Life: 54,000 hours  
 Input: 120V-277V


**PD-47828:** Size: 28" Watt: 57W  
 LED Lumens: 4,853 Delivered Lumens: 3,263

**PD-47839:** Size: 39" Watt: 57W  
 LED Lumens: 4,734 Delivered Lumens: 3,241

## Finish



Example: **PD-47828-CH**

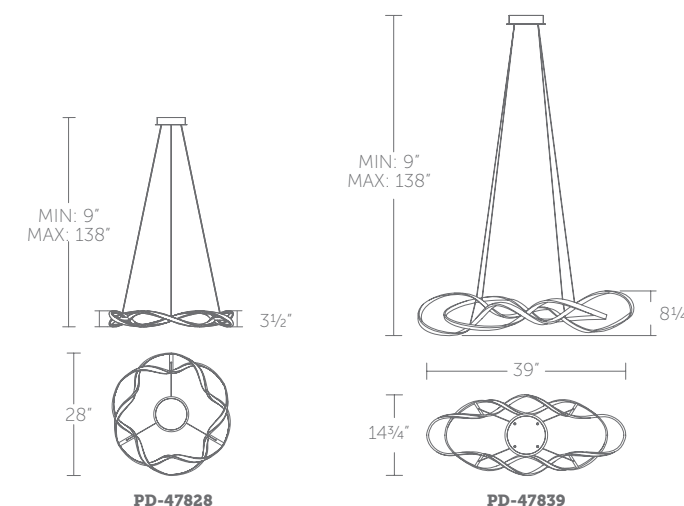






# LED Sconces + Bath

Creative, progressive designs conjure an inspired blend of modern materials, artful pieces and advanced artisanship. Our LED bath bars and vanity lights provide a flattering, soft layer of energy-efficient illumination to their surroundings. Many of our luminaires offer built-in color temperature adjustability to deliver a customized environment and the versatility to be placed vertically or horizontally to suit your space.



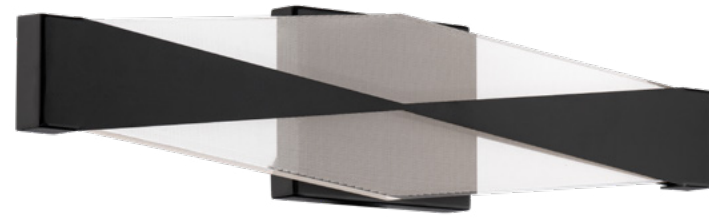

WS-59324-30-BK




## 24" LED SCONCE + BATH

- Side lit with light guide material
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- Thin canopy conceals a proprietary 120V/277V driver
- May be mounted on wall in all orientations

Color Temp: 2700K/3000K/3500K  
 CRI: 90  
 Dimming: 100% - 5% ELV, 100% - 5% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V/277V

**Finish**  
 **BK:**  
 Black  
 Example: **WS-59324-30-BK**

**WS-59324-27, WS-59324-30, WS-59324-35:**  
 Size: 24" Watt: 11W  
 LED Lumens: 895  
 Delivered Lumens: 382

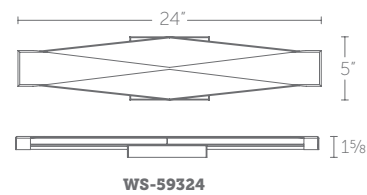

WS-59324



“Uniting clean geometric lines. Even, edge-lit LED illumination is dispersed through an elongated diamond shape.”

WS-59324-30-BK shown





“ Effortlessly deliberate. A complex array of slender light bars create crisp lines, adding a sculptural feel to any space. ”

WS-73120-30-BK shown



WS-73120-30-BK



WS-73127-30-BK

# PARALLAX

20" & 27" LED SCONCE + BATH



- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- Thin canopy conceals a proprietary 120V/277V driver
- May be mounted on wall in all orientations



Color Temp: 2700K/3000K/3500K  
 CRI: 90  
 Dimming: 100% - 5% ELV, 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V/277V

### Finish

**BK:**  
Black

Example: **WS-73120-30-BK**

#### WS-73120-27, WS-73120-30, WS-73120-35:



Size: 20" Watt: 20W  
 LED Lumens: 1,287  
 Delivered Lumens: Up to 789

#### WS-73127-27, WS-73127-30, WS-73127-35:

Size: 27" Watt: Up to 28W  
 LED Lumens: 1,826  
 Delivered Lumens: Up to 1,139



See complementary pieces on page 38-39.

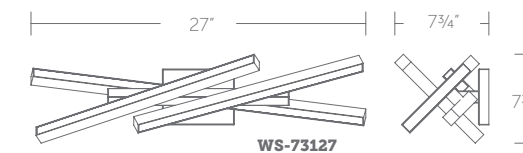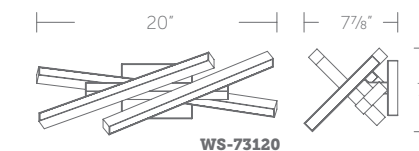



# LOOPHOLE



WS-61326-30-BK



WS-61334-30-BK



## 26" & 34" LED SCONCE + BATH

- Omnidirectional illumination
- Conversion plate included to accommodate 4" junction box
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- Thin canopy conceals a proprietary 120V/277V driver
- May be mounted on wall in all orientations


Color Temp: 2700K/3000K/3500K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 50,000 hours  
 Input: 120V/277V

### Finish




Example: **WS-61334-30-BK**

**WS-61326-27, WS-61326-30, WS-61326-35:**  
 Size: 26" Watt: 24W  
 LED Lumens: 1475  
 Delivered Lumens: Up to 981

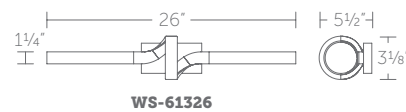

**WS-61334-27, WS-61334-30, WS-61334-35:**  
 Size: 34" Watt: 29W  
 LED Lumens: 1805  
 Delivered Lumens: Up to 1211

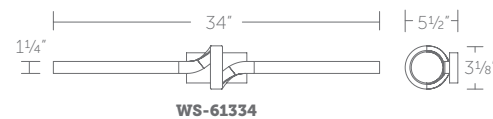

“ A twist of illumination. Elegant contours offering gracefully bending light. ”


WS-61334-30-BK shown





“ Clearly fascinating. A transparent tube of LED light providing dramatic illumination. ”

WS-51327-AB shown

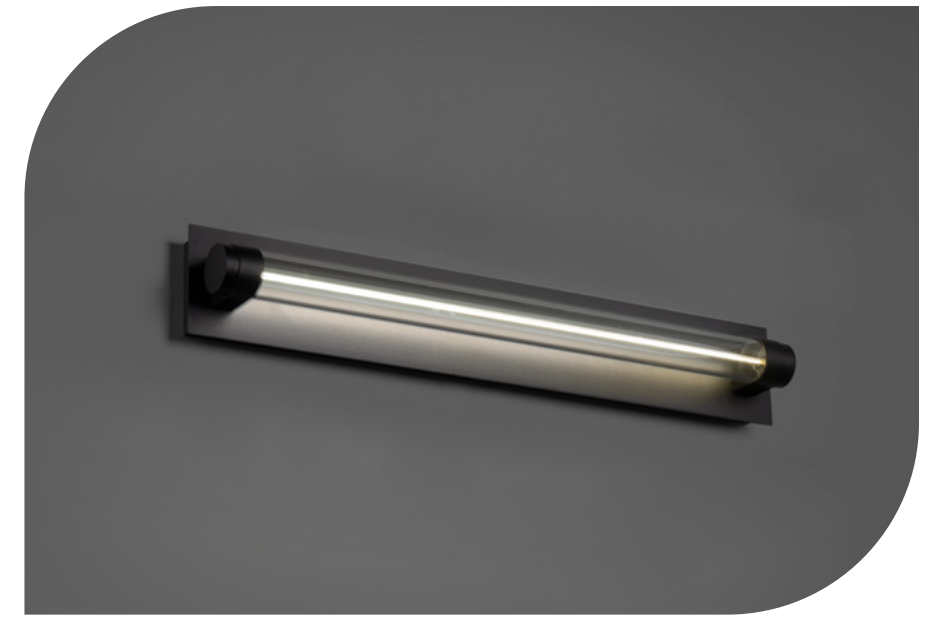

## 20" & 27" LED SCONCE + BATH

- New LED filament technology
- Conversion plate included to accommodate 4" junction box
- Thin canopy conceals a proprietary 120V/277V driver
- May be mounted on wall in all orientations



Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 50,000 hours  
 Input: 120V/277V

**WS-51320:** Size: 20" Watt: 7W  
 LED Lumens: 320 Delivered Lumens: 256



**WS-51327:** Size: 27" Watt: 9W  
 LED Lumens: 530 Delivered Lumens: 423

### Finish

**AB:**  
Aged Brass


**BK:**  
Black

Example: **WS-51327-AB**

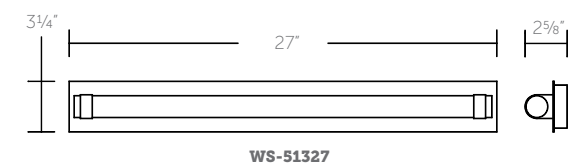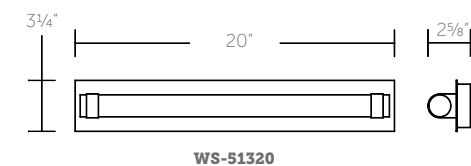

See complementary pieces on page 64-65.



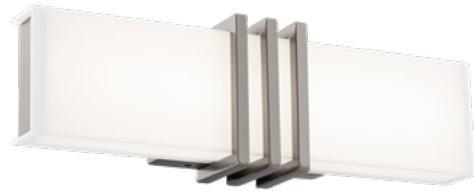

WS-75318-BN



WS-75328-BK

# MINIBAR

18" & 28" LED SCONCE + BATH



- Frontlight with acrylic diffuser
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- ACLED driverless technology
- May be mounted on wall in all orientations

Color Temp: 2700K/3000K/3500K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 50,000 hours  
 Input: 120V

### Finish



**BK:**



Black



**BN:**

Brushed Nickel

Example: **WS-75328-BK**

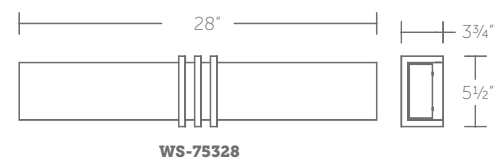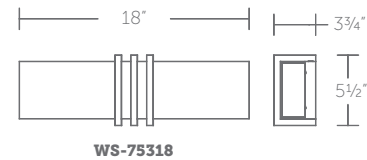

**WS-75318:** Size: 18" Watt: 19W  
 LED Lumens: 1,985  
 Delivered Lumens: 1,213  
**WS-75328:** Size: 28" Watt: 24W  
 LED Lumens: 2,550  
 Delivered Lumens: 1,557



“ Dissected design. A trio of bands encircling a luminous rectangular bar, accenting style and flair. ”


WS-75328-BK shown





WS-35027-BK shown

“Elegant diffuse illumination. Pairs well with circular, oval, or rectangular mirrors.”

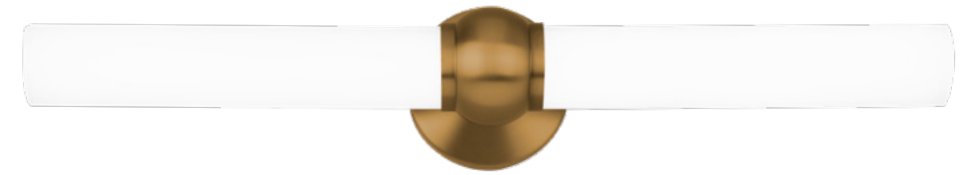

WS-35027-AB



WS-35020-CH

# JULIET

20" & 27" LED SCONCE + BATH




- Frontlight with opal glass diffuser
- ACLED driverless technology
- May be mounted on wall in all orientations

Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 54,000 hours  
 Input: 120V



**WS-35020:** Size: 20" Watt: 27W  
 LED Lumens: 2,059 Delivered Lumens: 1,439

**WS-35027:** Size: 27" Watt: 34W  
 LED Lumens: 2,778 Delivered Lumens: 1,983

### Finish

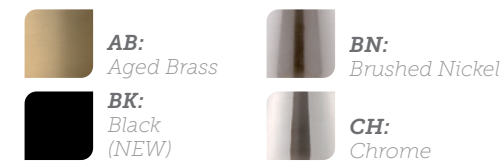

Example: **WS-35027-BK**

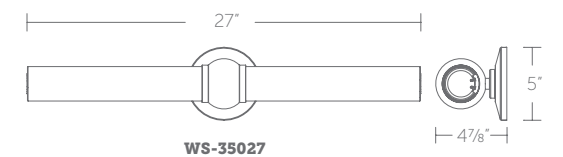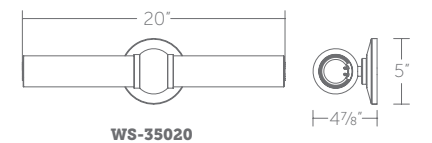






# LED Sconces

Groundbreaking innovations in LED, materials engineering, and creative optical design pave the way for endless possibilities for striking wall luminaires. Our sophisticated and compact LED wall fixtures can be paired with your home's distinctive architectural elements while delivering an attractive, ambient glow. Shape the decor of your space with sleek modern pieces perfect for various tasks in simple yet appealing silhouettes.







WS-65323-30-BK



## 23" LED SCONCE

- Edge-lit with etched acrylic diffuser
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- Thin canopy conceals a proprietary 120V/277V driver
- May be mounted on wall in all orientations

Color Temp: 2700K/3000K/3500K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 50,000 hours  
 Input: 120V/277V

### WS-65323-27, WS-65323-30, WS-65323-35:


Size: 23" Watt: 27W  
 LED Lumens: 2,050  
 Delivered Lumens: Up to 875

### Finish



BK:  
Black

Example: WS-65323-30-BK

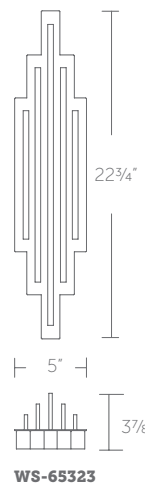

“Layers of luxe. Edge-lit panels stacked on a bold backplate create a stylized effect.”

WS-65323-30-BK shown





“ Glitz and style. A circle within a circle casts reflected illumination off a lustrous surface. ”

WS-53318-30-AB shown



WS-53318-30-BK



WS-53318-30-AB



## 18" LED SCONCE

- Frontlight with opal diffuser
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- 3CCT switch is installed in the canopy
- May be mounted on wall in all orientations

Color Temp: 2700K/3000K/3500K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 54,000 hours  
 Input: 120V


### WS-53318-27, WS-53318-30, WS-53318-35:

Size: 18" Watt: 7W  
 LED Lumens: 577  
 Delivered Lumens: 226

### Finish

- AB:** Aged Brass
- BK:** Black

Example: **WS-53318-30-AB**

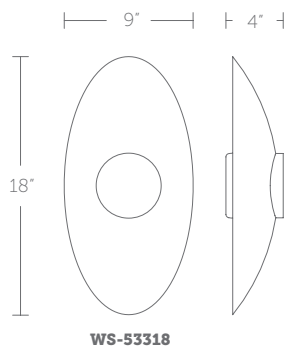

WS-53318





WS-51313-BK



WS-51313-AB

# JEDI

## 13" LED SCONCE



- New LED filament technology
- Thin canopy conceals a proprietary 120V/277V driver
- May be mounted vertically or upside down


Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 50,000 hours  
 Input: 120V/277V

**WS-51313:** Size: 13" Watt: 4W  
 LED Lumens: 260 Delivered Lumens: 207

### Finish

- AB:**  
Aged Brass
- BK:**  
Black

Example: **WS-51313-AB**

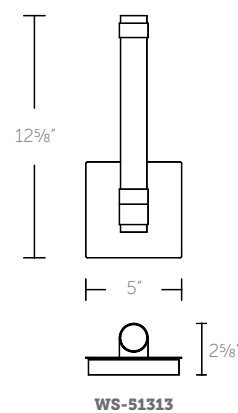

See complementary pieces on page 34-35.



“ Clearly fascinating. A transparent tube of LED light providing dramatic illumination. ”

WS-51313-AB shown





“ Rich tradition. A classic slender shape delivering elegant, focused downlight from the bottom of its slim arm. ”

WS-63322-BK shown



WS-63322-BK



## 22" LED SCONCE

- Ambient and downlight with opal glass diffuser
- Thin canopy conceals a proprietary 120V/277V driver




Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 50,000 hours  
 Input: 120V/277V

**WS-63322:** Size: 22" Watt: 20W  
 LED Lumens: 2,135  
 Delivered Lumens: 1,309

### Finish

**BK:**  
 Black

Example: **WS-63322-BK**

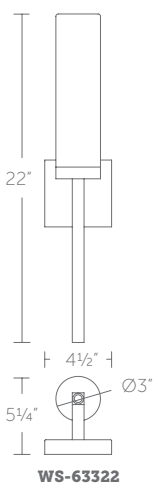



# VOILGA



WS-55318-30-BK



## 18" LED SCONCE

- Fabric shade with etched acrylic diffuser
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- Thin canopy conceals a proprietary 120V/277V driver
- May be mounted vertically or upside down

Color Temp: 2700K/3000K/3500K  
 CRI: 90  
 Dimming: 100% - 5% ELV  
 Rated Life: 54,000 hours  
 Input: 120V/277V

### WS-55318-27, WS-55318-30, WS-55318-35:


Size: 18" Watt: 19W  
 LED Lumens: Up to 2,146  
 Delivered Lumens: Up to 630

### Finish



BK:  
Black

Example: WS-55318-30-BK

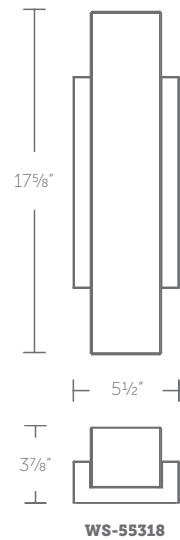

“Sheer elegance. Linear bars envelope textured fabric for a reimagined take on minimalist design.”

WS-55318-30-BK shown





# LED Bedside + Swing Arms

Both decorative and functional, dweLED swing arm luminaires make a stylish addition to a bedside or living area. Exuding ageless beauty and timeless charm, modern and retro designs boast metal wall mounts supporting an articulating arm, integral driver and convenient fingertip touch dimming. Our ADA compliant, energy efficient LED sconces are visually appealing, brilliant and engaging—the perfect choice for use in private and public spaces.





“Dome light. A rotatable neck accents a circular appeal for multidirectional illumination.”

BL-67305-BN shown



BL-67305-BK



BL-67305-AB



## 5" LED BEDSIDE LAMP

- On/off toggle switch on the canopy
- Light source offers 330 degree horizontal rotation and a 90 degree vertical rotation
- Driver concealed within the canopy


Color Temp: 3000K  
 CRI: 90  
 Rated Life: 54,000 hours  
 Input: 120V

**BL-67305:** Size: 5" Watt: 8W  
 LED Lumens: 1,050  
 Delivered Lumens: 315

### Finish

- AB:** Aged Brass
- BK:** Black
- BN:** Brushed Nickel

Example: **BL-67305-BN**

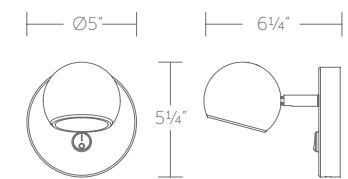

BL-67305



USB port on the bottom of the canopy for charging



See complementary piece on page 74-75.





**BL-67320-BK**



**BL-67320-BN**



## 20" LED BEDSIDE LAMP

- Two on/off toggle switch on the canopy to control each lamp individually
- Light source offers 330 degree horizontal rotation and a 90 degree vertical rotation
- Driver concealed within the canopy

Color Temp: 3000K  
 CRI: 90  
 Rated Life: 54,000 hours  
 Input: 120V

### Finish

**AB:**  
Aged Brass

**BK:**  
Black

**BN:**  
Brushed Nickel

Example: **BL-67320-AB**


**BL-67320:** Size: 20" Watt: 7W  
 LED Lumens: 1,075  
 Delivered Lumens: 322



USB port on the bottom of the canopy for charging



See complementary piece on page 72-73.

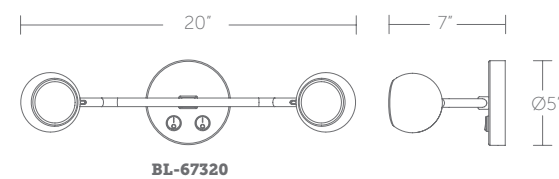

“ Dome light. A rotatable neck accents a circular appeal for multidirectional illumination. ”

**BL-67320-AB** shown





“ Ambidextrous. A flexible, multi-directional task light whose arm can swivel and straighten to deliver focused illumination. ”

BL-73314-30-WT shown



## 14" LED BEDSIDE LAMP

- On/off toggle switch at the base of the arm
- Light source offers 230 degree rotation
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- Driver concealed within the canopy


Color Temp: 2700K/3000K/3500K  
 CRI: 90  
 Rated Life: 54,000 hours  
 Input: 120V

### Finish



Example: **BL-73314-30-WT**

**BL-73314-27, BL-73314-30, BL-73314-35:**  
 Size: 14" Watt: 8W  
 LED Lumens: 1,210  
 Delivered Lumens: 315

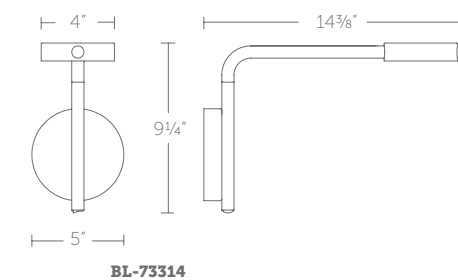

USB port on the bottom of the canopy for charging  
 On/off toggle switch at the base of the arm





**BL-69317-BK/AB**



## 17" LED BEDSIDE LAMP

- On/off toggle switch on the canopy
- Light source offers 180 degree rotation
- Thin canopy conceals a proprietary 120V/277V driver


Color Temp: 3000K  
 CRI: 90  
 Rated Life: 50,000 hours  
 Input: 120V/277V

### Finish

**BK/AB:**  
 Black/Aged Brass

Example: **BL-69317-BK/AB**

**BL-69317:** Size: 17" Watt: 11W  
 LED Lumens: 832  
 Delivered Lumens: 486

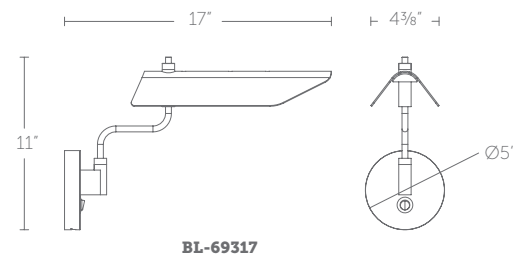

**BL-69317**



“ Enveloping light. A modern, folded design with a bold exterior offering gracefully reflected light. ”

**BL-69317-BK/AB** shown





“ Art’s perfect partner. With a slim, elegant profile, this sophisticated light is the perfect complement to any display piece. Conserves fine art while providing superior color rendering. ”

PL-11025-BN shown



## 17", 25", 33" & 42" LED PICTURE LIGHT

- Light source rotates 150 degrees
- Conversion plate included to accommodate 4" junction box
- Thin canopy conceals a proprietary universal 120V-220V-277V driver



Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 10% 0-10V, 100% - 5% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V-277V

**PL-11017:** Size: 17" Watt: 18W  
 LED Lumens: 569 Delivered Lumens: 380

**PL-11025:** Size: 25" Watt: 21W  
 LED Lumens: 825 Delivered Lumens: 544

**PL-11033:** Size: 33" Watt: 28W  
 LED Lumens: 1,072 Delivered Lumens: 747


**PL-11042:** Size: 42" Watt: 30W  
 LED Lumens: 1,618 Delivered Lumens: 1,000

### Finish

**BK:**  
Black

**BN:**  
Brushed Nickel

Example: **PL-11025-BN**

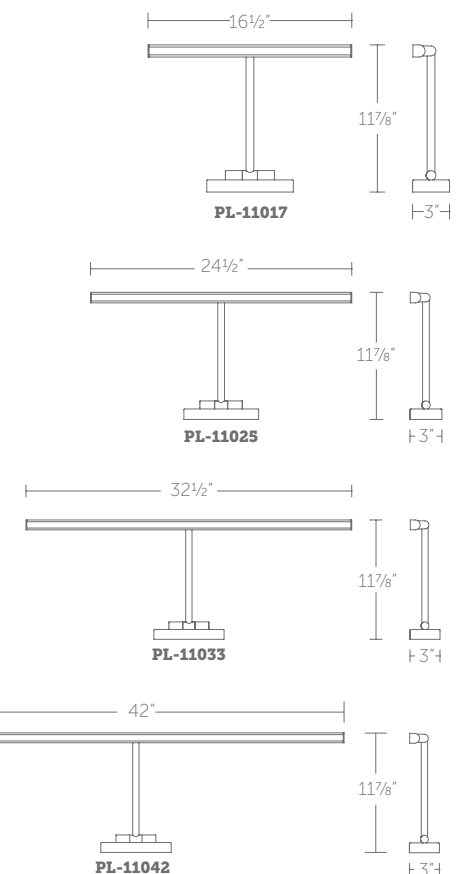





# LED Ceiling Mounts

Our ceiling mounts push the envelope of design and LED technology to deliver authentic originals. Dimmable, energy-efficient flush mount luminaires evoke a bright, radiant illumination and pair classic elements with minimalistic design to create contemporary additions to residential and hospitality settings.



# PARALLAX



FM-73116-30-BN



FM-73116-30-CH



FM-73116-30-BK



## 16" LED CEILING MOUNT

- Built in color temperature adjustability. Switch from 2700K/3000K/3500K.
- Thin canopy conceals a proprietary 120V/277V driver
- May be mounted on wall or ceiling in all orientations

Color Temp: 2700K/3000K/3500K  
 CRI: 90  
 Dimming: 100% - 5% ELV, 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V/277V

### FM-73116-27, FM-73116-30, FM-73116-35:

Size: 16" Watt: 28W  
 LED Lumens: 2,150  
 Delivered Lumens: Up to 1,352

### Finish



**BK:**  
Black




**BN:**  
Brushed Nickel



**CH:**  
Chrome

Example: **FM-73116-30-BN**

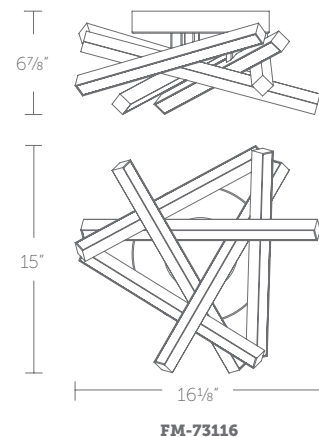

FM-73116



See complementary pieces on page 36-37.



Effortlessly deliberate. A ceiling mount or wall sconce of exaggerated proportions. Unparalleled.

FM-73116-30-BN shown





“ Circle in the square. Uniquely patterned, hammered glass creates a captivating play of shadow and light. ”

FM-W71310-30-BK shown



FM-W71310-30-BK

# CUBOID

10" INTERIOR/EXTERIOR  
LED CEILING MOUNT



- Backlit with glass diffuser
- Chrome plate reflector
- Built in color temperature adjustability. Switch from 3000K/3500K/4000K
- ACLED driverless technology
- May be mounted on wall or ceiling in all orientations


Color Temp: 3000K/3500K/4000K  
 CRI: 90  
 Dimming: 100% - 5% ELV, 100% - 5% TRIAC  
 Rated Life: 60,000 hours  
 Input: 120V

### Finish

**BK:**  
Black

Example: **FM-W71310-30-BK**

**FM-W71310-30, FM-W71310-35, FM-W71310-40:**  
 Size: 10" Watt: 11W  
 LED Lumens: 800  
 Delivered Lumens: 369

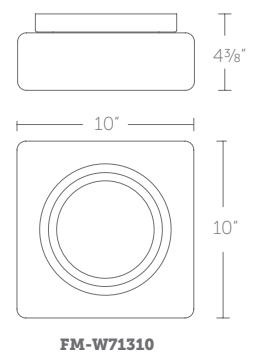



# CALIBER



FM-W36607-AL



FM-W36607-BZ



FM-W36607-BK



FM-W36607-WT







## 7" INTERIOR/EXTERIOR LED CEILING MOUNT

• Proprietary universal 120V-220V-277V driver concealed within fixture


Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 5% ELV, 100% - 5% 0-10V, 100% - 10% TRAIC  
 Rated Life: 50,000 hours  
 Input: 120V-277V

### Finish

-  **AL:** Brushed Aluminum
-  **BK:** Black
-  **BZ:** Bronze
-  **WT:** White

Example: **FM-W36607-BK**

**FM-W36607:** Size: 7" Watt: 11W  
 LED Lumens: 855  
 Delivered Lumens: 545

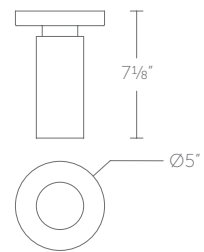

FM-W36607



See complementary pieces on our website.



“ Light projection tuned with precision. ”

FM-W36607-BK shown





# LED Outdoor

Our exterior collections elevate outdoor lighting with nostalgic design elements, quality finishes, and powerful illumination. Our versatile indoor/outdoor LED pendants and sconces embody sophisticated, modern and transitional styles ideal for illuminating entryways, façades, walkways and corridors to highlight residential, commercial and hospitality architecture.





**WS-W15312-30-BK**



## 12" LED OUTDOOR SCONCE

- Front, top and bottom illumination
- Ceramic silk-screen mitered glass diffuser
- Top and bottom light individually rotatable
- Built in color temperature adjustability. Switch from 3000K/3500K/4000K
- Thin canopy conceals a proprietary 120V/277V driver


Color Temp: 3000K/3500K/4000K  
 CRI: 90  
 Dimming: 100% - 5% ELV, 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V/277V

### WS-W15312-30, WS-W15312-35, WS-W15312-40:

Size: 12" Watt: 23W  
 LED Lumens: 1,367  
 Delivered Lumens: Up to 929

### Finish

**BK:**  
 Black  
 Example: **WS-W15312-30-BK**

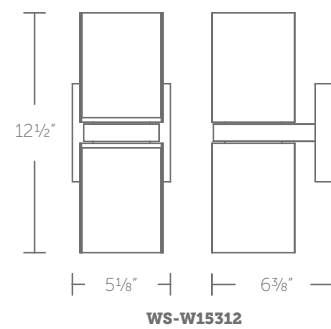

Bollards provided by  
 WAC Landscape Lighting



“ Mutual independence. Each segment can be rotated individually, casting light up, down and out. ”

**WS-W15312-30-BK** shown





“ Squarely there. A harmonious outline capturing etched diffusers shining with a uniform glow. ”

WS-W39316-BK shown



WS-W39305-BK



WS-W39310-BK



WS-W39316-BK




## 5", 10" & 16" LED OUTDOOR SCONCE

- Illumination on five sides with acrylic diffuser
- ACLED driverless technology
- May be mounted on wall in all orientations



Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 5% ELV, 100% - 10% TRIAC  
 Rated Life: 60,000 hours  
 Input: 120V




WS-W39305

**WS-W39305:** Size: 5" Watt: 10W  
 LED Lumens: 950  
 Delivered Lumens: 443

**WS-W39310:** Size: 10" Watt: 20W  
 LED Lumens: 2,405  
 Delivered Lumens: 1,121

**WS-W39316:** Size: 16" Watt: 30W  
 LED Lumens: 4,310  
 Delivered Lumens: 2,009

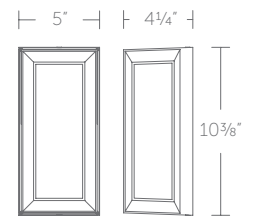


WS-W39310

### Finish



Example: **WS-W39316-BK**

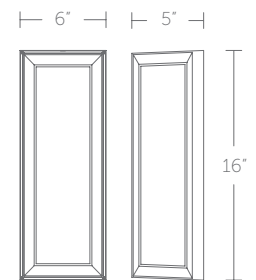

WS-W39316



# REVELS



WS-W13324-30-BK WS-W13336-30-BK WS-W13348-30-BK WS-W13360-30-BK WS-W13372-30-BK



## 24", 36", 48", 60" & 72" LED OUTDOOR SCONCE

- Illumination on both sides with acrylic diffuser
- Built in color temperature adjustability. Switch from 3000K/3500K/4000K
- ACLED driverless technology
- May be mounted on wall in all orientations



Color Temp: 3000K/3500K/4000K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 54,000 hours  
 Input: 120V

**WS-W13324-30, WS-W13324-35, WS-W13324-40:**  
 Size: 24" Watt: 13W  
 LED Lumens: 300 Delivered Lumens: 193

**WS-W13336-30, WS-W13336-35, WS-W13336-40:**  
 Size: 36" Watt: 17W  
 LED Lumens: 400 Delivered Lumens: 256

**WS-W13348-30, WS-W13348-35, WS-W13348-40:**  
 Size: 48" Watt: 24W  
 LED Lumens: 555 Delivered Lumens: 358


**WS-W13360-30, WS-W13360-35, WS-W13360-40:**  
 Size: 60" Watt: 28W  
 LED Lumens: 665 Delivered Lumens: 428

**WS-W13372-30, WS-W13372-35, WS-W13372-40:**  
 Size: 72" Watt: 28W  
 LED Lumens: 850 Delivered Lumens: 547

### Finish

**BK:**  
 Black

Example: **WS-W13348-30-BK**

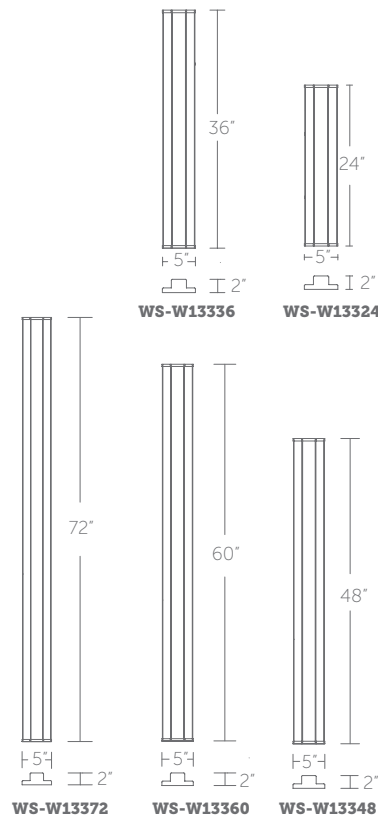

“Balanced with geometric precision. A slim bar of light glowing between the lines of a minimal profile.”


shown





“ Like a beacon in the night, soft illumination beckons through a cylinder of hammered glass. ”

WS-W49314-BK shown

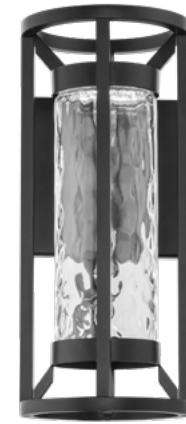

WS-W49314-BK



WS-W49319-BK

# ROSLYN

14" & 19" LED OUTDOOR SCONCE



- Downlight with clear hammered glass
- ACLED driverless technology

Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 54,000 hours  
 Input: 120V


**WS-W49314:** Size: 14" Watt: 13W  
 LED Lumens: 1,000 Delivered Lumens: 688

**WS-W49319:** Size: 19" Watt: 16W  
 LED Lumens: 1,247 Delivered Lumens: 858


### Finish



Example: **WS-W49314-BK**

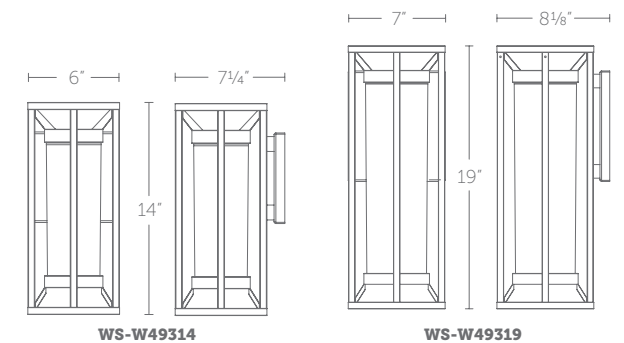



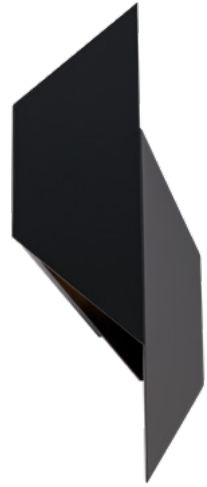

**WS-W47318-30-BK**



## 18" LED OUTDOOR SCONCE

- Top and bottom illumination
- Built in color temperature adjustability. Switch from 3000K/3500K/4000K
- Diamond shaped canopy can cover 4" round junction box and smaller
- Thin canopy conceals a proprietary 120V/277V driver

Color Temp: 3000K/3500K/4000K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 50,000 hours  
 Input: 120V/277V


**WS-W47318-30, WS-W47318-35, WS-W47318-40:**  
 Size: 18" Watt: 12W  
 LED Lumens: 252  
 Delivered Lumens: Up to 108

### Finish



**BK:**  
Black

Example: **WS-W47318-30-BK**

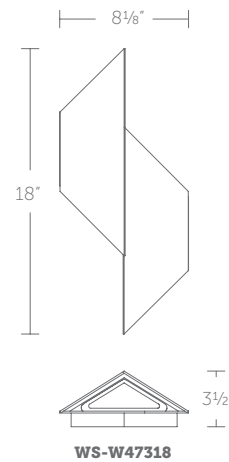

“ Giving style a new slant. Architectural design delivering up and downward illumination from smoothly angled planes. ”

**WS-W47318-30-BK** shown





“ Precision, framed. A sleek design with sophisticated up and downward illumination. ”

WS-W17310-35-BK shown



WS-W17310-30-WT



WS-W17310-30-BK



WS-W17310-30-AL

# EDGEY

## 10" LED OUTDOOR SCONCE



- Top and bottom illumination
- Built in color temperature adjustability. Switch from 3000K/3500K/4000K
- ACLED driverless technology
- May be mounted vertically or upside down

Color Temp: 3000K/3500K/4000K  
 CRI: 90  
 Dimming: 100% - 5% ELV, 100% - 5% TRIAC  
 Rated Life: 60,000 hours  
 Input: 120V


### WS-W17310-30, WS-W17310-35, WS-W17310-40:

Size: 10" Watt: 13W  
 LED Lumens: 765 Delivered Lumens: 313

### Finish

- AL:** Brushed Aluminum
- BK:** Black
- WT:** White

Example: **WS-W17310-30-BK**

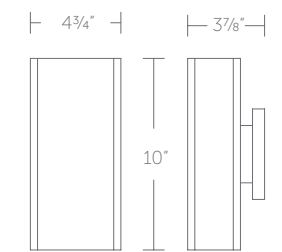

WS-W17310



# ALPHABETICAL INDEX

## A

ALTERNATE ..... 100-101  
ARGO ..... 94-95

## C

CALIBER ..... 88-89  
CARAFE ..... 6-7  
CHANTILLY ..... 16-17  
CUBOID ..... 86-87

## D

DOME ..... 24-25  
DUPLEX ..... 72-73, 74-75

## E

EDGEY ..... 102-103  
ELBO ..... 76-77  
ENIGMATIC ..... 46-47

## G

GEOMETRIX ..... 22-23  
GLAMOUR ..... 62-63

## I

ICE CUBE ..... 28-29  
INTERLACE ..... 43

## J

JEDI (MINI PD) ..... 32-33  
JEDI (PD) ..... 30-31, 34-35  
JEDI (WS) ..... 52-53, 64-65  
JULIET ..... 56-57

## L

LACEY ..... 4-5  
LOOPHOLE ..... 50-51  
LOYD ..... 78-79

## M

MINIBAR ..... 54-55  
MOONSTONE ..... 14-15

## N

NOUVEAU ..... 60-61

## P

PARALLAX (FM) ..... 84-85  
PARALLAX (PD) ..... 36-37, 38-39  
PARALLAX (WS) ..... 48-49  
PARK AVENUE ..... 10-11, 12-13

## R

REED ..... 80-81  
REVELS ..... 96-97  
RINGLET ..... 26-27  
ROSLYN ..... 98-99

## S

SALTAIRE ..... 66-67  
SOLITAIRE ..... 40-41  
SOLO ..... 18-19, 20-21  
STRUM ..... 8-9

## V

VAIATION ..... 92-93  
VOLGA ..... 68-69  
VORNADO ..... 42



# NUMERICAL INDEX

## B

BL-67305 .....	72-73
BL-67320 .....	74-75
BL-69317 .....	78-79
BL-73314 .....	76-77

## F

FM-73116 .....	84-85
FM-W36607 .....	88-89
FM-W71310 .....	86-87

## P

PD-19324 .....	18-19
PD-19348 .....	20-21
PD-21324 .....	40-41
PD-23316 .....	6-7
PD-25314 .....	16-17
PD-27308 .....	26-27
PD-29308 .....	28-29
PD-33312 .....	12-13
PD-33331 .....	10-11
PD-35320 .....	8-9
PD-37310 .....	24-25
PD-43310 .....	14-15
PD-45316 .....	4-5
PD-45322 .....	4-5
PD-47828 .....	43
PD-47839 .....	43
PD-51315 .....	32-33
PD-51322 .....	32-33
PD-51327 .....	34-35
PD-51344 .....	30-31
PD-57317 .....	22-23
PD-57327 .....	22-23
PD-73128 .....	38-39
PD-73134 .....	36-37
PD-87720 .....	42
PD-87723 .....	42
PD-87735 .....	42
PL-11017 .....	80-81
PL-11025 .....	80-81
PL-11033 .....	80-81
PL-11042 .....	80-81

## W

WS-35020 .....	56-57
WS-35027 .....	56-57
WS-51313 .....	64-65
WS-51320 .....	52-53
WS-51327 .....	52-53
WS-53318 .....	62-63
WS-55318 .....	68-69
WS-59324 .....	46-47
WS-61326 .....	50-51
WS-61334 .....	50-51
WS-63322 .....	66-67
WS-65323 .....	60-61
WS-73120 .....	48-49
WS-73127 .....	48-49
WS-75318 .....	54-55
WS-75328 .....	54-55
WS-W13324 .....	96-97
WS-W13336 .....	96-97
WS-W13348 .....	96-97
WS-W13360 .....	96-97
WS-W13372 .....	96-97
WS-W15312 .....	92-93
WS-W17310 .....	102-103
WS-W39305 .....	94-95
WS-W39310 .....	94-95
WS-W39316 .....	94-95
WS-W47318 .....	100-101
WS-W49314 .....	98-99
WS-W49319 .....	98-99



## Headquarters

Tel: 800.526.2588  
Fax: 800.526.2585

44 Harbor Park Dr  
Port Washington, NY 11050

### South East Manufacturing Facility

1600 Distribution Ct  
Lithia Springs, GA 30122

### Central Manufacturing Facility

1700 South J Elmer Freeway  
Suite 100  
Cedar Hill, TX 75104

### West Manufacturing Facility

1750 S Archibald Ave  
Ontario, CA 91761

Consult our manufacturing facility to take advantage of our custom capabilities in large quantities. For up to date product specifications and assistance please visit [wacighting.com](http://wacighting.com) or call **1-800-526-2588**

Many designs within are patented or patent pending. WAC Lighting will not hesitate to enforce its intellectual property rights through injunctive relief and seek further relief through damages if it has reason to believe that its intellectual property is being infringed.

Copyright © 2023 by WAC Lighting.  
All rights reserved. This catalog is copyrighted and WAC Lighting will use all measures available to it under the law against anyone who copies or derives from its copyrighted work.



Copyright © 2023 by WAC Lighting.  
All rights reserved. This catalog is copyrighted and WAC Lighting  
will use all measures available to it under the law against anyone  
who copies or derives from its copyrighted work.

dweLED

