

2024



WAC LIMITED®









# WAC LIMITED

Maximize desirability and minimize expenses with WAC LIMITED products designed to accommodate single-family or multi-family residential, apartment living, and large-scale hospitality projects.

A well-lit space elevates the perceived value of all finishes used and increases functionality of spaces while also minimizing maintenance and energy expenses. Dollar for dollar, quality lighting improves occupant experiences more than any other construction material. Our wide array of products covers kitchens, baths, bedrooms, closets, hallways, living rooms, laundry rooms and garages—all designed for safety and proven to last.

We also understand that installation costs are a major part of the value equation. As such, WAC LIMITED luminaires are engineered to reduce these costs. Premium lighting products and designs for residential and hospitality applications can be found in the WAC Lighting and dweLED product lines.









# WAC LIMITED

Maximize desirability and minimize expenses with WAC LIMITED products designed to accommodate single-family or multi-family residential, apartment living, and large-scale hospitality projects.

A well-lit space elevates the perceived value of all finishes used and increases functionality of spaces while also minimizing maintenance and energy expenses. Dollar for dollar, quality lighting improves occupant experiences more than any other construction material. Our wide array of products covers kitchens, baths, bedrooms, closets, hallways, living rooms, laundry rooms and garages—all designed for safety and proven to last.

We also understand that installation costs are a major part of the value equation. As such, WAC LIMITED luminaires are engineered to reduce these costs. Premium lighting products and designs for residential and hospitality applications can be found in the WAC Lighting and dweLED product lines.






F-033L-BN



An energy efficient ceiling fan with a quiet DC motor and LED luminaire make Disc II 70% more efficient than conventional fans.



DISC II LED FAN

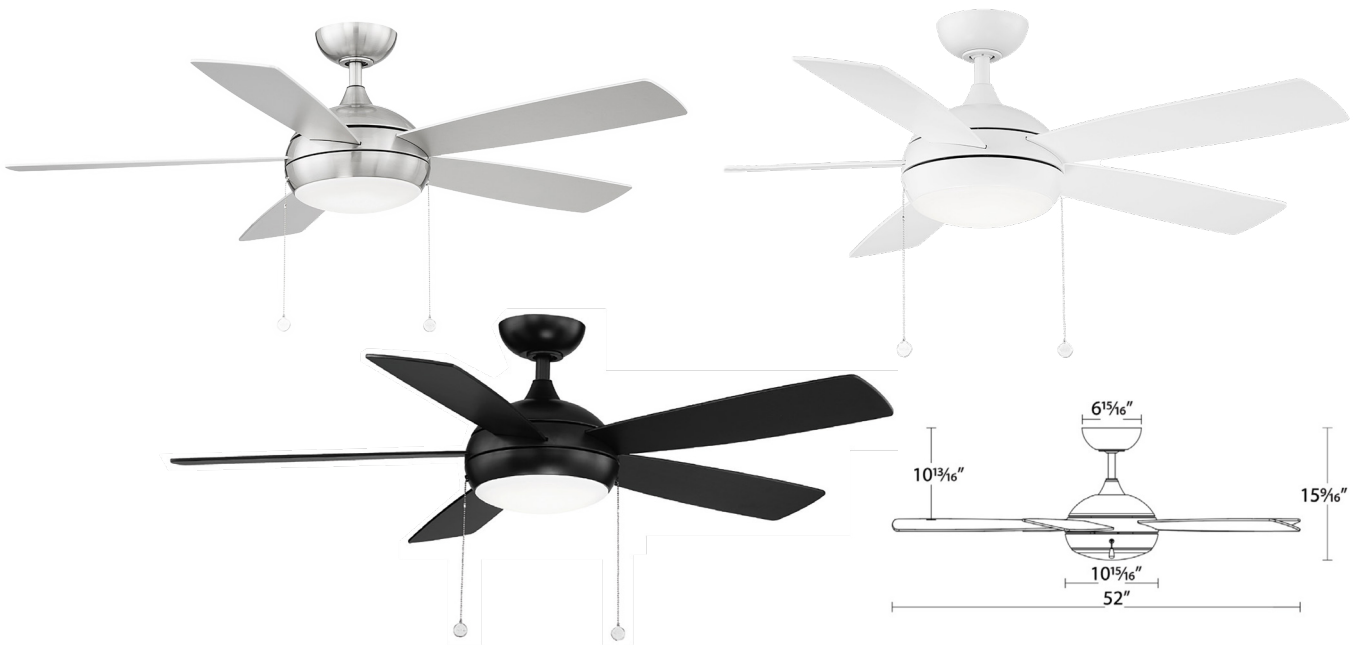

A streamlined look suited for bedrooms and living rooms. The sweep of the 52" blades efficiently creates a cooling effect and complements the silent DC motor.

- Blade:** 12° pitch, 52" sweep, plywood
- Downrod:** 3/4"W x 4 1/2"H included
- Mounting Slope:** Up to 30° standard, 45° with optional Slope Ceiling Kit
- Lead Wire:** 80"
- Hanging Weight:** 18 lbs
- Lumens/Delivered Lumens:** 2100/1410
- Total Power:** 51W
- LED Power:** 25W
- CRI:** 90
- Color Temperature:** 3000K
- LED Rated Life:** 50,000 hrs
- LED Dimming:** 100%-10% ELV/TRIAC  
(Refer to online product page for dimming compatibility)

- 3-speed 120 x 15 DC motor for quiet and powerful operation
- Precision balanced blades for wobble-free operation
- Pull-chain operated and reversible from housing
- Fan and LED module are Energy Star® certified
- Memory module—fan will recall last speed setting if switched off

Model		Housing	Blade
<b>F-033L</b>	<b>BN</b>	Brushed Nickel	Brushed Nickel
	<b>MB</b>	Matte Black	Matte Black
	<b>MW</b>	Matte White	Matte White

Example: **F-033L-BN**

ENERGY GUIDE		
Standard	High Speed	Weighted Average
Electricity	25W	17W
Airflow	5,032 CFM	3,964 CFM
Energy Costs*	-	\$5/yr
Efficiency	237 CFM/W	237 CFM/W


\*Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day

**ACCESSORIES** sold separately

<b>DC-1</b> Coupler	<b>BN</b>	Brushed Nickel
	<b>MB</b>	Matte Black
	<b>MW</b>	Matte White
<b>SC-</b> Slope Ceiling Kit	<b>BN</b>	Brushed Nickel
	<b>MB</b>	Matte Black
	<b>MW</b>	Matte White
<b>DR-</b> Downrods	<b>12"</b>	<b>BN</b> Brushed Nickel <b>MB</b> Matte Black <b>MW</b> Matte White
	<b>18"</b>	
	<b>24"</b>	
	<b>36"</b>	
	<b>48"</b>	
	<b>60"</b>	
<b>72"</b>		



## ATLANTIS LED FAN

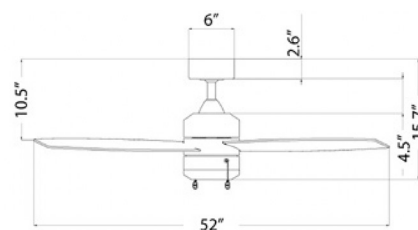

ATLANTIS offers a Damp rated, high-value fan with three speed options and can be reversed from the housing. Enhance your interiors with the gently-curved shape of this elegant fan.

- Blade:** 13° pitch, 52" sweep, plywood
- Downrod:** 3/4" W x 6" H included
- Mounting Slope:** Up to 30° standard,  
45° with optional Slope Ceiling Kit
- Lead Wire:** 80"
- Hanging Weight:** 18 lbs
- Lumens/Delivered Lumens:** 1600/708
- Total Power:** 83W
- LED Power:** 19.5W
- CRI:** 90
- Color Temperature:** 3000K
- LED Rated Life:** 50,000 hrs
- LED Dimming:** 100%-10% ELV/TRIAC  
(Refer to online product page for dimming compatibility)

- 3 fan speeds
- Silent 153 x 16 AC motor
- Pull chain operation
- Fan is reversible from housing

Model	Housing	Blade
<b>F-072L</b>	<b>MB</b> Matte Black	Matte Black
	<b>MW</b> Matte White	Matte White

Example: **F-072L-MB**

ENERGY GUIDE		
Standard	High Speed	Weighted Average
Electricity	63W	40W
Airflow	5,001 CFM	3,717 CFM
Energy Costs*	-	\$11/yr
Efficiency	92 CFM/W	92 CFM/W


\*Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day

### ACCESSORIES *sold separately*

<b>DC-1</b> Coupler	<b>MB</b>	Matte Black
	<b>MW</b>	Matte White
<b>SC-</b> Slope Ceiling Kit	<b>MB</b>	Matte Black
	<b>MW</b>	Matte White
<b>DR-</b> Downrods	<b>12"</b>	<b>MB</b> Matte Black <b>MW</b> Matte White
	<b>18"</b>	
	<b>24"</b>	
	<b>36"</b>	
	<b>48"</b>	
	<b>60"</b>	
<b>72"</b>		



ATLANTIS FLUSH FLUSH MOUNT LED FAN

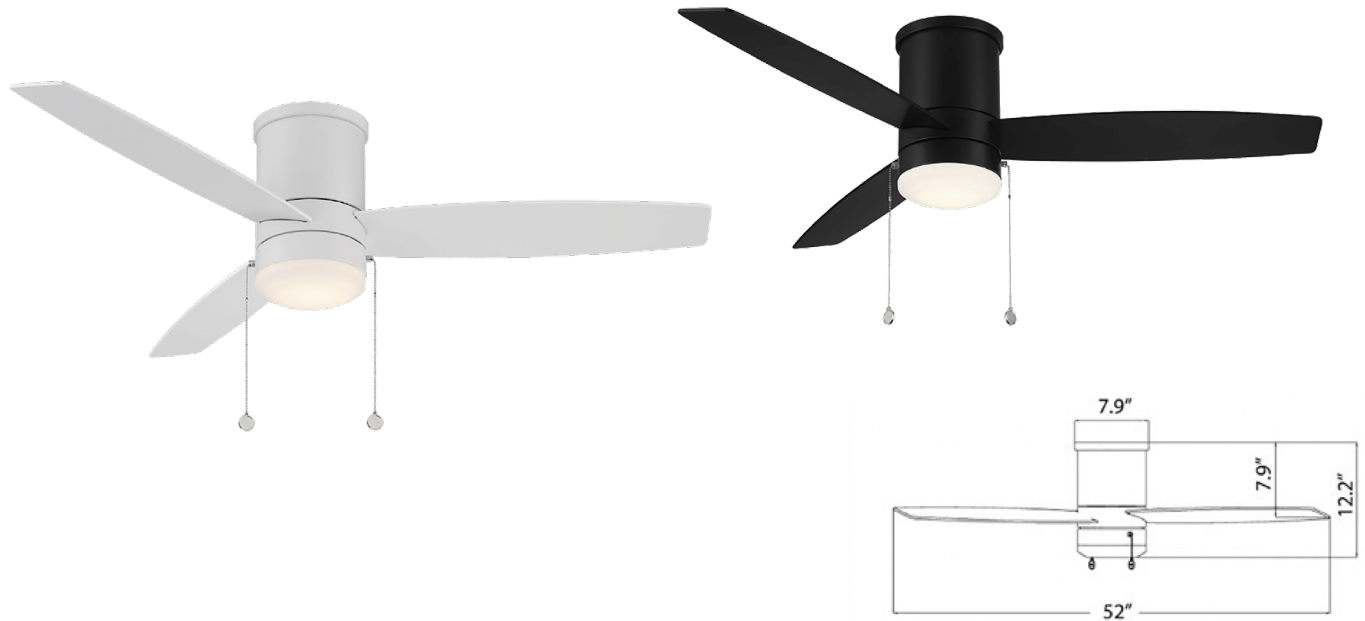

ATLANTIS FLUSH offers a Damp rated, high-value fan with three speed options and can be reversed from the housing. Enhance your interiors with the gently-curved shape of this elegant fan.

- Blade:** 13° pitch, 52" sweep, plywood
- Lead Wire** 8"
- Hanging Weight:** 18 lbs
- Lumens/Delivered Lumens:** 1600/708
- Total Power:** 83W
- LED Power:** 19.5W
- CRI:** 90
- Color Temperature:** 3000K
- LED Rated Life:** 50,000 hrs
- LED Dimming:** 100%-10% ELV/TRIAC  
(Refer to online product page for dimming compatibility)

- 3 fan speeds
- Silent 153 x 16 AC motor
- Pull chain operation
- Fan is reversible from housing

Model		Housing	Blade
<b>F-073L</b>	<b>MB</b>	Matte Black	Matte Black
	<b>MW</b>	Matte White	Matte White

Example: **F-073L-MB**

ENERGY GUIDE		
Standard	High Speed	Weighted Average
Electricity	63W	40W
Airflow	4,116 CFM	3,046 CFM
Energy Costs*	-	\$11/yr
Efficiency	75 CFM/W	75 CFM/W

\*Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day





CALIFORNIA  
**JA8**  
TITLE 24




### Cut and securely reconnect with ease



Input: 24VDC  
Lumens: Up to 300 lm/ft  
Rated Life: 50,000 hours


- Cut and re-connectable with secure screw terminal accessories
- May be cut every 2 inches
- Uniform illumination
- Seamless line of light



System	Lumens	Max Run	Wattage	Length	Length Description	Color Temp	CRI	Finish
<b>T24-GE1</b>	100+ lm/ft	40ft (60W), 40 ft (96W)	1.2W/ft	<b>15</b>	15 ft spool (incl. 2 pcs Tape to Tape Connector)	<b>27</b> 2700K	90	<b>WT</b> White
<b>T24-GE2</b>	200+ lm/ft	24ft (60W), 30ft (96W)	2.2W/ft	<b>24</b>	24 ft spool (incl. 4 pcs Tape to Tape Connector)	<b>30</b> 3000K		
<b>T24-GE3</b>	300+ lm/ft	15ft (60W), 24ft (96W)	3.9W/ft	<b>100</b>	100 ft spool (incl. 10 pcs Tape to Tape Connector)	<b>35</b> 3500K		
						<b>40</b> 4000K		

Example: **T24-GE3-15-27WT**

### EXAMPLE INSTALLATION FOR WIRELESS AND DMX CONTROL

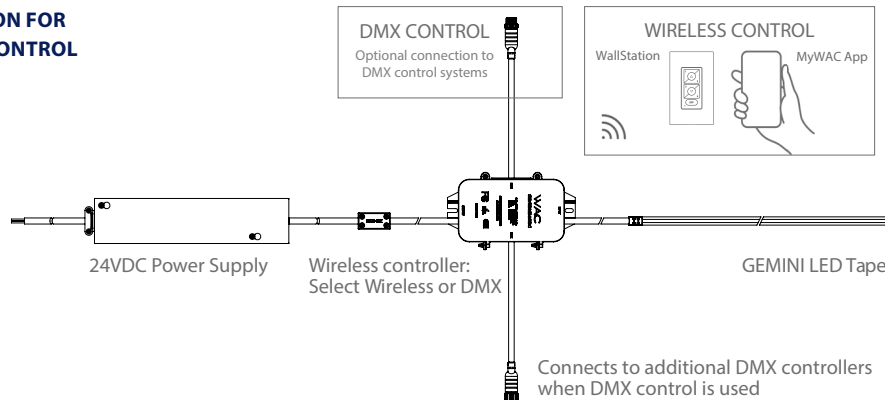



POWER SUPPLY AND CONTROLLER



- ELV Dimming 100%-10%
- 6ft Output lead wires



- TRIAC, ELV Dimming 100%-1%
- Universal Input, ≤ 0.9 pf
- Overload and short circuit protection







- Allows Gemini Tape to be wirelessly controlled through MyWAC app, WallStation, or DMX. Wi-Fi network is required to operate the system.



Model	Dimension	Input	Output	Dimming
<b>EN-BT60-24*</b>	6 1/2" x 2 1/16" x 1 1/4"	120V	24VDC 60W	ELV
<b>EN-BT96-24*</b>	6 1/2" x 2 1/16" x 1 1/4"	120V	24VDC 96W	ELV
<b>PS-24DC-U60R-BT</b>	8 13/16" x 2 1/16" x 1 1/4"	120V-277V	24VDC 60W	ELV/TRIAC
<b>PS-24DC-U96R-BT</b>	8 13/16" x 2 1/16" x 1 1/4"	120V-277V	24VDC 96W	ELV/TRIAC
<b>CTR-WDMX-24VDC</b>	5" x 3 1/2" x 1 1/2"	24VDC	24VDC 90W	MyWAC/ WallStation/ DMX

\*Not compatible with wireless controller (CTR-WDMX-24VDC)


ACCESSORIES FOR GEMINI TAPE

Type	Model	Finish
 Tape to Tape Connector Connects tape sections (10 pieces per pack)	<b>T24-BS-MM</b>	
 Power to Tape Connector Connects tape sections (10 pieces per pack)	<b>T24-BS-PM</b>	<b>CL</b> Clear
 L Connector Connects tape sections (2 pieces per pack)	<b>T24-BS-L</b>	
 Flex Y Connector Connects tape sections and power feed Includes LED-T-B (1pc)	<b>T24-BS-Y</b>	<b>BK</b> Black <b>WT</b> White
 Flex X Connector Connects tape sections and power feed Includes LED-T-B (1pc)	<b>T24-BS-X</b>	
 Low Voltage Wiring Box Neatly house connections for up to 2 wires	<b>LED-T-B</b>	<b>WT</b> White

Example: **T24-BS-MM-CL**

Type	Model	Finish
 Joiner Cable Extend distance between tape sections	<b>T24-BS-IC-002</b>	2 in
	<b>T24-BS-IC-006</b>	6 in
	<b>T24-BS-IC-012</b>	1 ft
	<b>T24-BS-IC-036</b>	3 ft
	<b>T24-BS-IC-072</b>	6 ft
 Extension Cable Extends distance between tape sections and power supply (Includes LED-T-B (1 pc) & screw driver)	<b>T24-BS-EX2-072</b>	6 ft
	<b>T24-BS-EX2-144</b>	12 ft
	<b>T24-BS-EX2-240</b>	20 ft
	<b>T24-BS-EX2-480</b>	40 ft

Example: **T24-BS-EX2-240-WT**

Model	Finish	Input/Output	L	W	H	Description
 <b>IR-96-24VACDC-BK</b> <b>IR-96-24VACDC-WT</b>	Black White	24V AC/DC 96W	1 3/8"	3/4"	3/8"	IR (Infrared) sensor switch works by turning the lights on when it becomes unobstructed. Can be surface mounted with bracket provided or double sided adhesive.





## INDOOR ALUMINUM CHANNELS



**Shallow Aluminum Channel**      **LED-T-CH4**      5 feet  
**Additional End Caps**      **LED-T-CH4-EC**      2 pcs

Includes a diffuser, two end caps, four mounting clips and four screws.



**Aluminum Channel**      **LED-T-CH**      5 feet  
**Additional End Caps**      **LED-T-CH-EC**      2 pcs

Diffuses light from WAC tape  
 Includes a diffuser, two end caps, and five screws



**Deep Aluminum Channel**      **LED-T-CH1**      5 feet  
**Additional End Caps**      **LED-T-CH1-EC**      2 pcs

Eliminates visible hot spots  
 Includes a diffuser, 2 end caps, and 5 screws



**45° Angled Aluminum Channel**      **LED-T-CH2**      5 feet  
**Additional End Caps**      **LED-T-CH2-EC**      2 pcs

Includes a diffuser, 2 end caps, and 5 screws



**Spot Optic - Deep Channel\***      **LED-T-CH3-SP**      5 feet  
**Additional End Caps**      **LED-T-CH1-EC**      2 pcs

Eliminates visible hot spots      \*Spot 9° Beam Angle  
 Includes a diffuser, 2 end caps, and 5 screws



**Flood Optic - Deep Channel\***      **LED-T-CH3-FL**      5 feet  
**Additional End Caps**      **LED-T-CH1-EC**      2 pcs

Eliminates visible hot spots      \*Flood 54° Beam Angle  
 Includes a diffuser, 2 end caps, and 5 screws




**Wide Flood Optic - Deep Channel\***      **LED-T-CH3-WF**      5 feet  
**Additional End Caps**      **LED-T-CH1-EC**      2 pcs

Eliminates visible hot spots      \*Wide Flood 84° Beam Angle  
 Includes a diffuser, 2 end caps, and 5 screws



**LED-T-CL3-PT**

Includes 2 pieces, four screws. Use to mount Aluminum Channel



**Adjustable Channel Clip**      **LED-T-CL2-PT**


Includes 2 pieces, 4 screws. Used to mount Aluminum Channel.  
 Adjust 50° from center either way

## INDOOR MOUNTING ACCESSORIES



**Aluminum Retrofit Channel**      **LED-T-RC**      3 feet

Can be bent to create fixed curves or used as a glare shield

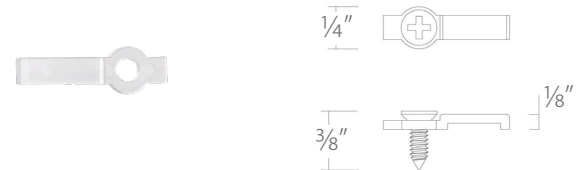

**Plastic Mounting Clip**      **T24-BS-CL1**      Clear

For installation on non-flat surfaces  
 Includes: 10 pcs plastic clips and 10 pcs screws



50% OFF 100%



ROCKER SWITCH  
ADJUSTS BETWEEN  
50%, OFF, OR 100%



ALL-IN-ONE CCT SELECTABLE,  
ADJUSTS BETWEEN  
2700K, 3000K  
OR 3500K



BARLIGHT UNDER CABINET LIGHTING




ALL-IN-ONE CCT SELECTABLE



Perfect for lighting kitchen counters, our 120V under cabinet Barlight with selectable 3 CCT technology and a High-Low switch to provide quality illumination for all tasks.

- Input:** 120V
- Dimming:** 100%-10% ELV, 100%-5% TRIAC
- Rated Life:** 50,000 hours
- Rocker switch to adjust between 0%, 50%, or 100%
- Construction: aluminum with white PC diffuser

Model	Length	Wattage	Max Lumens at 3000K	Color Temp	CRI	Finish
<b>BA-AC</b>	<b>08</b> 8"	6.5W	355	<b>CS</b> 2700K 3000K 3500K	90	<b>WT</b> <i>White</i>
	<b>18</b> 18"	10.5W	600			
	<b>24</b> 24"	15W	910			
	<b>30</b> 30"	17.5W	1075			



Example: **BA-AC18-CS-WT**

Model	Description	Length	Finish
<b>BA-I</b>	1" Connector BA-I		<b>WT</b> <i>White</i>
<b>BA-IC12</b> <b>BA-IC24</b> <b>BA-IC36</b>	Interconnect Cable BA-IC	12" 24" 36"	
<b>BA-PC6</b>	Power Cord	72"	






MINI PUCK LIGHT UNDER CABINET LIGHTING



An innovative under cabinet lighting solution that can be surface mounted or recessed mounted into cabinetry for a cleaner appearance, Mini Puck Lights deliver optimal ambient illumination in kitchens and other spaces.

- Input:** 24VAC or 24VDC  
**Dimming:** 100%-10% ELV, 100%-5% TRIAC  
**Rated Life:** 50,000 hours
- Install as surface or recessed
  - Compatible with portable wall plug or hardwired 24V driver/transformer
  - Construction: die-cast Aluminum and PC diffuser
  - Each fixture equipped with 6ft lead wires

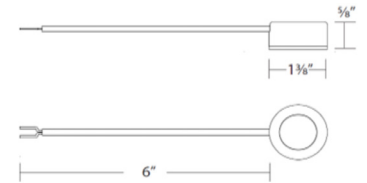

	Model	Wattage	Lumens	Color Temp	CRI	Finish
	<b>HR-LED10</b> 1 single light					
	<b>HR-LED10/6</b> Pack of 6 lights	2W per light	95lm per light	<b>30</b> 3000K	90	<b>BK</b> Black <b>WT</b> White
	<b>HR-LED10/10</b> Pack of 10 lights					
	<b>HR-LED10/6K</b> Puck Light Kit: 6 wired lights, 1 multiple terminal block, and 24V Portable Power Supply					

Example: **HR-LED10-30-BK**

COMPATIBLE 24VDC CLASS 2 POWER SUPPLY

	Model	Dimensions	Input	Output	Dimming	Finish
Portable Power Supply	<b>EN-2420D-P-BK</b> <b>EN-2420D-P-WT</b>	2¾" x 1½" x 1½"	100V-240V	24VDC 24W	Non-Dimmable	Black White
Remote Power Supply	<b>EN-24DC060-UNV-RB2</b> <b>EN-24DC096-UNV-RB2</b>	8¼" x 2¼" x 2¼" 8¼" x 2¼" x 2¼"	100V-277V 100V-277V	24VDC 60W 24VDC 96W	TRIAC, ELV TRIAC, ELV	Black Black

COMPATIBLE 24VAC CLASS 2 POWER SUPPLY

	Model	Dimensions	Input	Output	Dimming	Finish
Portable Power Supply	<b>EN-2460-P-AR</b>	2¾" x 1½" x 1¾"	120V	24VAC 60W	Non-Dimmable	Black
Remote Power Supply	<b>EN-2460-RB2</b> <b>EN-24100-RB2</b>	6½" x 1½" x 1¼" 6½" x 1½" x 1¼"	120V 120V	24VAC 60W 24VAC 100W	ELV	Black Black

MULTIPLE TERMINAL BLOCK

	Model	Description	Finish
	<b>MTB-01</b> <b>MTB-01-WT</b>	Multiple Terminal Block (Enclosure for up to 6 output connections)	Black White

## PUCK LIGHT UNDER CABINET LIGHTING



Surface or Recessed Mounted

120V Direct Input  
No Driver Required

### BUILD A SYSTEM

Available with 3 CCT selectable color temperatures, finishes, and recessed or surface mounted options. Order single pucks or kits of multiple pucks to link together.

### BEAUTIFULLY FINISHED CAST ALUMINUM



Black



Brushed Nickel



White

### ALL-IN-ONE CCT SELECTABLE







PUCK LIGHT UNDER CABINET LIGHTING



A solid lighting solution for kitchen counters, our 120V under cabinet Puck Light with 3 CCT selectable technology provides quality illumination for all tasks.




**Input:** 120V  
**Dimming:** 100%-10% ELV  
**Rated Life:** 50,000 hours

- Install as surface or recessed mount
- No driver required
- Construction: die-cast aluminum and PC diffuser



	Model	Wattage	Max Lumens	Color Temp	CRI	Finish
	<b>HR-AC70</b> 1 single wired light	4W	290	<b>CS</b> 2700K 3000K 3500K	90	<b>BK</b> <b>BN</b> <b>WT</b> Black Brushed Nickel White
	<b>HR-AC71</b> 1 single wired light and cord					
	<b>HR-AC72</b> 1 double wired light					
	<b>HR-AC73</b> Puck light kit: 2 double wired lights, 1 single wired light, and cord	4W x 3	290 x 3			

Example: **HR-AC72-CS-BN**

	Model	Description		CRI	Finish
	<b>HR-PC6</b>	Power Cord		90	<b>BK</b> <b>WT</b> Black White
	<b>HR-HWB</b>	Hardware Box			
	<b>HR-IC</b>	<b>12</b> <b>24</b> <b>36</b>	12" 24" 36" Linking Cable		

Example: **HR-HWB-BK**





LOTOS 2" ADJUSTABLE LED RECESSED



Shallow profile LED that is designed to fit in furred down ceilings without sacrificing lumen output.

**Input:** 120-277V

**Dimming:** 100%-5% ELV, TRIAC

**Rated Life:** 50,000 hours

- Fixture height: 2¼", driver: 1¼"
- 360° retractable pivot: downlight and adjustable
- Heavy gauge retention clips secure fixture to ceiling
- Installs into ceilings between ½" and 1½" thick
- Minimum plenum space required: 4"
- Construction: steel with frosted TIR lens

	Model	Beam	Wattage	Max Lumens	Max CBCP	Color Temp	CRI	Finish	
	<p><b>R2ERAR</b> 2" Round Adjustable IC Rated, Airtight, Wet Location Listed</p>								
			6W	500	1203				
		<b>W</b> 45°					<b>930</b> 3000K	90	<b>WT</b> White
			12W	500x2	1203x2				
	<p><b>R2ESAR</b> 2" Square Adjustable IC Rated, Airtight, Wet Location Listed</p>								
			18W	500x3	1203x3				
	<p><b>R2ESAR-2</b> 2 Light Adjustable IC Rated, Airtight, Wet Location Listed</p>								
			18W	500x3	1203x3				
	<p><b>R2ESAR-3</b> 3 Light Adjustable IC Rated, Airtight, Wet Location Listed</p>								
			18W	500x3	1203x3				

Example: **R2ERAR-W930-WT**

## LOTOS 4" & 6" ADJUSTABLE LED RECESSED



ALL-IN-ONE CCT SELECTABLE



**R4ERAR/R6ERAR**



Shallow profile LED that is designed to fit in furred down ceilings without sacrificing lumen output.

- |                                    |  |   |
|------------------------------------|--|---|
| <b>Input:</b> 120-277V             | • Fixture height: 1½", driver 1¼"                        | • Installs into ceilings between ½" and 1½" thick |
| <b>Dimming:</b> 100%-5% ELV, TRIAC | • 360° retractable pivot: downlight and adjustable       | • Minimum plenum space required: 4"               |
| <b>Rated Life:</b> 50,000 hours    | • Heavy gauge retention clips secures fixture to ceiling | • Construction: steel with frosted TIR lens       |

	Model	Beam	Wattage	Max Lumens	Max CBCP	Color Temp	CRI	Finish
	<b>R4ESAR</b> 4" Square Adjustable IC Rated, Airtight, Wet Location Listed	<b>W</b> 45°	9W	750	1050	2700K 3000K <b>9CS</b> 3500K 4000K 5000K	90	<b>WT</b> White
	<b>R4ERAR</b> 4" Round Adjustable IC Rated, Airtight, Wet Location Listed	<b>W</b> 45°	9W	800	1020	2700K 3000K <b>9CS</b> 3500K 4000K 5000K	90	<b>BK</b> Black <b>WT</b> White
	<b>R6ERAR</b> 6" Round Adjustable IC Rated, Airtight, Wet Location Listed	<b>W</b> 45°	15W	1340	1896	2700K 3000K <b>9CS</b> 3500K 4000K 5000K	90	<b>BK</b> Black <b>WT</b> White

Example: **R4ERAR-W9CS-WT**

- Installs into ceilings between ½" and 1¾" thick
- Fire Rated - ASTM E119 and UL 263 certified for 2 hours

FIRE RATED	Model	Beam	Wattage	Max Lumens	Max CBCP	Color Temp	CRI	Fire Rated	Finish
	<b>R4ERAR</b> 4" Round Adjustable IC Rated, Airtight, Wet Location Listed Fire Rated	<b>W</b> 45°	9W	800	1020	2700K 3000K <b>9CS</b> 3500K 4000K 5000K	90	<b>F</b>	<b>WT</b> White
	<b>R6ERAR</b> 6" Round Adjustable IC Rated, Airtight, Wet Location Listed Fire Rated	<b>W</b> 45°	9W	1320	1896	2700K 3000K <b>9CS</b> 3500K 4000K 5000K	90	<b>F</b>	<b>WT</b> White

Example: **R6ERAR-W9CS-FWT**

Frame-In Kit (Optional Accessory)	Model	Notes
New Construction Frame	<b>RER-FRAME</b>	Suitable for joists ranging from 12" to 24" apart



LOTOS R 4" REGRESSED ADJUSTABLE LED RECESSED



ALL-IN-ONE CCT SELECTABLE



Shallow profile LED that is designed to fit in furred down ceilings without sacrificing lumen output.

- |  |   |   |
|--|---|---|
| <p><b>Input:</b> 120-277V</p> <p><b>Dimming:</b> 100%-5% ELV, TRIAC</p> <p><b>Rated Life:</b> 50,000 hours</p> | <ul style="list-style-type: none"> <li>• Fixture height: 1½", driver 1¼"</li> <li>• 360° retractable pivot: downlight and adjustable</li> <li>• Beam cutoff angle: 15°</li> <li>• Heavy gauge retention clips secures fixture to ceiling</li> </ul> | <ul style="list-style-type: none"> <li>• Installs into ceilings between ½" and 1½" thick</li> <li>• Minimum plenum space required: 4"</li> <li>• Construction: steel with frosted TIR lens</li> </ul> |
|--|---|---|

	Model	Beam	Wattage	Max Lumens	Max CBCP	Color Temp	CRI	Finish
	<b>R4ERA2R</b>					2700K		
	4" Round Regressed Adjustable	<b>W</b>	50°	9W	775	750		
	IC Rated, Airtight, Wet Location Listed					<b>9CS</b>	90	<b>BK</b>
								<b>WT</b>
								Black White

Example: **R4ERA2R-W9CS-WT**

- Installs into ceilings between ½" and 1¾" thick
- Fire Rated - ASTM E119 and UL 263 certified for 2 hours



FIRE RATED

	Model	Beam	Wattage	Max Lumens	Max CBCP	Color Temp	CRI	Fire Rated	Finish
	<b>R4ERA2R</b>					2700K			
	4" Round Regressed Adjustable	<b>W</b>	50°	9W	775	750			
	IC Rated, Airtight, Wet Location Listed					<b>9CS</b>	90	<b>F</b>	
	Fire Rated							<b>WT</b>	White

Example: **R4ERA2R-W9CS-FWT**

Frame-In Kit (Optional Accessory)

	Model	Notes
New Construction Frame	<b>RER-FRAME</b>	Suitable for joists ranging from 12" to 24" apart

## LOTOS 4" & 6" ROUND LED RECESSED



### ALL-IN-ONE CCT SELECTABLE



Shallow profile LED that is designed to fit in furred down ceilings without sacrificing lumen output.

**Input:** 120-277V  
**Dimming:** 100%-5% ELV, TRIAC  
**Rated Life:** 50,000 hours

- Fixture height: 1", driver 1"
- Heavy gauge retention clips secure fixture to ceiling
- Installs into ceilings between 1/2" and 1 1/2" thick
- Minimum plenum space required: 4"
- Construction: steel with translucent diffuser

	Model	Beam	Wattage	Max Lumens	Color Temp	CRI	Finish
	<b>R4ERDR</b> 4" Round Downlight IC Rated, Airtight, Wet Location Listed	<b>W</b>	8W	725	2700K 3000K 3500K 4000K 5000K	90	<b>WT</b> White
	<b>R6ERDR</b> 6" Round Downlight IC Rated, Airtight, Wet Location Listed	<b>W</b>	14W	1200			

Example: **R4ERDR-W9CS-WT**

- Installs into ceilings between 1/2" and 1 3/4" thick
- Fire Rated - ASTM E119 and UL 263 certified for 2 hours

	Model	Beam	Wattage	Max Lumens	Color Temp	CRI	Fire Rated	Finish
	<b>R4ERDR</b> 4" Round Downlight IC Rated, Airtight, Wet Location Listed Fire Rated	<b>W</b>	8W	725	2700K 3000K 3500K 4000K 5000K	90	<b>F</b>	<b>WT</b> White
	<b>R6ERDR</b> 6" Round Downlight IC Rated, Airtight, Wet Location Listed Fire Rated	<b>W</b>	12W	1200				

Example: **R4ERDR-W9CS-FWT**

Frame-In Kit (Optional Accessory)	Model	Notes
New Construction Frame	<b>RER-FRAME</b>	Suitable for joists ranging from 12" to 24" apart



LOTOS 4" & 6" SQUARE LED RECESSED



ALL-IN-ONE CCT SELECTABLE



Shallow profile LED that is designed to fit in furred down ceilings without sacrificing lumen output.

**Input:** 120-277V

**Dimming:** 100%-5% ELV, TRIAC

**Rated Life:** 50,000 hours

- Fixture height: 1", driver 1"
- Heavy gauge retention clips secures fixture to ceiling
- Installs into ceilings between 1/2" and 1 1/2" thick
- Minimum plenum space required: 4"
- Construction: steel with translucent diffuser

	Model	Beam	Wattage	Max Lumens	Color Temp	CRI	Finish
	<b>R4ESDR</b> 4" Square Downlight IC Rated, Airtight, Wet Location Listed	<b>W</b>	8W	600	2700K 3000K <b>9CS</b> 3500K 4000K 5000K	90	<b>WT</b> White
	<b>R6ESDR</b> 6" Square Downlight IC Rated, Airtight, Wet Location Listed	<b>W</b>	14W	950			

Example: **R4ESDR-W9CS-WT**

Frame-In Kit (Optional Accessory)	Model	Notes
New Construction Frame	<b>RER-FRAME</b>	Suitable for joists ranging from 12" to 24" apart

## ION 2" LED RECESSED



Minimum profile ION 2" Round and Square downlight with removable driver and electrical box for easy remodel or new construction installation.

**Power:** 9W  
**Input:** 120-277V  
**Dimming:** 100%-10% ELV, 100%-5% TRIAC  
**Rated Life:** 50,000 hours

- Available as a remodel or new construction
- Installs into ceilings between 1/2" and 1 1/2" thick
- Construction: die-cast aluminum with frosted TIR lens



	Model	Beam	Max Lumens	Max CBCP	Color Temp	CRI	Finish	
	<b>R2DRDR</b> Round Remodel IC Rated, Airtight, Wet Location Listed	F 45°	680	1390	930	3000K	90	<b>WT</b> White
	<b>R2DRDN</b> Round New Construction IC Rated, Airtight, Wet Location Listed							
	<b>R2DSDR</b> Square Remodel IC Rated, Airtight, Wet Location Listed	F 45°	735	1390	930	3000K	90	<b>WT</b> White
	<b>R2DSDN</b> Square New Construction IC Rated, Airtight, Wet Location Listed							

Example: **R2DRDR-F930-WT**

### Frame-In Kit (Optional Accessory)

New Construction Frame



**R2DRDN-FRAME**

Ceiling thickness: 1/2" - 1 1/2"

Model

Notes



PATRIOT 3" LED RECESSED



ALL-IN-ONE CCT SELECTABLE



5-CCT meets adjustability. 3" PATRIOT Recessed Downlight and Adjustable provides up to 1000 lumens, perfect for residential applications. An optional frame-in kit is available for all new construction installations.

**Power:** 12W  
**Input:** 120-277V  
**Dimming:** 100%-10% ELV, 100%-5% TRIAC  
**Rated Life:** 50,000 hours

- Available as a remodel or new construction
- Installs into ceilings between 1/2" and 1 1/2" thick
- Two beam angle options included: 45° beam film pre-installed, remove film for 25° narrow beam
- Construction: die-cast aluminum with reflector

	Model	Beam	Max Lumens	Max CBCP	Color Temp	CRI	Finish
	<b>R3HRDR</b> Round Remodel IC Rated, Airtight, Wet Location Listed	<b>F</b> 25° 45°	1035	3045	<b>9CS</b> 2700K 3000K 3500K 4000K 5000K	90	<b>WT</b> White
	<b>R3HRAR</b> Round Adjustable Remodel IC Rated, Airtight, Wet Location Listed		1000	3095			
	<b>R3HSDR</b> Square Remodel IC Rated, Airtight, Wet Location Listed		1035	3045			
	<b>R3HSAR</b> Square Adjustable Remodel IC Rated, Airtight, Wet Location Listed		1000	3095			

Example: **R3HRDR-F9CS-WT**

Frame-In Kit (Optional Accessory)

	Model	Notes
New Construction Frame	<b>R3H-FRAME</b>	Ceiling thickness: 1/2" - 1 1/2"



## POP-IN 4" LED RECESSED



### ALL-IN-ONE CCT SELECTABLE



Minimum profile downlight with driver and electrical connection box attached to fixture for easy remodel or new construction installation.

**Power:** 12W  
**Input:** 120-277V  
**Dimming:** 100%-10% ELV, 100%-5% TRIAC  
**Rated Life:** 50,000 hours

- Electrical wiring box directly on the back of the fixture
- Available as a remodel or new construction
- Installs into ceilings between 1/2" and 1 1/2" thick
- Construction: die-cast aluminum with frosted TIR lens

Model	Beam	Max Lumens	Max CBCP	Color Temp	CRI	Finish
<p><b>R4DRDR</b>                      Round                      Remodel                      IC Rated, Airtight,                      Wet location Listed</p>						
<p><b>R4DRDN</b>                      Round                      New construction                      IC Rated, Airtight,                      Wet location Listed</p>		1080	1309			
<p><b>R4SDR</b>                      Square                      Remodel                      IC Rated, Airtight,                      Wet location Listed</p>						
<p><b>R4SDN</b>                      Square                      New construction                      IC Rated, Airtight,                      Wet location Listed</p>	<b>F</b> 45°	1000	1256	<b>9CS</b> 2700K 3000K 3500K 4000K 5000K	90	<b>BK</b> Black <b>WT</b> White

Example: **R4DRDR-F9CS-WT**

### Frame-In Kit (Optional Accessory)

### Model

### Notes

New Construction Frame



**R4DRDN-FRAME**

Ceiling thickness: 1/2"-1 1/2"



BLAZE 6" LED RECESSED




ALL-IN-ONE CCT SELECTABLE



BLAZE 6" Round and Square.  
5-CCT selectable downlight.

**Power:** 25W  
**Input:** 120-277V  
**Dimming:** 100%-10% ELV, 100%-5% TRIAC  
**Rated Life:** 50,000 hours


- Available as a remodel or new construction
- Installs into ceilings between 1/2" and 1 1/2" thick
- Construction: die-cast aluminum with frosted TIR lens

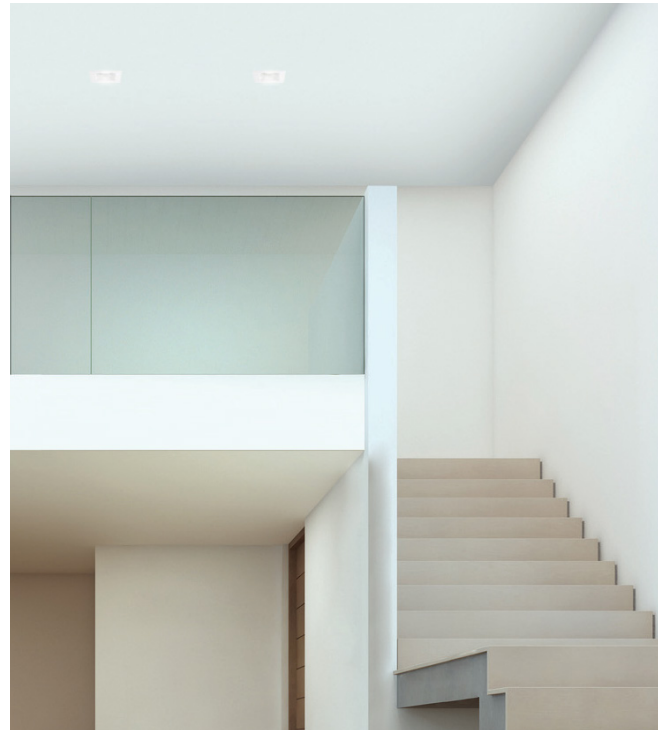

	Model	Beam	Max Lumens	Max CBCP	Color Temp	CRI	Finish
	<b>R6DRDR</b> Round Remodel IC Rated, Airtight, Wet Location Listed	F 55°	2485	2130	<b>9CS</b> 2700K 3000K 3500K 4000K 5000K	90	<b>WT</b> White
	<b>R6DRDN</b> Round New construction IC Rated, Airtight, Wet location Listed						
	<b>R6SDR</b> Square Remodel IC Rated, Airtight, Wet location Listed		2360	2060			
	<b>R6SDN</b> Square New Construction IC Rated, Airtight, Wet location Listed						

Example: **R6SDR-F9CS-WT**

Frame-In Kit (Optional Accessory)	Model	Notes
New Construction Frame	<b>R6DRDN-FRAME</b>	Ceiling thickness: 1/2"-1 1/2"





Quick and convenient. Easy to use and easy to install, our new Twist-N-Lite system offers a variety of surface mounts and pendant luminaires in five color temperatures and three finishes. A single flexible mounting base accommodates our complete suite of Twist-N-Lite products. The flexible design enables you to interchange the fixtures in the field to meet your various lighting applications. This energy-efficient engineering wonder offers dimmable options for high performance and a classic, minimalistic aesthetic. Select your color temperature, Twist it in and Turn it on. Elevating multifunctional illumination to a higher standard.

**Input:** 120V  
**Dimming:** 100%-10% ELV, 100%-5% TRIAC  
**Rated Life:** 50,000 hours

- Installs over 3", 4" or combination 3/0, 4/0 electrical box
- Construction: aluminum with translucent acrylic diffuser
- Shared canopy allows for easily swapping between fixtures without adjusting the mounting hardware
- All wiring and connections are made in the junction box prior to installing the mounting base and canopy

**Quick Install:** Mount and power any fixture in the Twist-N-Lite family by twisting it onto the canopy





TWIST-N-LITE LUMINAIRE SYSTEM




ALL-IN-ONE CCT SELECTABLE



- 45° flood beam angle

Example: **FM-240103-CS-WT**


Model	Wattage	Max Lumens	Color Temp	CRI	Finish
<b>FM-240103</b>	12W	900	2700K	90	<b>BK</b> Black <b>BN</b> Brushed Nickel <b>WT</b> White
			3000K		
			3500K		
			4000K		
			5000K		



- Dual-layer acrylic for frosted and even glow

Example: **FM-240203-CS-BK**


Model	Wattage	Max Lumens	Color Temp	CRI	Finish
<b>FM-240203</b>	9W	550	2700K	90	<b>BK</b> Black <b>BN</b> Brushed Nickel <b>WT</b> White
			3000K		
			3500K		
			4000K		
			5000K		



- Dual-layer acrylic for frosted and even look

Example: **FM-240209-CS-BN**


Model	Wattage	Max Lumens	Color Temp	CRI	Finish
<b>FM-240209</b>	22W	1500	2700K	90	<b>BK</b> Black <b>BN</b> Brushed Nickel <b>WT</b> White
			3000K		
			3500K		
			4000K		
			5000K		



- Dual-layer acrylic for frosted and even look
- Retract or extend the cable by pressing on the cable gripper

Example: **PD-240212-CS-BK**

Model	Wattage	Max Lumens	Color Temp	CRI	Finish
<b>PD-240212</b>	13W	900	2700K	90	<b>BK</b> Black <b>BN</b> Brushed Nickel <b>WT</b> White
			3000K		
			3500K		
			4000K		
			5000K		







EDGELESS  
LED CEILING OR WALL LUMINAIRE



ALL-IN-ONE CCT SELECTABLE



5"



8"



12"

Edgeless LED luminaires are designed with a low profile and slim trim. They are engineered for smooth, glare-free, consistent illumination. A welcome addition to ceilings and walls for various applications.

**Input:** 120V  
**Dimming:** 100%-10% ELV, 100%-5% TRIAC  
**Rated Life:** 50,000 hours

- Size: 5", 8", 12"
- Install into 3", 4" or a combination 3/0-4/0 electrical box
- Construction: aluminum with translucent diffuser



	Model	Wattage	Max Lumens	Color Temp	CRI	Finish
	<b>FM-240505</b>	15W	1330	<b>9CS</b> 2700K 3000K 3500K 4000K 5000K	90	<b>BK</b> Black <b>WT</b> White
	<b>FM-240508</b>	20W	1985			
	<b>FM-240512</b>	30W	2750			

Example: **FM-240508-9CS-WT**

## I CAN'T BELIEVE IT'S NOT RECESSED LED CEILING LIGHT



Multiple mid-powered LEDs illuminate the acrylic diffuser uniformly without socket shadows, which are common in conventional flush mounts.

**Input:** 120V  
**Dimming:** 100%-10% ELV, 100%-5% TRIAC  
**Rated Life:** 50,000 hours

- Imitates a traditional 6" line voltage recessed downlight with an R30 light bulb
- Install into 4" junction box or a combination 3/0-4/0 electrical box
- Construction: aluminum with translucent diffuser
- Finished screw caps included to eliminate shadows

	Model	Max Lumens	Power	Color Temp	CRI	Finish
	<b>FM-616G2-930</b>	1050	16W	3000K	90	<b>WT</b> White

Example: **FM-616G2-930-WT**



**DISC**  
LED CEILING LIGHT & RECESSED RETROFIT



**FM-306-930JB-WT**



**FM-306MS-930JB-WT**

Multiple mid-powered LEDs uniformly illuminate the acrylic diffuser.

**Input:** 120V  
**Dimming:** 100%-10% ELV, 100%-5% TRIAC  
**Rated Life:** 50,000 hours

- FM-306MS: motion sensor keeps the light illuminated for 3 minutes before shutting off if no movement is detected
- Construction: aluminum with translucent diffuser

	Model	Max Lumens	Wattage	Color Temp	CRI	Finish	
	<b>FM-304</b>	725	12W	<b>930</b> 3000K	90	<b>WT</b> White	Fits over a 4" recessed can or direct wire in a 3" or 4" junction box or pancake box
	<b>FM-306</b>	950	15W	<b>930</b> 3000K <b>940</b> 4000K	90	<b>WT</b> White	Fits over a 5" to 6" recessed can or direct wire in a 3" or 4" junction box or pancake box
	<b>FM-306</b>	950	15W	<b>930JB</b> 3000K	90	<b>WT</b> White	
	<b>FM-306MS</b> Infrared Motion Sensor	1100	14W	<b>930JB</b> 3000K	90	<b>WT</b> White	Direct mount on a 3" or 4" junction box or pancake box
	<b>FM-309</b>	1725	23W	<b>9CSJB</b> 2700K 3000K 3500K 4000K 5000K	90	<b>WT</b> White	

Example: **FM-306-930JB-WT**



BLO • FLO • GLO  
LED CEILING & WALL MOUNTS



ALL-IN-ONE CCT SELECTABLE




BLO



**Input:** 120-277V  
**Dimming:** 100%-10% ELV, 100%-5% TRIAC  
**Rated Life:** 50,000 hours

- Install over 3", 4" or a combination 3/0, 4/0 electrical box
- Construction: aluminum with translucent acrylic diffuser




Model	Max Lumens	Wattage	Color Temp	CRI	Finish
<b>FM-113</b>	1600	22W	CS 2700K 3000K 3500K 4000K 5000K	90	<b>WT</b> White
<b>FM-115</b>	2230	26W			

FLO



**Input:** 120-277V  
**Dimming:** 100%-10% ELV, 100%-5% TRIAC  
**Rated Life:** 50,000 hours

- Sizes: 24", 36", 48"
- Installation: wall and ceiling
- Construction: aluminum with translucent acrylic diffuser

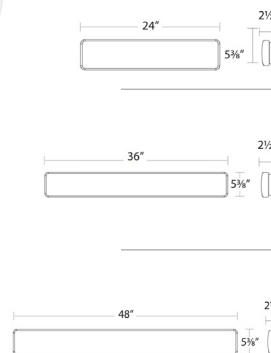


Model	Max Lumens	Wattage	Color Temp	CRI	Finish
<b>WS-224</b>	1400	17W	CS 2700K 3000K 3500K 4000K 5000K	90	<b>WT</b> White
<b>WS-236</b>	2250	28W			
<b>WS-248</b>	2630	32W			

GLO



**Input:** 120-277V  
**Dimming:** 100%-10% ELV, 100%-5% TRIAC  
**Rated Life:** 50,000 hours

- Install over 3", 4" or a combination 3/0, 4/0 electrical box
- Construction: aluminum with translucent acrylic diffuser

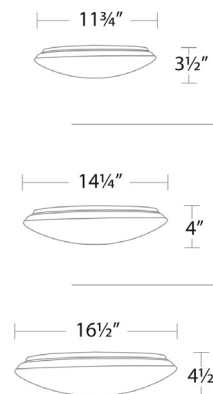

Model	Max Lumens	Wattage	Color Temp	CRI	Finish
<b>FM-211</b>	1160	15W	CS 2700K 3000K 3500K 4000K 5000K	90	<b>WT</b> White
<b>FM-214</b>	1660	22W			
<b>FM-216</b>	2300	26W			



## ROUND & SQUARE 5" LED CEILING OR WALL LUMINAIRE



At just 1/2" thick, these edge-lit flush mounts are frequently replacing the usage of recessed lighting and larger flush mounts to preserve ceiling height. Mounting over standard size junction boxes, the broad illumination is perfect for lighting hallways and other narrow spaces. Available in a range of sizes, smaller sizes are also wet location rated for use outdoors.

**Input:** 120V-277V  
**Dimming:** 100%-10% ELV, 100%-5% TRIAC  
**Rated Life:** 50,000 hours

- Size: 5"
- Install into 3", 4" or a combination 3/0-4/0 electrical box
- Construction: injection molded UV rated PC with translucent diffuser
- Suitable for outdoor and coastal regions

	Model	Wattage	Max Lumens	Color Temp	CRI	Finish
	<b>FM-05RN</b> Round	12W	1050	<b>930</b>	3000K	90
				<b>935</b>	3500K	90
	<b>FM-05SQ</b> Square	12W	1030			<b>BZ</b> Bronze <b>WT</b> White

Example: **FM-05RN-930-WT**

ROUND & SQUARE  
LED CEILING OR WALL LUMINAIRE



**Input:** 120V  
**Dimming:** 100%-10% ELV, 100%-5% TRIAC  
**Rated Life:** 50,000 hours

- Sizes: 7", 11", 15" (Round only)
- Install into 3", 4" or a combination 3/0-4/0 electrical box
- Construction: aluminum with translucent diffuser

		Model	Max Lumens	Wattage	Color Temp	CRI	Finish
		<b>FM-07RN</b> Round	1100	15W			
		<b>FM-11RN</b> Round	1525	20W			<b>BK</b> Black <b>BN</b> Brushed Nickel <b>BZ</b> Bronze <b>WT</b> White
		<b>FM-15RN</b> Round	2550	28W	<b>930</b> 3000K <b>935</b> 3500K	90 90	
		<b>FM-07SQ</b> Square	1100	15W			<b>BN</b> Brushed Nickel <b>BZ</b> Bronze <b>WT</b> White
		<b>FM-11SQ</b> Square	1650	20W			

Example: **FM-15RN-930-WT**





LITHIUM EM BATTERY BACKUP



ALL-IN-ONE CCT SELECTABLE



Convenient emergency battery backup button is discreet to maintain product appearance

The standard ceiling light and emergency battery backup ceiling light are nearly identical in 2 convenient sizes.

High light output, hidden hardware, and broad even illumination are the primary features of this sleek flush mount. Often used in hallways, dorm rooms, and bathrooms. Installation is a snap.

**Input:** 120-277V  
**Dimming:** 100%-10% ELV, 100%-5% TRIAC  
**Rated Life:** 50,000 hours

- During emergency mode, fixture will stay illuminated for 90 minutes at reduced power
- Install over 3", 4" or a combination 3/0-4/0 electrical box
- Construction: aluminum with translucent diffuser

	Model	Wattage	Max Lumens	Color Temp	CRI	Finish
	<b>FM-200111</b>	15W	1080	<b>CS</b> 2700K 3000K 3500K 4000K 5000K	90	<b>BN</b> Brushed Nickel
	<b>FM-200115</b>	25W	1815			
	<b>FM-200115EM</b> Emergency Back Up					
	<b>FM-200118</b>	31W	2410			
	<b>FM-200118EM</b> Emergency Back Up					

Example: **FM-200115-CS-BN**



Multiple mid-powered LEDs deliver soft illumination through translucent acrylic. Metro is available as a wall sconce or as a flush mount to meet a variety of applications. Available in Chrome and Brushed Nickel to pair with popular bath hardware.

- |   |  |
|---|--|
| <p><b>Input:</b> 120-277V</p> <p><b>Dimming:</b> 100%-10% ELV, 100%-5% TRIAC</p> <p><b>Rated Life:</b> 50,000 hours</p> | <ul style="list-style-type: none"> <li>• Sizes: 12", 18"</li> <li>• Fixture height: 1¾"</li> <li>• Install into 3", 4" or a combination 3/0-4/0 electrical box</li> <li>• Construction: aluminum with dual layer acrylic diffuser</li> </ul> |
|---|--|

	Model	Max Lumens	Wattage	Color Temp	CRI	Finish
	<b>FM-180112</b>	1800	24W	30 3000K	90	<b>BN</b> Brushed Nickel <b>CH</b> Chrome
	<b>FM-180118</b>	2375	32W			

Example: **FM-180118-30-BN**

METRO LED VANITY LIGHTS & WALL SCONCE



Multiple mid-powered LEDs deliver soft illumination through translucent acrylic. Metro is available as a wall sconce or as a flush mount to meet a variety of applications. Available in Chrome and Brushed Nickel to pair with popular bath hardware.

- |   |  |
|---|--|
| <p><b>Input:</b> 120-277V</p> <p><b>Dimming:</b> 100%-10% ELV, 100%-5% TRIAC</p> <p><b>Rated Life:</b> 50,000 hours</p> | <ul style="list-style-type: none"> <li>• Sizes: 20", 27", 37"</li> <li>• Construction: aluminum with dual layer acrylic diffuser</li> <li>• Can be mounted vertically or horizontally</li> </ul> |
|---|--|

	Model	Max Lumens	Wattage	Color Temp	CRI	Finish
	<b>WS-180120</b>	1150	16W	<b>30</b> 3000K	90	<b>BN</b> Brushed Nickel <b>CH</b> Chrome
	<b>WS-180127</b>	1450	20W			
	<b>WS-180137</b>	2130	28W			

Example: **WS-180127-30-BN**






REMI LED VANITY LIGHTS & WALL SCNCE



ALL-IN-ONE CCT SELECTABLE

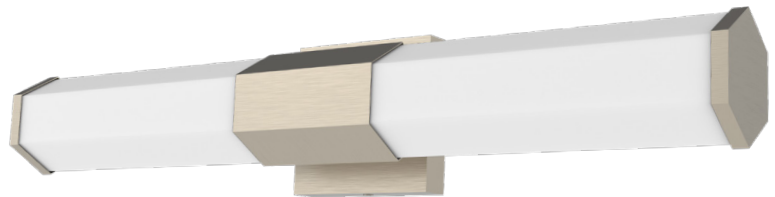

Finely crafted of white acrylic and aluminum, Remi delivers robust, flattering illumination as a vanity luminaire in a elegant bath or wall sconce that blends with any interior decor.

**Input:** 120V  
**Dimming:** 100%-10% ELV, 100%-5% TRIAC  
**Rated Life:** 50,000 hours

- Sizes: 16", 24"
- Construction: aluminum with acrylic diffuser

	Model	Max Lumens	Wattage	Color Temp	CRI	Finish
	<b>WS-230116</b>	900	18W	<b>CS</b> 2700K 3000K 3500K	90	<b>BN</b> Brushed Nickel <b>BK</b> Black
	<b>WS-230124</b>	1500	30W			

Example: **WS-230116-CS-BN**

## STUDIO LED VANITY LIGHTS & WALL SCNCE



ALL-IN-ONE CCT SELECTABLE



Sleek and contemporary. The Studio bath vanity offers a three-in-one LED CCT Selectable feature to create beautiful, flattering illumination for an updated aesthetic. Stylish and modern, the solid linear aluminum profile is durable and works well in various residential and hospitality settings.

**Input:** 120V  
**Dimming:** 100%-10% ELV, 100%-5% TRIAC  
**Rated Life:** 50,000 hours

- Sizes: 26"
- Construction: aluminum with acrylic diffuser
- Can be mounted vertically or horizontally

	Model	Max Lumens	Wattage	Color Temp	CRI	Finish
	<b>WS-240926</b>	1950	31W	<b>CS</b> 2700K 3000K 3500K	90	<b>BN</b> Brushed Nickel <b>BK</b> Black

Example: **WS-240926-CS-BK**



RAZOR LED VANITY LIGHTS & WALL SCNCE



ALL-IN-ONE CCT SELECTABLE



A modern minimalist design evokes a unique mood and feel for any fine bath. The Razor bath vanity is a wall fixture with a contemporary design and a unique aluminum frame offered in black and brushed nickel. The frosted diffuser deploys soft, flattering illumination for your own personal environment, creating a warm and relaxing setting. The three-in-one CCT selectable allows individual color temperature adjustment to suit one's personal preferences.

**Input:** 120V  
**Dimming:** 100%-10% ELV, 100%-5% TRIAC  
**Rated Life:** 50,000 hours

- Sizes: 28"
- Construction: aluminum with glass diffuser
- Can be mounted vertically or horizontally

	Model	Max Lumens	Wattage	Color Temp	CRI	Finish
	<b>WS-241128</b>	835	20W	<b>CS</b> 2700K 3000K 3500K	90	<b>BN</b> Brushed Nickel <b>BK</b> Black

Example: **WS-241128-CS-BN**

## DEMI LED VANITY LIGHTS & WALL SCNCE



### ALL-IN-ONE CCT SELECTABLE



A compact but appealing design that blends well into contemporary bathrooms and powder rooms. This piece features a frosted glass diffuser for robust, flattering illumination in your sanctuary, where you perform most of your primping and prepping for the day ahead. The dimmable, three-in-one CCT selectable feature provides an option to adjust the color temperature of your choice.

**Input:** 120V  
**Dimming:** 100%-10% ELV, 100%-5% TRIAC  
**Rated Life:** 50,000 hours

- Sizes: 27"
- Construction: aluminum with glass diffuser
- Can be mounted vertically or horizontally

	Model	Max Lumens	Wattage	Color Temp	CRI	Finish
	<b>WS-241227</b>	1010	23W	<b>CS</b> 2700K 3000K 3500K	90	<b>BN</b> Brushed Nickel <b>BK</b> Black

Example: **WS-241227-CS-BK**

SLIM LED VANITY LIGHTS & WALL SCNCE



ALL-IN-ONE CCT SELECTABLE



Sleek and versatile with a modern architectural style. Slim is the perfect LED vanity light or wall sconce to provide a flattering glow for grooming in your fine bath.

**Input:** 120V  
**Dimming:** 100%-10% ELV, 100%-5% TRIAC  
**Rated Life:** 50,000 hours

- Sizes: 18", 24", 36"
- Construction: aluminum with acrylic diffuser
- Can be mounted vertically or horizontally


	Model	Max Lumens	Wattage	Color Temp	CRI	Finish
	<b>WS-240818</b>	1300	20W	<b>CS</b> 2700K 3000K 3500K 4000K 5000K	90	<b>BN</b> Brushed Nickel <b>BK</b> Black
	<b>WS-240824</b>	1700	24W			
	<b>WS-240836</b>	2200	30W			

Example: **WS-240824-CS-BK**





TURBO LED VANITY LIGHTS & WALL SCNCE

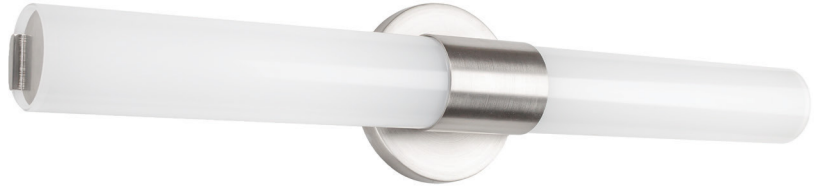

A contemporary design provides soft diffused illumination through translucent acrylic. Turbo can be mounted vertically or horizontally to accommodate a variety of applications. Available in Chrome and Brushed Nickel to pair with popular bath hardware.

- Input:** 120-277V
- Dimming:** 100%-10% ELV, 100%-5% TRIAC
- Rated Life:** 50,000 hours
- Sizes: 14", 24"
- Construction: aluminum with dual layer acrylic diffuser

	Model	Max Lumens	Wattage	Color Temp	CRI	Finish
	<b>WS-180414</b>	1000	12W	<b>30</b> 3000K <b>35</b> 3500K	90 90	<b>BN</b> Brushed Nickel <b>CH</b> Chrome
	<b>WS-180424</b>	1570	18W			

Example: **WS-180414-35-BN**



Sleek style with plated brushed nickel finished end caps and high-powered LEDs that provide broad ample illumination. Fuse can be mounted on walls or on the ceiling to suit a variety of applications and styles in current architectural design.

- Input:** 120V-277V
- Dimming:** 100%-10% ELV, 100%-5% TRIAC
- Rated Life:** 50,000 hours
- Sizes: 16", 27", 37"
- Construction: aluminum with acrylic diffuser
- Installation: wall or ceiling, horizontally or vertically

	Model	Max Lumens	Wattage	Color Temp	CRI	Finish
	<b>WS-180216</b>	1025	16W			
	<b>WS-180227</b>	1450	20W	<b>30</b> 3000K	90	<b>BN</b> Brushed Nickel
	<b>WS-180237</b>	2025	28W			

Example: **WS-180216-30-BN**



LINK LED VANITY LIGHTS & WALL SCNCE



This low-profile transitional wall sconce provides bountiful light and style. Link adds a clean, modern look to bath vanities and other decor. May be installed horizontally over a vanity or vertically as a sconce.

**Input:** 120V-277V  
**Dimming:** 100%-10% ELV, 100%-5% TRIAC  
**Rated Life:** 50,000 hours

- Sizes: 27", 37"
- Construction: aluminum with white acrylic diffuser
- Can be mounted vertically or horizontally

	Model	Max Lumens	Wattage	Color Temp	CRI	Finish
	<b>WS-180327</b>	1380	20W	<b>30</b> 3000K	90	<b>BN</b> Brushed Nickel
	<b>WS-180337</b>	1950	28W			

Example: **WS-180337-30-BN**



CUBIX & CYLINDER OUTDOOR SCNCE



Available in single and double directions, Cubix and Cylinder are ideal for illuminating outdoor entrances and walkways.

**Input:** 120V  
**Dimming:** 100%-10% ELV  
**Rated Life:** 50,000 hours

- Sizes: 6¾" single light, 9¼" double lights
- Construction: die-cast aluminum
- Finish: powder coated aluminum

	Model	Wattage	Max Lumens	Color Temp	CRI	Finish
	<b>WS-W220208</b> Cubix Single Light	6W	285	<b>30</b> 3000K	80	<b>BK</b> Black <b>BZ</b> Bronze <b>WT</b> White
	<b>WS-W220212</b> Cubix Double Light	18W	765			
	<b>WS-W190208</b> Cylinder Single Light	6W	285			
	<b>WS-W190212</b> Cylinder Double Light	18W	765			

Example: **WS-W220208-30-BK**





Offered in a curvaceous single and double head configuration, the adjustable Cylinder Indoor/Outdoor Sconces provide strong energy efficient LED spot lighting precisely where you need it. Cleanly finished with no visible hardware, these stylish aluminum cylinders are available in three architectural powder coat finishes.

**Input:** 120V  
**Dimming:** 100%-10% ELV  
**Rated Life:** 50,000 hours

- Construction: aluminum with TIR lens
- Finish: powder coated aluminum


	Model	Max Lumens	Wattage	Color Temp	CRI	Finish
	<b>WS-W230301</b>	1085	17W	<b>30</b> 3000K	90	<b>BK</b> Black <b>BZ</b> Bronze <b>WT</b> White
	<b>WS-W230302</b>	1085 x 2	33W			

Example: **WS-W230301-30-BK**

VUE OUTDOOR SCONCE



ALL-IN-ONE CCT SELECTABLE

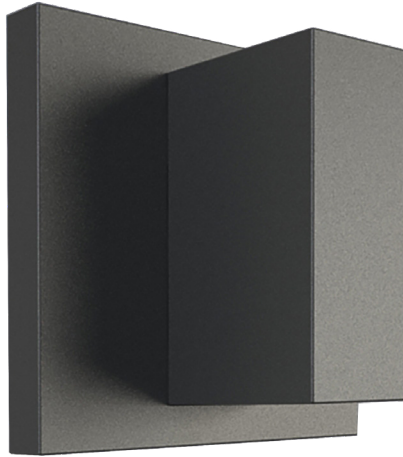

A geometric design that defines a modern aesthetic in your indoor or outdoor space. Vue is a die-cast aluminum sconce that provides up and down lighting for beautiful ambient illumination.

- |                    |              |                                   |
|--------------------|--------------|-----------------------------------|
| <b>Input:</b>      | 120V         | • Size: 5"                        |
| <b>Dimming:</b>    | 100%-10% ELV | • Construction: die-cast aluminum |
| <b>Rated Life:</b> | 50,000 hours | • Finish: powder coated aluminum  |

	Model	Max Lumens	Wattage	Color Temp	CRI	Finish
	<b>WS-W230205</b>	250 Up 250 Down	9W	<b>CS</b> 3000K 3500K 4000K	90	<b>BK</b> Black <b>WT</b> White

Example: **WS-W230205-CS-BK**

## MIDTOWN OUTDOOR SCNCE



ALL-IN-ONE CCT SELECTABLE



A handsome tower-styled fixture provides a soft glow and refined aesthetic that is pleasing to the eyes. Perfect for illuminating modern exterior and interior spaces, the LED luminaire offers versatility in a clean, contemporary look. This versatile sconce is constructed with die-cast aluminum for durability and quality while providing ambient and down lighting through its smooth, curvaceous acrylic diffuser. Customize the color temperature of your light from 2700K warm white to 5000K cool white.

- Input:** 120V
- Dimming:** 100%-10% ELV
- Rated Life:** 50,000 hours
- Sizes: 10"
- Construction: die-cast aluminum with acrylic diffuser
- Finish: powder coated aluminum

	Model	Max Lumens	Wattage	Color Temp	CRI	Finish
	<b>WS-W241310</b>	375	12W	<b>CS</b> 2700K 3000K 3500K 4000K 5000K	90	<b>BK</b> Black

Example: **WS-W241310-CS-BK**



VEGA OUTDOOR SCNCE



Add a modern vibe and powerful illumination to your porch, deck, or garage with the sleek Vega, an ADA-compliant indoor/outdoor sconce.

- Input:** 120V
- Dimming:** 100%-10% ELV
- Rated Life:** 50,000 hours
- Sizes: 9", 14"
- Construction: die-cast aluminum with acrylic diffuser
- Finish: powder coated aluminum

	Model	Max Lumens	Wattage	Color Temp	CRI	Finish
	<b>WS-W190109</b>	545	8W	<b>30</b> 3000K	90	<b>BK</b> Black
	<b>WS-W190114</b>	1050	16W			



Example: **WS-W190114-30-BK**

## 120/277V RECTANGULAR STEP & WALL LIGHTS



**Input:** 120V, 277V  
**Brightness:** Up to 4 lm  
**Dimming:** 100%-10% ELV (120V only)  
**Rated Life:** 50,000 hours

- Fluid decorative profile with full cut-off illumination
- Die-cast aluminum construction with abrasion-resistant powder-coated finish or plated brushed nickel finish
- Title 24 compliant (120V only)

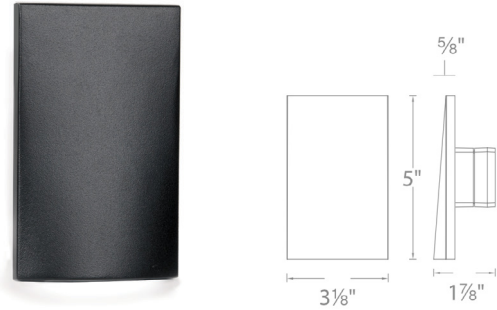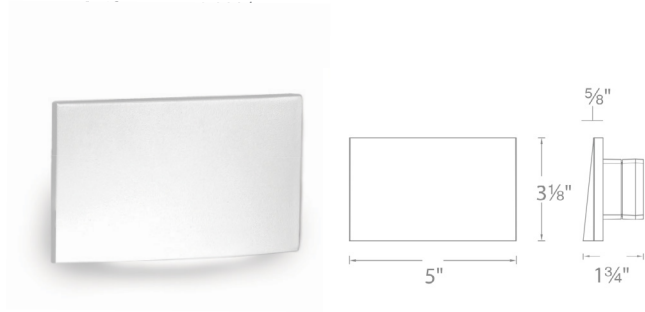

Model	Voltage	Wattage	Color Temp	CRI	Finish
<b>WL-LED110-C</b> <b>WL-LED110-AM</b>	120V	3.5W	3000K Amber	90	<b>BK</b> Black on AL <b>BN*</b> Brushed Nickel <b>BZ</b> Bronze on AL <b>WT</b> White on AL
<b>WL-LED110F-C</b> <b>WL-LED110F-AM</b>	277V	3W	3000K Amber		

Model	Voltage	Wattage	Color Temp	CRI	Finish
<b>WL-LED210-C</b> <b>WL-LED210-AM</b>	120V	3.5W	3000K Amber	90	<b>BK</b> Black on AL <b>BN*</b> Brushed Nickel <b>BZ</b> Bronze on AL <b>WT</b> White on AL
<b>WL-LED210F-C</b> <b>WL-LED210F-AM</b>	277V	3W	3000K Amber		


Example: **WL-LED110-C-WT**

Example: **WL-LED210-C-BK**

\* BN finish is damp location listed and is not warranted for contact with harsh chemicals or exterior installations.

**Input:** 120V, 277V  
**Brightness:** Up to 36 lm  
**Dimming:** 100%-10% ELV (120V only)  
**Rated Life:** 50,000 hours

- Louvered design shields glare for visual comfort
- Die-cast aluminum construction with abrasion-resistant powder-coated finish

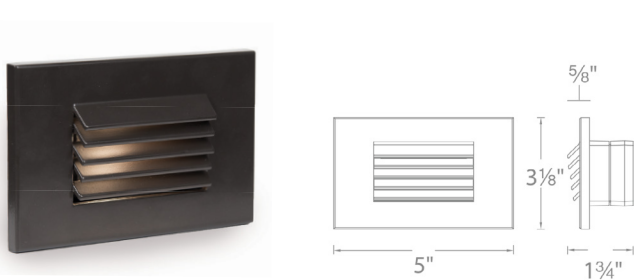

Model	Voltage	Wattage	Color Temp	CRI	Finish
<b>WL-LED120-C</b> <b>WL-LED120-AM</b>	120V	3.5W	3000K Amber	90	<b>BK</b> Black on AL <b>BZ</b> Bronze on AL <b>WT</b> White on AL
<b>WL-LED120F-C</b> <b>WL-LED120F-AM</b>	277V	3W	3000K Amber		

Model	Voltage	Wattage	Color Temp	CRI	Finish
<b>WL-LED220-C</b> <b>WL-LED220-AM</b>	120V	3.5W	3000K Amber	90	<b>BK</b> Black on AL <b>BZ</b> Bronze on AL <b>WT</b> White on AL
<b>WL-LED220F-C</b> <b>WL-LED220F-AM</b>	277V	3W	3000K Amber		

Example: **WL-LED120-C-BZ**


Example: **WL-LED220-C-BZ**

## 120V/277V RECTANGULAR STEP & WALL LIGHTS



**Input:** 120V, 277V  
**Brightness:** Up to 40 lm  
**Dimming:** 100%-10% ELV (120V only)  
**Rated Life:** 50,000 hours

- Tempered glass diffuses light for even illumination
- Die-cast aluminum construction
- Abrasion-resistant powder-coated finish or marine grade stainless steel option available
- Title 24 compliant (120V only)

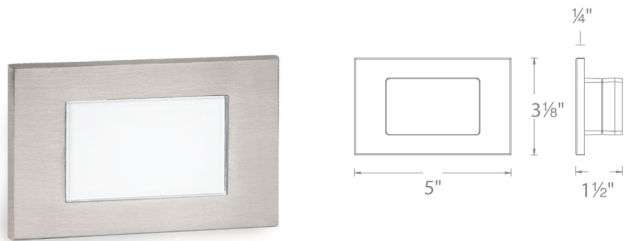


Mounts Vertically or Horizontally

Model	Voltage	Wattage	Color Temp	CRI	Finish
<b>WL-LED130-C</b> <b>WL-LED130-AM</b>	120V	3.5W	3000K Amber	90	<b>BK</b> Black on AL <b>BZ</b> Bronze on AL <b>SS</b> Stainless Steel <b>WT</b> White on AL
<b>WL-LED130F-C</b> <b>WL-LED130F-AM</b>	277V	3W	3000K Amber		

Example: **WL-LED130-C-SS**

**Input:** 120V, 277V  
**Brightness:** Up to 3 lm  
**Dimming:** 100%-10% ELV (120V only)  
**Rated Life:** 50,000 hours

- Geometric design with downward illumination
- Die-cast aluminum construction with abrasion-resistant powder-coated finish
- Title 24 compliant (120V only)



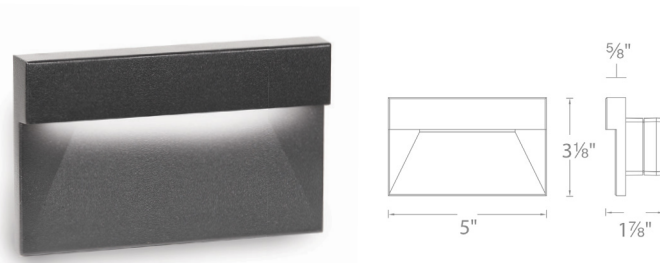


Model	Voltage	Wattage	Color Temp	CRI	Finish
<b>WL-LED140-C</b> <b>WL-LED140-AM</b>	120V	3.5W	3000K Amber	90	<b>BK</b> Black on AL <b>BZ</b> Bronze on AL <b>WT</b> White on AL
<b>WL-LED140F-C</b> <b>WL-LED140F-AM</b>	277V	3W	3000K Amber		

Example: **WL-LED140-C-BK**





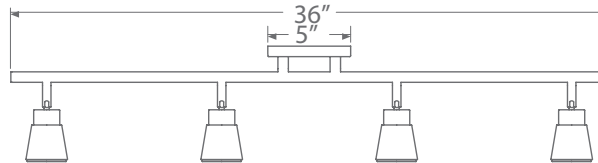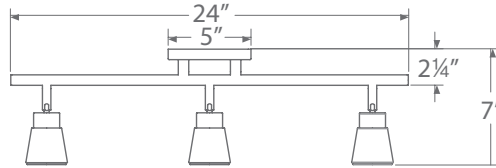

Monopoint, 3-head, or 4-head fixed track with individually adjustable LED track fixtures can be wall mounted or ceiling mounted for a wide multitude of applications. It is specifically designed for residential and low-ceiling commercial applications.

**Comparable To:** 65W MR16  
**Input:** 120V  
**Dimming:** 100%-10% ELV, 100%-5% TRIAC  
**Rated Life:** 50,000 hours

- Monopoint, 3-head, or 4-head fixed rails
- Sizes: 5" (Monopoint), 24", 36"
- Construction: die-cast aluminum with frosted TIR lens
- Installation: wall and ceiling
- 350° horizontal and 90° vertical aiming per head

System	Model	Lights	Beam	Max Lumens	CBCP	Wattage	Color Temp	CRI	Finish	
<b>TK</b>	<b>1805</b>	<b>01</b>	45°	800	1095	10W	<b>30</b> 3000K	90	<b>BK</b> Black	
		<b>03</b>		2400 (800 x3)	3285 (1095 x3)	30W				<b>BN</b> Brushed Nickel
		<b>04</b>		3200 (800 x4)	4380 (1095 x4)	40W				<b>WT</b> White

Example: **TK-180503-30-BK**



LOW VOLTAGE LED/MR16 FLEXIBLE SPOT LIGHTS

Power: 7W      Color Temp: 3000K  
 Lumens: 450      Dimming: ELV  
 CBCP: 929      LED Lamp  
 Comparable: 35W MR16      Rated Life: 25,000 hours

- Integral electronic transformer
- Accepts 12V LED MR16 or halogen MR16 lamps up to 50W max
- LED MR16 included when ordered as LED
- 1 watt minimum load
- Can be wall or ceiling mounted
- Available extensions from 6 to 48 inches
- Clear lens included (see below for alternate lens options)

007

	Model	Lamp	Extension (optional)	CRI	Finish
	<b>ME-007LED</b> <b>ME-007</b>	MR16 LED 12V 7W included MR16 sold separately	X6      6"	90	<b>BK</b> Black <b>WT</b> White
			X12      12"		
			X18      18"		
			X24      24"		
			X36      36"		
			X48      48"		



Example: **ME-007LED-BK** or **ME-007LED-X6-BK** (with 6" extension)

FRAMING PROJECTOR ACCESSORY

008FP	<b>BK</b>	Black
	<b>WT</b>	White

Example: **008FP-BK**



808

	Model	Lamp	Extension (optional)	CRI	Finish
	<b>ME-808LED</b> <b>ME-808</b>	MR16 LED 12V 7W included MR16 sold separately	X6      6"	90	<b>BK</b> Black <b>WT</b> White
			X12      12"		
			X18      18"		
			X24      24"		
			X36      36"		
			X48      48"		



Example: **ME-808LED-WT** or **ME-808LED-X12-WT** (with 12" extension)

LAMPS

	Finish	Wattage	Color Temp	Input	Beam	CRI	Lumens	CBCP	Average Life
	Black White	7W	3000K	12V	35°	90	450	929	25,000 Hours

LENS ACCESSORIES

Amber <b>LENS-16-AMB</b>	Blue Green <b>LENS-16-BLU</b> <b>LENS-16-GRN</b>	Red Frosted <b>LENS-16-RED</b> <b>LENS-16-FR</b>	UV Filter Spread <b>LENS-16-UVF</b> <b>LENS-16-SPR</b>	Beam Elongating Honeycomb Louver <b>LENS-16-BEL</b> <b>LENS-16-HCL</b>
--------------------------	--	--	--	--



**Input:** 120V  
**Dimming:** 100%-10% ELV, 100%-5% TRIAC  
**Rated Life:** 50,000 hours

- Suitable for H, J or L track
- 350° horizontal and 90° vertical aiming
- Driver concealed within fixture
- Construction: die-cast aluminum with frosted TIR lens

	System	Model	Beam	Max Lumens	CBCP	Wattage	Color Temp	CRI	Finish
	<b>H</b> H Track	<b>7010</b>	45°	850	1078	10W	<b>30</b> 3000K	90	<b>BK</b> Black <b>BN</b> Brushed Nickel <b>WT</b> White
	<b>L</b> L Track <b>J</b> J/J2 Track	<b>7010</b>			1078				<b>BK</b> Black <b>WT</b> White

Example: **H-7010-30-BN**



CHARGE 8010 & 8020 LED TRACK



H-8010/3-30-BN

H-8010-30-BK

H-8020-30-WT

**Input:** 120V  
**Dimming:** 100%-10% ELV, 100%-5% TRIAC  
**Rated Life:** 50,000 hours

- Suitable for H, J or L track
- 350° horizontal and 90° vertical aiming
- Driver concealed within fixture
- Construction: die-cast aluminum with frosted TIR lens

		System	Model	Beam	Max Lumens	CBCP	Wattage	Color Temp	CRI	Finish
	<b>H</b> H Track <b>L</b> L Track <b>J</b> J/J2 Track	<b>8020</b>	45°	1280	1402	16W	30	3000K	90	<b>BK</b> Black <b>BN</b> Brushed Nickel <b>WT</b> White
										<b>BK</b> Black <b>BN</b> Brushed Nickel <b>DB</b> Dark Bronze <b>WT</b> White
	<b>H</b> H Track <b>L</b> L Track <b>J</b> J/J2 Track	<b>8010</b>	45°	850	1196	11W	30	3000K	90	<b>BK</b> Black <b>BN</b> Brushed Nickel <b>DB</b> Dark Bronze <b>WT</b> White
										<b>BK</b> Black <b>WT</b> White
<p>Track Pack includes</p> <ul style="list-style-type: none"> <li>• 4ft H Track</li> <li>• Floating Canopy</li> <li>• Three 8010 Charge Track Heads</li> </ul>	<b>H</b> H Track	<b>8010/3</b>		850x3	1196x3	11Wx3				<b>BK</b> Black <b>BN</b> Brushed Nickel <b>DB</b> Dark Bronze <b>WT</b> White

Example: **H-8010-30-DB**

## H TRACK SYSTEM

**Description:** Single circuit H-Track  
**Power per Circuit:** 120V, 1920W max  
**Operating Current:** Rated 20A max




### TRACK SECTIONS

Model	Length	Finish	Description
<b>HT</b> H Track	<b>2</b> 2'	<b>BK</b> Black	120V 3-wire track
	<b>4</b> 4'	<b>BN</b> Brushed Nickel	
	<b>6</b> 6'	<b>WT</b> White	
	<b>8</b> 8'	<b>DB</b> Dark Bronze	

Example: **HT6-BK**

Each section includes two matching end caps



















### TRACK SUSPENSION

System		Model				Finish		
All Track Suspension Kit		<b>SK</b>	<b>18</b>	18"	<b>36</b>	36"	<b>BK</b> Black <b>BN</b> Brushed Nickel <b>WT</b> White <b>DB</b> Dark Bronze	Extends track from ceiling. Includes track bracket, rod and ceiling canopy. Use two per 4' length, three per 8' length.
Suspension Kit Extender			<b>R</b>	<b>18</b>	18"	<b>48</b>		48"
		<b>24</b>		24"	<b>72</b>	72"		
Sloped Ceiling Adapter		<b>SK14</b>						
Rod Coupler		<b>RI</b>						Join two rods for suspensions longer than 48".
Suspension Adjustment Collar Kit		<b>SK05</b>	Includes two collars					Used when suspension rod is field cut to custom lengths. One kit of two required for each rod.
Cable Suspension		<b>SKC96</b>					<b>NI</b> Nickel	Suspends track from ceiling. Includes 96" aircraft cable; may be field cut.
Cable Suspension Canopy with Feed		<b>SKCF96</b>					<b>BK</b> Black <b>WT</b> White	Canopy covers a standard 4" junction box. Includes 96" of aircraft cable and feed wire; may be field cut.
Low Voltage Track Head Extension		<b>X</b>	<b>6</b>	6"	<b>24</b>	24"	<b>BK</b> Black <b>BN</b> Brushed Nickel <b>WT</b> White <b>DB</b> Dark Bronze	Extends low voltage track heads from track. Specify extension, fixture and finish. Only available as complete unit. Custom order example: X18-HHT-809-WT.
			<b>12</b>	12"	<b>36</b>	36"		
			<b>18</b>	18"	<b>48</b>	48"		
Line Voltage Track Head Extension (H track only)		<b>H</b>	<b>18</b>	18"	<b>36</b>	36"		Extends H System line voltage track heads.
			<b>24</b>	24"	<b>48</b>	48"		
Wall Mount Suspension Bracket		<b>TBKT</b>		24"				

Example: **SK24-BK**

# ACCESSORIES

		Model	Finish	Dimensions	Description
Live End Connector		<b>HLE</b>		4 1/4" x 1 3/8" x 3/4"	Use for direct wiring through ceiling. A canopy plate is required when using with a standard junction box.
Live End BX Connector		<b>HBXLE</b>		6" x 1 3/8" x 1 1/4"	Use with surface mounted BX or non-metallic sheathed cable. Also provides through the ceiling connection.
"I" Power Connector		<b>HI-PWR</b>		6 3/4" x 1 3/8" x 3/4"	Power entry point at the connection of 2 tracks.
"L" Connector Left		<b>HL-LEFT</b>		2 3/4" x 2 3/4" x 3/4"	Use to join 2 track sections to make power feedable 90° left polarity turns.
"L" Connector Right		<b>HL-RIGHT</b>		2 3/4" x 2 3/4" x 3/4"	Use to join 2 track sections to make power feedable 90° right polarity turns.
"T" Connector		<b>HT</b>	<b>BK</b> Black <b>BN</b> Brushed Nickel <b>WT</b> White <b>DB</b> Dark Bronze	4" x 2 3/4" x 3/4"	Use to join 3 tracks sections. "T" Connector with opposite polarity can be custom ordered.
"X" Connector		<b>HX</b>		4 1/8" x 4 1/8" x 3/4"	Use to join 4 track sections.
"I" Connector		<b>HI</b>		9 3/4" x 1 3/8" x 3/4"	Use to join two sections of track with electrical continuity.
"I" Dead End Connector		<b>HI-DEC</b>		3" x 1 3/8" x 3/4"	Joins two sections of track without electrical continuity.
Flexible Track Connector		<b>HFLX</b>		9 3/4" x 1 3/8" x 3/4"	Connects two track sections at variable angles. Use as a transition from wall-to-wall, wall-to-ceiling. Power feedable.
Suspension Loop		<b>H-LOOP</b>		1 3/8" x 1 3/8" x 3"	3" electrical loop accepts chain hung fixtures up to 35lbs. Contains compartment for electrical connections.
15' Cord, Male Plug		<b>HCORD</b>	<b>BK</b> Black <b>WT</b> White	15'	Maximim capacity: 7A, 800W, 120V.
T-Bar Drop Ceiling Attachment		<b>T-BARCLIP</b>	Chrome	1 1/2" x 1 1/4"	Attaches track to T-bar drop ceilings. Use two for 2' or 4' tracks, three for 6' or 8' tracks.
Monopoint Canopy Adapter		<b>HMP</b>		5 3/8" x 5 3/8"	Mount a single track fixture to a junction box. When used with a low voltage track head the transformer box will protrude off of the face of the monopoint.
Canopy Plate		<b>CP</b>	<b>BK</b> Black <b>BN</b> Brushed Nickel <b>WT</b> White <b>DB</b> Dark Bronze	4 1/2" x 4 1/2"	Covers a standard 4" junction box. Use with any powerable connectors.
Floating Canopy Connector		<b>HFC</b>		4 1/2" x 4 1/2" x 1 1/2"	Connects to octagon box. Allows track to be powered anywhere along the length of the track.

## H TRACK CURRENT LIMITER

WAC TRACK CURRENT LIMITERS ARE DESIGNED TO ADDRESS ENERGY ALLOWANCES

### WITHOUT A CURRENT LIMITER

WATTAGE TOWARDS ENERGY ALLOWANCE

**ASHRAE 90.1 AND IECC**

The greater of either:

- The sum of the maximum rated wattage of the luminaires OR
- 30 watts per linear ft of track circuit

**CALIFORNIA'S TITLE 24**

The greater of either:

- The sum of the maximum rated wattage of the luminaires OR
- 45 watts per linear ft of track circuit

### WITH A CURRENT LIMITER

WATTAGE TOWARDS ENERGY ALLOWANCE


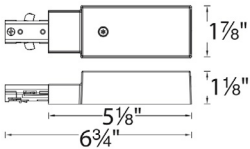


**ASHRAE 90.1 AND IECC**

Wattage rating of the current limiter

**CALIFORNIA'S TITLE 24**

The greater of either:

- Wattage rating of the current limiter OR
- 12.5 watts per linear foot of track circuit

	Model	Circuit Breaker	Max Wattage	Finish	
 <p>Slime Single Live End</p> 	<b>THL-HLES</b>				
		<b>1/2A</b>	0.5A	60W	<b>BK</b> Black <b>BN</b> Brushed Nickel <b>DB</b> Dark Bronze <b>WT</b> White
		<b>1A</b>	1.0A	120W	
		<b>2A</b>	2.5A	300W	
		<b>5A</b>	5.0A	600W	
		<b>7A</b>	7.5A	900W	
 <p>Single Live End</p> 	<b>THL-HLE</b>				







Example: **THL-HLES-1A-BK**











LOW VOLTAGE  
MR16 MULTIPLE SPOTS (1 WATT MINIMUM LOAD TRANSFORMERS)







1 LIGHT

Trims (Order Housing Separately)	Model	Finish	Reflector/Trim	
 	1 Light Trim <b>MT-116</b> Halogen MR16 sold separately <b>MT-116LED</b> LED MR16 included	<b>WT/WT</b>	White/White	
 	1 Light Invisible Trim™ <b>MT-116TL</b> Halogen MR16 sold separately <b>MT-116LEDTL</b> LED MR16 included	<b>WT</b>	White	
Low Voltage Multiple Spot Housings (Required)	Model	Type	Wattage	Rating
 	<b>MT-116HS</b>	1 Light	12V 50W MAX	Non-IC

2 LIGHTS

Trims (Order Housing Separately)	Model	Finish	Reflector/Trim	
 	2 Light Trim <b>MT-216</b> Halogen MR16 sold separately <b>MT-216LED</b> LED MR16 included	<b>WT/WT</b>	White/White	
 	2 Light Invisible Trim™ <b>MT-216TL</b> Halogen MR16 sold separately <b>MT-216LEDTL</b> LED MR16 included	<b>WT</b>	White	
Low Voltage Multiple Spot Housings (Required)	Model	Type	Wattage	Rating
 	<b>MT-216HS</b>	2 Lights	12V 50W MAX	Non-IC

3 LIGHTS

Trims (Order Housing Separately)	Model	Finish	Reflector/Trim	
 	3 Light Trim <b>MT-316</b> Halogen MR16 sold separately <b>MT-316LED</b> LED MR16 included	<b>WT/WT</b>	White/White	
 	3 Light Invisible Trim™ <b>MT-316TL</b> Halogen MR16 sold separately <b>MT-316LEDTL</b> LED MR16 included	<b>WT</b>	White	
Low Voltage Multiple Spot Housings (Required)	Model	Type	Wattage	Rating
 	<b>MT-316HS</b>	3 Lights	12V 50W MAX	Non-IC

Non-IC housings require 3" of clearance from insulation on all sides. Recommended ELV dimming. Accommodates ceiling thickness of up to 1" for remodel & 3/4" for new construction.

LENSES, LOUVERS & LAMPS

Colored Lenses	Color
<b>LENS-16</b> Colored Lens	<b>AMB</b> Amber <b>BLU</b> Blue <b>GRN</b> Green <b>RED</b> Red





Lenses & Louvers	LED MR16 Lamp	Finish
<b>LENS-16-UVF</b> UV Filter Lens <b>LENS-16-FR</b> Frosted Lens <b>LENS-16-HCL</b> Honeycomb Louver	<b>LENS-16-SPR</b> Spread Lens <b>LENS-16-BEL</b> Beam Elongating Lens	<b>BK</b> Black <b>WT</b> White


LED MR16 Lamp	Finish
<b>MR16LED-BAB</b>	<b>BK</b> Black <b>WT</b> White

## 2.5" LOW VOLTAGE MR16



- 1 watt minimum load transformers
- Non-IC housings require 3" of clearance from insulation on all sides
- Accommodates ceiling thickness of up to 3/4" for both remodel or new construction

2.5" trims (Order Housing Separately)	Model	Finish	Baffle/Trim
 	<b>HR-836</b> <b>HR-836LED</b> Metal Trim	<b>BN</b> <b>WT</b>	Brushed Nickel White/White
 	<b>HR-837</b> <b>HR-837LED</b> Gimbal Ring, 25° Adjustment from Vertical	<b>BK</b> <b>BN</b> <b>WT</b>	Black Brushed Nickel White


2.5" Housings (Required)	Model	Input	Transformer	Output	Type
	<b>HR-801</b>	120V	Electronic	12V, 50W max 1W min	Remodel Non-IC
	<b>HR-802</b>	120V	Electronic	12V, 50W max 1W min	New Construction Non-IC



*Non-IC housings require 3" of clearance from insulation on all sides.*

## 4" LOW VOLTAGE MR16

### Accommodates Most LED MR16 Lamps

- Die-cast aluminum construction
- Steel spring clips secure trim to housing
- Abrasion resistant powder coat paint or plated metal finish

4" Downlight Trims (Order Housing Separately)	Model	Input	Finish	Description
 	Square open reflector <b>HR-D412-S</b> MR16 sold separately <b>HR-D412LED-S</b> LED MR16 included	MR16, 50W max	<b>SC/BN</b> <b>SC/WT</b>	Specular/Brushed Nickel Specular/White
 	Round open reflector <b>HR-D412</b> MR16 sold separately <b>HR-D412LED</b> LED MR16 included	35° adjustment from vertical, MR16, 50W max		
 	Step baffle <b>HR-D411</b> MR16 sold separately <b>HR-D411LED</b> LED MR16 included		<b>WT/WT</b>	White Baffle/White
 	Gimbal ring <b>HR-D417</b> MR16 sold separately <b>HR-D417LED</b> LED MR16 included	25° adjustment from vertical, MR16, 50W max	<b>BN</b> <b>WT</b>	Brushed Nickel White
 	Directional spot <b>HR-D425</b> MR16 sold separately <b>HR-D425LED</b> LED MR16 included	80° adjustment from vertical, MR16, 50W max	<b>WT</b>	White

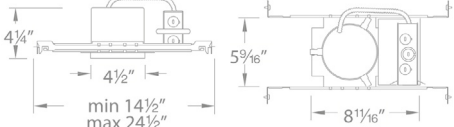
4" Low Voltage Housings (Required)	Model	Input	Transformer	Output	Type
	<b>HR-8402E</b>	120V	Electronic	12V, 50W max 1W min	New Construction Non-IC
	<b>HR-8401E</b>	120V	Electronic	12V, 50W max 1W min	Remodel Non-IC

*Non-IC housings require 3" of clearance from insulation on all sides.  
Accommodates ceiling thickness of up to 3/4" for remodel and new construction.*

## MR16 TRACK LUMINAIRES




### 809



System	Model	Lamp (Voltage/Wattage)	Finish
<b>HHT</b>	H	<b>809LED</b> MR16 LED 12V 7W Included	<b>BK</b> Black
<b>LHT</b>	L		<b>WT</b> White
<b>JHT</b>	J/J2	MR16 sold separately	

Example: **LHT-809-BK**


### 180



System	Model	Lamp (Voltage/Wattage)	Finish
<b>HHT</b>	H	<b>180LED</b> MR16 LED 12V 7W Included	<b>BK</b> Black
<b>LHT</b>	L		<b>WT</b> White
<b>JHT</b>	J/J2	MR16 sold separately	

Example: **LHT-180-BK**

## LED LAMPS

	Model	Finish	Wattage	Color Temp	Input	Beam	CRI	Lumens	CBCP	Average Life	
	MR16	<b>MR16LED-BAB-BK</b> <b>MR16LED-BAB-WT</b>	Black White	7W	3000K	12V	35°	90	450	850	25,000 Hours

## LENS ACCESSORIES


Amber <b>LENS-16-AMB</b>	Blue Green <b>LENS-16-BLU</b> <b>LENS-16-GRN</b>	Red Frosted <b>LENS-16-RED</b> <b>LENS-16-FR</b>	UV Filter Spread <b>LENS-16-UVF</b> <b>LENS-16-SPR</b>	Beam Elongating Honeycomb Louver <b>LENS-16-BEL</b> <b>LENS-16-HCL</b>
--------------------------	---	---	---	---





# MR16 TRACK LUMINAIRES

## 007




System	Model	Lamp (Voltage/Wattage)	Finish
<b>HHT</b>	H	<b>007LED</b> MR16 LED 12V 7W included <b>007</b> MR16 sold separately	<b>BK</b> Black
<b>LHT</b>	L		<b>WT</b> White
<b>JHT</b>	J/J2		

Example: **JHT-007-BK** Clear lens included

Framing Projector Accessory		<b>008FP-BK</b> <b>008FP-WT</b>	Black White
-----------------------------	---	------------------------------------	----------------

Available in Monopoint

## 808




System	Model	Lamp (Voltage/Wattage)	Finish
<b>HHT</b>	H	<b>808LED</b> MR16 LED 12V 7W included <b>808</b> MR16 sold separately	<b>BK</b> Black
<b>LHT</b>	L		<b>WT</b> White
<b>JHT</b>	J/J2		

Example: **JHT-808LED-BK** Clear lens included


Available in Monopoint

## LED LAMPS

	Model	Finish	Wattage	Color Temp	Input	Beam	CRI	Lumens	CBCP	Average Life	
	MR16	<b>MR16LED-BAB-BK</b> <b>MR16LED-BAB-WT</b>	Black White	7W	3000K	12V	35°	90	450	850	25,000 Hours

## LENS ACCESSORIES


Amber <b>LENS-16-AMB</b>	Blue <b>LENS-16-BLU</b> Green <b>LENS-16-GRN</b>	Red <b>LENS-16-RED</b> Frosted <b>LENS-16-FR</b>	UV Filter <b>LENS-16-UVF</b> Spread <b>LENS-16-SPR</b>	Beam Elongating <b>LENS-16-BEL</b> Honeycomb Louver <b>LENS-16-HCL</b>
--------------------------	---	---	---	---



System	Model	Lamp (Voltage/Wattage)	Finish
<b>HTK</b>	H	GU10LED 7W included	<b>BK</b> Black
<b>LTK</b>	L		<b>DB*</b> Dark Bronze
<b>JTK</b>	J/J2		<b>WT</b> White

Example: **LTK-103LED-BK**

\*DB Finish only available in HTK



System	Model	Lamp (Voltage/Wattage)	Finish
<b>HTK</b>	H	GU10LED 7W included	<b>BK</b> Black
<b>LTK</b>	L		<b>WT</b> White
<b>JTK</b>	J/J2		

Example: **LTK-104LED-WT**


## LED LAMPS

	Model	Finish	Power	Color Temp	Voltage	Beam	CRI	Lumens	CBCP	Average Life	
	GU10	<b>GU10LED-BAB-BK</b> <b>GU10LED-BAB-WT</b>	Black White	7W	3000K	12V	35°	90	470	850	25,000 Hours



PAR & BR TRACK LUMINAIRES

720, 730

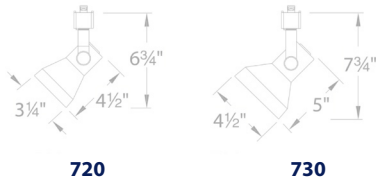


System	Model	Lamp (Voltage/Wattage)	Finish
<b>HTK</b>	H	<b>720</b>	<b>BK</b> Black <b>WT</b> White
<b>LTK</b>	L	<b>730</b>	
<b>JTK</b>	J/J2		



Example: **HTK-730-WT**

*Order lamp separately*

763, 764, 765

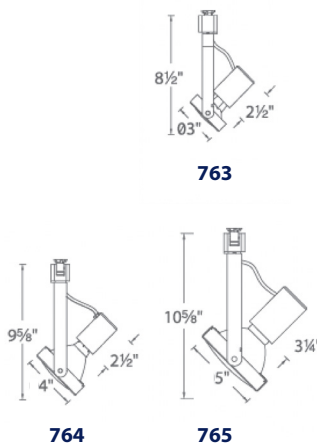


System	Model	Lamp (Voltage/Wattage)	Finish
<b>HTK</b>	H	<b>763</b>	<b>BK</b> Black <b>WT</b> White
<b>LTK</b>	L	<b>764</b>	
<b>JTK</b>	J/J2	<b>765</b>	

Example: **HTK-763-WT**

*Order lamp separately*



### 704




System	Model	Lamp (Voltage/Wattage)	Finish
<b>HTK</b>	H	120V BR30 and PAR30 75W Max	<b>BK</b> Black
<b>LTK</b>	L		<b>WT</b> White
<b>JTK</b>	J/J2		

Example: **LTK-704-WT**

*Order lamp separately*

### 703



System	Model	Lamp (Voltage/Wattage)	Finish
<b>HTK</b>	H	BR30 and PAR30 75W Max	<b>BK</b> Black
<b>LTK</b>	L		<b>WT</b> White
<b>JTK</b>	J/J2		

Example: **HTK-703-BK**


*Order lamp separately*





PAR & BR TRACK LUMINAIRES

178 UNIVERSAL MEDIUM BASE



System	Model	Lamp (Voltage/Wattage)	Finish
<b>HTK</b> H	<b>178</b>	BR20/30/40. PAR20/30/38 120V 100W Max	<b>BK</b> Black
<b>LTK</b> L			<b>WT</b> White
<b>JTK</b> J/J2			

Example: **LTK-178-BN**

*Order lamp separately*


**BARN DOOR (ORDER SEPARATELY)**

**PAR20BD**  
**PAR30BD**  
**PAR38BD**

**BK** Black  
**WT** White



725



System	Model	Lamp (Voltage/Wattage)	Finish
<b>HTK</b> H	<b>725</b>	PAR20 / BR20 50W max	<b>BK</b> Black
<b>LTK</b> L			<b>WT</b> White
<b>JTK</b> J/J2			

Example: **HTK-725-WT**

*Order lamp separately*

## INDEX

DISC II .....	4-5
ATLANTIS .....	6
ATLANTIS FLUSH .....	7
GEMINI .....	8-9
INDOOR ALUMINUM CHANNELS .....	11
BARLIGHT .....	12-13
MINI PUCK LIGHT .....	15
PUCK LIGHT .....	16-17
LOTOS 2" ADJUSTABLE .....	19
LOTOS 4" & 6" ADJUSTABLE .....	20
LOTOS R 4" REGRESSED ADJUSTABLE .....	21
LOTOS 4" & 6" .....	22-23
ION 2" .....	24
PATRIOT 3" .....	25
POP-IN 4" .....	26
BLAZE 6" .....	27
TWIST-N-LITE LUMINAIRE SYSTEM .....	28-29
EDGELESS .....	31
I CAN'T BELIEVE IT'S NOT RECESSED .....	32
DISC .....	33
BLO • FLO • GLO .....	35
ROUND & SQUARE 5" .....	36
ROUND & SQUARE .....	37
LITHIUM EM BATTERY BACKUP .....	39
METRO LED FLUSH MOUNT .....	40
METRO .....	41
REMI .....	43
STUDIO .....	44
RAZOR .....	45
DEMI .....	46
SLIM .....	47
TURBO .....	49
FUSE .....	50
LINK .....	51
CUBIX & CYLINDER .....	53
CYLINDER OUTDOOR SCONCE .....	54
VUE .....	55
MIDTOWN .....	56
VEGA .....	57
120/277V RECTANGULAR STEP & WALL LIGHTS .....	58-59
SOLO LED FIXED RAIL .....	60
LOW VOLTAGE LED/MR16 FLEXIBLE SPOT LIGHT .....	61
BULLET 7010 .....	62
CHARGE 8010 & 8020 .....	63
H TRACK SYSTEM .....	64-65
HTRACK CURRENT LIMITER .....	66
LOW VOLTAGE MR16 MULTIPLE SPOTS (1 WATT MINIMUM LOAD TRANSFORMERS) .....	67
2.5" LOW VOLTAGE MR16 .....	68
4" LOW VOLTAGE MR16 .....	69
MR16 TRACK LUMINAIRES .....	70-71
GU10 TRACK LUMINAIRES .....	72
PAR & BR TRACK LUMINAIRES .....	73-75

## Headquarters

Tel: 800.526.2588  
Fax: 800.526.2585

44 Harbor Park Dr  
Port Washington, NY 11050

### South East Manufacturing Facility

1600 Distribution Ct  
Lithia Springs, GA 30122

### Central Manufacturing Facility

1700 South J Elmer Freeway  
Suite 100  
Cedar Hill, TX 75104

### West Manufacturing Facility

1750 S Archibald Ave  
Ontario, CA 91761

Consult our manufacturing facility to take advantage of our custom capabilities  
in large quantities. For up to date product specifications and assistance please  
visit [wacighting.com](http://wacighting.com)

or call

**1-800-526-2588**

# WAC LIMITED®

WAC LIMITED technology and designs are protected by several patents and patent applications. WAC LIMITED will not hesitate to enforce its intellectual property rights through injunctive relief and seek further relief through damages if it has reason to believe its patents are being infringed.

Copyright © 2024 WAC LIMITED. All rights reserved. This catalog is copyrighted and WAC LIMITED will use all measures available to it under the law against anyone who copies or derives from its copyrighted work.

WAC LIMITED retains the right to modify the design of its products at any time as part of the company's continuous improvement program. Please refer to our website for the latest product specifications.

[wacighting.com](http://wacighting.com)

